


FR-10 (welded version) — blank 1 of 7

Side plate (right + left) · blank 3.762” × 9.875” · HR steel sheet 10 ga (0.135”) · 2 per side · FR + FL (mirror) = 4 per vehicle

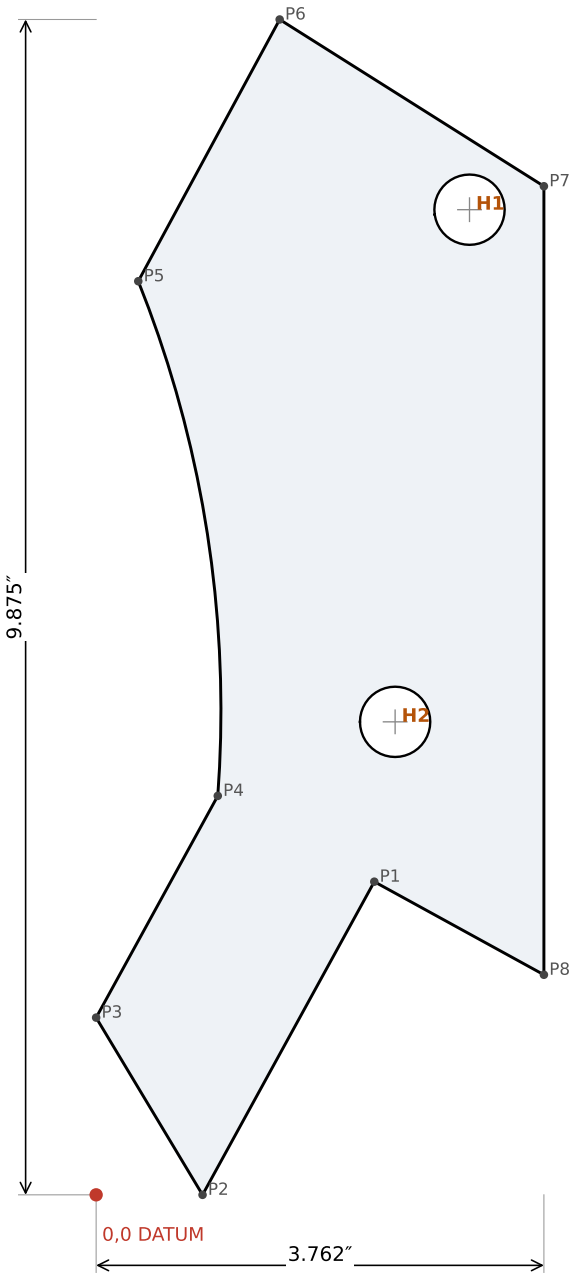

HOLES (centre X, Y from datum)

H1	Ø0.591"	X 3.137	Y 8.277
H2	Ø0.591"	X 2.512	Y 3.974

CURVED EDGES (radius, centre X, Y)

R1	R 9.700"	centre -8.651, 4.071
----	----------	----------------------

OUTLINE POINTS (X, Y from datum)

P1	2.337	2.631
P2	0.894	0.000
P3	0.000	1.489
P4	1.022	3.352
P5	0.354	7.676
P6	1.542	9.875
P7	3.762	8.474
P8	3.762	1.849

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 1 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate (right + left)	QTY: 2 per side · FR + FL (mirror) = 4 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 7

FR-10 (welded version) — blank 2 of 7


Plate A-H · blank 6.625" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	6.625	2.731
P3	6.625	0.000
P4	0.000	0.000

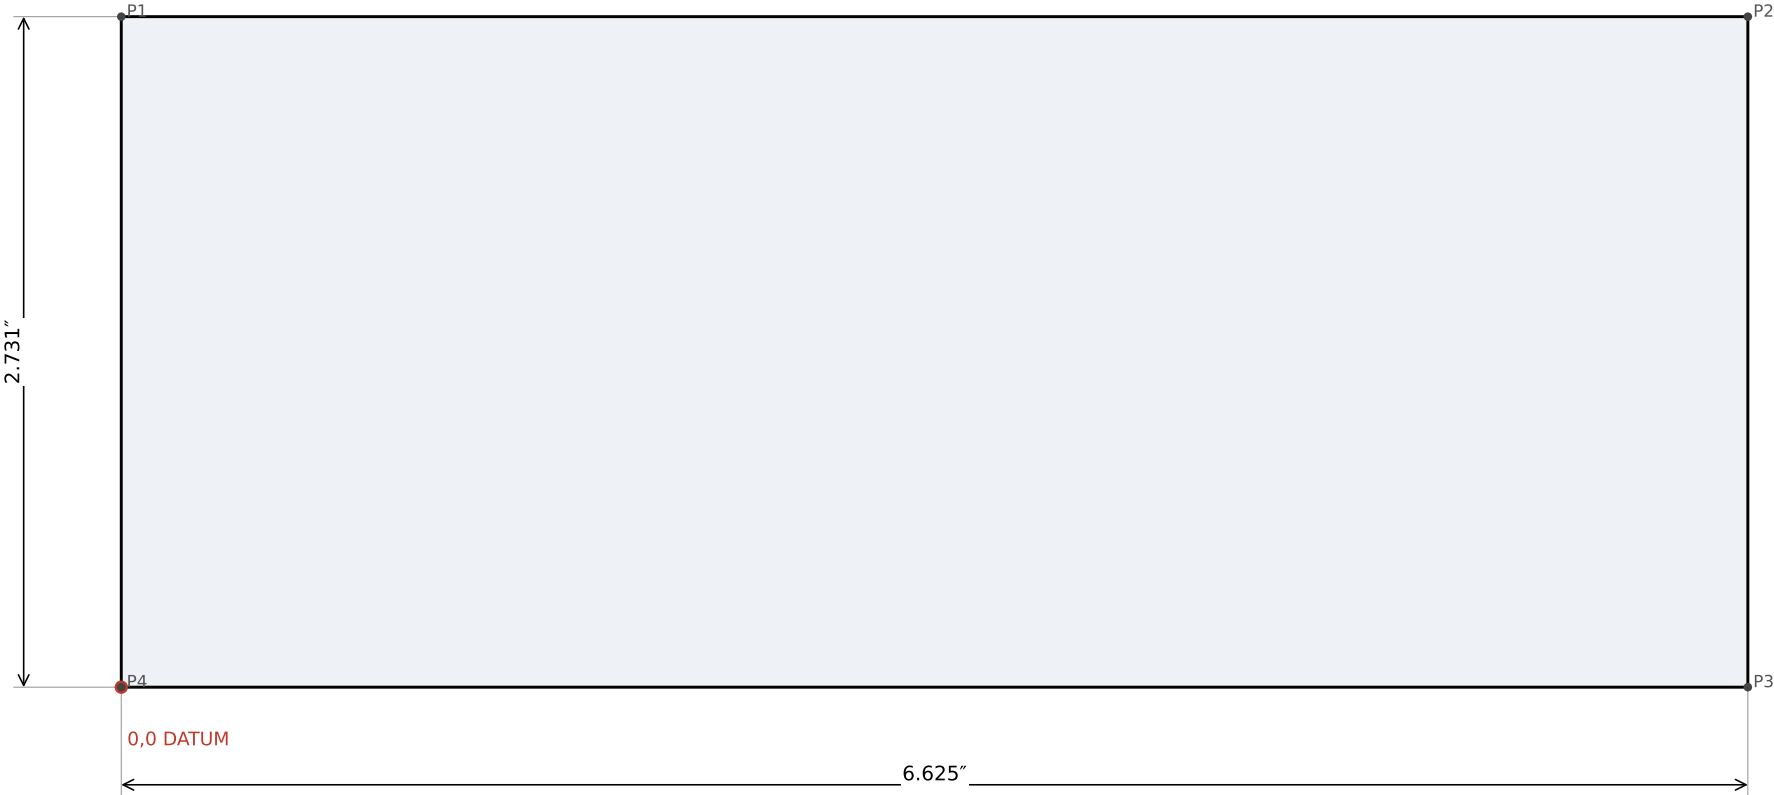


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 2 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-H	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 7

FR-10 (welded version) — blank 3 of 7

Plate A-B (hole Ø1.1) · blank 2.625" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

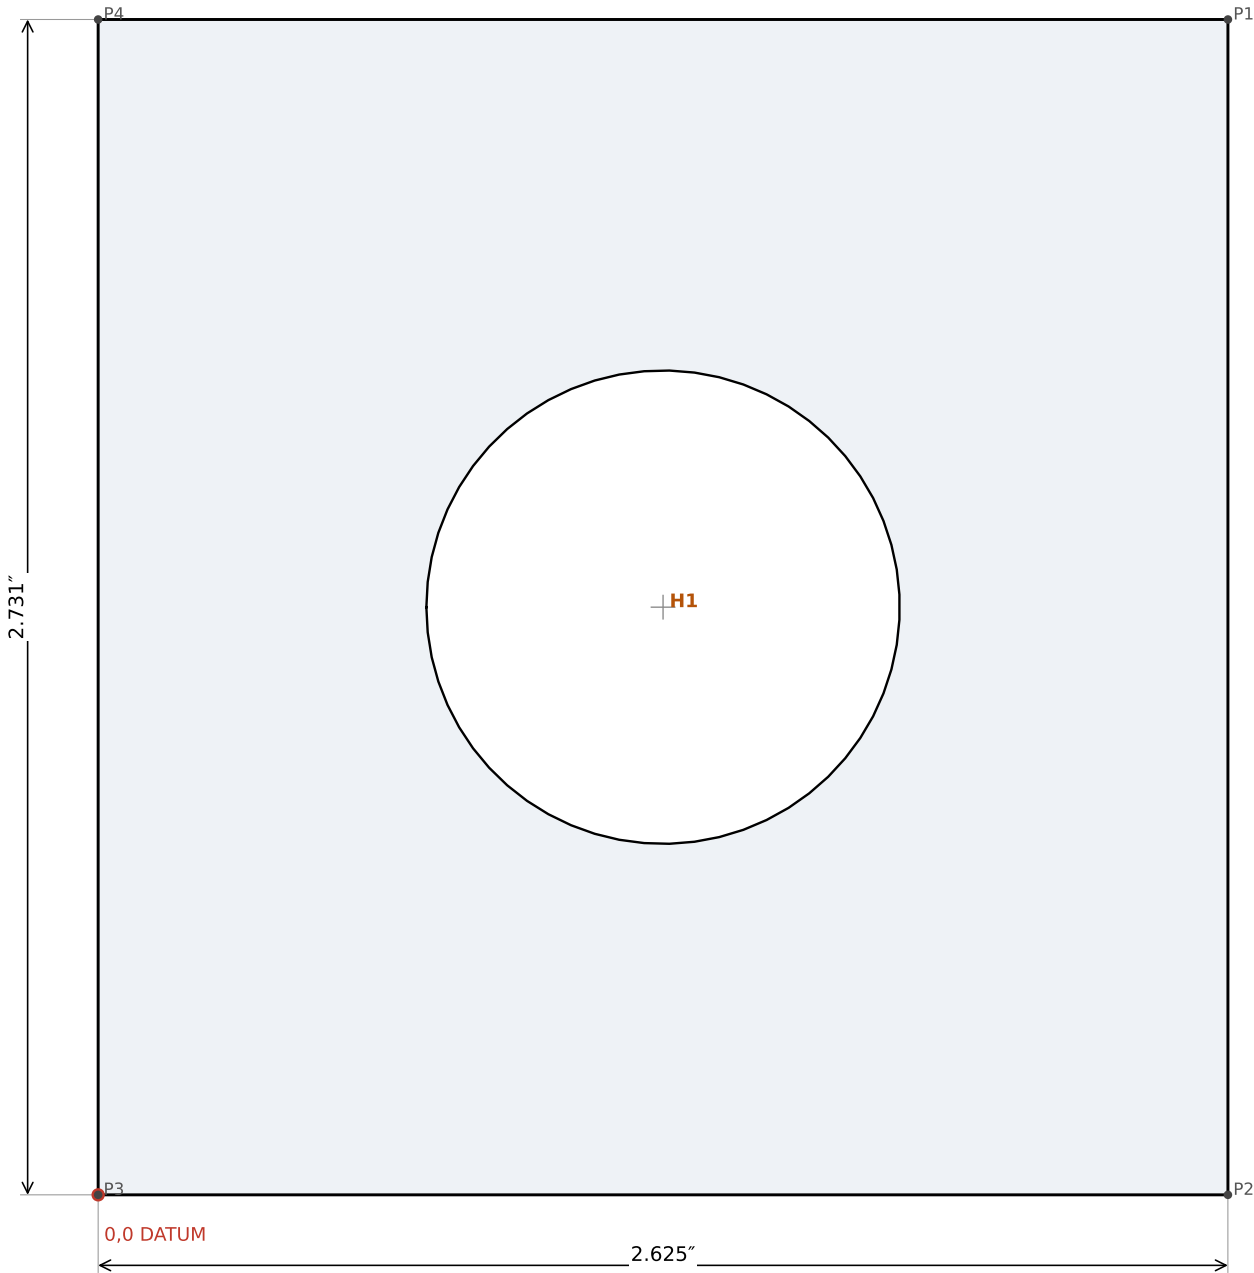

HOLES (centre X, Y from datum)

H1 Ø1.100" X 1.313 Y 1.366

OUTLINE POINTS (X, Y from datum)

P1	2.625	2.731
P2	2.625	0.000
P3	0.000	0.000
P4	0.000	2.731


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + bushing OD1.5×0.4

FR-10 (welded version) — blank 3 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-B (hole Ø1.1)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 3 / 7

FR-10 (welded version) — blank 4 of 7

Plate B-C · blank 2.499" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

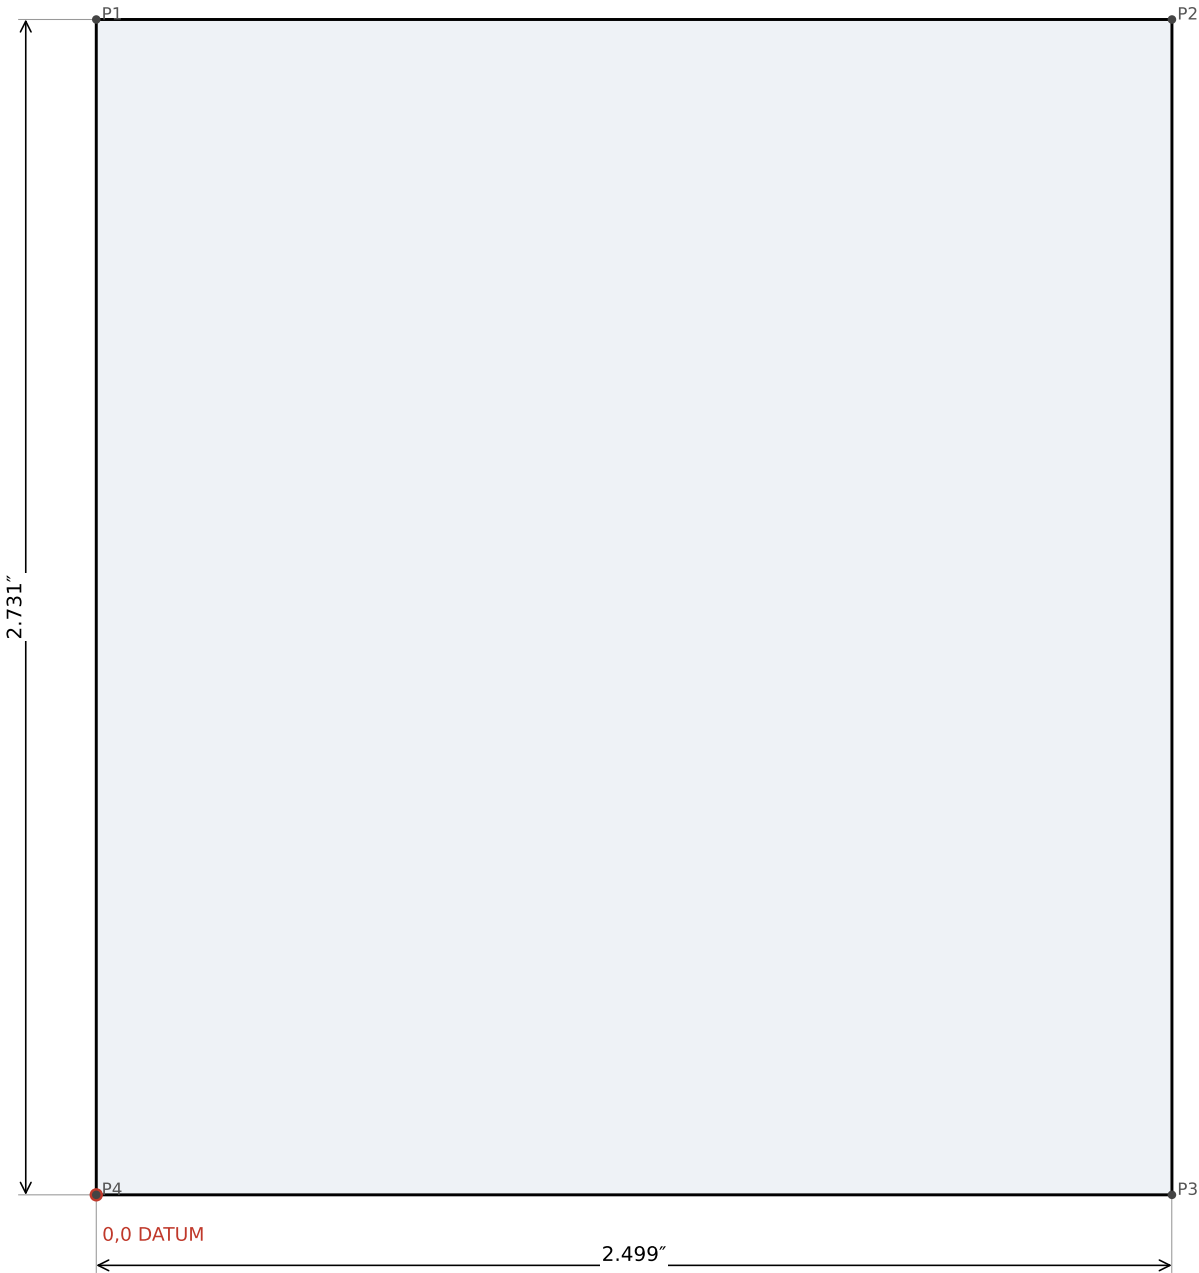

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	2.499	2.731
P3	2.499	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 4 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate B-C	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 4 / 7

FR-10 (welded version) — blank 5 of 7

Plate E-F · blank 1.737" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

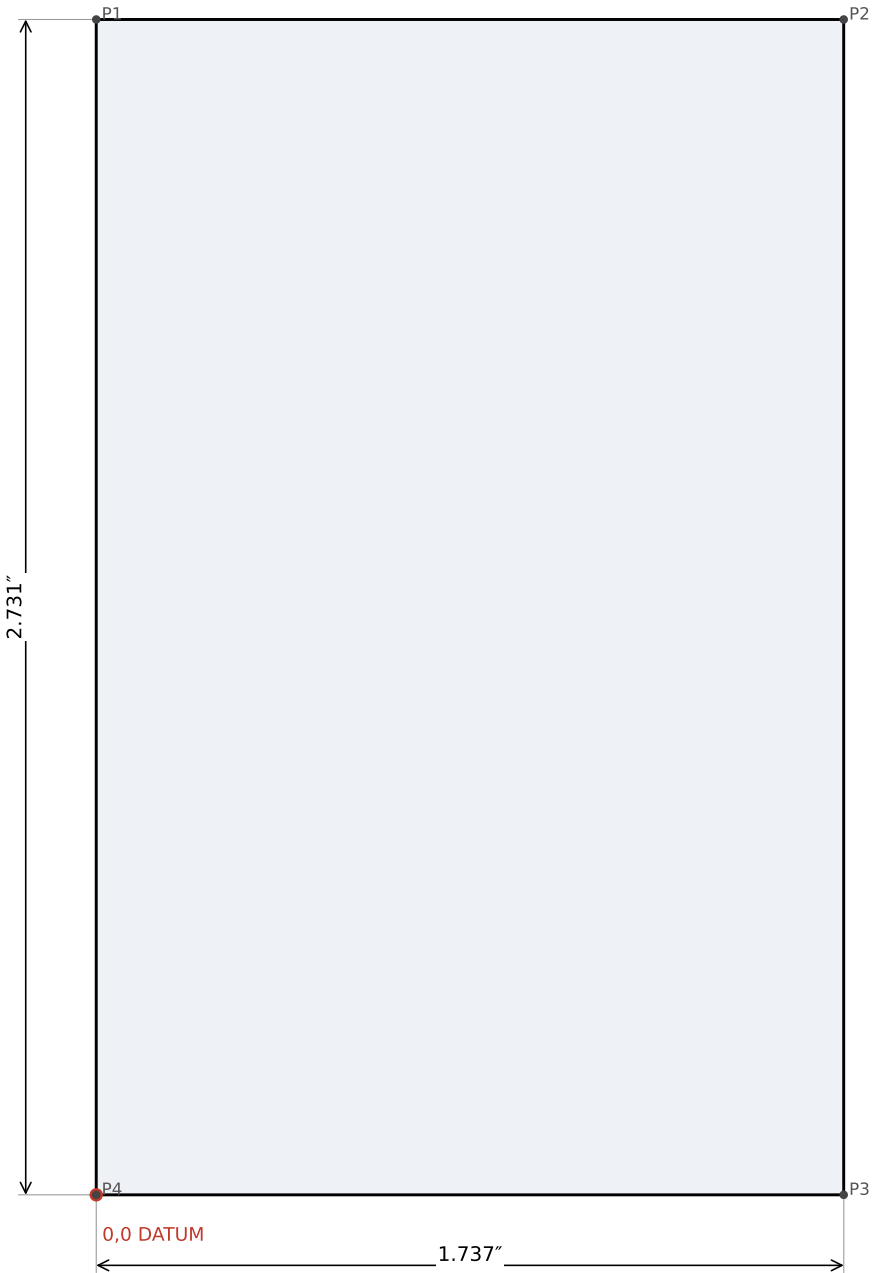

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	1.737	2.731
P3	1.737	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 5 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate E-F	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 5 / 7

FR-10 (welded version) — blank 6 of 7

Shelf (hole Ø1.181 for the bushing) · blank 2.375" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

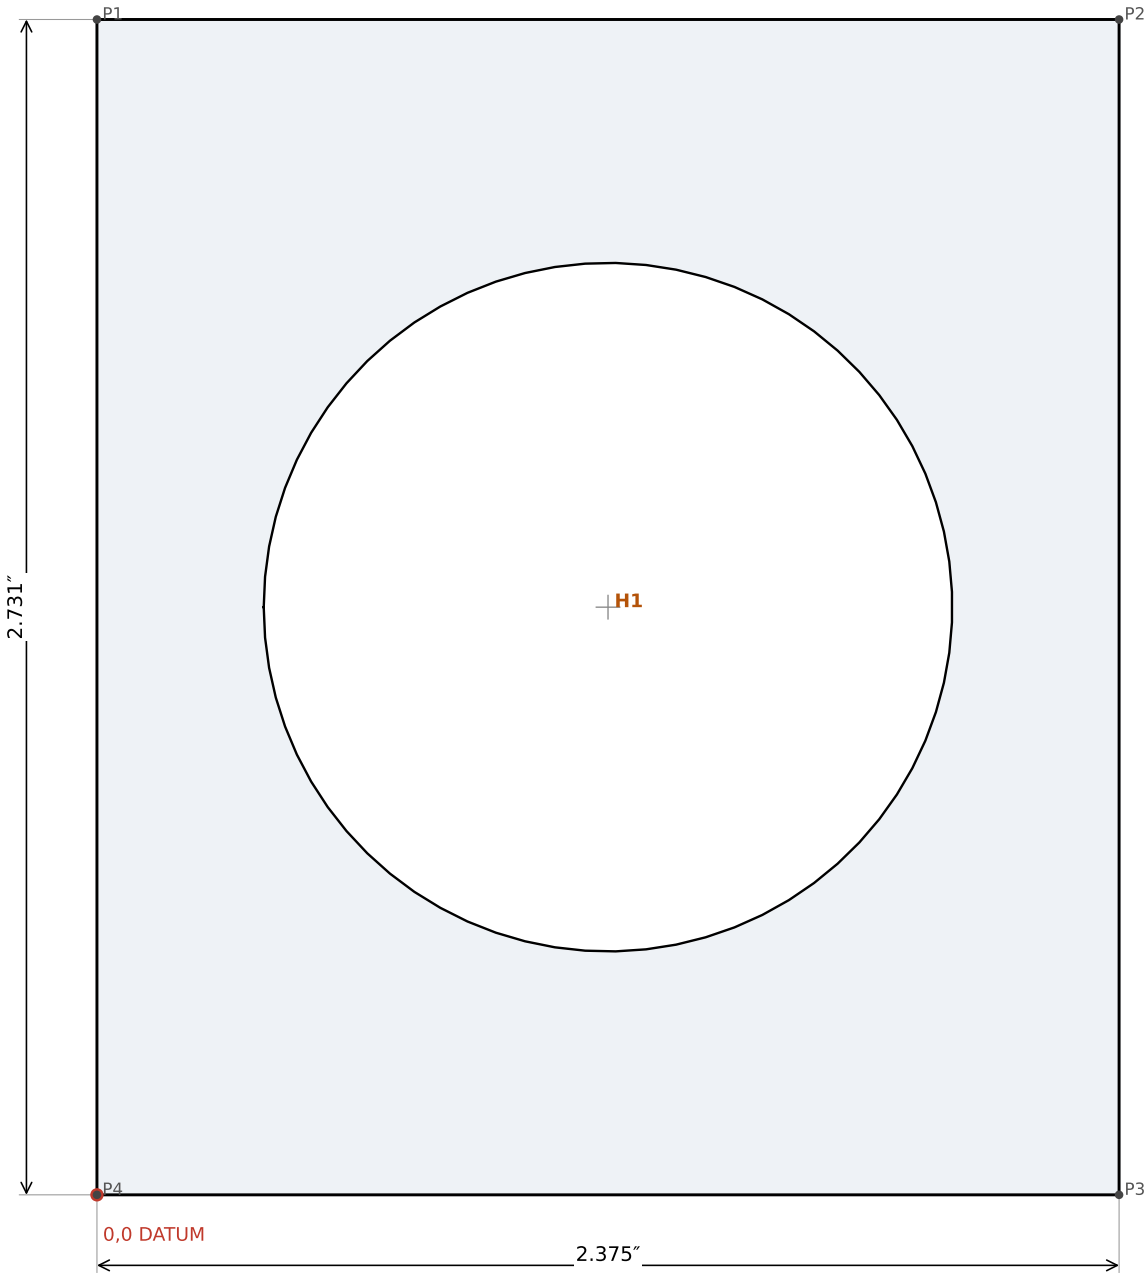

HOLES (centre X, Y from datum)

H1 Ø1.600" X 1.187 Y 1.366

OUTLINE POINTS (X, Y from datum)

P1 0.000 2.731
P2 2.375 2.731
P3 2.375 0.000
P4 0.000 0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + bushing OD1.6×0.394

FR-10 (welded version) — blank 6 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Shelf (hole Ø1.181 for the bushing)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 6 / 7

FR-10 (welded version) — blank 7 of 7

Inner plate · blank 5.748" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	2.731
P3	5.748	2.731
P4	5.748	0.000



NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 7 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Inner plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 7 / 7