

FR-2 (welded version) — blank 1 of 4

Top (2 slots) · blank 6.750" × 3.000" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)			
H1	slot	0.749 × 0.625"	@0° X 5.875 Y 1.125
H2	slot	0.709 × 0.472"	@0° X 0.875 Y 1.250
OUTLINE POINTS (X, Y from datum)			
P1		6.750	0.000
P2		0.000	0.000
P3		0.000	3.000
P4		6.750	3.000




NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-2 (welded version) — blank 1 of 4	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Top (2 slots)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 4

FR-2 (welded version) — blank 2 of 4

Leg wall · blank 2.981" × 3.240" · HR steel sheet 10 ga (0.135") · 4 per side · FR + FL (mirror) = 8 per vehicle

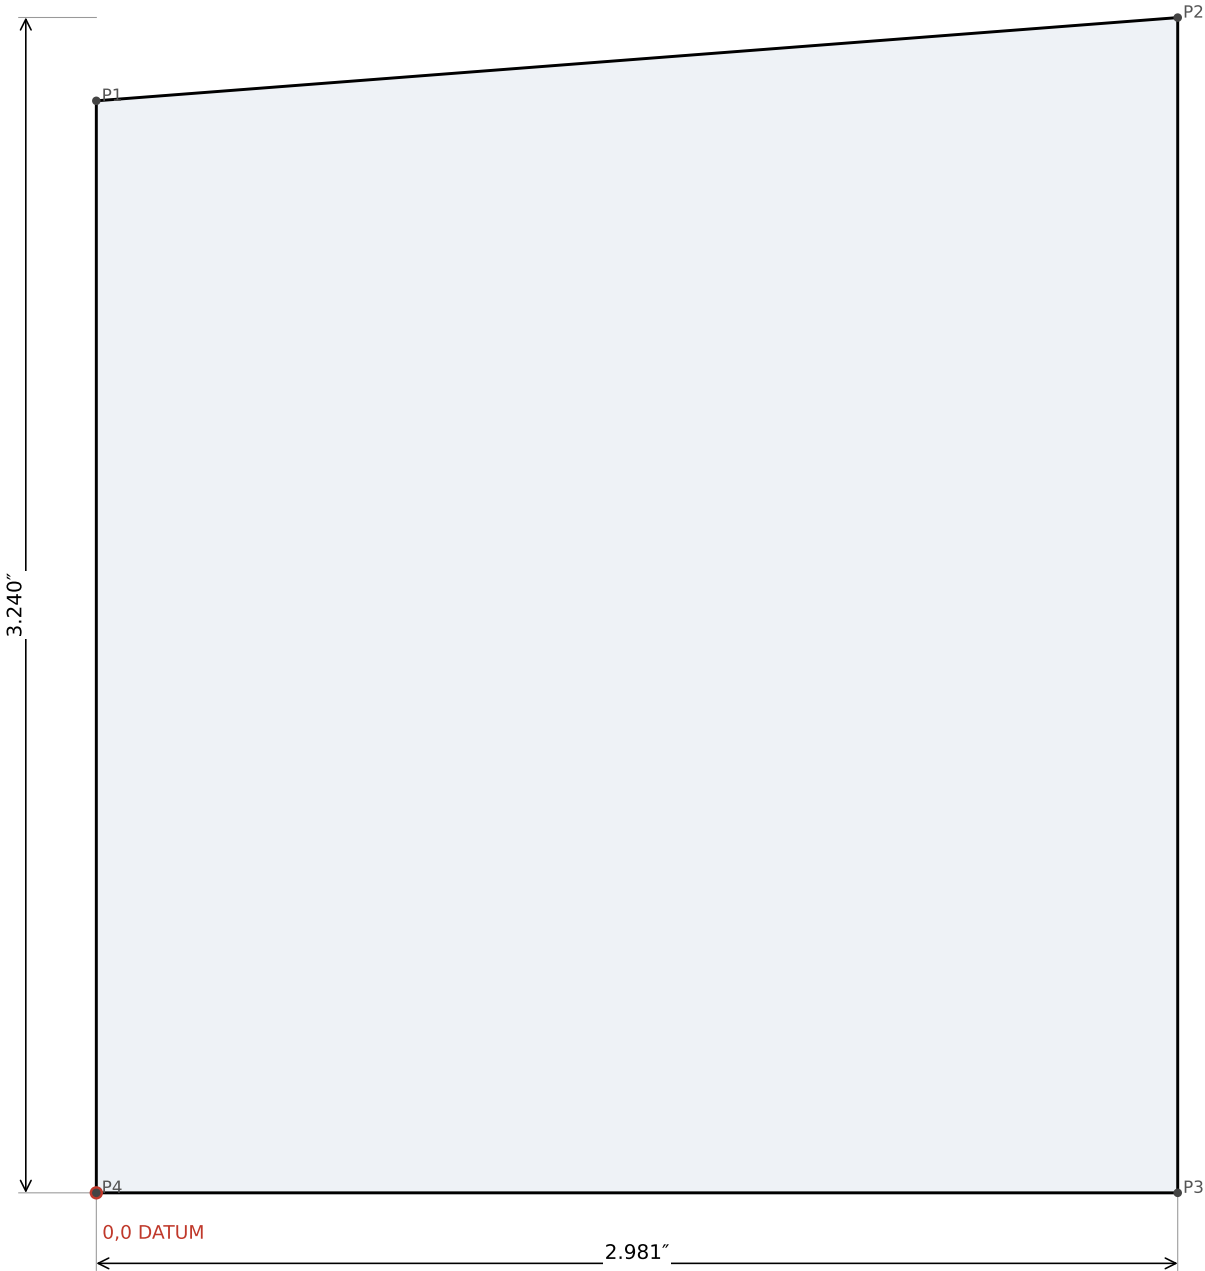

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	3.010
P2	2.981	3.240
P3	2.981	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-2 (welded version) — blank 2 of 4	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Leg wall	QTY: 4 per side · FR + FL (mirror) = 8 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 4

FR-2 (welded version) — blank 3 of 4

Leg bottom, left (slot 0.709×0.472) · blank 2.000" × 3.250" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

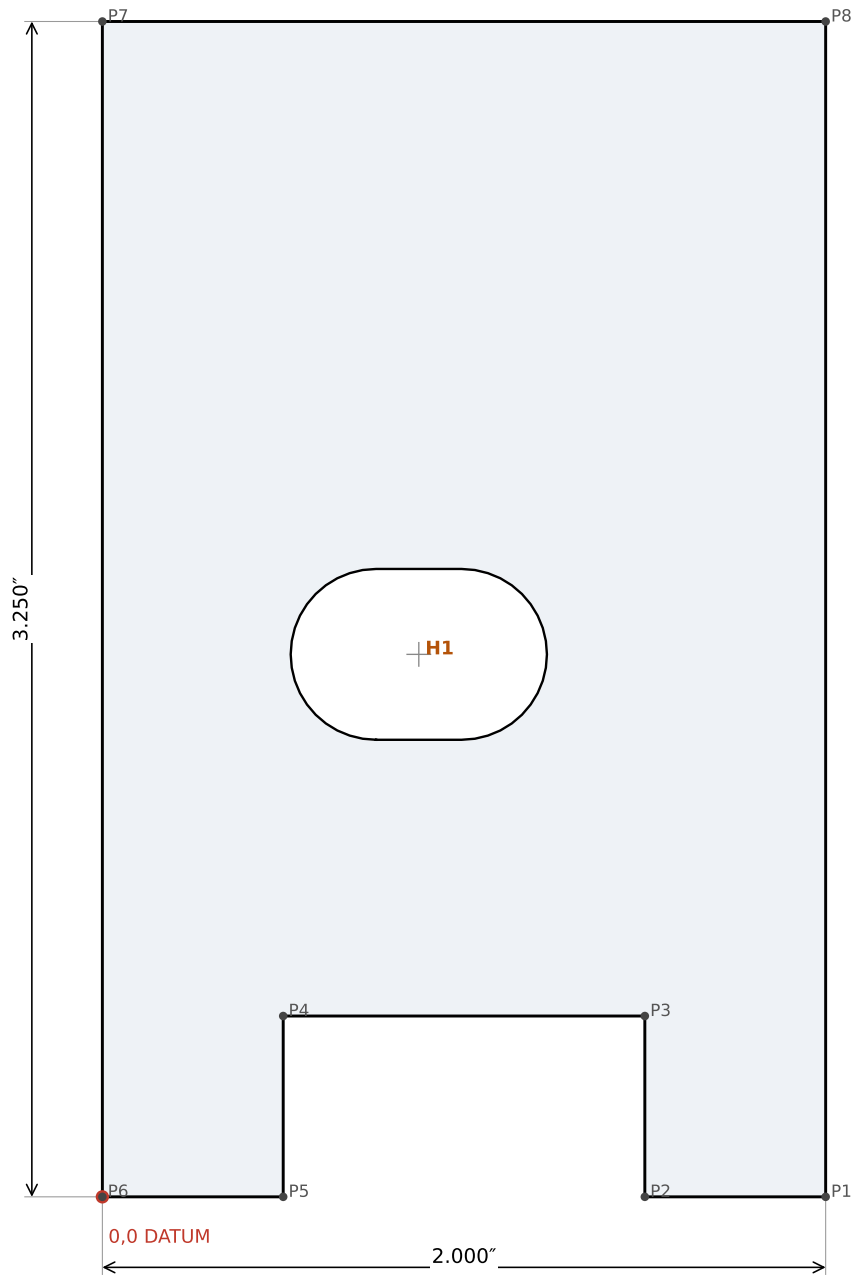

HOLES (centre X, Y from datum)		
H1	slot 0.709 × 0.472" @0°	X 0.875 Y 1.500
OUTLINE POINTS (X, Y from datum)		
P1	2.000	0.000
P2	1.500	0.000
P3	1.500	0.500
P4	0.500	0.500
P5	0.500	0.000
P6	0.000	0.000
P7	0.000	3.250
P8	2.000	3.250


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-2 (welded version) — blank 3 of 4	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Leg bottom, left (slot 0.709×0.472)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 3 / 4

FR-2 (welded version) — blank 4 of 4

Leg bottom, right (slot 3/4×5/8) · blank 2.000″ × 3.250″ · HR steel sheet 10 ga (0.135″) · 1 per side · FR + FL (mirror) = 2 per vehicle

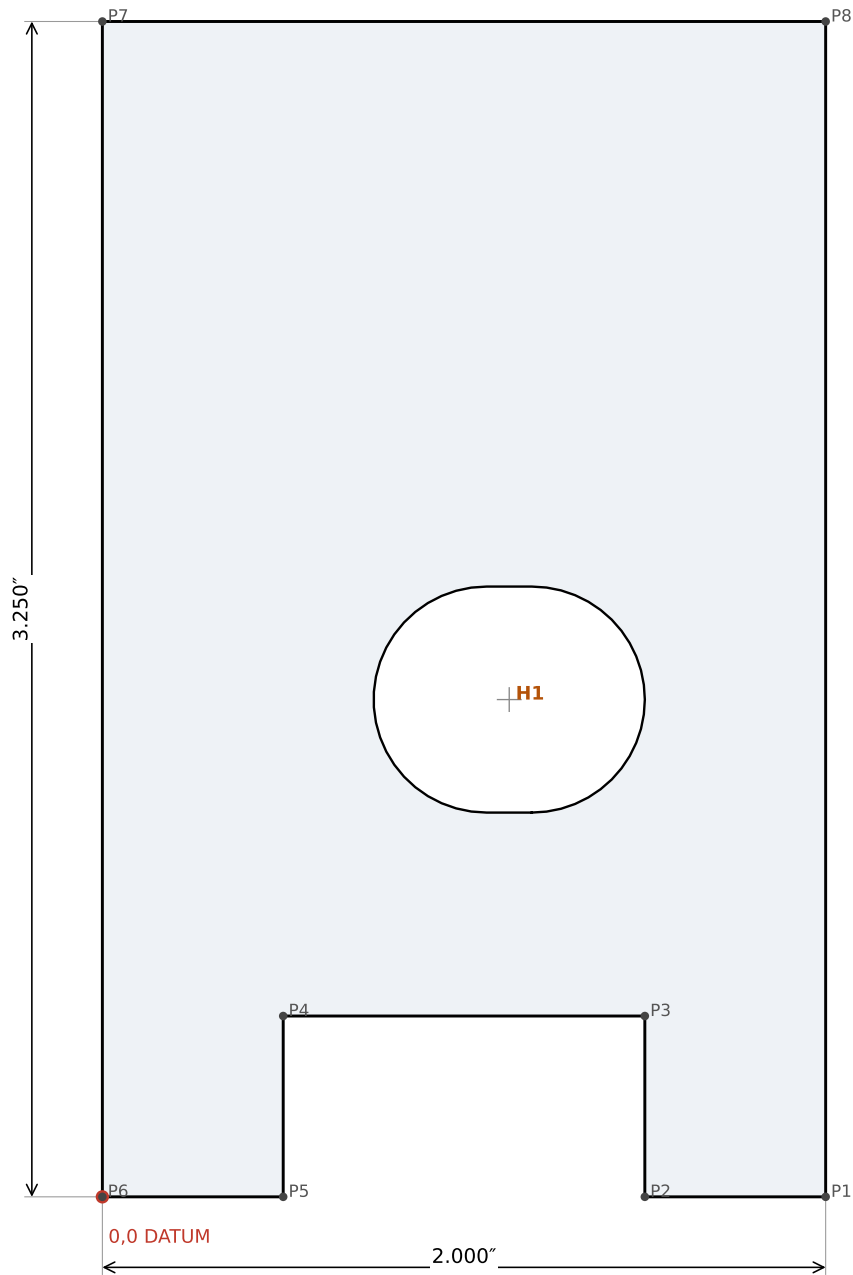

HOLES (centre X, Y from datum)		
H1	slot 0.749 × 0.625″ @0°	X 1.125 Y 1.375
OUTLINE POINTS (X, Y from datum)		
P1	2.000	0.000
P2	1.500	0.000
P3	1.500	0.500
P4	0.500	0.500
P5	0.500	0.000
P6	0.000	0.000
P7	0.000	3.250
P8	2.000	3.250

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135″) (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-2 (welded version) — blank 4 of 4	HR steel sheet 10 ga (0.135″)	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Leg bottom, right (slot 3/4×5/8)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010″ · bends ±1° · IR = t	SHEET 4 / 4