


FR-4 (welded version) — blank 1 of 8

Side plate, right (hole Ø0.512) · blank 6.500" × 6.875" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

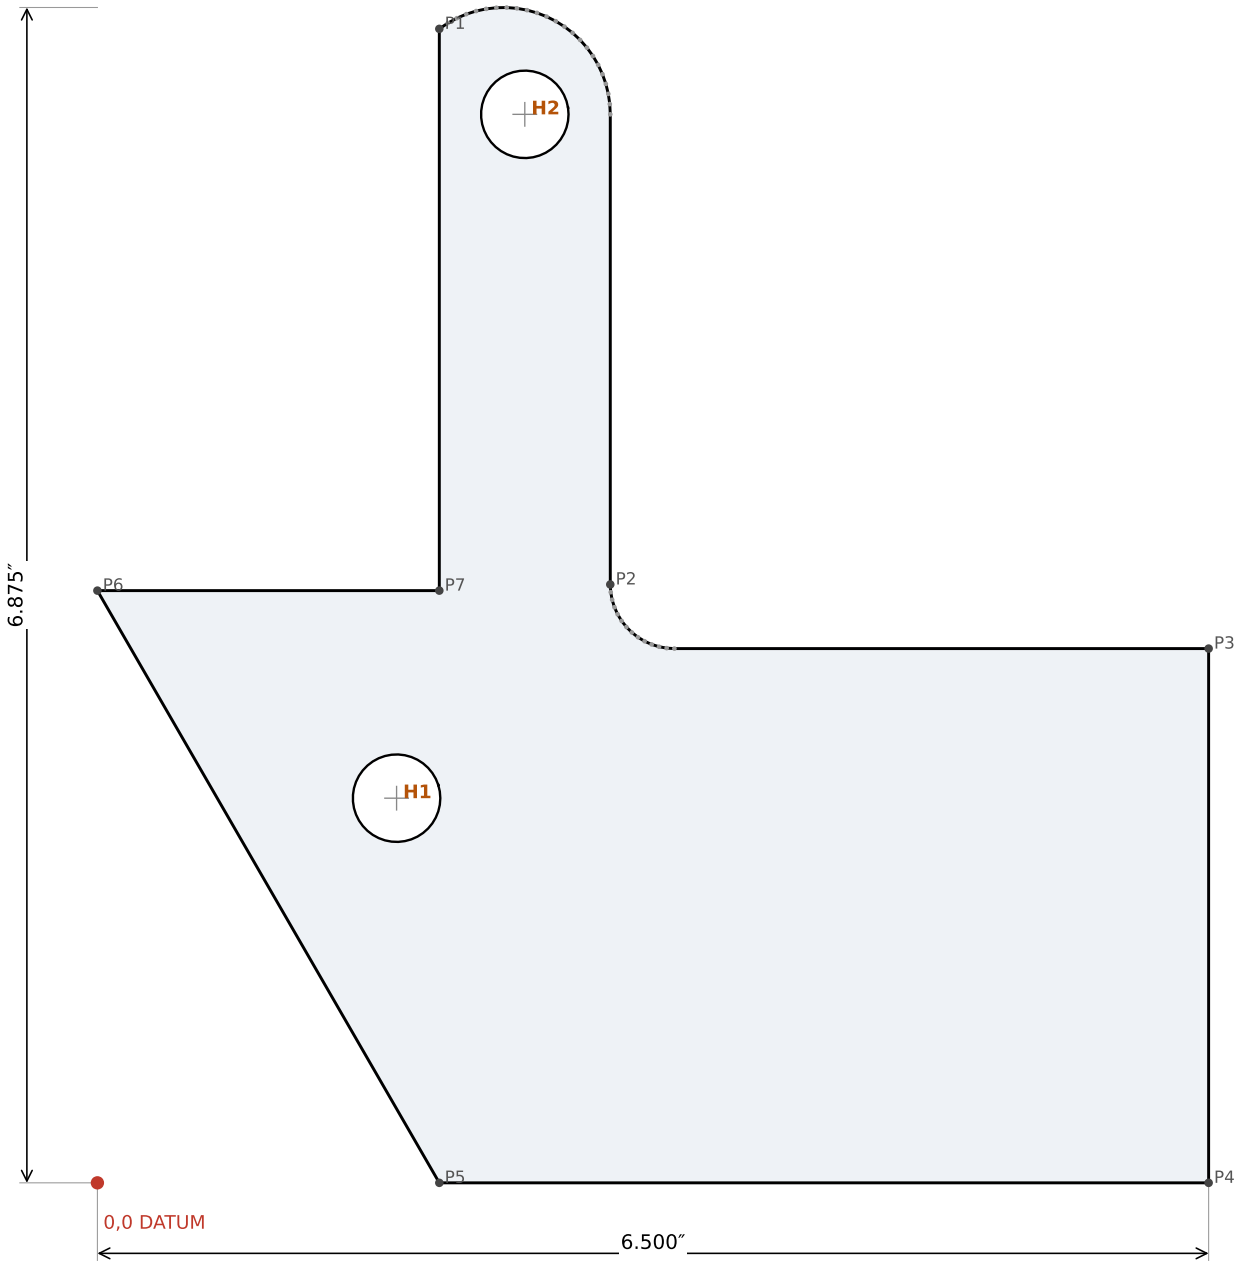

HOLES (centre X, Y from datum)

H1	Ø0.512"	X 1.750	Y 2.250
H2	Ø0.512"	X 2.500	Y 6.250

OUTLINE POINTS (X, Y from datum)

P1	2.000	6.750
P2	3.000	3.500
P3	6.500	3.125
P4	6.500	0.000
P5	2.000	0.000
P6	0.000	3.464
P7	2.000	3.464

FREE-FORM CURVE 1 (grey dots, follow DXF) — points X, Y

2.050	6.784
2.103	6.812
2.158	6.836
2.215	6.854
2.274	6.867
2.334	6.874
2.394	6.875
2.454	6.870
2.513	6.859
2.571	6.843
2.627	6.822
2.681	6.795
2.732	6.763
2.780	6.726
2.824	6.685
2.863	6.640
2.899	6.591
2.929	6.539
2.954	6.485
2.974	6.428
2.988	6.370
2.997	6.310
3.000	6.250

FREE-FORM CURVE 2 (grey dots, follow DXF) — points X, Y

3.003	3.455
3.011	3.410
3.024	3.367
3.043	3.326
3.066	3.287
3.094	3.251
3.126	3.219
3.162	3.191
3.201	3.168
3.242	3.149
3.285	3.136
3.330	3.128
3.375	3.125


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-4 (welded version) — blank 1 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate, right (hole Ø0.512)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 8

FR-4 (welded version) — blank 2 of 8

Side plate, left (hole Ø0.34) · blank 6.500" × 6.875" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

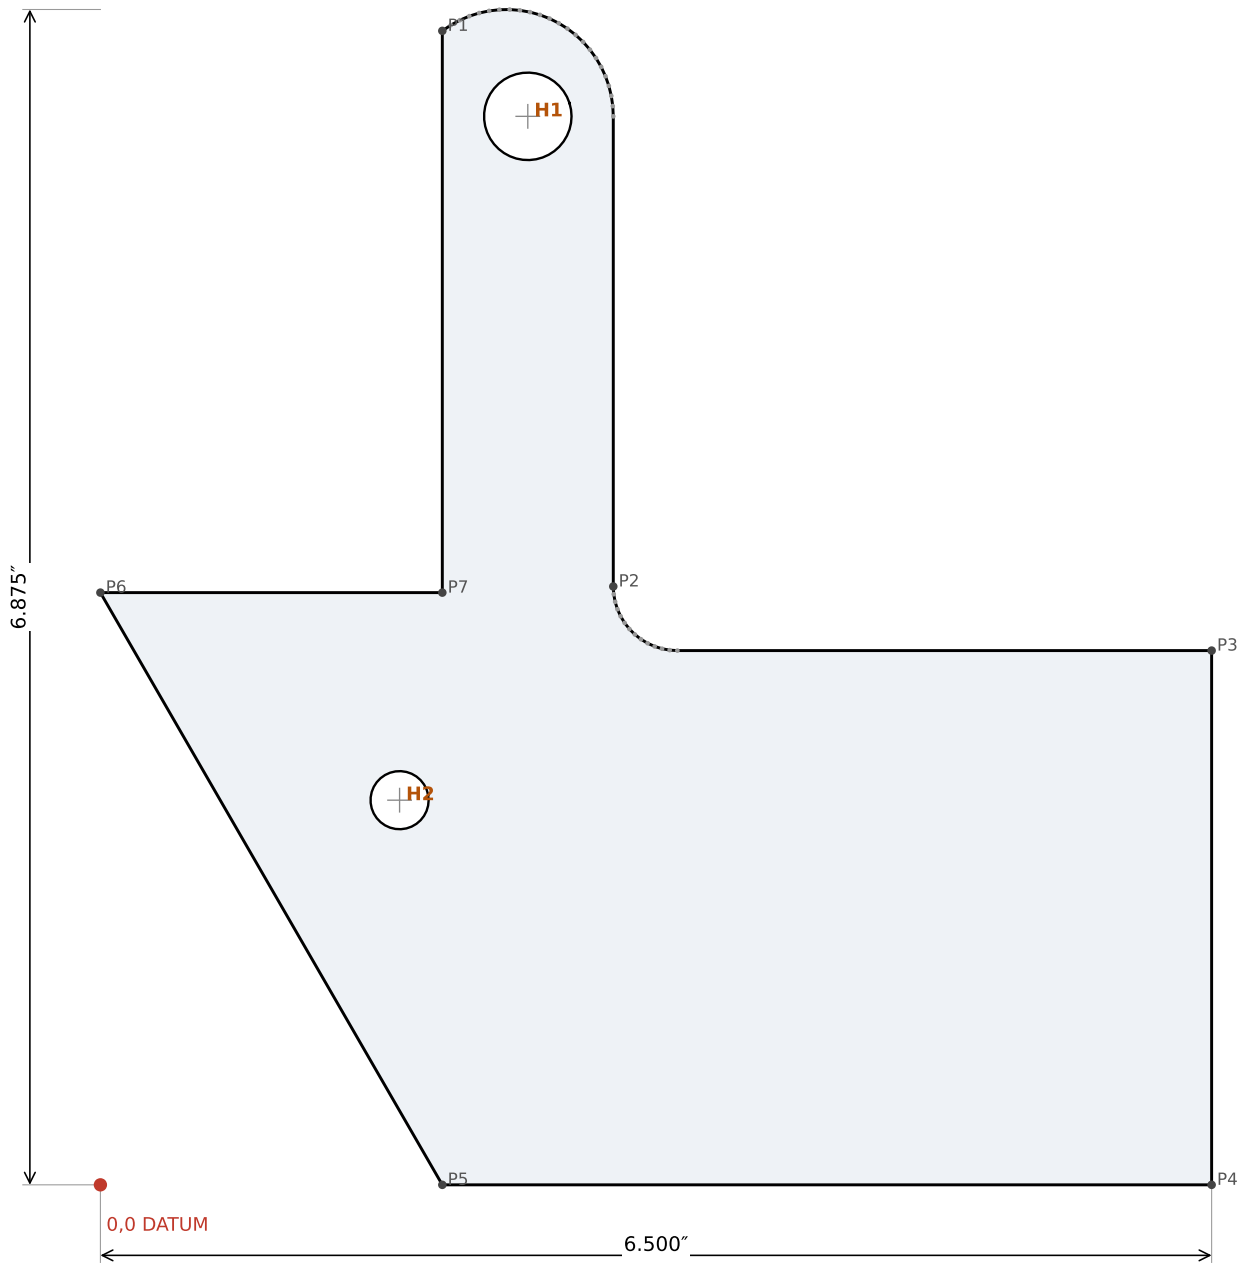

HOLES (centre X, Y from datum)

H1	Ø0.512"	X 2.500	Y 6.250
H2	Ø0.340"	X 1.750	Y 2.250

OUTLINE POINTS (X, Y from datum)

P1	2.000	6.750
P2	3.000	3.500
P3	6.500	3.125
P4	6.500	0.000
P5	2.000	0.000
P6	0.000	3.464
P7	2.000	3.464

FREE-FORM CURVE 1 (grey dots, follow DXF) — points X, Y

2.050	6.784
2.103	6.812
2.158	6.836
2.215	6.854
2.274	6.867
2.334	6.874
2.394	6.875
2.454	6.870
2.513	6.859
2.571	6.843
2.627	6.822
2.681	6.795
2.732	6.763
2.780	6.726
2.824	6.685
2.863	6.640
2.899	6.591
2.929	6.539
2.954	6.485
2.974	6.428
2.988	6.370
2.997	6.310
3.000	6.250

FREE-FORM CURVE 2 (grey dots, follow DXF) — points X, Y

3.003	3.455
3.011	3.410
3.024	3.367
3.043	3.326
3.066	3.287
3.094	3.251
3.126	3.219
3.162	3.191
3.201	3.168
3.242	3.149
3.285	3.136
3.330	3.128
3.375	3.125


NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
3. Flat pattern already includes bend allowance (K = 0.44, R = t).
4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
5. Deburr all edges. Curved edges: smooth arcs per DXF.
6. FR side as drawn; FL side = mirror image (flip the blank).

FR-4 (welded version) — blank 2 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate, left (hole Ø0.34)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 8

FR-4 (welded version) — blank 3 of 8

Front plate · blank 2.731" × 3.125" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

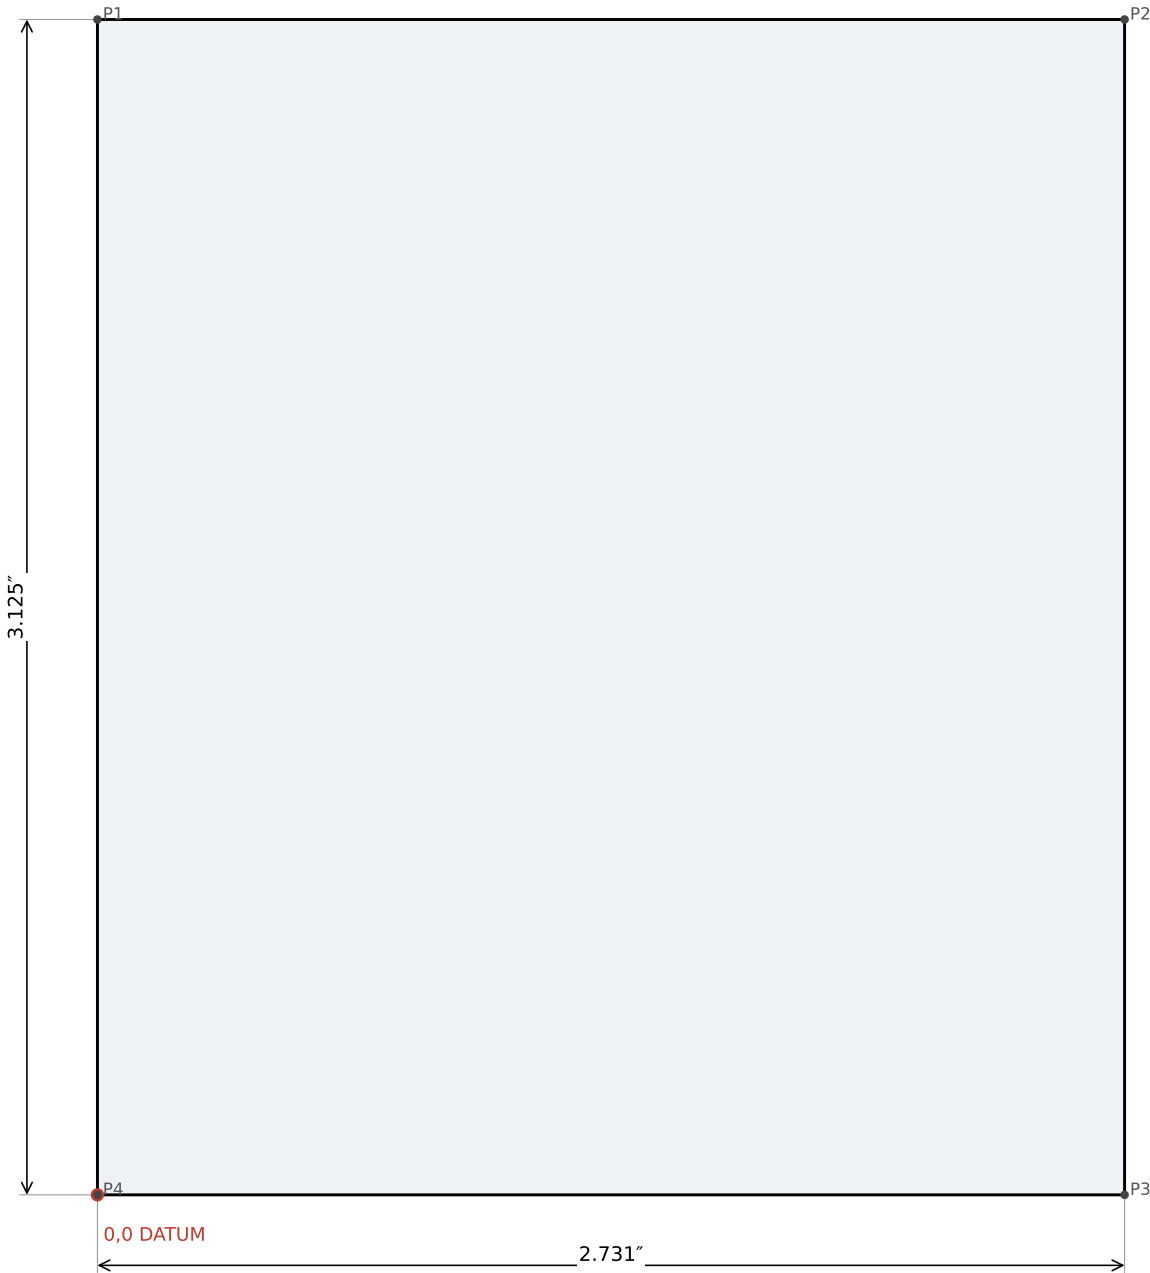

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	3.125
P2	2.731	3.125
P3	2.731	0.000
P4	0.000	0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-4 (welded version) — blank 3 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Front plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 3 / 8

FR-4 (welded version) — blank 4 of 8

Slanted plate · blank 4.000" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle



HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	2.731
P3	4.000	2.731
P4	4.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-4 (welded version) — blank 4 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Slanted plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 4 / 8

FR-4 (welded version) — blank 5 of 8

Bottom plate (hole Ø1.5 for the tube) · blank 2.731” × 4.210” · HR steel sheet 10 ga (0.135”) · 1 per side · FR + FL (mirror) = 2 per vehicle

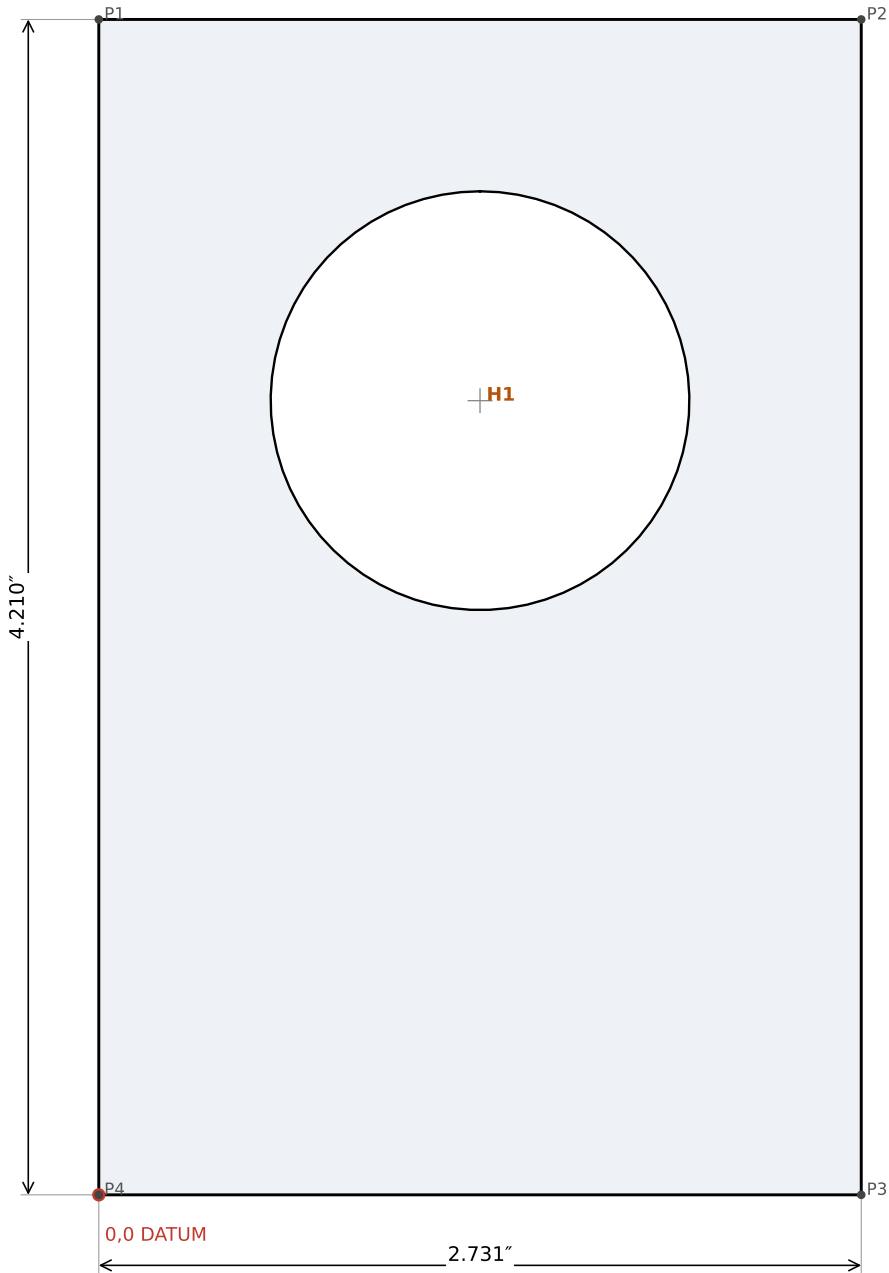

HOLES (centre X, Y from datum)

H1 Ø1.500” X 1.366 Y 2.845

OUTLINE POINTS (X, Y from datum)

P1	0.000	4.210
P2	2.731	4.210
P3	2.731	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135”) (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + tube OD1.5 / ID1.181 through (bottom + top), weld all round

FR-4 (welded version) — blank 5 of 8	HR steel sheet 10 ga (0.135”)	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Bottom plate (hole Ø1.5 for the tube)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010” · bends ±1° · IR = t	SHEET 5 / 8

FR-4 (welded version) — blank 6 of 8

Top plate (hole Ø1.5 for the tube) · blank 2.731” × 3.365” · HR steel sheet 10 ga (0.135”) · 1 per side · FR + FL (mirror) = 2 per vehicle

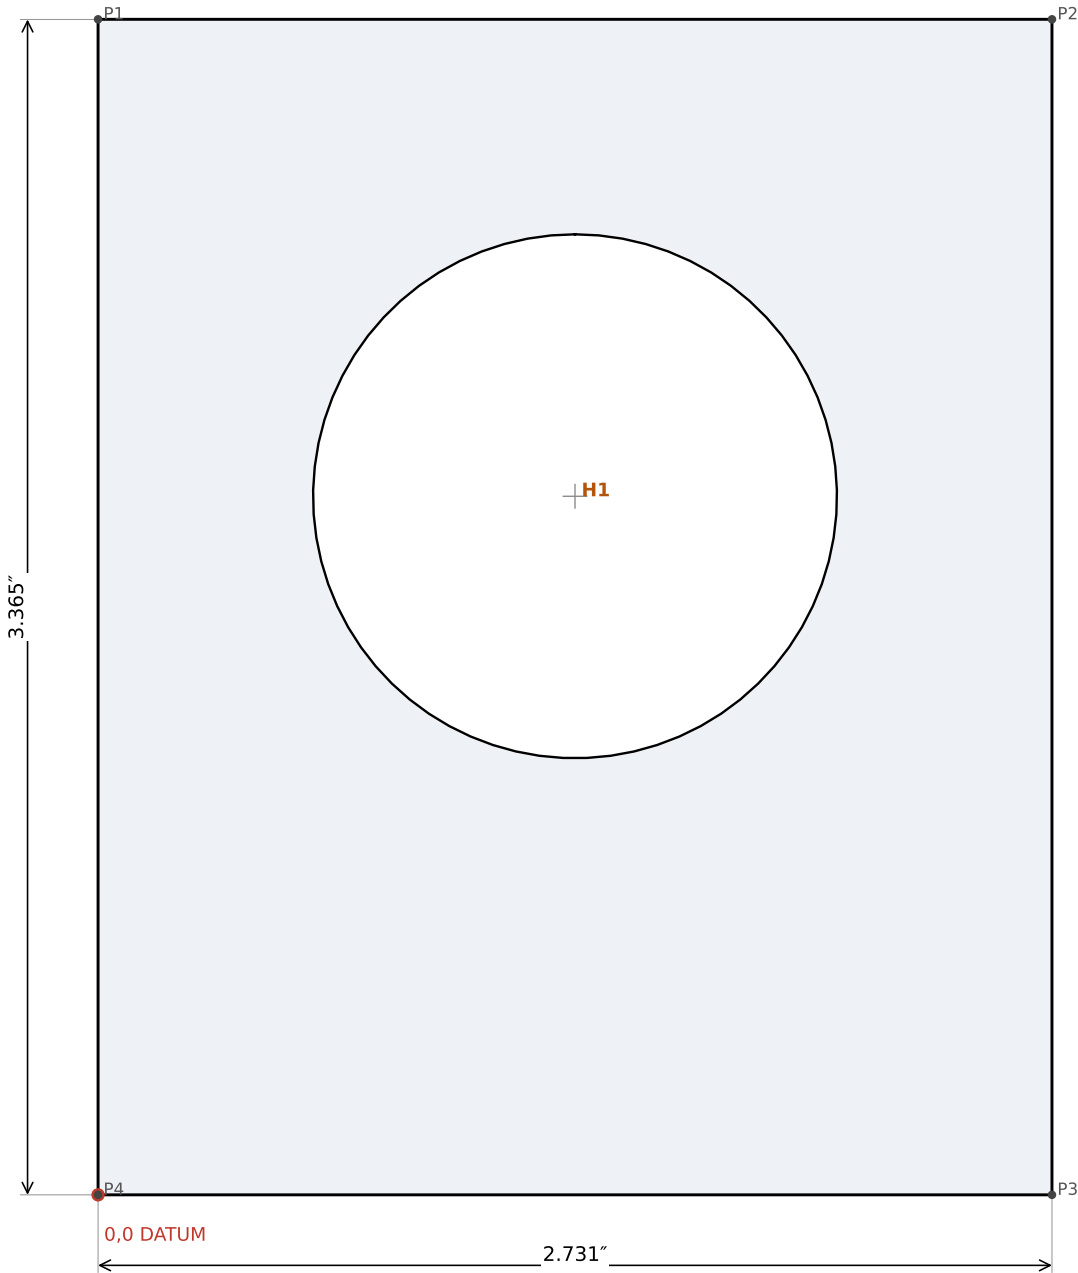

HOLES (centre X, Y from datum)

H1 Ø1.500” X 1.365 Y 2.000

OUTLINE POINTS (X, Y from datum)

P1 0.000 3.365
P2 2.731 3.365
P3 2.731 0.000
P4 0.000 0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135”) (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * the tube passes through

FR-4 (welded version) — blank 6 of 8	HR steel sheet 10 ga (0.135”)	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Top plate (hole Ø1.5 for the tube)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010” · bends ±1° · IR = t	SHEET 6 / 8

FR-4 (welded version) — blank 7 of 8

Ear plate · blank 2.731" × 3.259" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

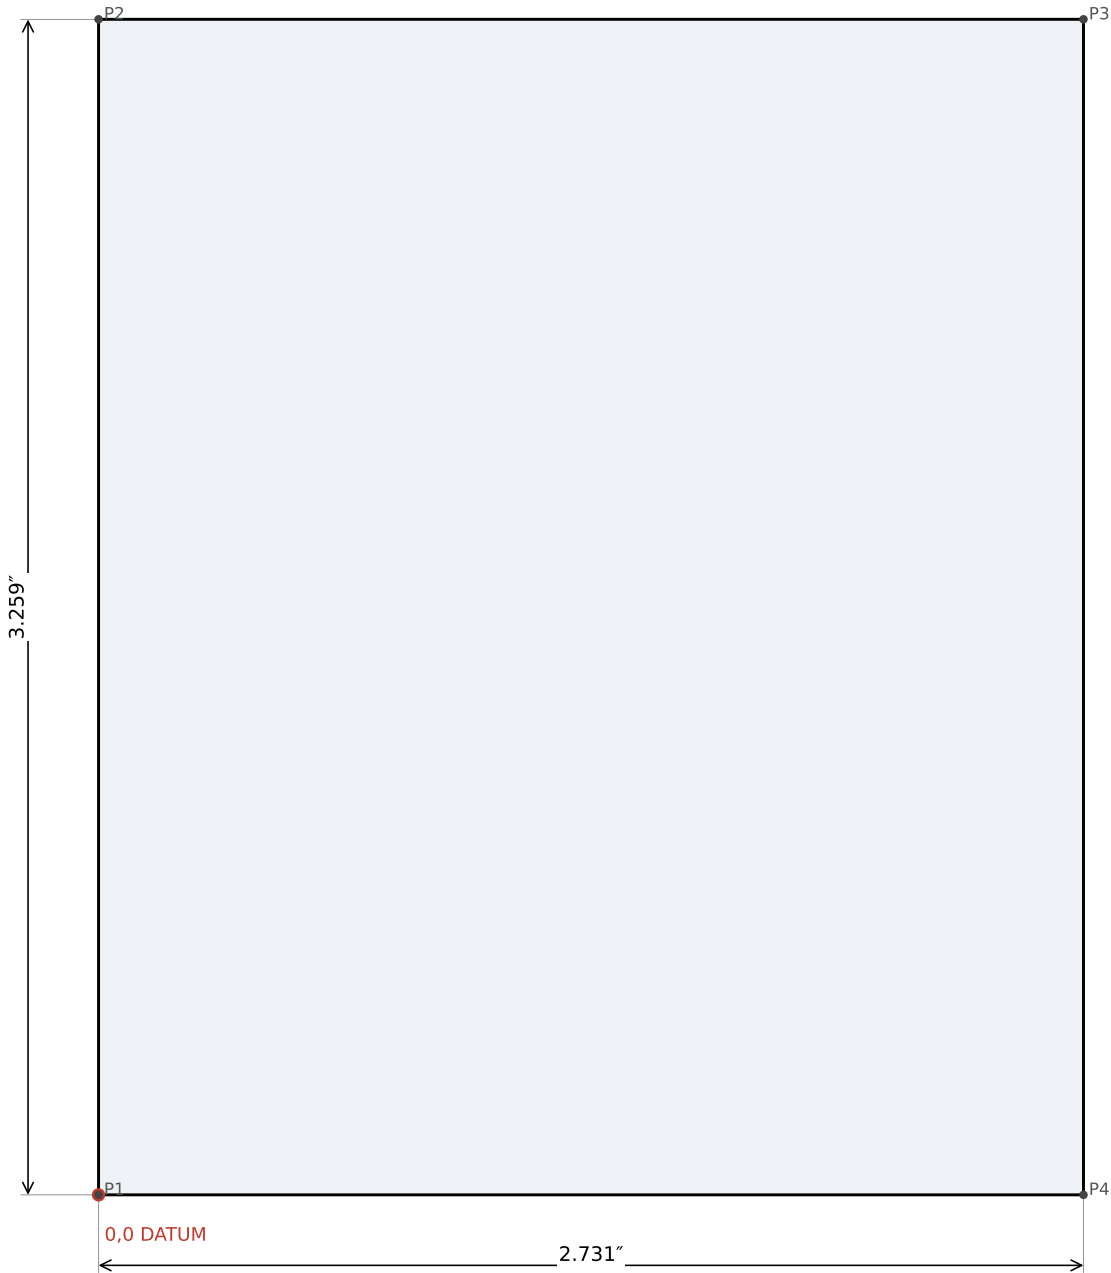

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	3.260
P3	2.731	3.260
P4	2.731	0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-4 (welded version) — blank 7 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Ear plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 7 / 8

FR-4 (welded version) — blank 8 of 8

Ear cap (bend R0.625) · blank 2.705" × 1.200" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	2.705	0.000
P2	2.705	1.200
P3	0.000	1.200
P4	0.000	0.000



NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * bend to arc R 0.625; V-notch 5/8

FR-4 (welded version) — blank 8 of 8	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Ear cap (bend R0.625)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 8 / 8