


FR-5 (welded version) — blank 1 of 2

Side plate · blank 4.849" × 6.483" · HR steel sheet 10 ga (0.135") · 2 per side · FR + FL (mirror) = 4 per vehicle

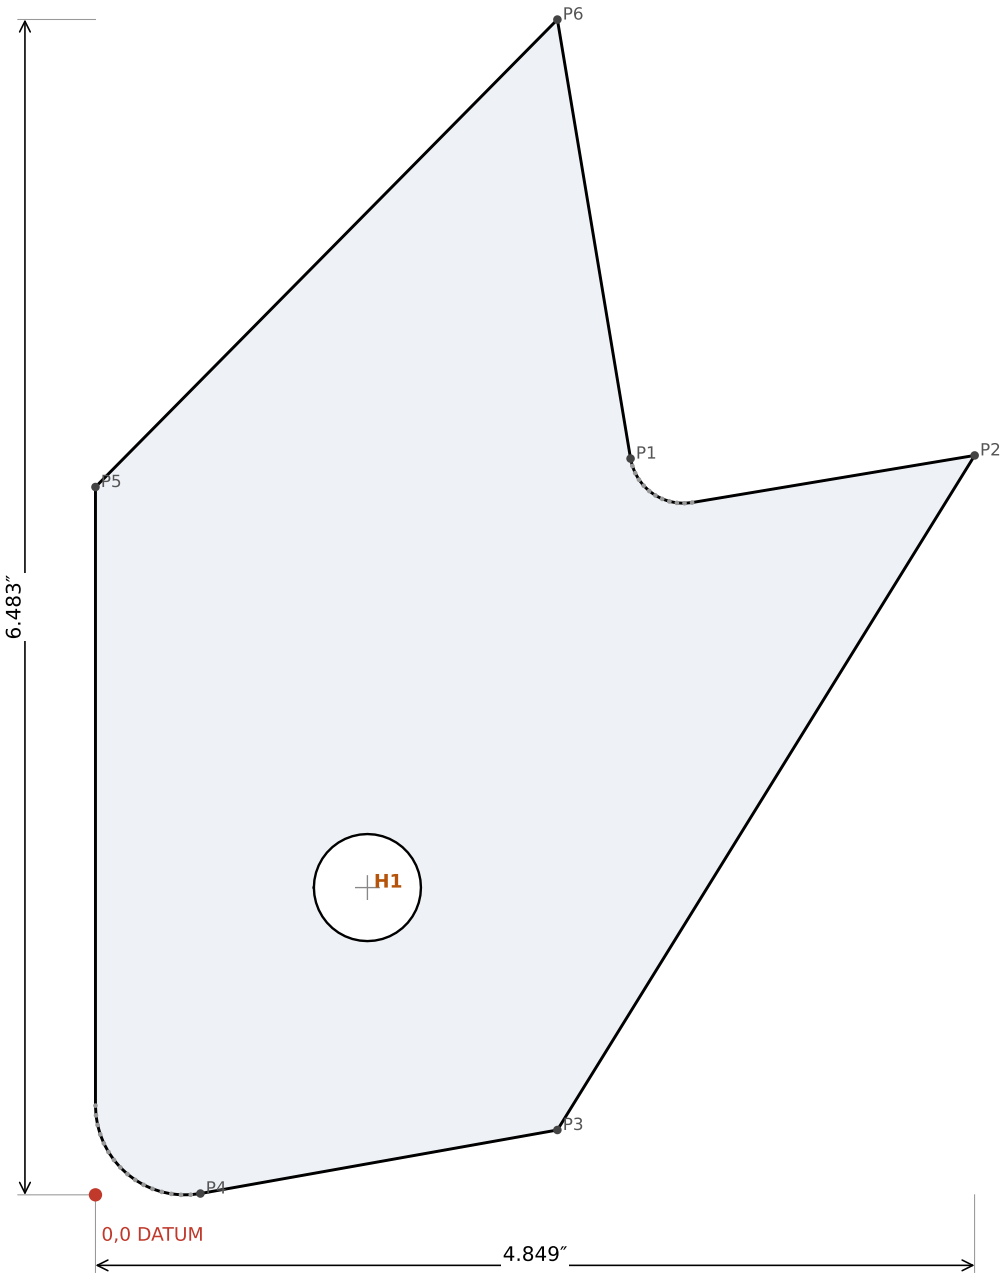

HOLES (centre X, Y from datum)

H1 Ø0.591" X 1.500 Y 1.695

OUTLINE POINTS (X, Y from datum)

P1 2.951 4.061
P2 4.849 4.078
P3 2.548 0.358
P4 0.579 0.007
P5 0.000 3.904
P6 2.548 6.483

FREE-FORM CURVE 1 (grey dots, follow DXF) — points X, Y

2.961 4.020
2.977 3.981
2.998 3.945
3.024 3.911
3.054 3.882
3.089 3.858
3.126 3.838
3.166 3.825
3.207 3.817
3.249 3.815
3.291 3.819

FREE-FORM CURVE 2 (grey dots, follow DXF) — points X, Y

0.525 0.001
0.472 0.000
0.418 0.005
0.366 0.016
0.315 0.033
0.266 0.055
0.219 0.082
0.176 0.115
0.137 0.151
0.102 0.192
0.072 0.236
0.046 0.284
0.026 0.334
0.012 0.385
0.003 0.438
0.000 0.492


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-5 (welded version) — blank 1 of 2	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate	QTY: 2 per side · FR + FL (mirror) = 4 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 2

FR-5 (welded version) — blank 2 of 2

Plate on edge A-C · blank 3.625" × 2.231" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

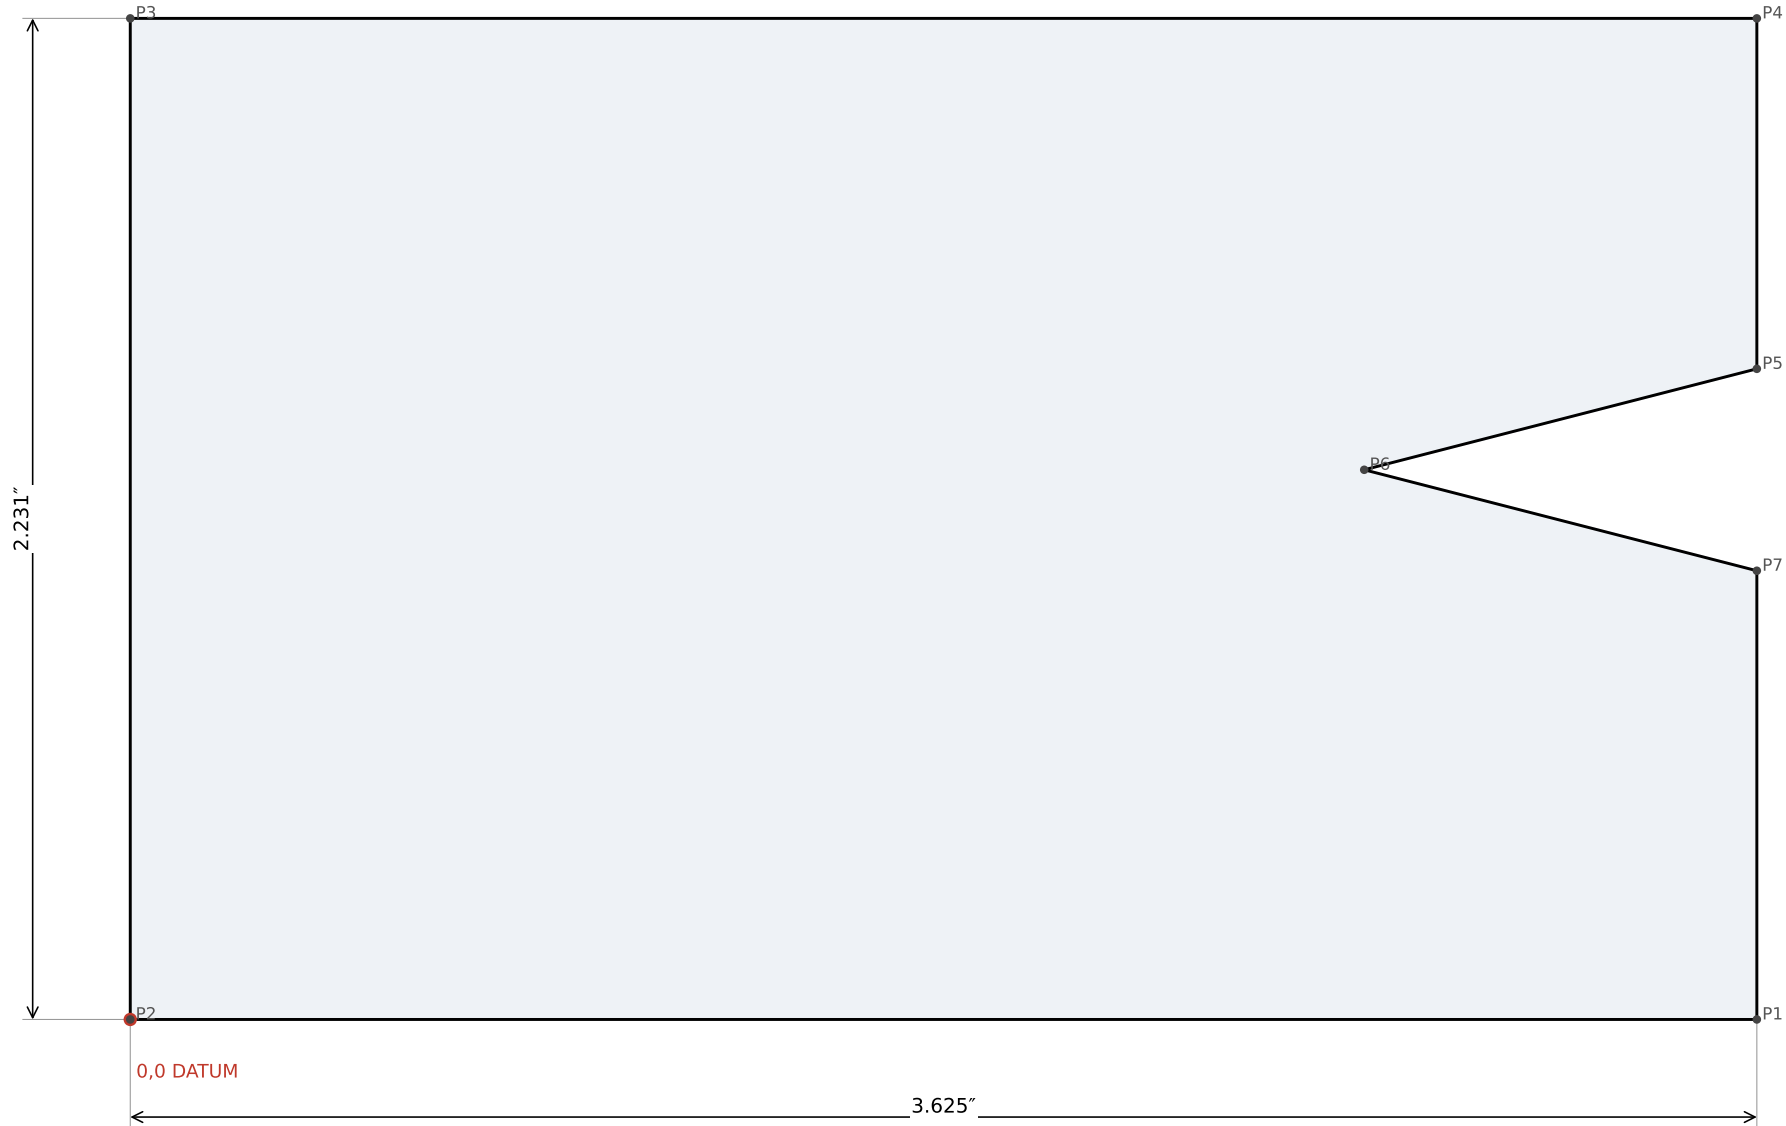

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	3.625	0.000
P2	0.000	0.000
P3	0.000	2.231
P4	3.625	2.231
P5	3.625	1.450
P6	2.750	1.225
P7	3.625	1.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-5 (welded version) — blank 2 of 2	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate on edge A-C	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 2