


FR-8 (bent version) — blank 1 of 1

Channel (top + 2 sides) · blank 6.209" × 12.000" · HR steel sheet 11 ga (0.120") · 1 per side · FR + FL (mirror) = 2 per vehicle

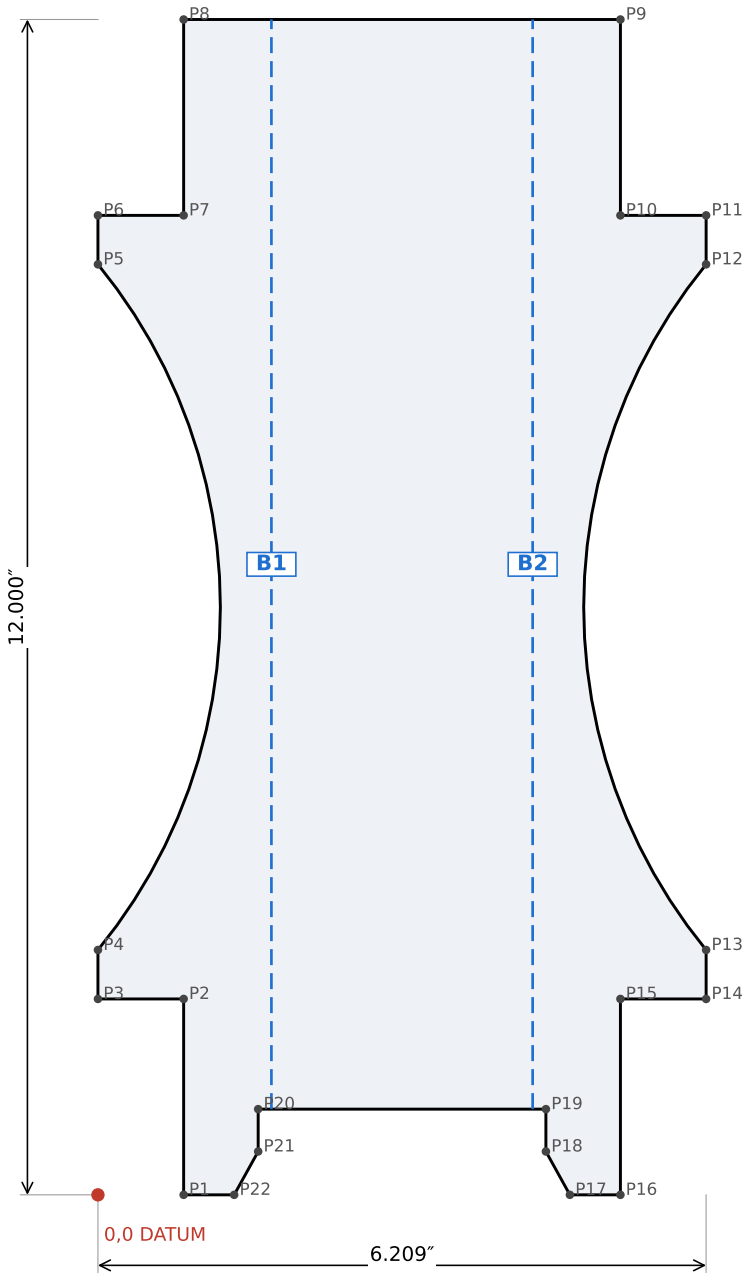

HOLES (centre X, Y from datum)

none

BENDS (bend centre line, from datum) IR = t = 11 ga (0.120")

B1 (1) 90° (1.771, 0.875) → (1.771, 12.000)
B2 (2) 90° (4.438, 0.875) → (4.438, 12.000)

CURVED EDGES (radius, centre X, Y)

R1 R 5.525" centre -4.275, 6.000
R2 R 5.525" centre 10.484, 6.000

OUTLINE POINTS (X, Y from datum)

P1 0.875 0.000
P2 0.875 2.000
P3 0.000 2.000
P4 0.000 2.500
P5 0.000 9.500
P6 0.000 10.000
P7 0.875 10.000
P8 0.875 12.000
P9 5.334 12.000
P10 5.334 10.000
P11 6.209 10.000
P12 6.209 9.500
P13 6.209 2.500
P14 6.209 2.000
P15 5.334 2.000
P16 5.334 0.000
P17 4.818 0.000
P18 4.574 0.443
P19 4.574 0.875
P20 1.636 0.875
P21 1.636 0.443
P22 1.391 0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 11 ga (0.120") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).
- * 90° bends, R = t; relief cut at B

FR-8 (bent version) — blank 1 of 1	HR steel sheet 11 ga (0.120")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Channel (top + 2 sides)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 1