

ARKITESSUTO

COLOR BODY PORCELAIN STONEWARE


24"x24"

12"x24"

6"x24"

12"x12"

RAGNO  USA

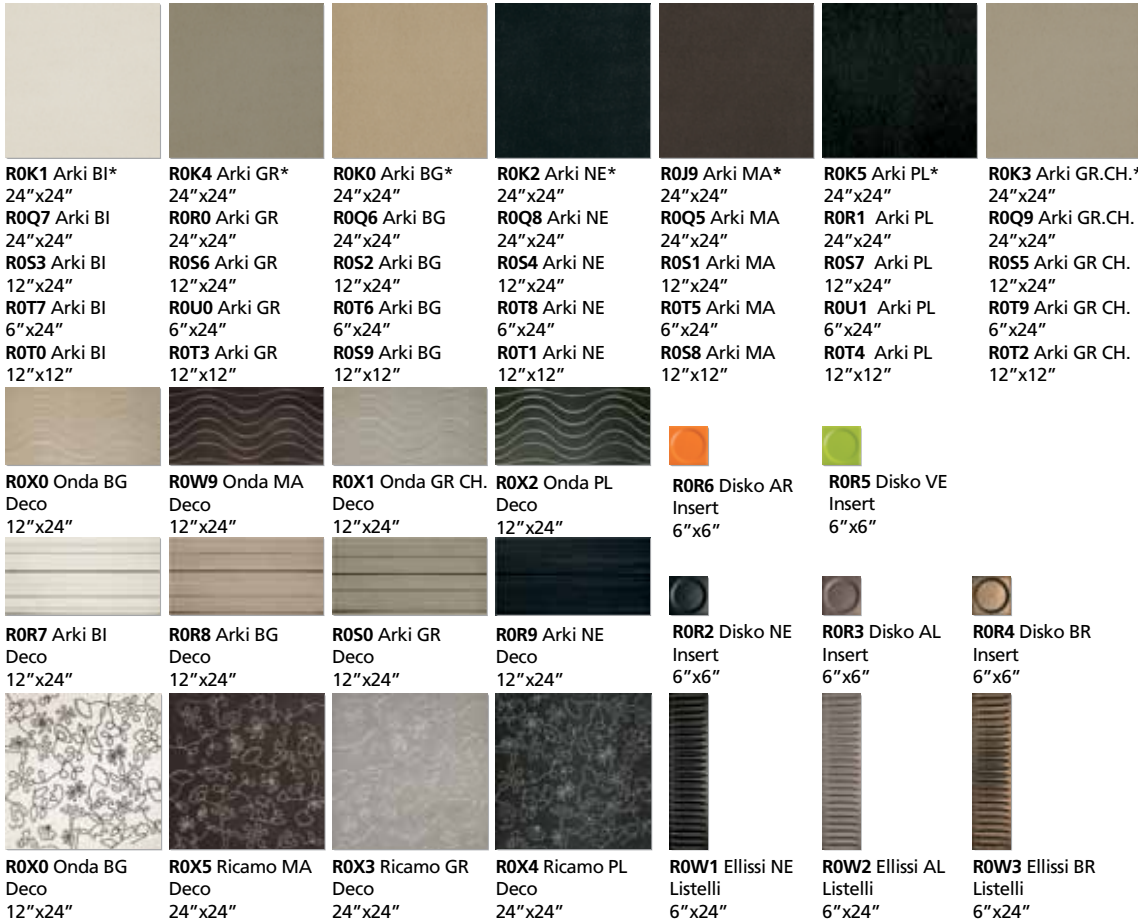

-  Field Tile
-  Wall Tile
-  Modular Tile
-  Decorative Tile
-  Trim Available
-  Suitable for Outdoors
-  Moderate Variation
-  Frost Resistant
-  Meets ADA Recommendations
-  Abrasion Resistance
-  C.O.F. (Wet)
-  C.O.F. (Dry)

TRIMS

- R0V6** Arki BI Pencil Liner
R0V5 Arki BG Pencil Liner
R0V4 Arki MA Pencil Liner
R0V8 Arki GR CH. Pencil Liner
R0V9 Arki GR Pencil Liner
R0V7 Arki NE Pencil Liner
R0W0 Arki PL Pencil Liner
1/2"x12"
- R0V0** Arki BI Bullnose
R0U9 Arki BG Bullnose
R0U8 Arki MA Bullnose
R0V2 Arki GR CH. Bullnose
R0V3 Arki GR Bullnose
R0V1 Arki NE Bullnose
4"x12"
- R0U4** Arki BI Stairtread
R0U3 Arki BG Stairtread
R0U2 Arki MA Stairtread
R0U6 Arki GR CH. Stairtread
R0U7 Arki GR Stairtread
R0U5 Arki NE Stairtread
12"x12"

R0X8 Tre MA
Listelli
1 1/4"x24"

R0X7 Tre NE
Listelli
1 1/4"x24"

R0X9 Tre BG
Listelli
1 1/4"x24"

TECHNICAL SPECIFICATIONS

DESCRIPTION	ANSI STANDARD	RESULT	ASTM TEST METHOD
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	8	MOHS SCALE
Breaking Strength	24"x24"	≥ 250 lbf.	≥ 1065 lbf.
	12"x24"	≥ 250 lbf.	≥ 1386 lbf.
	12"x12"	≥ 250 lbf.	≥ 847 lbf.
Facial Dimension	-3.0 % < Nominal < 2.0 %	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (Squareness)	+/- 0.50 % or +/- 2.0 mm*	Within Standard	C502
Warpage (Flatness)	+/- 0.75 % or +/- 2.3 mm*	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
C.O.F. (Wet)	As Reported	0.60 ≤ COF < 0.70	C1028
C.O.F. (Dry)	As Reported	0.60 ≤ COF < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

* Whichever is less

