





Embrace new organic, ethically and ecologically sourced atmospheres.


Ouroundy









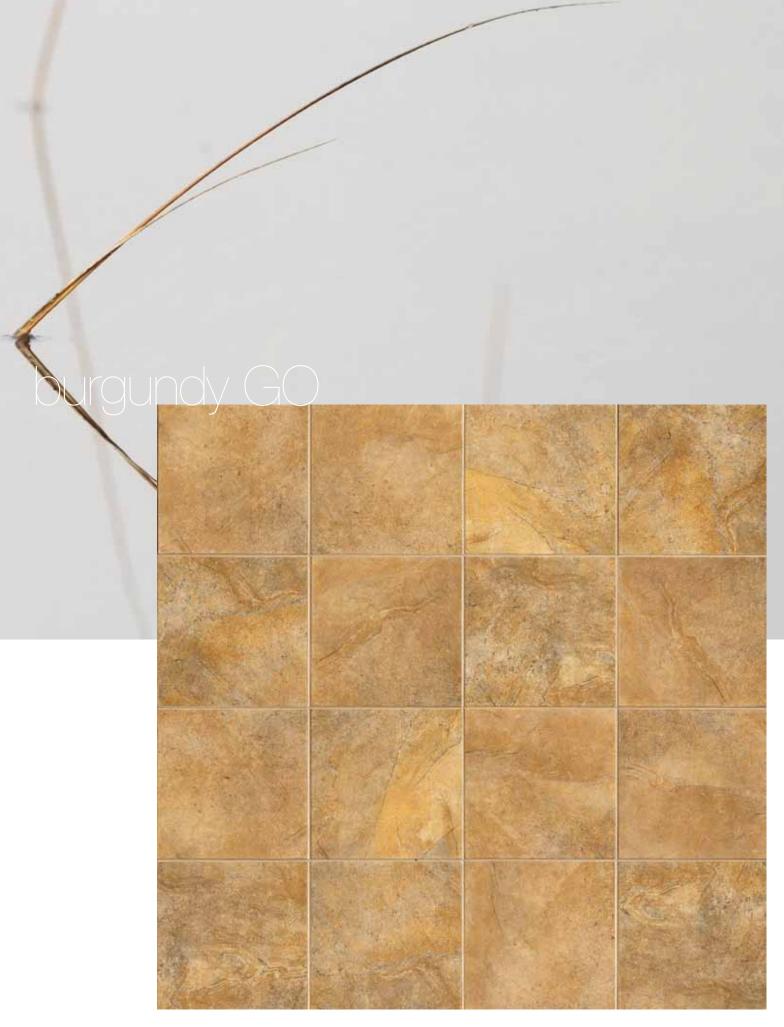













burgundy TC

Burgundy tile body and surface, enlarging the expressive potentiality of this product: a robust and resilient stone with a deceptive surface that is

lived-in and warm.





20"x20" 13"x13" 61/2"x61/2"



AF3N Burgundy GR 20"x20" AF3J Burgundy GR 13"x13" **AF56** Burgundy GR 6^{1/2}"x6^{1/2}"



AF62 Burgundy GR Listelli 1"x13"



AF3Q Burgundy NO 20"x20" AF3L Burgundy NO 13"x13" AF58 Burgundy NO 61/2"x61/2"



AF64 Burgundy NO Listelli 1"x13"



AF3P Burgundy GO 20"x20" AF3K Burgundy GO 13"x13" **AF57** Burgundy GO 6^{1/2}"x6^{1/2}"





AF3R Burgundy TC 20"x20" AF3M Burgundy TC 13"x13" AF59 Burgundy TC 61/2"x61/2"





AF67 Burgundy Corner-Insert

V-Cap

V-Cap

V-Cap

V-Cap

TRIMS



Bullnose AF3S Burgundy GR AF3T Burgundy GO Bullnose **AF3U** Burgundy NO Bullnose AF3V Burgundy TC Bullnose 3"x13"

AF5E Burgundy GR AF5F Burgundy GO AF5G Burgundy NO **AF5H** Burgundy TC 1"x6^{1/2}"



Bead

Bead

Bead

Bead

AF5J Burgundy GR Beak AF5K Burgundy GO Beak AF5L Burgundy NO Beak AF5M Burgundy TC 1"x1" Beak



AF5N Burgundy GR AF5P Burgundy GO AF5Q Burgundy NO AF5R Burgundy TC 2"x6^{1/2}"



AF5S	Burgundy GR
AF5T	Burgundy GC
AF5U	Burgundy NC
AF5V	Burgundy TC
7/8" v 2"	,



AG58 Burgundy GR Mosaic - Square 2"x2" 13"x13"



AG59 Burgundy GO Mosaic - Square 2"x2" 13"x13"



AG6A Burgundy NO Mosaic - Square 2"x2" 13"x13"



AG6B Burgundy TC Mosaic - Square 2"x2" 13"x13"



AK65 Burgundy GR Cove Base AK66 Burgundy GO Cove Base AK67 Burgundy NO Cove Base AK68 Burgundy TC Cove Base 6"x13"



AK69 Burgundy GR Cove Base In Agnle AK72 Burgundy GO Cove Base In Agnle AK73 Burgundy NO Cove Base In Agnle AK74 Burgundy TC Cove Base In Agnle 1"x6"




AK75 Burgundy GR Cove Base Out Agnle AK76 Burgundy GO Cove Base Out Agnle AK77 Burgundy NO Cove Base Out Agnle AK78 Burgundy TC Cove Base Out Agnle 1"x6"

Shade variations

The color and shade of all tiles vary to some degree. This variance can be from piece to piece and can also occur from production run to production run.

American National Standard Specifications for Ceramic Tile (ANSI) has implemented a guide that rates ceramic tile on a five-point scale and ranges from V0 through V4.

Instituting the ANSI's color shade variation guidelines you will reduce customer complaints and sell the unique and individual beauty of each ceramic tile.

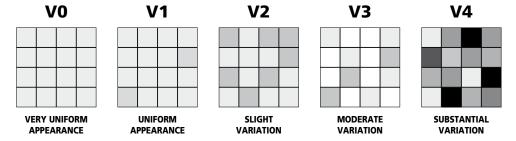

V0 Very Uniform Appearance

Pieces of the same shade value are very uniform and smooth in texture.

V1 Uniform Appearance

Differences among pieces from the same production run are minimal.

V2 Slight Variation

Clearly Distinguishable differences in texture and/ or pattern within similar colors.

V3 Moderate Variation

While the colors and or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

V4 Substantial Variation

Random color and/or texture differences from tile to tile, so that one tile may have totally different colors and/or texture from that on other tiles. Thus, the final installation will be unique. It is recommended that the range be viewed before selection.

SHADE VARIATION AND APPLICATIONS						
V3		Residential	Commercial	Industrial		
	Floor	•	•			
	Wall	•	•	•		
	Countertop	•	•	•		
MODERATE VARIATION	Pool	•	•	•		

Water, oil, grease, or other fluids create slippery conditions. Floors with exposure to these conditions require extra caution in product selection and proper maintenance.

Care & Maintenance

Burgundy is a stain-resistant porcelain tile. Routine maintenance will keep your tile looking new for years to come.

Ragno USA's products are typically easy to install and maintain using the following general guidelines:

- Choose tile from same dye lot and caliber whenever possible
 Select tile alternately from several boxes and rotate when installing
- Follow industry-accepted installation practices as detailed by Tile Council of America "Handbook for Ceramic Tile Installation" or those recommended by the Ceramic Tile Institute of America
- Remove all grout residue promptly after application; neither acid cleaning nor sealing is recommended
- Clean regularly with clear water and/or a neutral (soapless) cleaner, wipe dry to lessen slippery conditions

TECHNICAL SPECIFICATIONS							
DESCRIPTION		ANSI STANDARD	RESULT	ASTM TEST METHOD			
Water Absorption		≤ 0.50%	≤ 0.50%	C373			
Frost Resistance	Frost Resistance		Resistant	C1026			
Scratch Resistance		MOHS 1-10	6	MOHS SCALE			
Breaking Strength	20"x20"	≥ 250 lbf.	≥ 530 lbf.	C648			
	13"x13"	≥ 250 lbf.	≥ 400 lbf.	C648			
Facial Dimension		-3.0 % < Nominal < 3.0 %	Within Standard	C499			
Thickness		≤ 0.04 in (1.02 mm max)	Within Standard	C499			
Wedging (Squareness)		+/- 0.50 % or +/- 2.0 mm*	Within Standard	C502			
Warpage (Flatness)		+/- 0.75 % or +/- 2.3 mm*	Within Standard	C485			
Abrasion Resistance		Class 0 - Class V	Class IV	C1027			
C.O.F. (Wet)		As Reported	0.60 ≤ COF < 0.70	C1028			
C.O.F. (Dry)		As Reported	0.70 ≤ COF < 0.80	C1028			
Chemical Resistance		Class A - Class E	Class A	C650			
Stain Resistance		Class A - Class E	Class A	C1378			

^{*} Whichever is less

PACKAGING								
	SIZE	THICKNESS	вох					
			PCS	SQ FT				
Floor Tile	20"x 20"	7/16"	6	16.15	84.00	24	387.60	2016.00
Floor Tile	13"x 13"	5/16"	15	17.90	73.00	38	680.20	2774.00
Floor Tile	61/2"x 61/2"	5/16"	36	10.55	42.00	51	538.05	2142.00
Listelli	1"x 13"	Compatible	6		2.00			
Mosaic - 2"x2" Square	13"x 13"	Compatible	10		35.00			
Corner - Insert	1"x 1"	Compatible	4		1.00			
V-Cap	2"x 61/2"	Compatible	10		7.00			
V-Cap Corner	^{7/8} "x 2"	Compatible	4		1.00			
Bead	1"x 61/2"	Compatible	10		2.00			
Beak	1"x 1"	Compatible	4		1.00			
Cove Base	6"x 13"	Compatible	12		26.00			
Cove Base In Angle	1"x 6"	Compatible	6		2.00			
Cove Base Out Angle	1"x 16"	Compatible	6		2.00			
Bullnose	3"x 13"	Compatible	20		20.00			



Floor Tile



Wall Tile



Abrasion Resistance



C.O.F. (Wet)



C.O.F. (Dry)



Modular Tile



Decorative Tile



Moderate Variation



Trim Available



Frost Resistant



Meets ADA Recommendations

