




GLOBAL 3G CELLULAR  
SMART MODEM

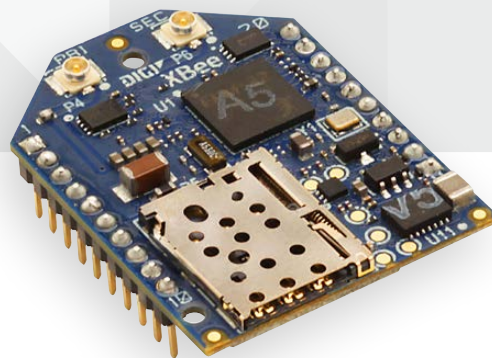

# DIGI XBEE® CELLULAR 3G

Digi XBee smart modems offer the easiest way to integrate cellular connectivity into an OEM device or IoT gateway.

Digi XBee Cellular smart modems were specifically designed to accelerate time to market for OEMs or solution providers adding cellular technology to their products. The modems are end-device certified, so there is no need to go through the costly and lengthy FCC or carrier end-device certifications. The software integration is simplified by using Digi's straightforward and flexible API.

Digi XBee Cellular 3G devices support 3G standards (HSPA/GSM) with fall back to 2G to maximize coverage globally. It is ideally suited for OEMs looking to have global cellular coverage on their products while minimizing the number of wireless standards supported.

With the suite of standard XBee API frames and AT commands, existing Digi XBee customers can seamlessly transition to this new modem with only minor software adjustments. When OEMs add the Digi XBee Cellular to their design, they create a future-proof design with flexibility to switch between wireless protocols or frequencies as needed, ideal for any business with an agile roadmap.

Like all Digi products, customers can manage all of their wireless devices with Digi Remote Manager®. The XBee Cellular can also be bundled with a cellular data plan and SIM, eliminating the hassle of securing and managing carrier data plans.

## BENEFITS

- FCC/IC, PTCRB, and AT&T certified – eliminates certification costs and risks
- Integrated MicroPython programmability enables custom scripting directly on the modem
- 90 days of free cellular service with development kits
- Low-power modes for battery powered applications
- Enhanced with Digi TrustFence® security framework
- Manage and configure with XCTU and Digi Remote Manager®
- Transparent and API modes simplify software integration

## RELATED PRODUCTS



Development  
Kits



ConnectCore®  
6UL SBC Pro



XCTU



Digi Remote  
Manager®



Digi Design  
Services

## APPLICATION EXAMPLE



END USER




CLOUD-BASED  
APPLICATION



CELL TOWER



HSPA/GSM

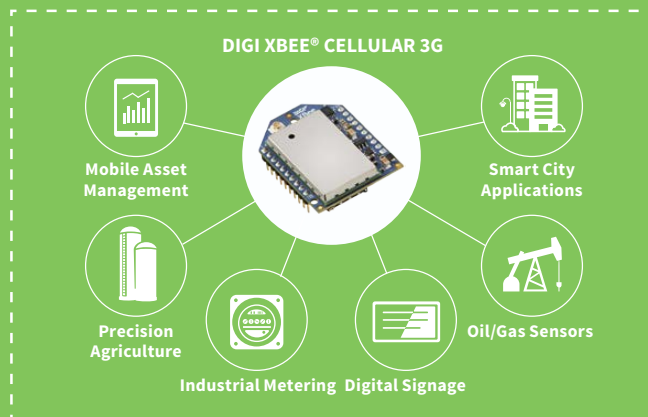

SPECIFICATIONS		Digi XBee® Cellular Smart Modem, 3G	
INTERFACES AND HARDWARE			
CHIPSET REFERENCE	u-blox U201		
SERIAL DATA INTERFACE	UART, SPI coming soon		
CONFIGURATION METHODS	AT Commands, API Frames, local or OTA		
OPERATING MODES	Transparent, API, Bypass		
PROGRAMMABILITY	MicroPython with 8 KB Flash / 24 KB RAM		
ANALOG I/O	4 ADC lines (10-bit)		
DIGITAL I/O	13 DIO lines		
FORM FACTOR	Digi XBee 20-pin through-hole		
ANTENNA OPTIONS	1 U.FL		
DIMENSIONS	24.38 mm x 32.94 mm		
OPERATING TEMPERATURE	-40° C to +85° C (-30 to +70C if 2G fallback is enabled)		
SIM CARD	4FF (Nano size)		
RF CHARACTERISTICS			
TRANSMIT POWER	Up to 24 dBm (Power Class 3)		
RECEIVE SENSITIVITY	-111 dBm		
NETWORKING AND CARRIER			
CARRIER AND TECHNOLOGY	3G HSPA/GSM with 2G fall-back (see User Guide for more details on this feature)		
SUPPORTED BANDS	Band 19 (800 MHz), Band 5 (850 Mhz), Band 8 (900 MHz), Band 2 (1900 MHz), Band 1 (2100 MHz)		
SECURITY	Digi Trustfence™ security with Secure Boot, Encrypted Storage, Protected JTAG, SSL/TLS 1.2		
RF THROUGHPUT	Up to 921 Kbps		
DOWNLINK/UPLINK SPEEDS	7.2 Mbps / 5.76 Mbps		
POWER REQUIREMENTS			
SUPPLY VOLTAGE	2.7 to 5.5 V		
TRANSMIT CURRENT (24 DBM)	702 mA @ 3.3 V 425 mA @ 5 V		
RECEIVE CURRENT	224 mA @ 3.3 V 160 mA @ 5 V		
IDLE CURRENT (LISTENING)	87 mA @ 3.3 V 72 mA @ 5 V		
DEEP SLEEP CURRENT	10 uA @ 3.3 V		
REGULATORY AND CARRIER APPROVALS			
UNITED STATES	Contains FCC ID: XPY1CGM5NNN		
CANADA	Contains IC: 8595A-1CGM5NNN		
EUROPE (CE)	Pending		
ROHS	Lead-free and RoHS compliant		
PTCRB CERTIFICATION	Yes		
AT&T END DEVICE CERTIFIED	Yes		

PART NUMBERS	DESCRIPTION
XBC-M5-UT-001	Digi XBee Cellular 3G, U.FL, TH, US/Canada/LATAM/EU
XKC-M5T-W	Digi XBee Cellular 3G Development Kit, U.FL, TH, US/Canada/LATAM/EU

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2017 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91003675  
A9/1117

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL GERMANY**  
+49-89-540-428-0

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

