POWER ASSURANCE CHECK in HOVER FLIGHT (NR=100%)

HEATER/COND OFF
GENERATOR LOAD TO MINIMUM (BELOW 17%)
SET NR to 100%
TEST ENGINE MODE SWITCH: FLIGHT
OTHER ENGINE MODE SWITCH: IDLE
INCREASE COLLECTIVE UNTIL LIGHT ON WHEELS OR HOVERING AT 5 FEET, NOSE ON WIND. DO NOT EXCEED 775°C ITT OR 102.4% NG OR 105% TQ
STABILIZE POWER 1 MINUTE, THEN RECORD OAT, PRESSURE ALTITUDE, ENGINE TORQUE, ITT AND NG
ENTER CHART AT INDICATED TQ, MOVE DOWN TO INTERSECT PRESSURE ALTITUDE, PROCEED TO THE RIGHT TO INTERSECT OAT,
THEN MOVE UP TO READ VALUES FOR MAXIMUM ALLOWABLE ITT AND NG
IF INDICATED ITT OR NG EXCEEDS MAXIMUM ALLOWABLE, REPEAT CHECK
REPEAT CHECK USING OTHER ENGINE
IF EITHER ENGINE EXCEEDS ALLOWABLE ITT OR NG, PUBLISHED PERFORMANCE MAY NOT BE ACHIEVABLE. REFER TO EMM

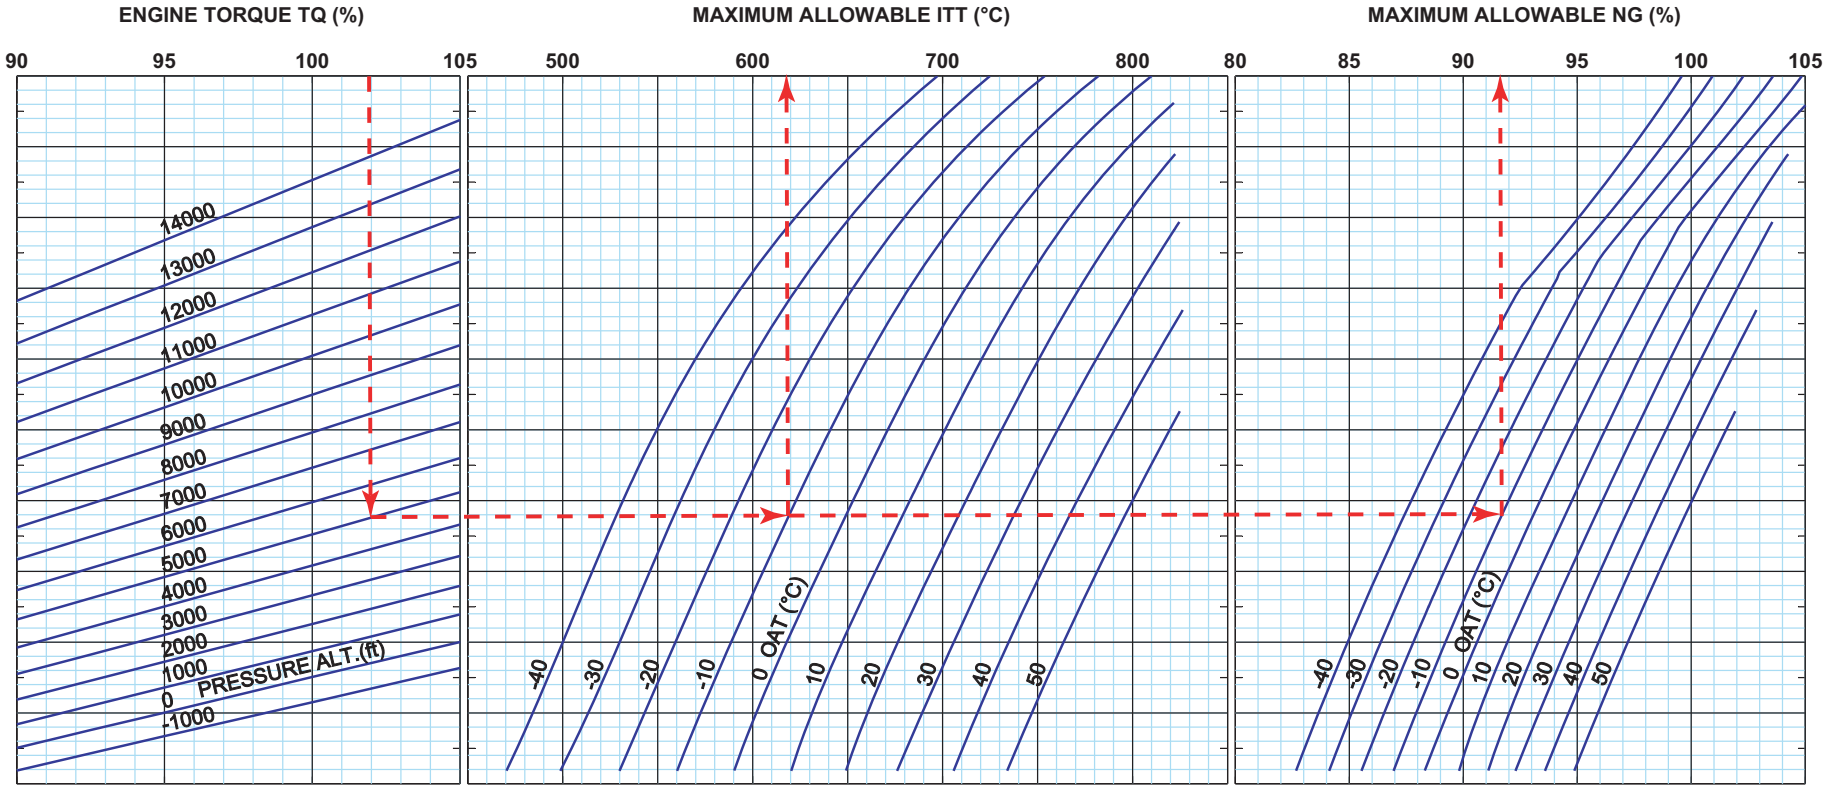

139G0040A001 ISSUE F

ICN-39-A-154000-A-A0126-00001-A-06-1

Figure 4-5 PWC PT6C-67C Hover Power Check Chart