


Proyecto 1

- Link de video: <https://youtu.be/oJZ5cvU0Mq0>
- Link de github: https://github.com/diegosamayaaa/progra-de-microcontroladores/tree/main/Proyecto_1

Diagrama y cableado

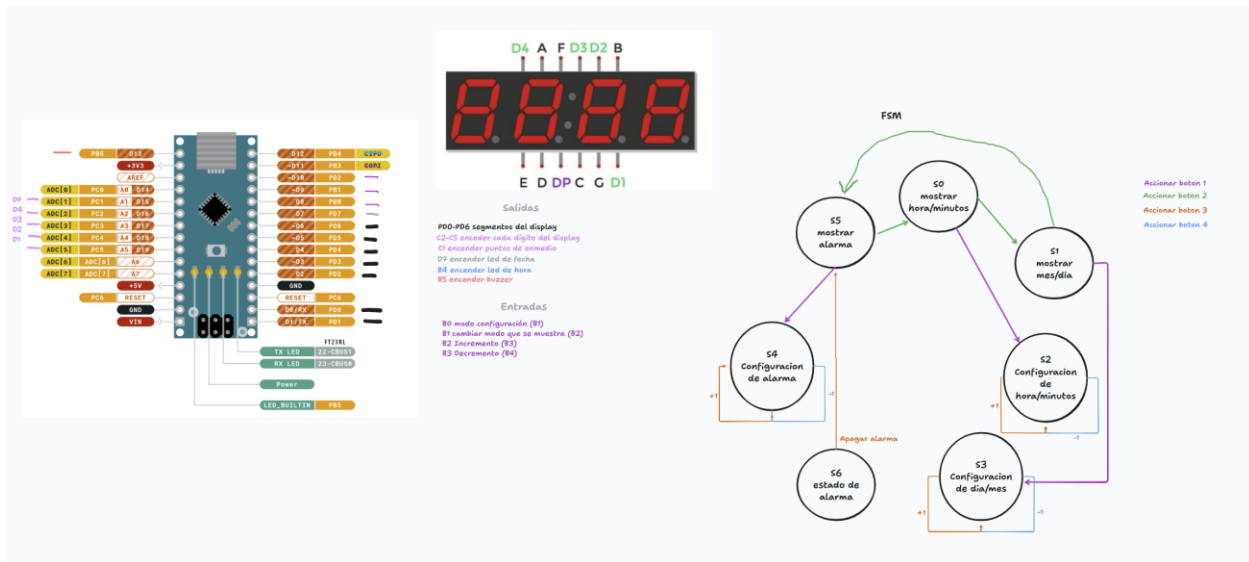

Timer size (bits)	8		CSn2	CSn1	CSn0	0	0	0	No clock source (Timer/Counter stopped)
System Clock Frequency (Hz)	16000000		0	1	1	0	0	1	clk _{IO} /(no prescaling)
System clock prescaler	1					0	1	0	clk _{IO} /8 (from prescaler)
Clock I/O Frequency	16000000					0	1	1	clk _{IO} /64 (from prescaler)
Clock I/O Prescaler	64	ANY				1	0	0	clk _{IO} /256 (from prescaler)
Desired delay (s)	0.001000					1	0	1	clk _{IO} /1024 (from prescaler)
Timer Frequency(Hz)	250000								
Ticks (s)	0.000004								
Maximum time (s)	0.001024								
Minimum precaler needed	62.5								
OCR0A	250.0	CTC MODE							
TNCT0	6.0	Normal Mode							

$$OCR0A = \frac{f_{clk} \times t_{deseado}}{Prescaler}$$

$$TNCT0 = 256 - \frac{f_{clk} \times t_{deseado}}{Prescaler}$$