



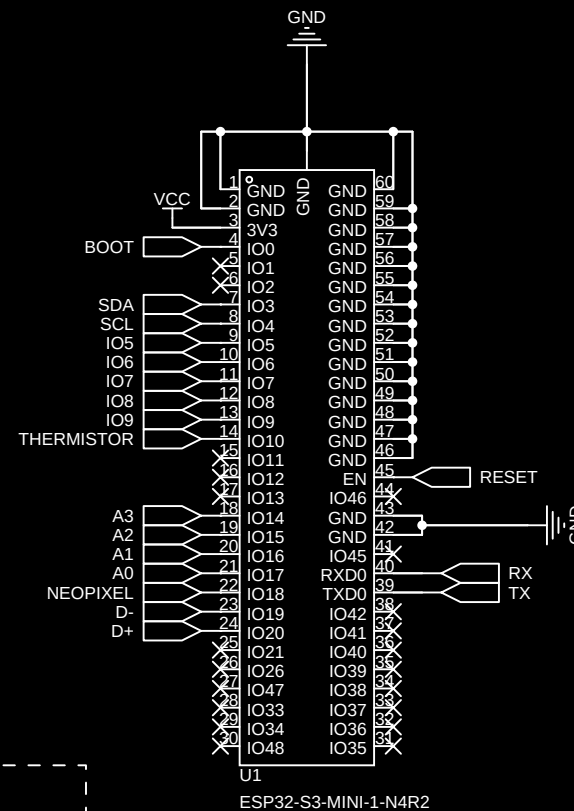

ESP32-S3-MINI-1-N4R2

The diagram illustrates the wiring of an I2C module to an Arduino Uno. The module has four main pins: VCC, GND, SCL, and SDA. These are connected to the corresponding pins on the Arduino: VCC to +5V, GND to GND, SCL to A5, and SDA to A4. Additionally, there are RX and TX pins on the module, which are connected to the RX and TX pins on the Arduino.

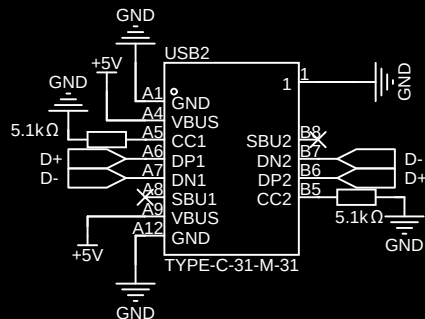