
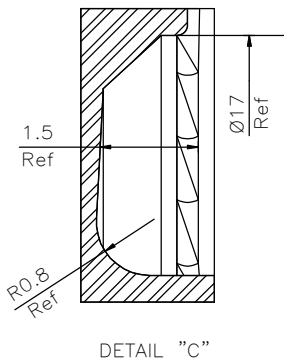



Dimensions According COMIL Standard	
Material:	Boron Low Carbon Steel
Heat Treatment:	Quenched and Tempered 8.8
Superficial Treatment:	BICHROMATIC
Coating Thickness:	5a8u
Drying Time:	48 hours CB; 72 hours CV

* Measured in the complete fillet
** Before coating

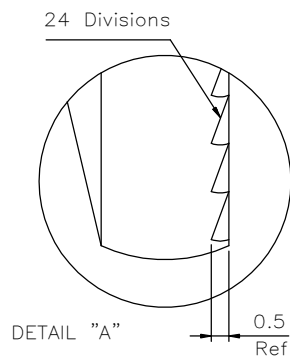

MECHANICAL PROPERTIES		
Test	Standard	Specification
Chemical Composition	ISO 898-1	According Standard
Traction (rupture)	ISO 898-1	800 N/mm
Traction (flow)	ISO 898-1	640 N/mm
Hardness	ISO 898-1	22-32 HRC

[illegible]