

# Installation Instructions


## Digilock KT-H Surface Mount with Pull Handle

Door Preparation: Before Installing Digilock you must prep your door by following these steps:

1. Install a Strike Plate (used to engage bolt/latch while locked)
2. Drill lock mounting holes
3. Install your lock

FIGURE 1

**1** Install either a Security Strike or L Bracket strike plate (not provided) on your door as shown in Figure 1. Be sure you install the strike plate at the same height as you would like lock. If you need to order strike plates, contact a Digilock sales representative.

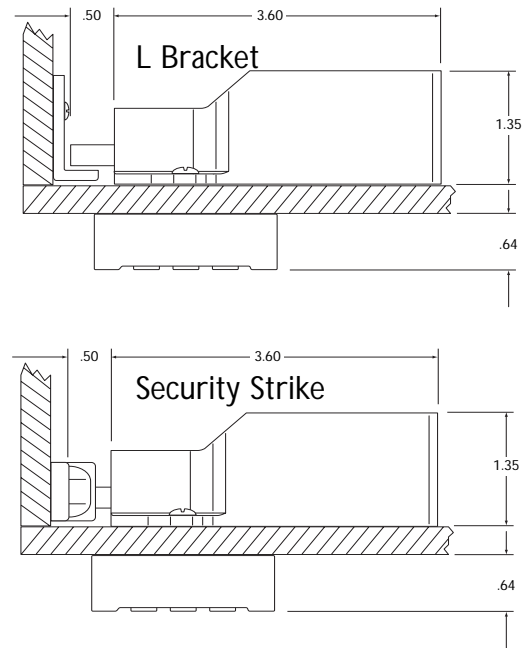

**2** Follow the directions on the "Wood Door Hole Template" on page 3 and use Figure 2 (lock mounting hole template) below to drill your lock mounting holes.

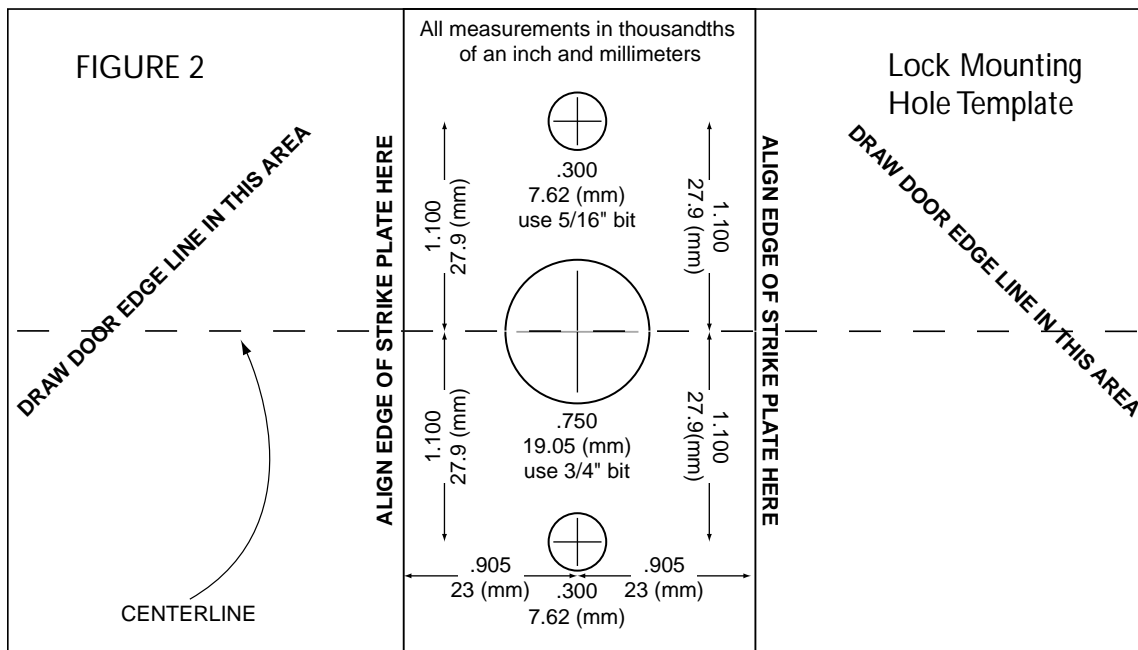


FIGURE 3

Rear Unit Connector

- Place the front unit along with the pull handle on the front face of the door connecting it with the rear unit. Make sure to align the pins of the rear unit connector with the extender of the front unit connector. An audible triple beep indicates that the lock was connected properly. If you do not hear this beep, reconnect the front and rear units. Tighten the mounting screws.  
(See Figure 5)

- 
- FIGURE 4**
- Front Unit
- Front Unit Connector
- Pin Extender
- FIGURE 5**
- Rear Unit
- Mounting Holes
- Surface Mount w/ Pull
- Mounting Screws
- Lock Washers
- Rear Unit Connectors
- Front Unit

# Wood Door Hole Template Instructions

**2** Using a pencil, mark the door edge on the template and also mark the centerline on the door edge. Open door, remove template.

