


Features

- All metal housing
- Keypad operation
- Assigned use functionality
- Standard body with or without pull handle
- 1/2" (12 mm) motorized deadlatch
- Unlocks with assigned 4-digit code
- Locks by closing the door
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding Indicator
- 2 year product warranty

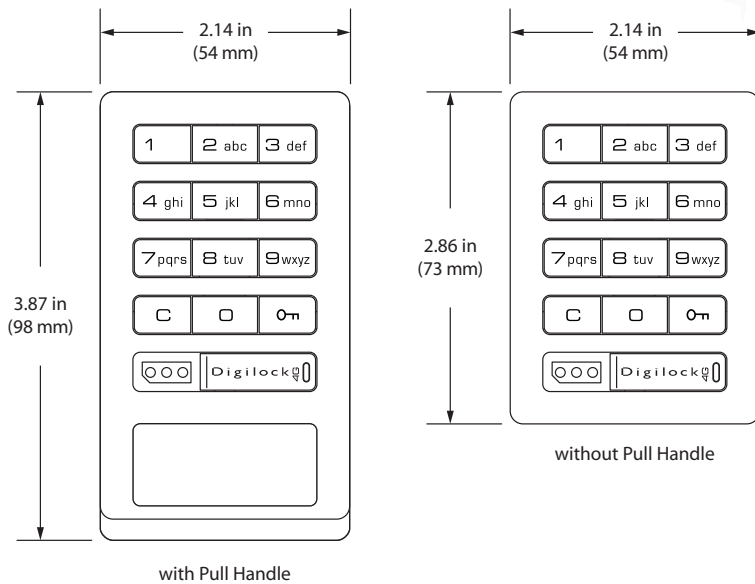



Surface or recess mount
Brushed nickel or custom finishes
Accommodates door thickness of
0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power
Manager Bypass Key (up to 25) with
external power
Accessibility User Key
Strike plate

Accessories . Options

DAK1-APS1



side view

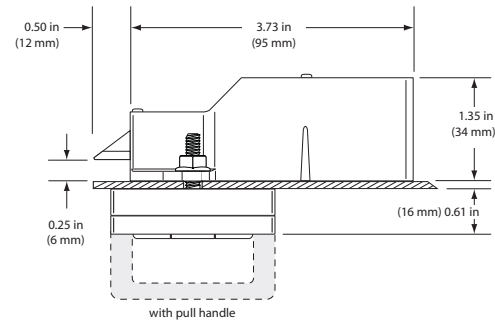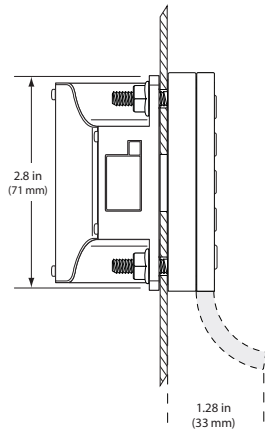

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

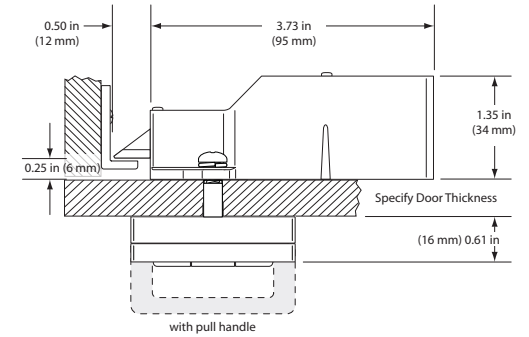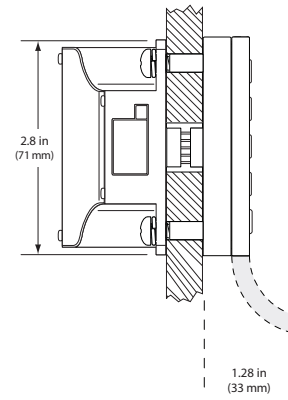

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

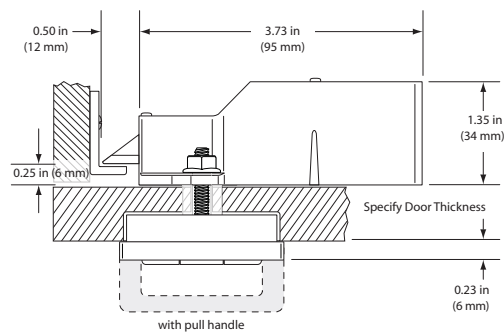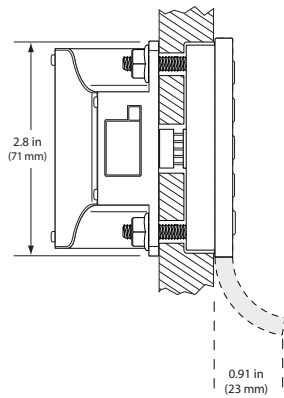

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

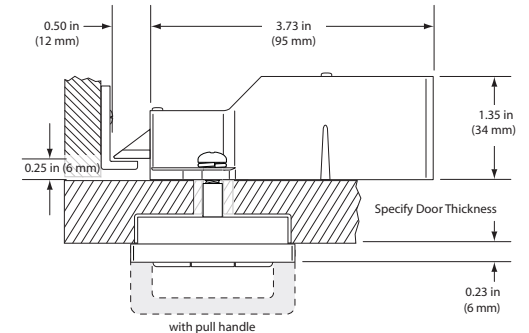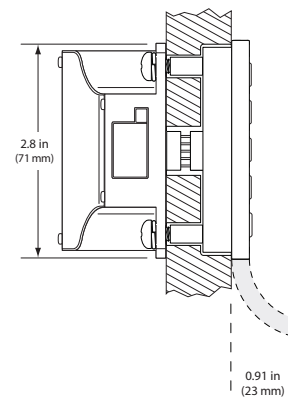

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness


top view



Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.



- All metal housing
- Keypad operation
- Assigned use functionality
- Vertical body with or without pull handle
- 1/2" (12 mm) motorized deadlatch
- Unlocks with assigned 4-digit code
- Locks by closing the door
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding Indicator
- 2 year product warranty

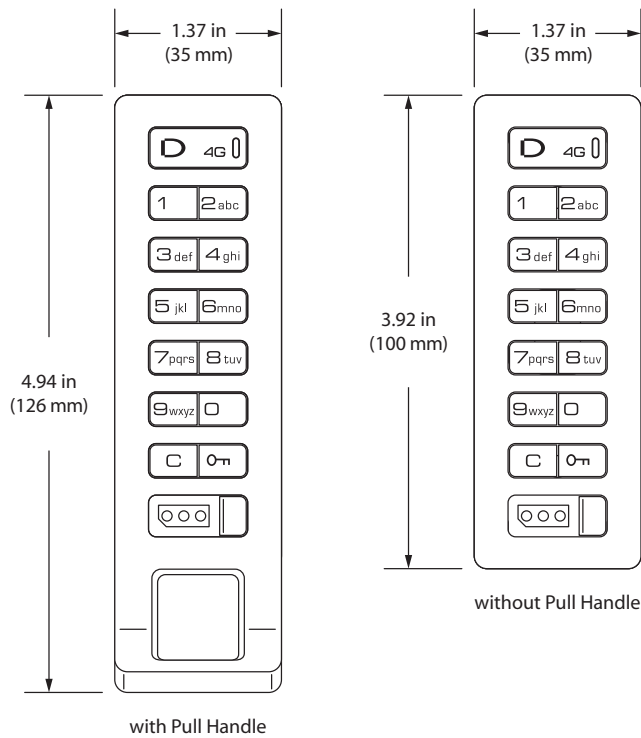



Surface or recess mount
Brushed nickel or custom finishes
Accommodates door thickness of
0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power
Manager Bypass Key (up to 25) with
external power
Accessibility User Key
Strike plate

Accessories . Options

DAKI-APV1



side view

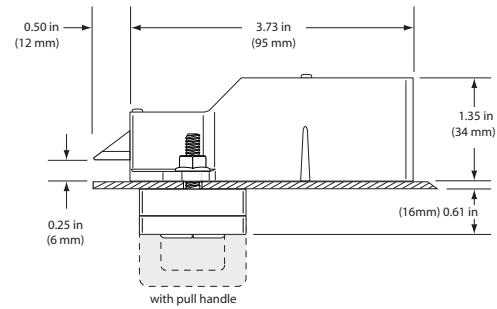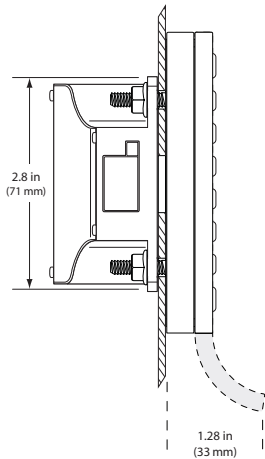

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

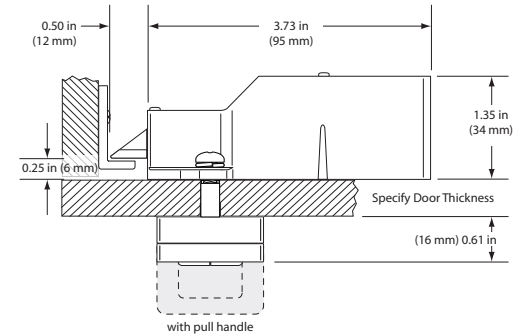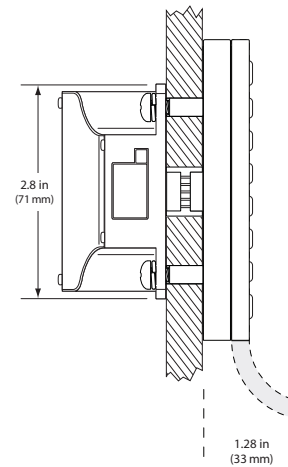

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

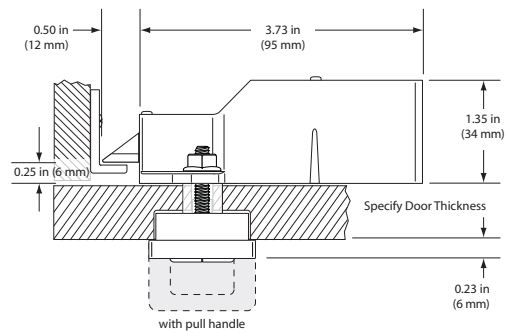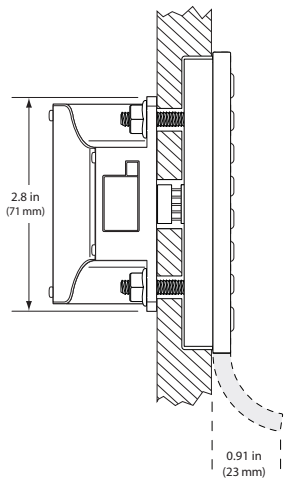

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

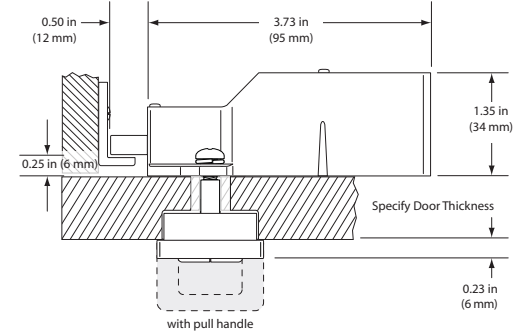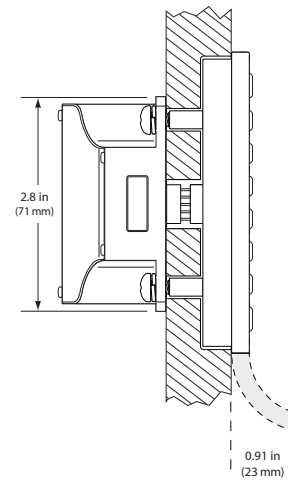

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness


top view




Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.



- All metal housing
- Keypad operation
- Assigned use functionality
- Horizontal body with or without pull handle
- 1/2" (12 mm) motorized deadlatch
- Unlocks with assigned 4-digit code
- Locks by closing the door
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding Indicator
- 2 year product warranty

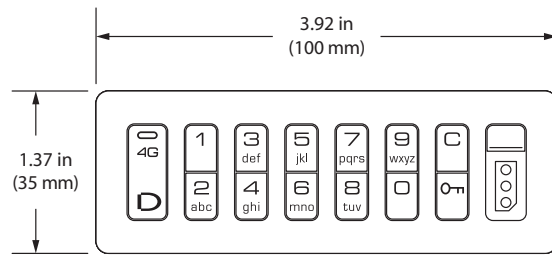

without Pull Handle

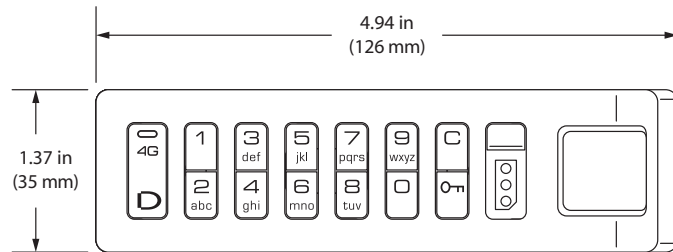



with Pull Handle



- Surface or recess mount
- Brushed nickel or custom finishes
- Left or right hand pull handle
- Accommodates door thickness of 0.09"-2.00" (2.2 - 50.8 mm)

- Programming Key with external power
- Manager Bypass Key (up to 25) with external power
- Accessibility User Key
- Strike plate



side view

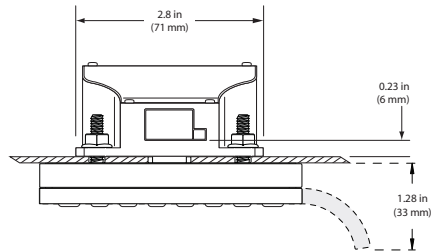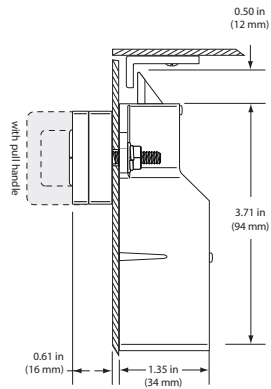

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

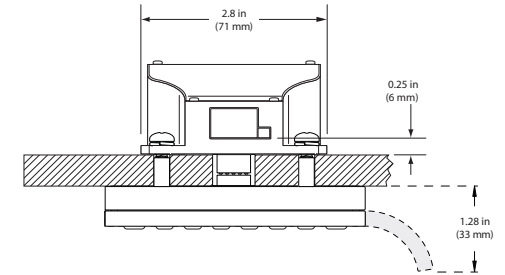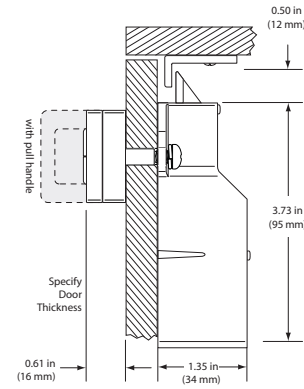

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

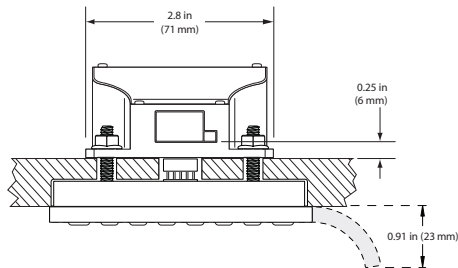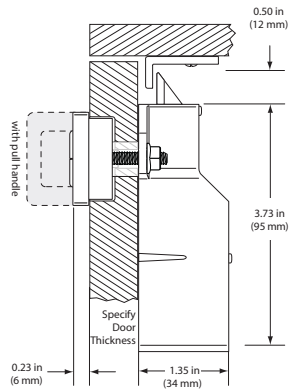

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

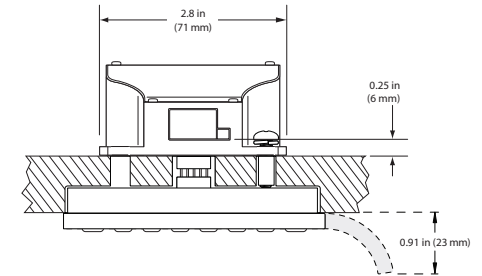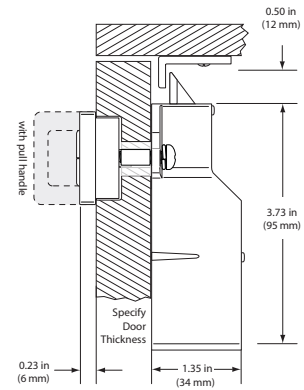

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view



Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.

