


- All metal housing
- RFID operation
- Shared use functionality
- Standard body with or without pull handle
- 1/2" (12 mm) motorized deadbolt
- Operates with any RFID access card
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding indicator
- 2 year product warranty
- Compatible RFID standards:
 - ISO 14443A
 - ISO 14443B
 - ISO 15693

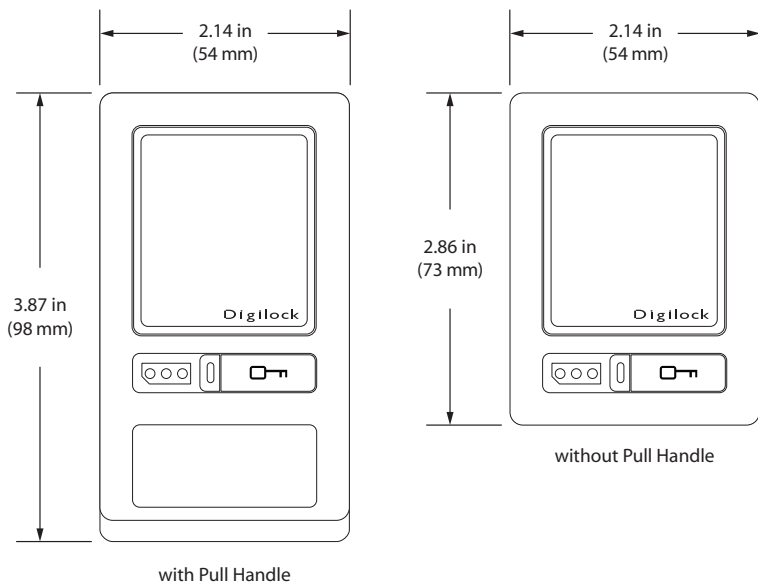

Digilock®



Accessories . Options

Surface or recess mount
 Brushed nickel or custom finishes
 Accommodates door thickness of
 0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power
 Manager Bypass Key (up to 25) with
 external power
 RFID access card (1 per user)
 Accessibility User Key
 Strike plate

DAR1-ATSI



side view

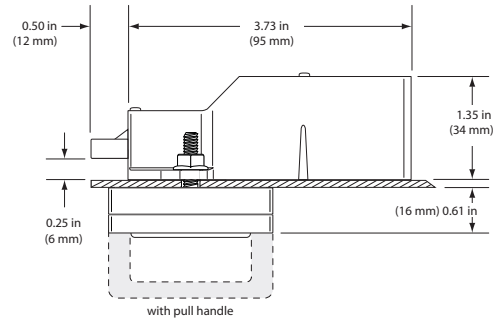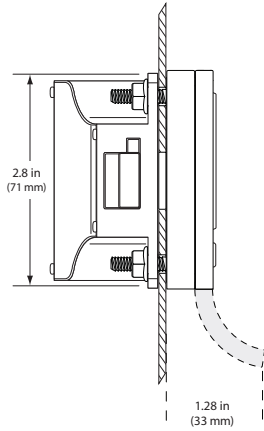

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

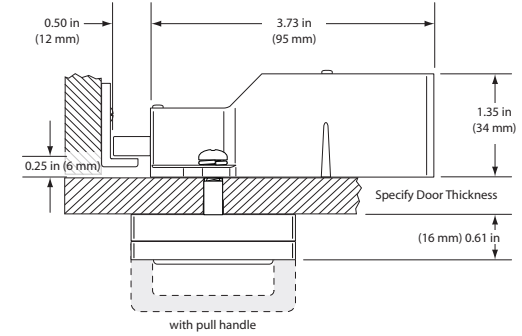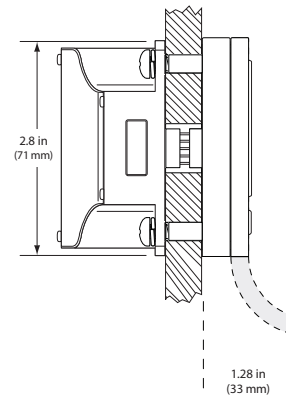

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

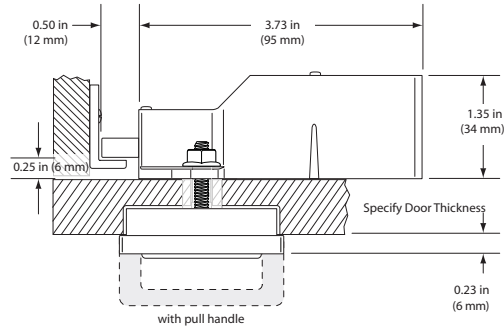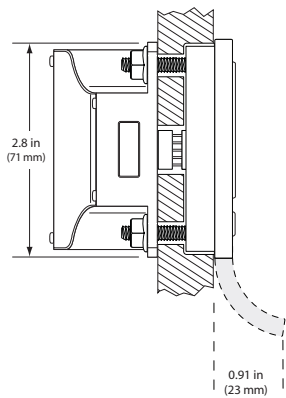

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

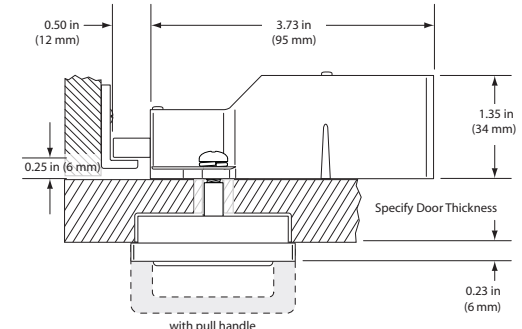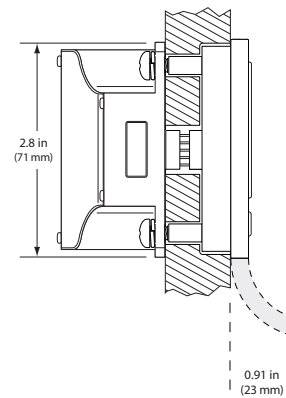

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness



top view



Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.



- All metal housing
- RFID operation
- Shared use functionality
- Vertical body with or without pull handle
- 1/2" (12 mm) motorized deadbolt
- Operates with any RFID access card
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding indicator
- 2 year product warranty
- Compatible RFID standards:
 - ISO 14443A
 - ISO 14443B
 - ISO 15693

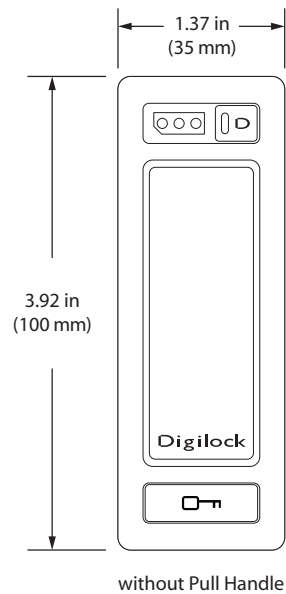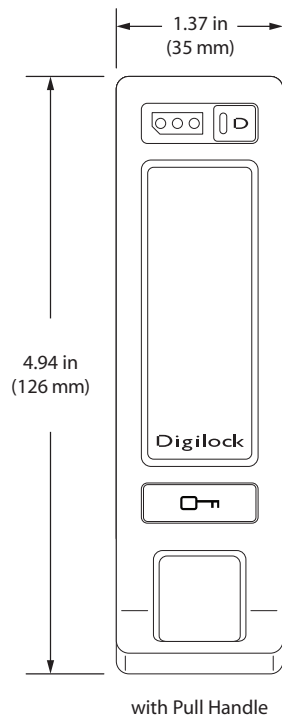

Digilock®



DAR1-ATV1

Surface or recess mount
Brushed nickel or custom finishes
Accommodates door thickness of
0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power
Manager Bypass Key (up to 25) with
external power
RFID access card (1 per user)
Accessibility User Key
Strike plate

Accessories . Options



side view

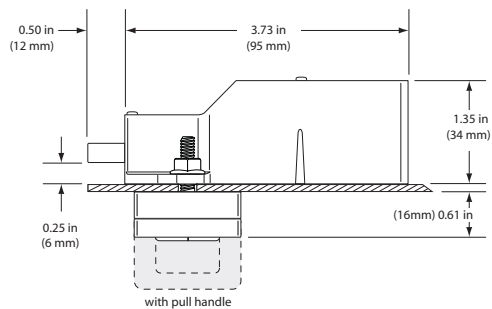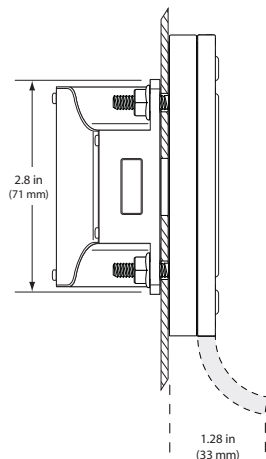

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

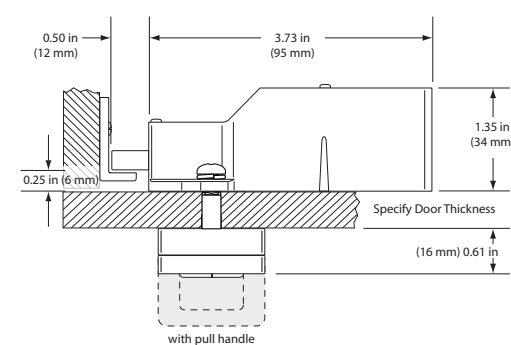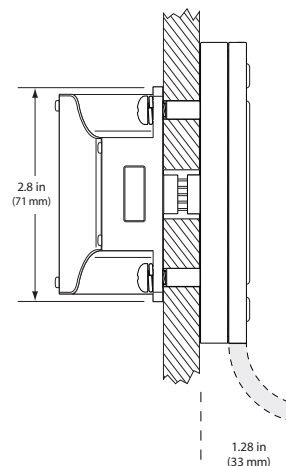

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

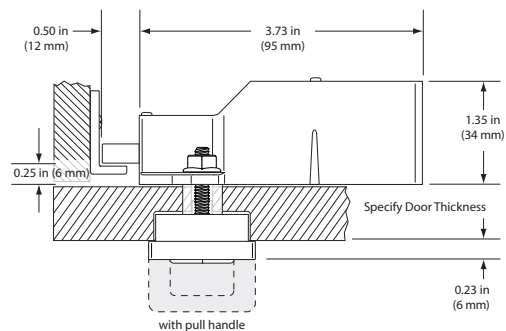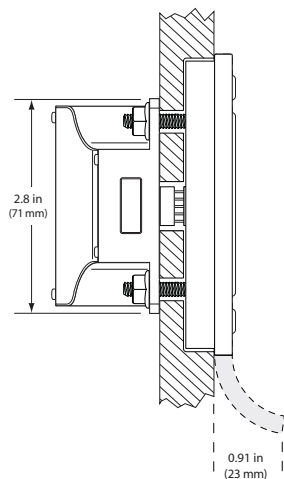

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

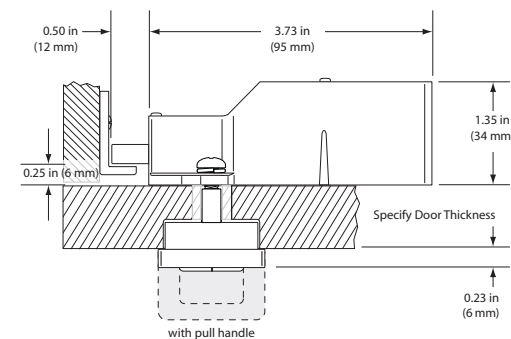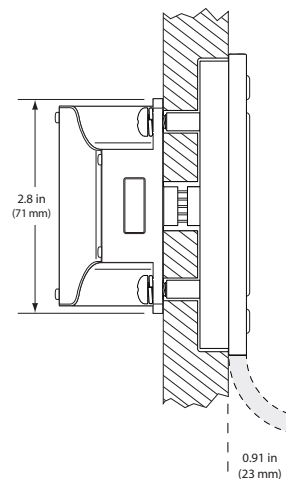

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view



Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.

