Digilock®

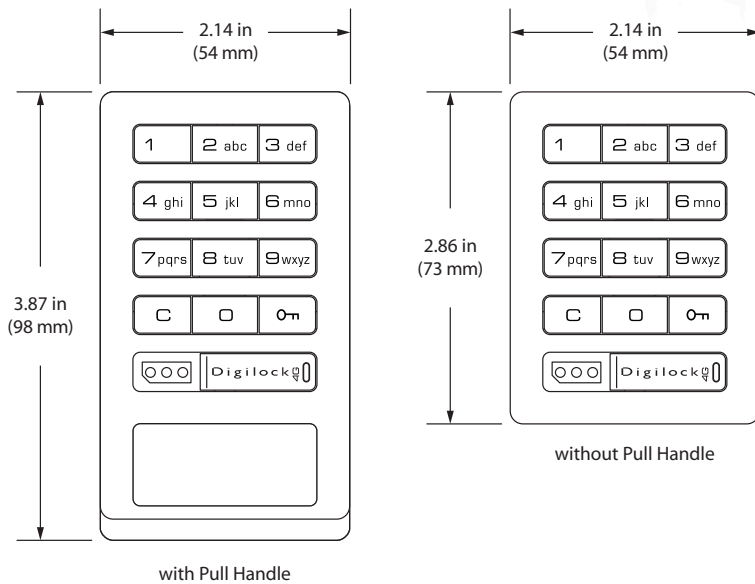## Features

- All metal housing
- Keypad operation
- Shared use functionality
- Standard body with or without pull handle
- ½" (12 mm) motorized deadbolt
- Operates with user selected 4-digit code
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Programmable automatic unlock
- Programmable LED indicator
- Powered by 4 premium AA batteries
- 3-5 year battery life
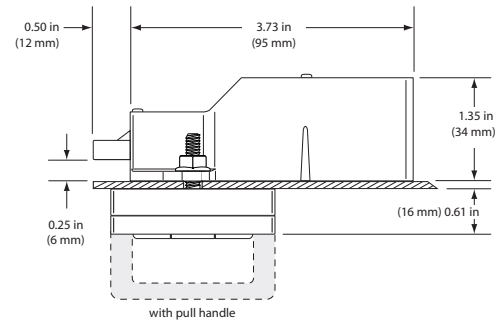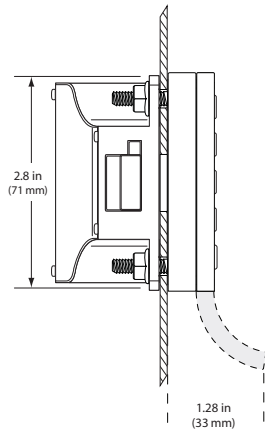- Low battery and binding indicator
- 2 year product warranty

DAK1-AT51

Accessories . Options

- Surface or recess mount
- Brushed nickel or custom finishes
- Accommodates door thickness of 0.09"-2.00" (2.2 - 50.8 mm)

- Programming Key with external power
- Manager Bypass Key (up to 25) with external power
- Accessibility User Key
- Strike plate

2.14 in (54 mm)

3.87 in (98 mm)

with Pull Handle

2.14 in (54 mm)

2.86 in (73 mm)

without Pull Handle

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

2.8 in
(71 mm)

1.35 in
(34 mm)

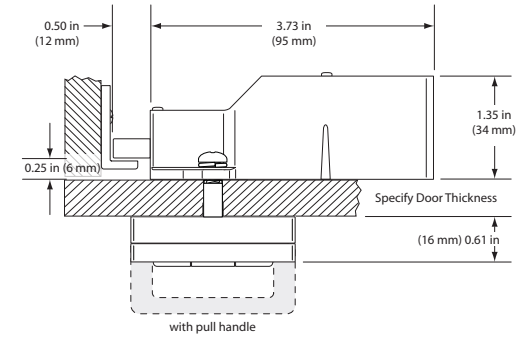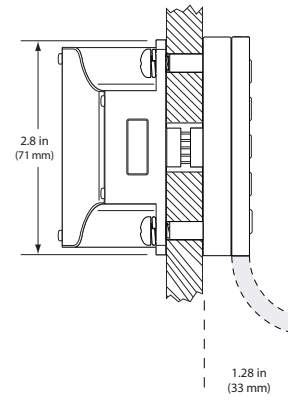0.25 in
(6 mm)

(16 mm) 0.61 in

1.28 in
(33 mm)

with pull handle

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

2.8 in
(71 mm)

1.35 in
(34 mm)

0.25 in (6 mm)

Specify Door Thickness

(16 mm) 0.61 in

1.28 in
(33 mm)

with pull handle
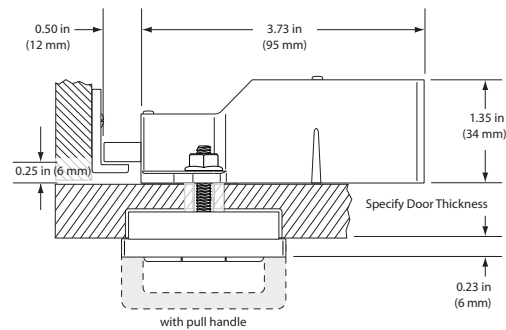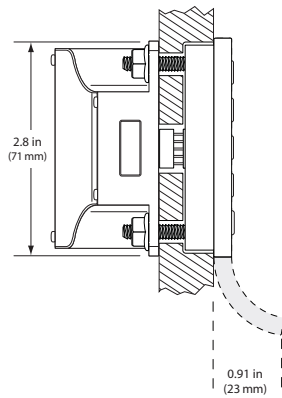
Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view

side view

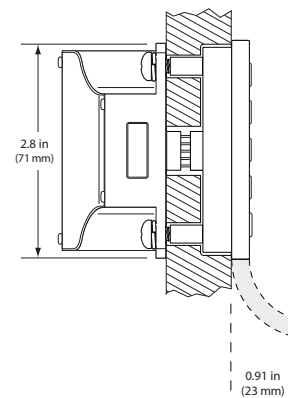0.50 in
(12 mm)

3.73 in
(95 mm)

2.8 in
(71 mm)

1.35 in
(34 mm)

0.25 in (6 mm)

Specify Door Thickness

0.91 in
(23 mm)

0.23 in
(6 mm)

with pull handle

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

2.8 in
(71 mm)

1.35 in
(34 mm)

0.25 in (6 mm)

Specify Door Thickness

0.91 in
(23 mm)

0.23 in
(6 mm)

with pull handle

Nut Post
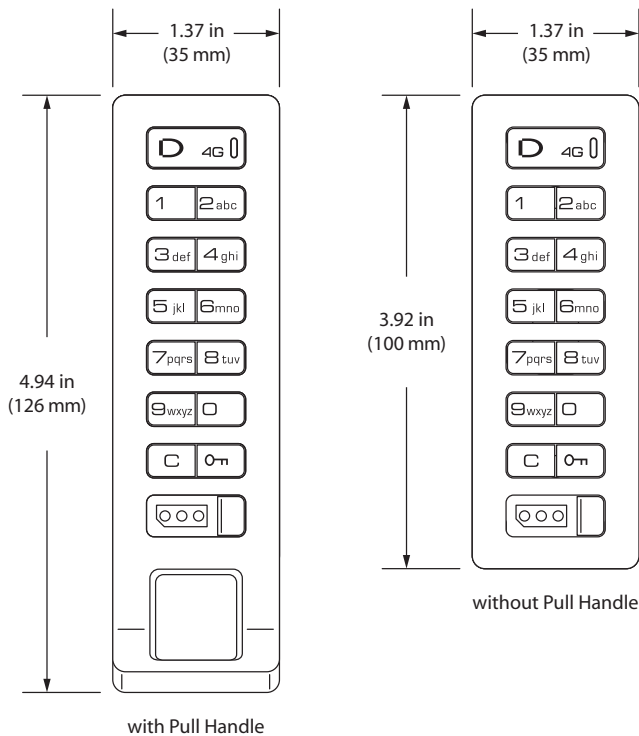0.850-2.368 in (21.6-60.1 mm) door thickness

top view

Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.

Digilock

Features

All metal housing

Keypad operation

Shared use functionality

Vertical body with or without pull handle

½" (12 mm) motorized deadbolt

Operates with user selected 4-digit code

Tamper guard

Manager bypass functionality

Visual & audible usage indicators

Programmable automatic unlock

Programmable LED indicator

Powered by 4 premium AA batteries

3-5 year battery life

Low battery and binding indicator

2 year product warranty

1.37 in
(35 mm)

4.94 in
(126 mm)

with Pull Handle

1.37 in
(35 mm)

3.92 in
(100 mm)

without Pull Handle
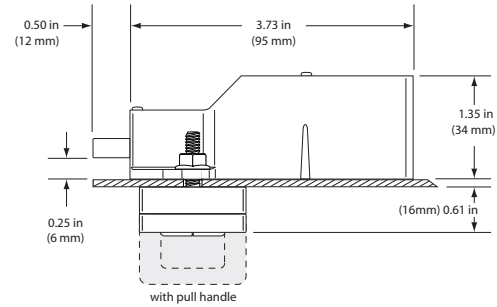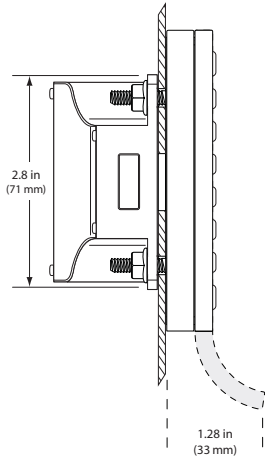
DAK1-ATV1

Accessories . Options

Surface or recess mount

Brushed nickel or custom finishes

Accommodates door thickness of
0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power

Manager Bypass Key (up to 25) with
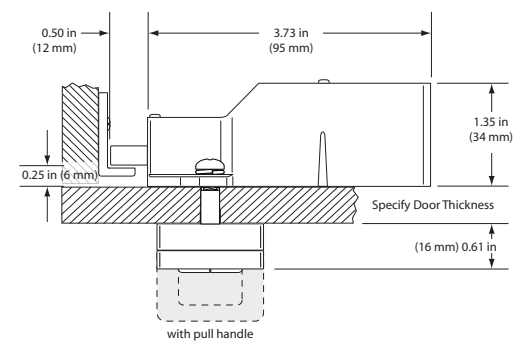external power

Accessibility User Key

Strike plate

side view

0.50 in
(12 mm)
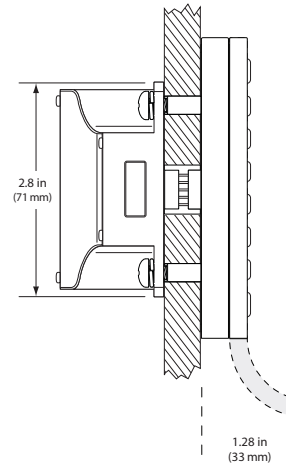
3.73 in
(95 mm)

1.35 in
(34 mm)

2.8 in
(71 mm)

0.25 in
(6 mm)

(16mm) 0.61 in

with pull handle

1.28 in
(33 mm)

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

1.35 in
(34 mm)

2.8 in
(71 mm)

0.25 in (6 mm)

Specify Door Thickness
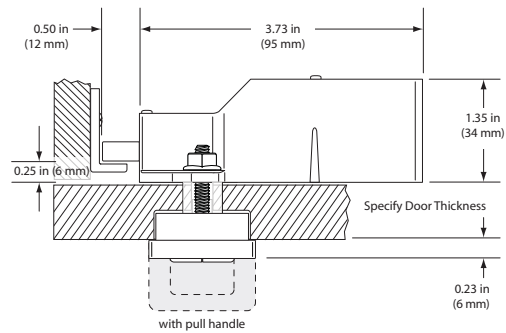
with pull handle

(16 mm) 0.61 in

1.28 in
(33 mm)

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

1.35 in
(34 mm)
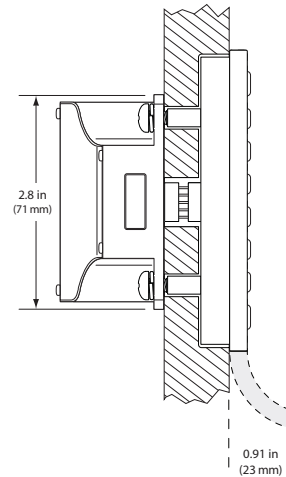
2.8 in
(71 mm)

0.25 in (6 mm)

Specify Door Thickness

with pull handle

0.23 in
(6 mm)

0.91 in
(23 mm)

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

side view

0.50 in
(12 mm)

3.73 in
(95 mm)

1.35 in
(34 mm)

2.8 in
(71 mm)

0.25 in (6 mm)

Specify Door Thickness

with pull handle

0.23 in
(6 mm)

0.91 in
(23 mm)

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view

Digilock
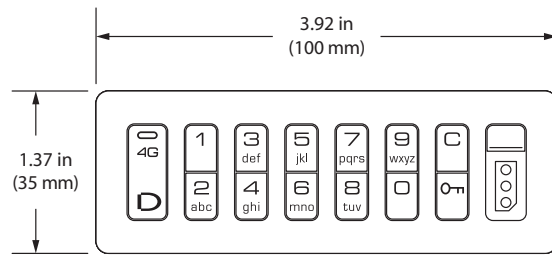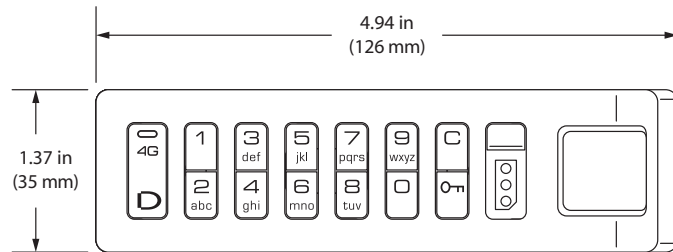
Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.

Features

All metal housing

Keypad operation

Shared use functionality

Horizontal body with or without pull handle

½" (12 mm) motorized deadbolt

Operates with user selected 4-digit code

Tamper guard

Manager bypass functionality

Visual & audible usage indicators

Programmable automatic unlock

Programmable LED indicator

Powered by 4 premium AA batteries

3-5 year battery life

Low battery and binding indicator

2 year product warranty

DAKI-ATHI

3.92 in
(100 mm)

1.37 in
(35 mm)

without Pull Handle

4.94 in
(126 mm)

1.37 in
(35 mm)

with Pull Handle

Accessories . Options
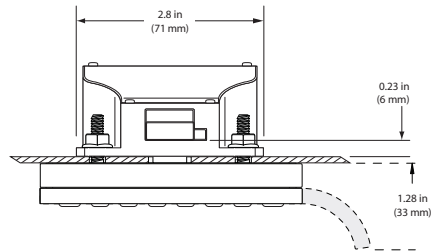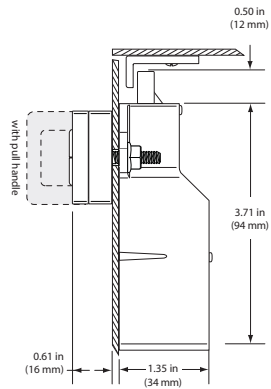
Surface or recess mount

Left or right hand pull handle

Brushed nickel or custom finishes

Accommodates door thickness of
0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power

Manager Bypass Key (up to 25) with
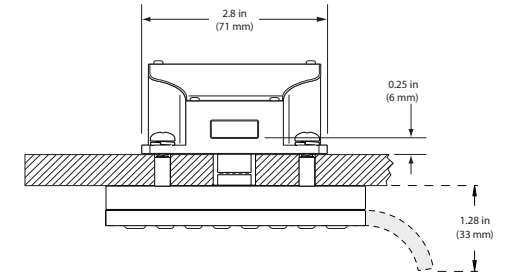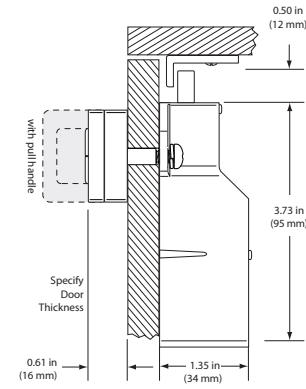external power

Accessibility User Key

Strike plate

Surface Mount

0.50 in
(12 mm)

with pull handle

2.8 in
(71 mm)

0.23 in
(6 mm)

3.71 in
(94 mm)

1.28 in
(33 mm)

0.61 in
(16 mm)

1.35 in
(34 mm)

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view

0.50 in
(12 mm)

with pull handle

2.8 in
(71 mm)

0.25 in
(6 mm)

3.73 in
(95 mm)

1.28 in
(33 mm)

Specify
Door
Thickness

0.61 in
(16 mm)

1.35 in
(34 mm)
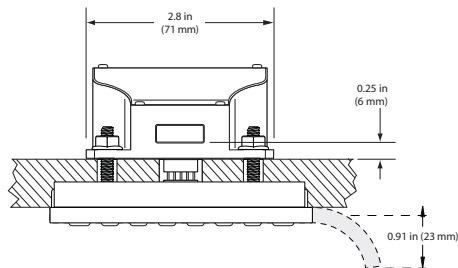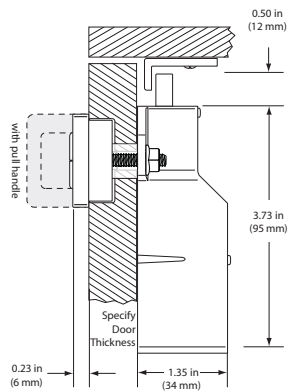
Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view

Recess Mount

0.50 in
(12 mm)

with pull handle

2.8 in
(71 mm)

0.25 in
(6 mm)

3.73 in
(95 mm)

0.91 in (23 mm)

Specify
Door
Thickness

0.23 in
(6 mm)

1.35 in
(34 mm)
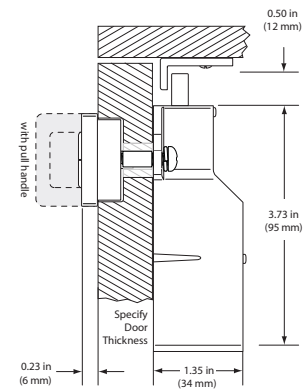
Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

0.50 in
(12 mm)

with pull handle

2.8 in
(71 mm)

0.25 in
(6 mm)

3.73 in
(95 mm)

0.91 in (23 mm)

Specify
Door
Thickness

0.23 in
(6 mm)

1.35 in
(34 mm)

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view

Digilock

Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.