
EAST RIDING DESIGN CODE

APRIL 2025

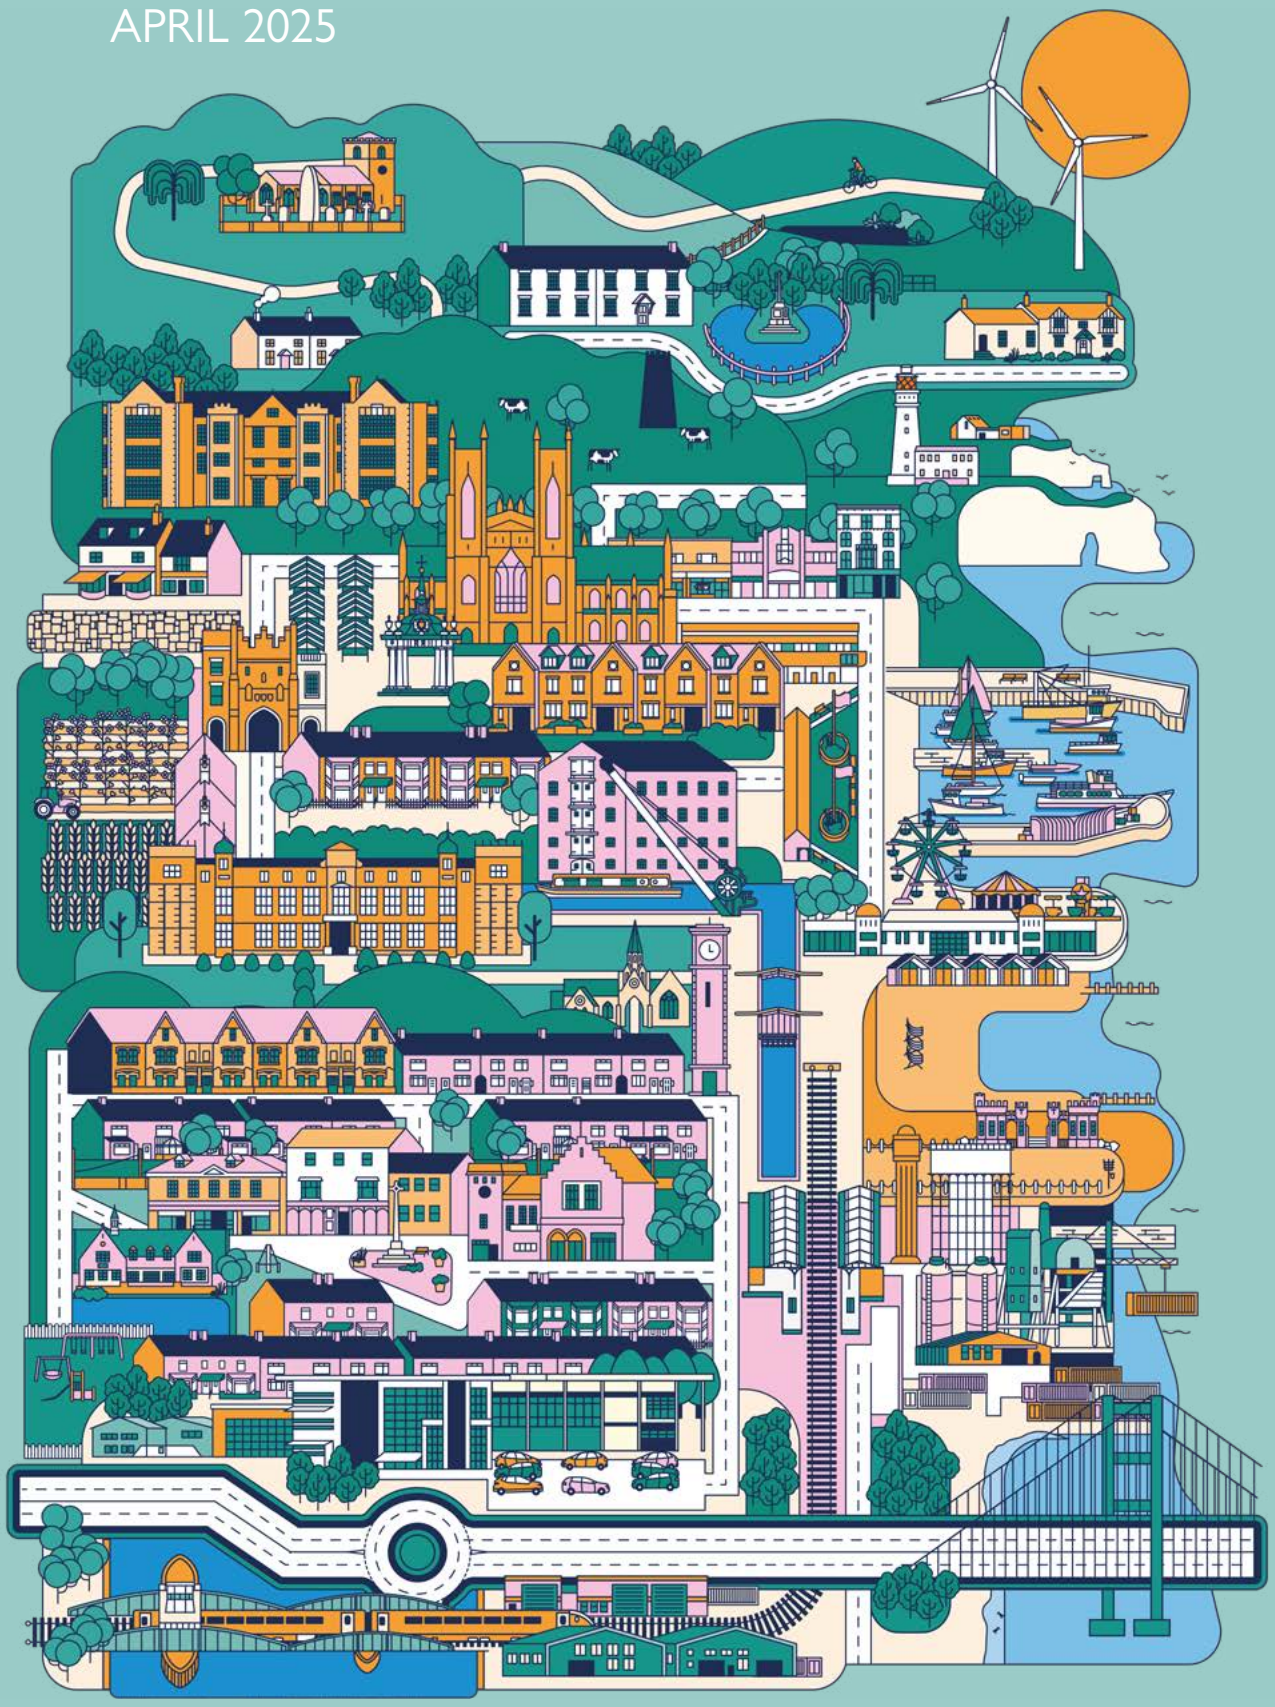

EAST RIDING
OF YORKSHIRE COUNCIL

April 2025 Version 2: Adoption
September 2025 Version 2a: Minor updates

Credits:

Illustrations by
Harper Perry Ltd
Images and artwork. All rights reserved © 2024.

Harper Perry Ltd,
High Bridge Works,
39 High Bridge,
Newcastle Upon Tyne,
NE1 1EW

Illustrations by Joseph Cox,
FORM Studio
The Artist retains all rights to the artwork, including copyright.

Form Shop & Studio
62 Humber Street
Hull
HU1 1TU

AECOM
4th Floor, 100 Embankment
Cathedral Approach
Manchester M3 7FB,
United Kingdom

Contents

Use this icon, located in the corner of each section banner, to jump back to the contents page



Chapter 1 Introduction To The East Riding Design Code 1

1.1 Introduction 4
1.2 Policy Context 5
1.3 How to Use This Design Code 7
1.4 Which Codes to Use 9
1.5 Identifying Your Place Type 10
1.6 Demonstrating Compliance 15
1.7 Heritage Assets 17
1.8 Good Design and Context 17
1.9 Design Codes and the Design Process 18



Chapter 2 Design Vision and Values, and Place Types 19

2.1 Design Vision and Values 21
2.2 Place Types Vision 25
2.3 Town Centre 26
2.4 Inner Neighbourhood 27
2.5 Outer Neighbourhood 28
2.6 Neighbourhood Centre 29
2.7 Village 30
2.8 Countryside 31
2.9 Business and Industrial 32



Chapter 3 Codes and Guidance: Environment 33

3.1 Green Infrastructure 35
3.2 Biodiversity 37
3.3 Trees and Hedges 39
3.4 Sustainable Drainage 41
3.5 Renewable Energy 45



Chapter 4 Codes and Guidance: Layout 47

4.1 Respecting the Local Context 49
4.2 Legibility 51
4.3 Street Hierarchy 53
4.4 Connectivity 57
4.5 Development Mix 59



Chapter 5 Codes and Guidance: Public Open Space 61

5.1 Public Open Space Character 65
5.2 Design for All 67
5.3 Play Facilities 69
5.4 Safety and Surveillance 70



Chapter 6 Codes and Guidance: Blocks 71

6.1 Block Form and Typologies 73
6.2 Block Size 75




Chapter 7 Codes and Guidance: Streets 77

7.1 Active Frontages 79
7.2 Footways, Footpaths and Crossings 81
7.3 Resting Points 83
7.4 Enclosure 85
7.5 Building Line 87
7.6 Carriageways 89
7.7 Methods of Reducing Speed 93
7.8 Parking 95
7.9 Residential Parking Solutions 101



Chapter 8 Codes and Guidance: Plots 103

8.1 Plot Measurements 105
8.2 Scale of Extensions 108
8.3 Boundary Treatments 111
8.4 Private Gardens 113
8.5 Bin Storage 115



Chapter 9 Codes and Guidance: Buildings 117

9.1 Materials 119
9.2 Elevational Features and Proportions 121
9.3 Frontages: Shops, Bars and Eateries 127
9.4 Building Conversions 129
9.5 New Agricultural Buildings 131
9.6 New Industrial, Storage and Distribution, and Commercial Buildings 133



Appendices 135

A Glossary 137
B Reference List 145
C List of Tables and Figures 147
D Code and Policy Reference Matrix 151
E Settlement Network 161

Appendices (separate documents - follow links below)

F Allocated Sites Place Type Designations
G Compliance Checklists

Introduction to the

East Riding
Design Code



Chapter Contents

1.1	Introduction	4
1.2	Policy Context	5
1.3	How to Use this Design Code	7
1.4	Which Codes to Use	9
1.5	Identifying Your Place Type	10
1.6	Demonstrating Compliance	15
1.7	Heritage Assets	17
1.8	Good Design and Context	17
1.9	Design Codes and the Design Process	18



Figure 1 Beverley terrace

1.1 Introduction

1.1.1 The Purpose of This Design Code

The East Riding Design Code has been prepared to clarify design expectations and improve the quality of new development across the whole of the East Riding of Yorkshire.

A design code is a set of simple, illustrated design requirements which provide specific, detailed parameters for new development.

The Design Code seeks to ensure that all development is responsive to its context, sits comfortably in the landscape and encourages biodiverse and sustainable choices in a predominantly rural setting.

The Design Code has been created through consultation with the public and local stakeholders.

It reflects the vision and values people who live and work in the East Riding of Yorkshire have for new development.

By following the requirements of the Design Code, applications submitted for new development will better reflect local character and design preferences, leading to a more efficient process for applicants and a high standard of development for local communities.

The East Riding Design Code is a Supplementary Planning Document (SPD). This means it is a material consideration in the determination of planning applications. It is relevant to all new developments, for all uses, including extensions to existing buildings and land.

1.1.2 Structure of This Design Code

This Design Code is structured so as to place focus on the most fundamental components of design, ensuring that they are the first items to be considered and included as part of development proposals. Accordingly, the first chapter of Codes and Guidance is dedicated to environmental imperatives, with subsequent chapters proceeding through an increasingly finer grain of design, from layouts and public open space, to blocks and streets, and finally plots and buildings.

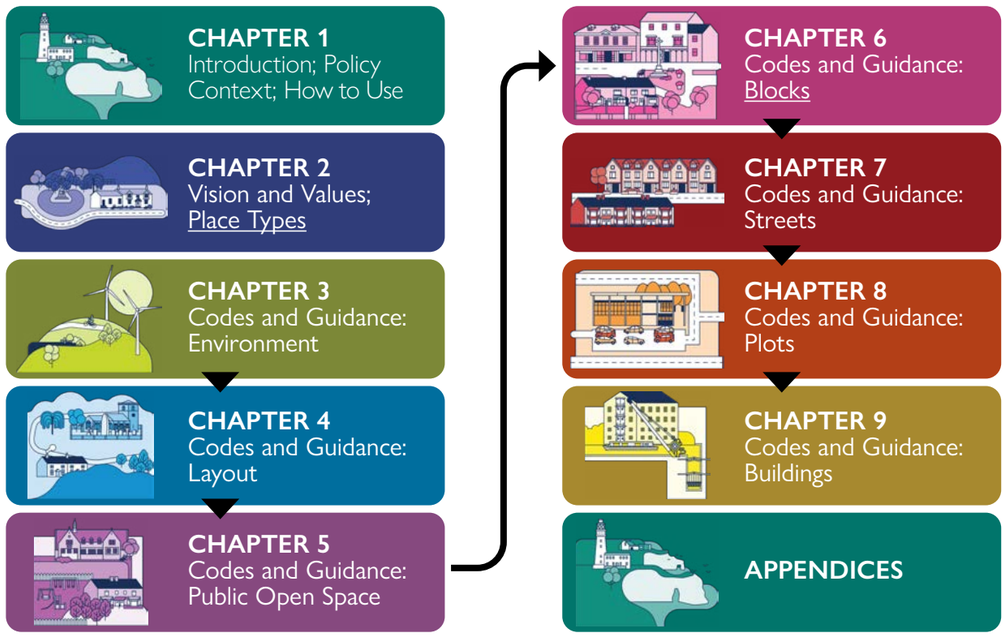


Figure 2 Design Code contents structure

1.2 Policy Context

1.2.1 National Scale

The East Riding Design Code relates to paragraph 133 of the National Planning Policy Framework (NPPF) (2024). This states that local planning authorities should produce design guides and codes to provide maximum clarity about local character and design preferences. The Design Code's production has been informed by the National Model Design Code (NMDC).

This Design Code sits below the National Design Guide (NDG), which includes 10 characteristics of well-designed places, and other important guidance documents including the Manual for Streets (MfS), Building for a Healthy Life, Green Infrastructure Framework and Building with Nature.

1.2.2 Authority Wide Scale

This Design Code has been adopted as a Supplementary Planning Document (SPD) to support policies in the East Riding Local Plan. The code relates to several policies within the local plan, in particular policy ENV1. Policy ENV1 focuses on integrating high quality design over a range of design issues and is strategic in nature. By following this Design Code the requirements of policy ENV1 will be met. Links to relevant policies are set out with each code in **Appendix D**.

The codes and guidance in this Design Code are the authority's preferred method for meeting policy requirements. They should be used unless another method is required for a specific application. Design codes are given weight in decision-making through paragraph 139 of the NPPF and through being adopted as a SPD.

If a development proposal does not meet the requirements of one of the relevant codes within this document it will require a robust justification to be submitted with the application. The **compliance checklist** must be submitted alongside planning applications to set out where in the supporting documents the codes are complied with or non-compliance justified.

1.2.3 Local Scale

The East Riding Design Code covers the whole of the authority. A finer grain of detail is possible when looking at individual towns and villages.

Where adopted, neighbourhood plans can include local design requirements and information about character and context. Where neighbourhood plans do not provide this level of local design information for a settlement, the authority intends to produce a series of identity and context documents to illustrate typical materials and features.

There are a number other of locally produced documents that are useful to design, including landscape character assessments, conservation area appraisals, the local housing needs assessment, the infrastructure study, and the strategic flood risk assessment.

Master plans, design codes and development briefs can also cover design requirements for specific sites. Site-specific masterplans and design codes can be created by landowners and developers or may be created by the local authority for specific allocations.

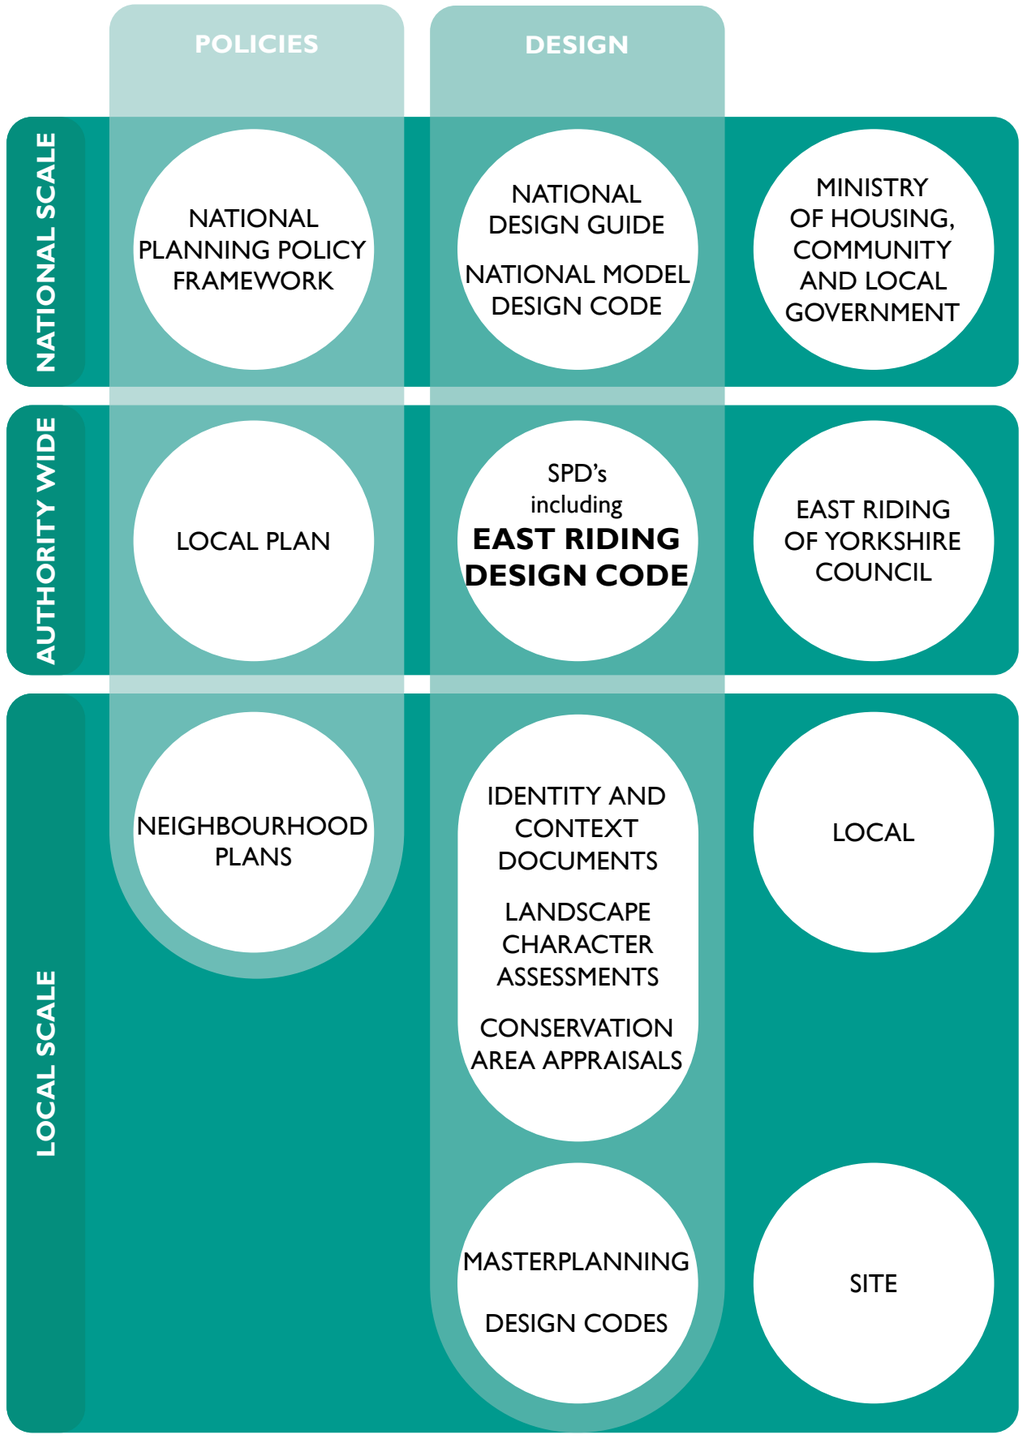


Figure 3 Policy context


1.3 How to Use This Design Code

The banner at the top of each spread states the respective subchapter number and subchapter title.

An introduction to the subchapter sets out the aims and intentions of the guidance and code on the page.

NOTE
Definitions of a number of terms in the Design Code (shown underlined) are listed in **Appendix A**.

Wherever possible, photographs or illustrations will provide additional context, showcasing good or best practice.

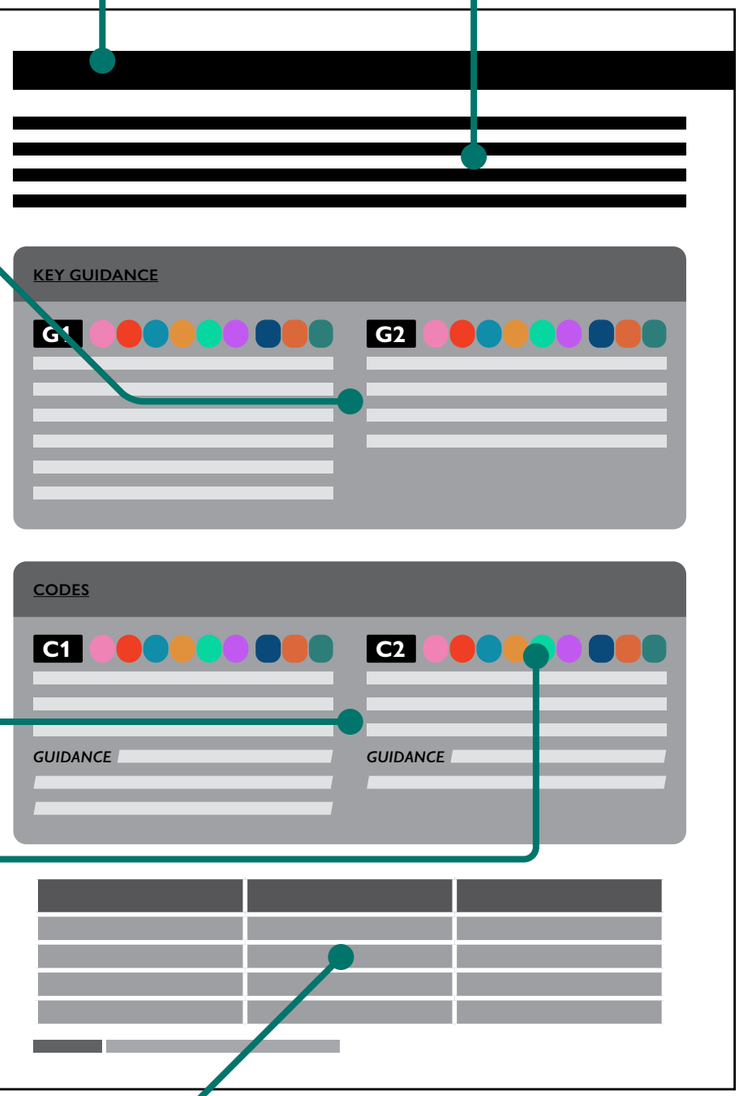

KEY GUIDANCE text boxes set out desirables that will help achieve a high standard of design which the Authority would like to see demonstrated as part of applications.


CODES text boxes set out requirements (mainly quantifiable). Meeting code requirements should give confidence to an applicant that the scheme will be acceptable to the local authority, in terms of design.

Codes are often accompanied by guidance in italics which give further information on applying the code and the reasons behind the codes.

Each piece of key guidance or code requirement is accompanied by the development scale and type key. These link with the codes set out in the **compliance checklists** (see section **1.4** for further information on which codes to use).*

Where required, tables provide concise breakdowns of parameters for development limitations

***NOTE**
As referenced in sections **1.4** and **1.5**, some more complex or subjective development types have been given unique **compliance checklists** to account for instances where code requirements that are usually applicable do not apply.

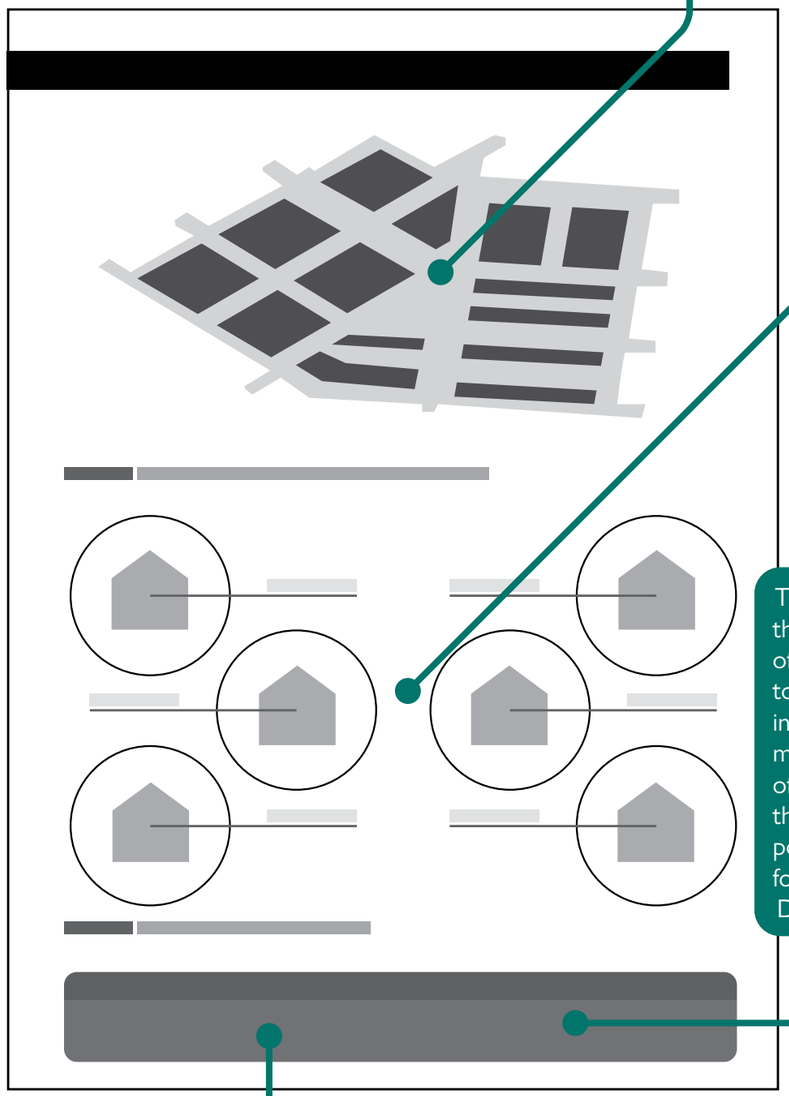

The shaded box at the end of the section also provides a list of local plan policies relevant to the codes and guidance in the respective section. A more detailed breakdown of these policies, including the specific relevant sub-policies within them, can be found in **Appendix D** of the Design Code.

The shaded box at the end of the section specifies where there are relevant supporting guidance documents, the full details of which can be found in **Appendix B** of the Design Code. The supporting documents provide further information on the subject covered in the section.**

****NOTE**
Not all sections within the Design Code reference specific supporting documents, in which case users are directed to the reference list (**Appendix B**) for useful general guidance documents.

Figure 4 Typical Design Code subchapter page layout

1.4 Which Codes to Use

The Design Code applies to developments of all scales, from householder applications to large strategic developments. Codes which apply to non-residential development types, agricultural, industrial and commercial, are also included. It is not possible to cover every type of non-residential development. If you are not sure which codes apply to a particular type of development, it is recommended that the local planning authority be contacted for pre-application advice.

Not every code applies to every application. **Table 1** below sets out the different scales and non-residential development types. There may be exceptions to Table 1. For exceptions, it is recommended that the local planning authority be contacted for pre-application advice.

The **compliance checklist** also sets out codes by development scale.

H	**HOUSEHOLDER DEVELOPMENT** Extensions, or minor works requiring planning permission, to a single existing housing unit.	
1	**1-2 UNITS**	New housing units. Please note a seperate checklist exists for residential conversions.
2	**3-9 UNITS**	
3	**10+ UNITS**	
4	**MIXED USE** Residential and commercial mixed use sites.	
F	**FLATS** New-build flats, or the conversion of existing premises to flats where requiring planning permission.	
A	**AGRICULTURAL** New-build development on agricultural land (not including changes of use to non-agricultural development or development not supporting an existing agricultural function).	
B	**INDUSTRIAL, STORAGE AND DISTRIBUTION (B CLASS USES)** Development intended for B Class uses including general industrial and storage and distribution.	
C	**COMMERCIAL** All forms of new-build development intended for commercial use, including offices, bars and eateries, and community spaces.	

For **outline and reserved matters applications**, the scale of development relevant to your proposals should still be followed and its requirements applied. To account for matters reserved for assessment at a later stage, a separate series of **compliance checklists** set out which requirements apply to which reserved matter (see **Appendix G**). Further details on how to complete the appropriate **compliance checklist** is provided in section **1.6 (Demonstrating Compliance)**.

For the above scales/types of development separate **compliance checklists** are provided, setting out which codes should be met depending on what is being delivered on site. If you are unsure which codes apply, engagement with the Local Planning Authority through a pre-application enquiry is recommended. The "not applicable" box can be used when there is a clear reason a code would not apply to a specific application (see section 1.6 for more information).

Table 1 Development scales and definitions with explanatory text

1.5 Identifying Your Place Type

Areas of settlements function differently and have distinguishing physical characteristics in how the built form is laid out, such as plot size and setbacks. To reflect this some codes have been broken down into place types.

Whilst aesthetic character varies across the authority, the place types have been designed to apply across the whole area covered by the Code. Place types should be identified according to the expected characteristics of the proposed development. This will not necessarily be the same place type as the sites surrounding the area.

Place types are different to the settlement hierarchy set out in the local plan. Many settlements include multiple different place types. Large developments may include more than one place type, meaning that different codes will apply across the site. Where there is a lack of surrounding context to draw place types from, for example a large new strategic application, the place types and relevant codes should be used to form a site-specific master plan.

The Authority has assigned a place type to each site allocation in the local plan – see **Appendix F** (place types assigned to allocations). Otherwise, a place type can be derived by using the charts overleaf **Figure 6** (Identifying place types).

If an applicant is not sure which codes to use it is recommended that the local planning authority is contacted for pre-application advice. This could save time during the application process.

Chapter 2 provides more detail about the vision for place types.


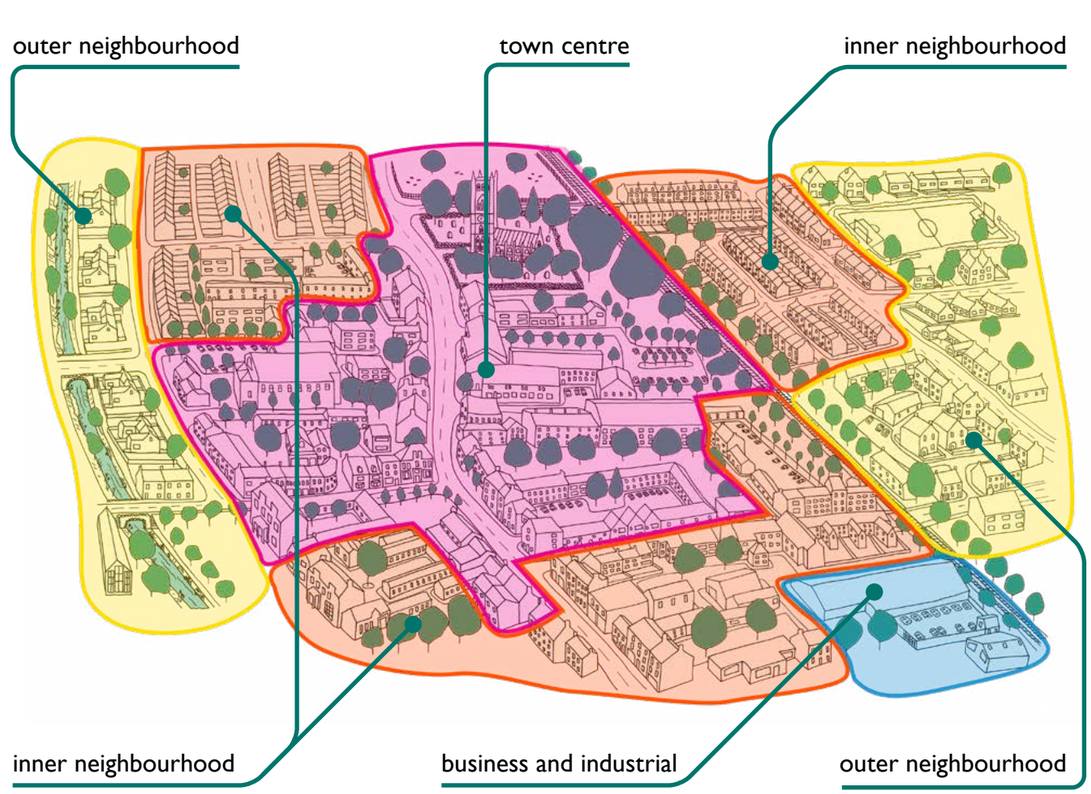



Figure 5 Indicative place type boundaries

Figure 6 (overleaf) Flow charts to identify the place type for your proposal site ▶

1.5 Identifying Your Place Type

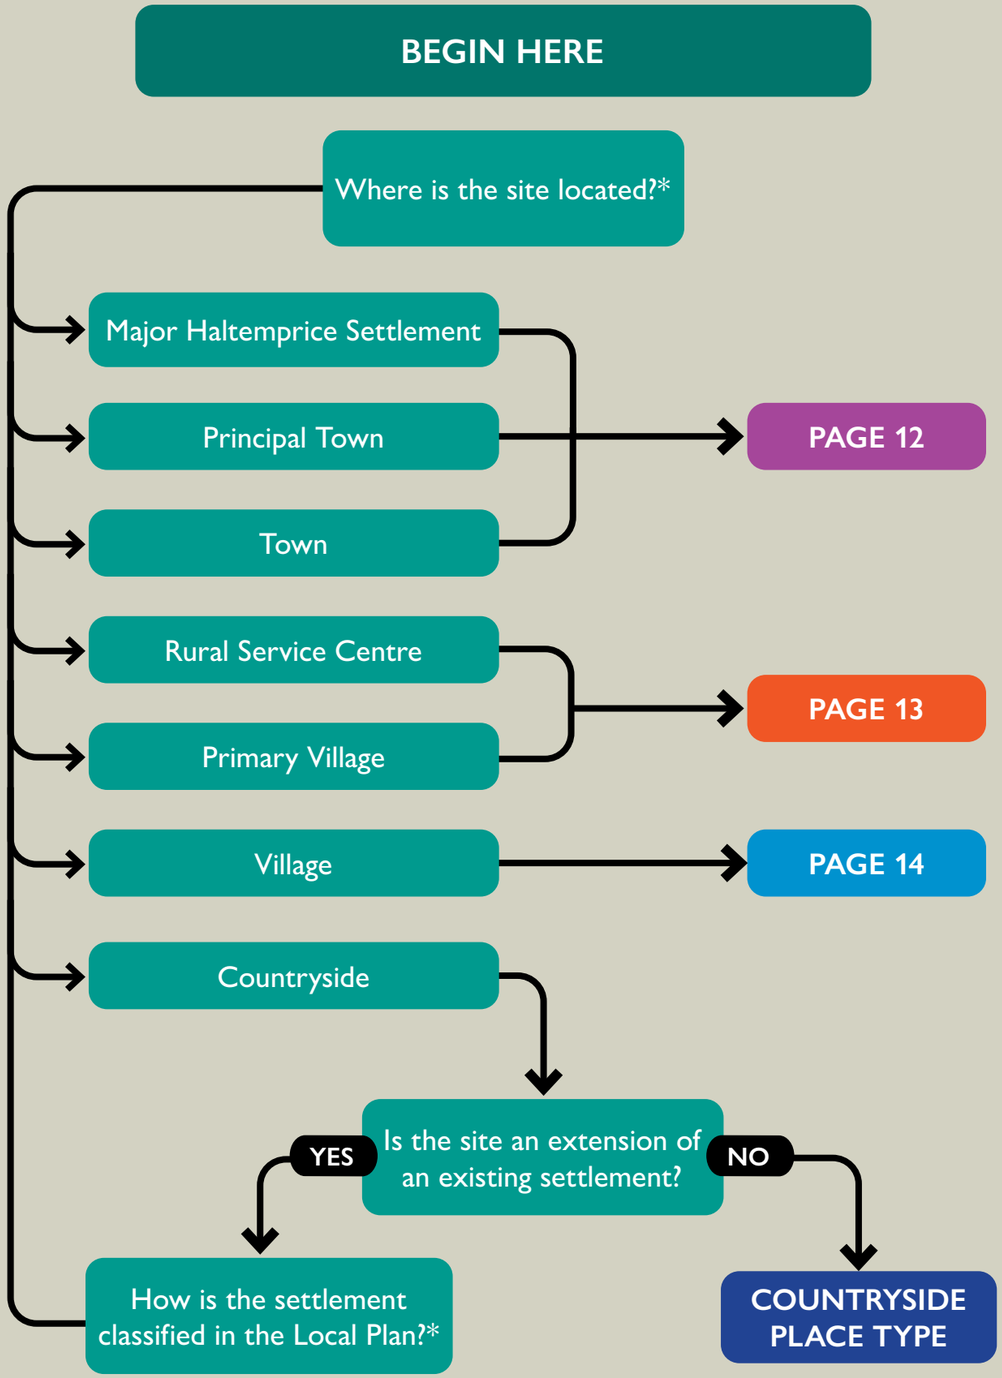

* Please refer to **Appendix E** for the settlement network.

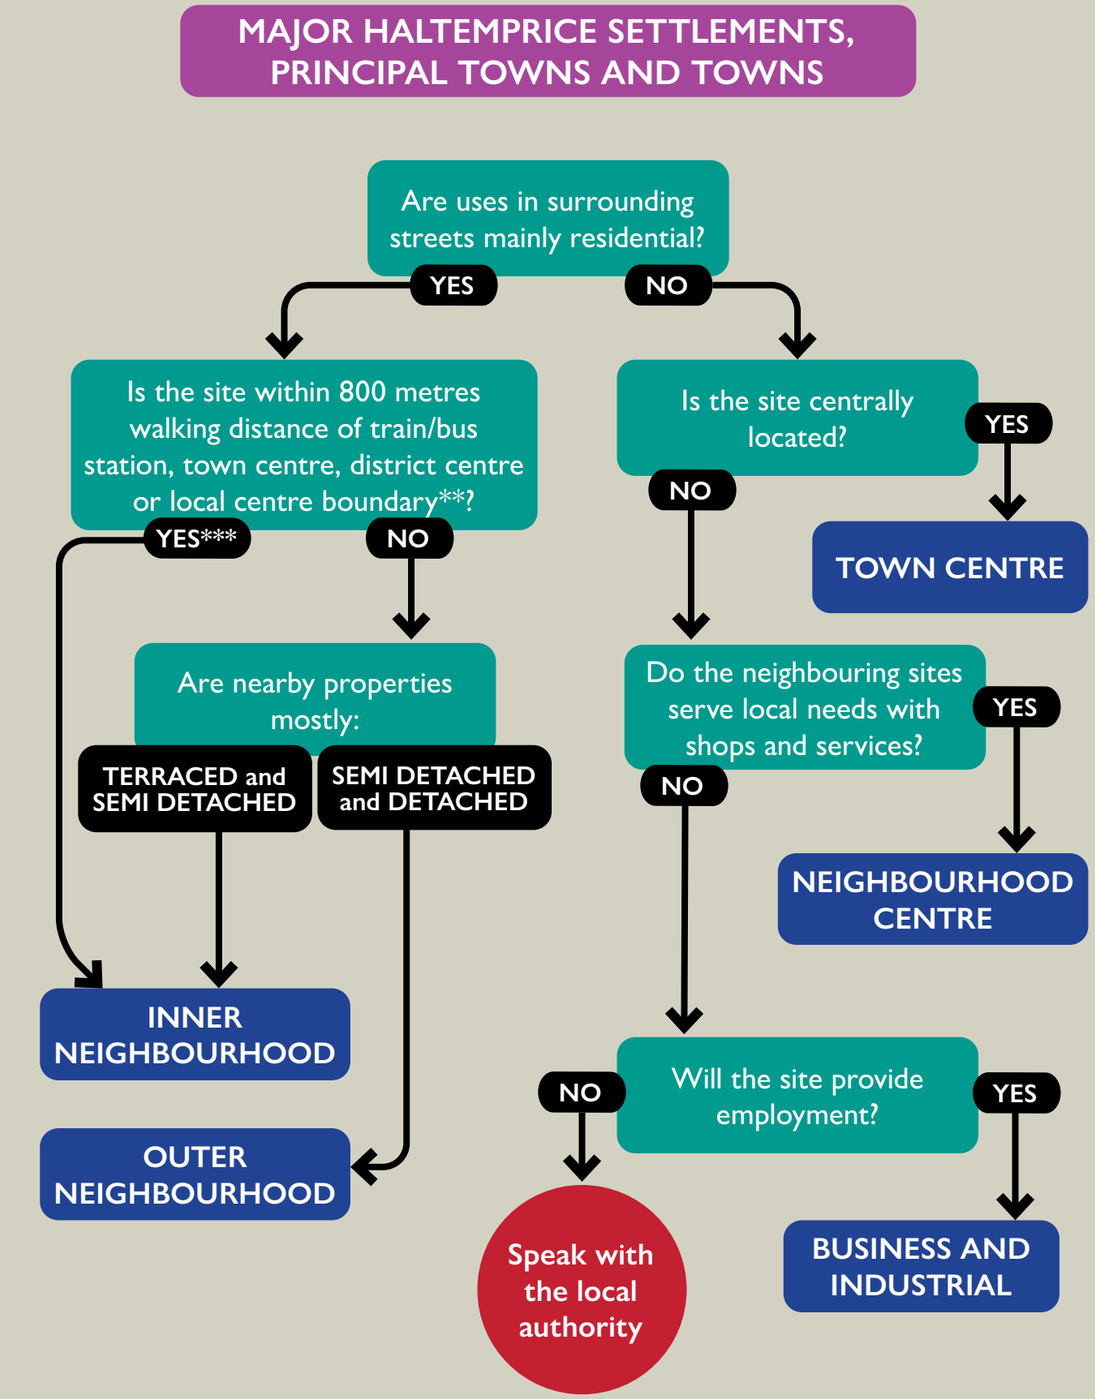

** Policy S7 of the Local Plan.
***When a proposal site is within a conservation area, development density should not have an adverse impact on the character of the conservation area.


1.5 Identifying Your Place Type

RURAL SERVICE CENTRE AND PRIMARY VILLAGES



** Policy S7 of the Local Plan.

VILLAGES

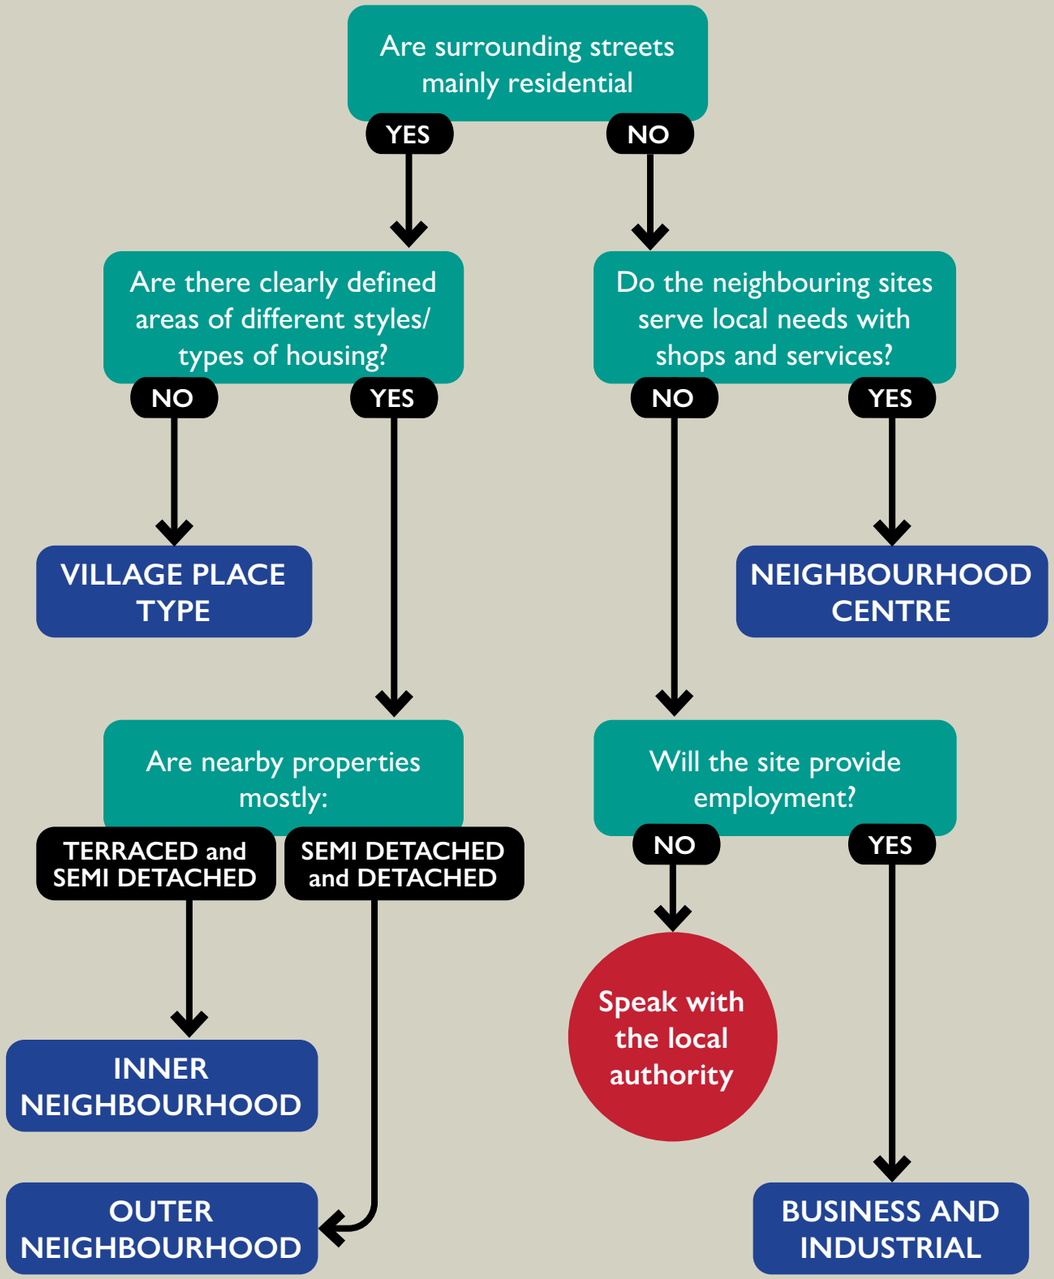

1.6 Demonstrating Compliance

Applicants must show within the application that they have complied with the relevant codes. The relevant **compliance checklist** in **Appendix G** must be completed and included when an application with any form of design consideration (see **Table 2**) is submitted. The **compliance checklist** has space to note where in the application documents each code has been addressed. For example – compliance with C33 (parking spaces) might be shown on a site plan.

At the beginning of each chapter there is a list of "Where to demonstrate compliance" documents. These documents are ones that would be likely to be submitted with an application and are suggested as the best places to demonstrate compliance with the codes and key guidance in that chapter. The requirement to submit sufficient information to demonstrate how local design expectations have been met is set out in paragraph 137 of the NPPF (2024).

Reference to key guidance is included in the **compliance checklist**. This is to ensure that the guidance is considered throughout the design process. The application of key guidance is more subjective compared to the application of code, however applicants should still set out in the **compliance checklist** where in the application the response to the key guidance is demonstrated.

Non-compliance - As the Design Code covers a large area and many development types there may be times where a departure from the Design Code is needed. Where a departure from the Design Code is planned, a robust justification, with evidence, must be provided in the applications supporting documents.

Whether a departure from the Design Code is acceptable will depend on the context of the site and the proposed development. In all cases the requirements for good design set out in chapter 12 of the NPPF and policy ENV1 of the East Riding Local Plan (and other relevant policies – see **Appendix D** for a full list of how the codes relate to local plan policies) will need to be demonstrated.

Not Applicable – A not applicable (N/A) column is provided for when the code requirements are not be applicable to the proposal. For example, codes regarding dormer windows where no dormers are proposed. **If any code checked N/A is found to be material to the assessment of the proposals, applicants may be asked to withdraw the application, or the applications may be refused on grounds of insufficient information.**

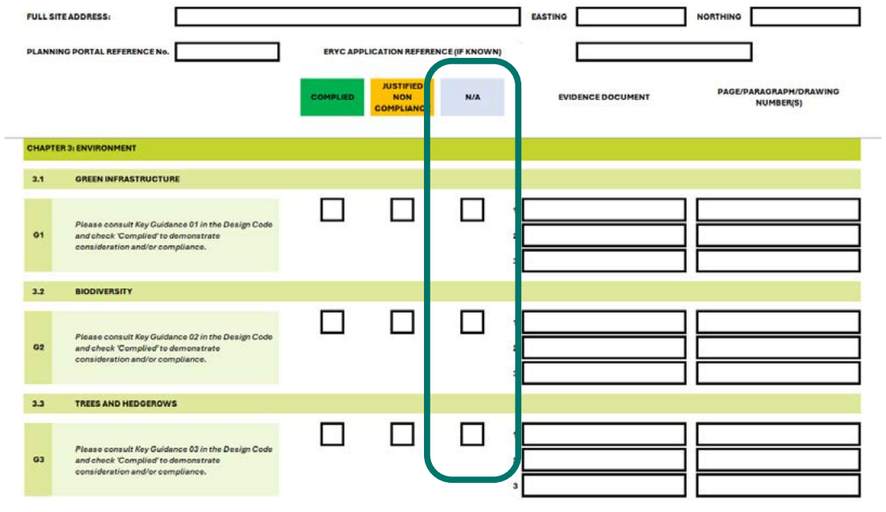


Figure 7 Full planning application compliance checklist extract. Checklists include a 'Not Applicable' (N/A) column for instances where code and guidance requirements are legitimately not applicable

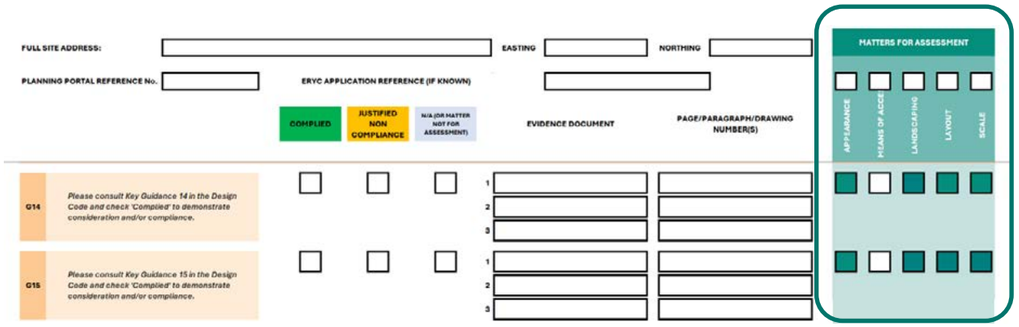


Figure 8 Outline Planning/Reserved Matters application compliance checklist extract

Appendix G1 **Householder**	**Form 1** **Form 1a**	H	Householder Development Householder Outbuildings only
Appendix G2 **Residential Units 1-25+** Appendix G3 **Residenital Units 1-25+ Outline and Reserved Matters (O&RM)**	**Form 2/6**	1	1-2 Units/ *O&RM*
	Form 3/7	2	3-9 Units/ *O&RM*
	Form 4/8	3	10+ Units/ *O&RM*
	Form 5/9	4	Mixed Use - Residential and Commercial/ *O&RM*
	Form 5a		Residential conversions
Appendix G4 **Flats and Apartments**	**Form 10** **Form 10a** **Form 10b** **Form 11** **Form 11a**	F	Flats - one block Flats - 2+ blocks Flats - Conversions Flats - One block *O&RM* Flats - 2+ blocks *O&RM*
Appendix G5 **Non Residential Development**	**Form 12** **Form 12a**	A	Agricultural - new building Agricultural - extension
	Form 13 **Form 13a** **Form 13b** **Form 14**	B	Industrial, Storage & Distribution (B Class uses) - new building - conversion - extension - *O&RM*
	Form 15 **Form 15a** **Form 15b** **Form 15c** **Form 15d** **Form 15e**	C	Commercial - new building Commercial - 2+ buildings Siting of holiday lodges/caravans Outdoor commercial Commercial - extension Commercial - conversion
	Form 16 **Form 16a** **Form 16b** **Form 16c**	C	Commercial - new building *O&RM* Commercial - 2+ buildings *O&RM* Siting of holiday lodges/Caravans *O&RM* Outdoor commercial *O&RM*
	Form 17		Advertisement Consent

Table 2 Development types, corresponding scales and compliance checklist form numbers

1.7 Heritage Assets

New development which impacts a heritage asset, or its setting, requires additional design consideration. Heritage assets include conservation areas, listed buildings and other designated heritage assets. Whilst the requirements of the Design Code must be followed where appropriate, it is important that any development which impacts a heritage asset is designed to preserve and enhance that asset.

It is recognised that a tailored response which deviates from the Design Code may be required in some instances. Where this is the case the justification for the approach taken must be set out in the application along with details about how the design response will preserve and enhance the heritage asset.

1.8 Good Design and Context

The East Riding Design Code has been developed to support good design. Good design is about the way a place functions and connects to its surroundings, both physically and visually.

The Design Code has been designed to support places which function well across the authority. Covering a wide area there will be times when a solution which doesn't fit with the Design Code is needed to make the best possible use of the site. In this instance it is expected that the justification for not meeting the Design Code will be set out within the application, demonstrating how the aims of the Design Code are still being achieved.

It is important that all applications reflect the surrounding context in some way, whether the visual appearance of the proposal for the application site is traditional or contemporary. Good contemporary design can bring positive benefits to a wider area than the application site. There may be instances when to achieve a good contemporary design elements of the Design Code will not be complied with. In this instance it is expected that the application will set out the rationale behind not complying with the specific elements of the Design Code and show how the design responds to the surrounding context.

Some of the ingredients for context (look beyond the red line):

- Spaces between buildings;
- Heights and massing;
- Historic context;
- Community context and existing uses;
- Green and blue infrastructure;
- Materials;
- Design of features – i.e. windows, doors, chimneys, brick work, boundary features.

Context needs to feed through the whole design of a site from layout to buildings. How the contextual analysis of a site has fed into the design should be clearly set out in Design and Access Statements.

For more information on local context please look at local Conservation Area Appraisals, Neighbourhood Plans and Identity and Context documents.

1.9 Design Codes and the Design Process

The Design Code sets out a process for achieving good design.

By considering the themes set out in this Design Code in a holistic way from the beginning of the design process, new development should be of a high quality which reflects local character and design preferences. To make sure proposals are well designed it is also important that for each site a thorough baseline analysis is carried out and local communities are engaged with.

The suggested approach to ensure this happens is:

1. BASELINE ANALYSIS

a. Look at the history of the site and surrounding area. This should be relative to the scale of the proposal. Consider local features and movement connections. Section 1.8 sets out some of the ingredients for context.

b. Look at relevant local information such as neighbourhood plans, identity and context documents, landscape character assessments and conservation area appraisals.

c. Engage with local community and key stakeholders.

2. LOCAL AUTHORITY REQUIREMENTS

Check local plan policies, Validation Checklist, Design Code.

3. SCHEME CONCEPT/MASTER PLAN

a. Applicants must have a strong vision and brief for their proposal. Ideally the vision should reflect the Design Code's vision and values. The vision should concentrate on quality and look to the 10 characteristics of good design set out in the NDG. It is equally important to have a design vision for the extension of a single house as it is for the development of a thousand new homes.

b. Engage with the local authority for pre-application discussions. Pre-application discussions can be in the form of pre-application advice or planning performance agreements depending on the complexities of the proposal and the amount of advice required. For more information please see the council's website.

c. Engage with the local community and key stakeholders to develop the plan.

4. SUBMITTING A PLANNING APPLICATION

Use the Validation Checklist and Design Code **compliance checklist** to make sure all the documents needed to consider your proposal are submitted.

By working with the Design Code from scheme inception, applications should embed the level of design quality the authority requires for approval.

NOTE

Any form of **engagement with local communities** should be appropriate to the scale of development – from talking to neighbours for a house extension through to a settlement wide community public engagement strategy for large strategic applications.

Chapter 2

Vision, Values and Place Types



Chapter Contents

2.1	Design Vision and Values	21
2.2	Place Types Vision	25
2.3	Town Centre	26
2.4	Inner Neighbourhood	27
2.5	Outer Neighbourhood	28
2.6	Neighbourhood Centre	29
2.7	Village	30
2.8	Countryside	31
2.9	Business and Industrial	32

2.1 Design Vision and Values

The National Model Design Code defines a design vision as:

"A clear articulation of what an area should be like in the future, developed with the local community."

The vision and values developed for the codes in this document are based on detailed consultation and engagement with local stakeholders. The vision and values the Design Code is based on support the local plan position on design quality, itself established on a sound and well consulted evidence base and support East Riding of Yorkshire Council's corporate priorities.

Visions have also been created for each of the place types considered through the Design Code. These set out a vision for how each place type should evolve and also need to be considered by applicants.

The National Design Guide sets out ten criteria for well-designed places. This is a useful touch point and the values the authority are seeking in this Design Code have been aligned to show coverage in all areas (see **Figure 9**).

Applicants should keep both the authority's values, and the 10 characteristics in mind as they work through the codes and undertake design development, so that they come back to these objectives and criteria again and again.

All values are relevant throughout the Design Code, however the key values for each chapter are highlighted throughout the document.

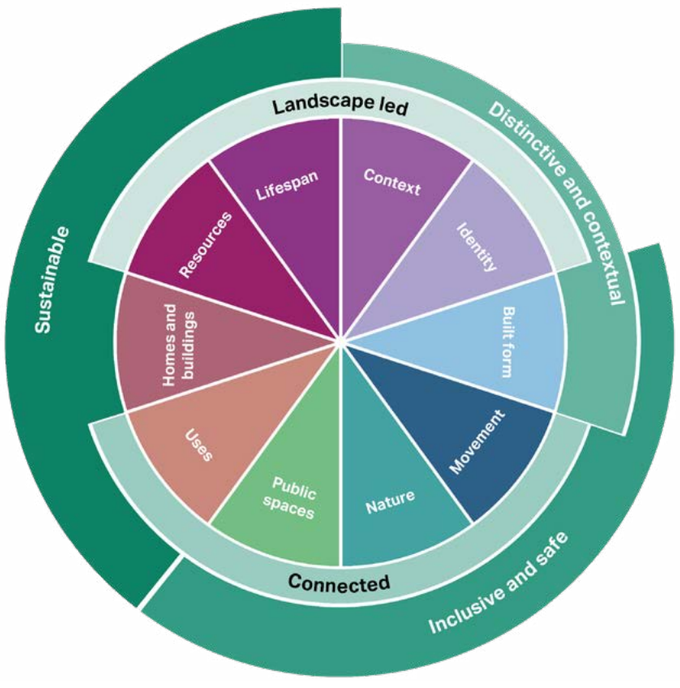



Figure 9 Characteristics of a well-designed place (adapted from National Model Design Code)



Figure 10 Withernsea Lighthouse and residential street

2.1 Design Vision and Values

2.1.1 Vision

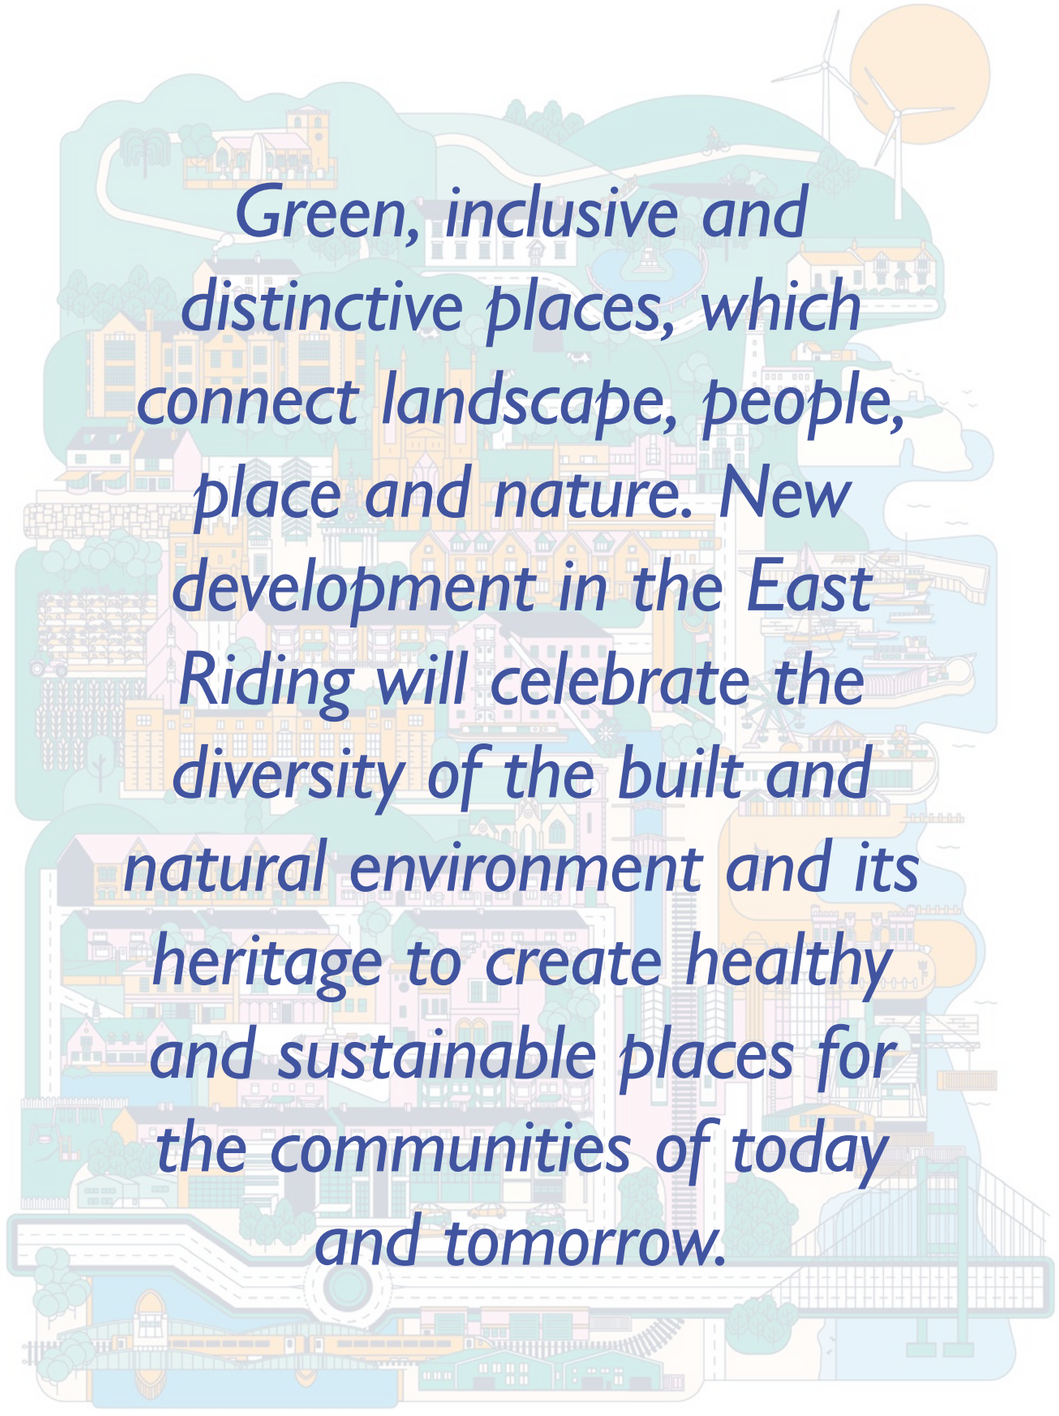

Green, inclusive and distinctive places, which connect landscape, people, place and nature. New development in the East Riding will celebrate the diversity of the built and natural environment and its heritage to create healthy and sustainable places for the communities of today and tomorrow.

2.1.2 Values

CONNECTED

New development will create, or support, a network of well-connected, walkable and legible neighbourhoods. Places should provide direct lines of movement to shops, workplaces, open spaces including countryside, community facilities, and services. Development will promote active travel and modal choice, providing safe cycle routes to create equitable and accessible movement around and between places. Prioritising pedestrians and those of all abilities is paramount.

LANDSCAPE LED

The East Riding landscape is varied, from the rolling hills of the Wolds to the coast and Spurn Point. The local landscape should influence all new development and be integrated with drainage solutions that counter flood risk, provide appealing public open space, enhanced views and biodiversity net gain proposals. The public realm, including streets, should be designed to provide multiple benefits and be adaptable for future changes to lifestyle and climate.

DISTINCTIVE AND CONTEXTUAL

The East Riding of Yorkshire is made up of cultural and contextual fabrics, local character, landscape setting and identity supported by a rich heritage. Market towns, such as Driffield and Pocklington, with compact centres offered important points for trade and along the coast towns like Bridlington benefit from a rich fishing heritage. It is the rich heritage of the authority that creates a sense of civic pride and belonging, and is reflected through the built form. The character of each place across the East Riding is different, and an authentic and respectful response to the context will create distinctive places.

Context must be reflected through all aspects of design from layout and street design to landscape design and built form. Innovative design is welcomed but should still be reflective of, and work with, the local setting.

SUSTAINABLE

Sustainability is a fundamental aspect of whole-of-life design and includes environmental, social and economic considerations. Sustainable and high-performing built outcomes are better for health and wellbeing, contributing to social and economic equity by reducing resource consumption and running costs, while enhancing comfort and usability.

Buildings should be designed in a way that allows them to be adapted for future uses.

INCLUSIVE AND SAFE

The approach to future development should be inclusive, working in the broadest possible sense to support and nurture the health and well-being of all in our authority. Streets and public spaces must be accessible for all and be designed with public safety in mind. The design of buildings must consider the needs of all user groups and how they can contribute to the inclusivity and safety of surrounding public spaces.

New developments offering employment should be designed in a way which supports the health and well-being of the workforce and promotes ties to local communities.

2.2 Place Types vision

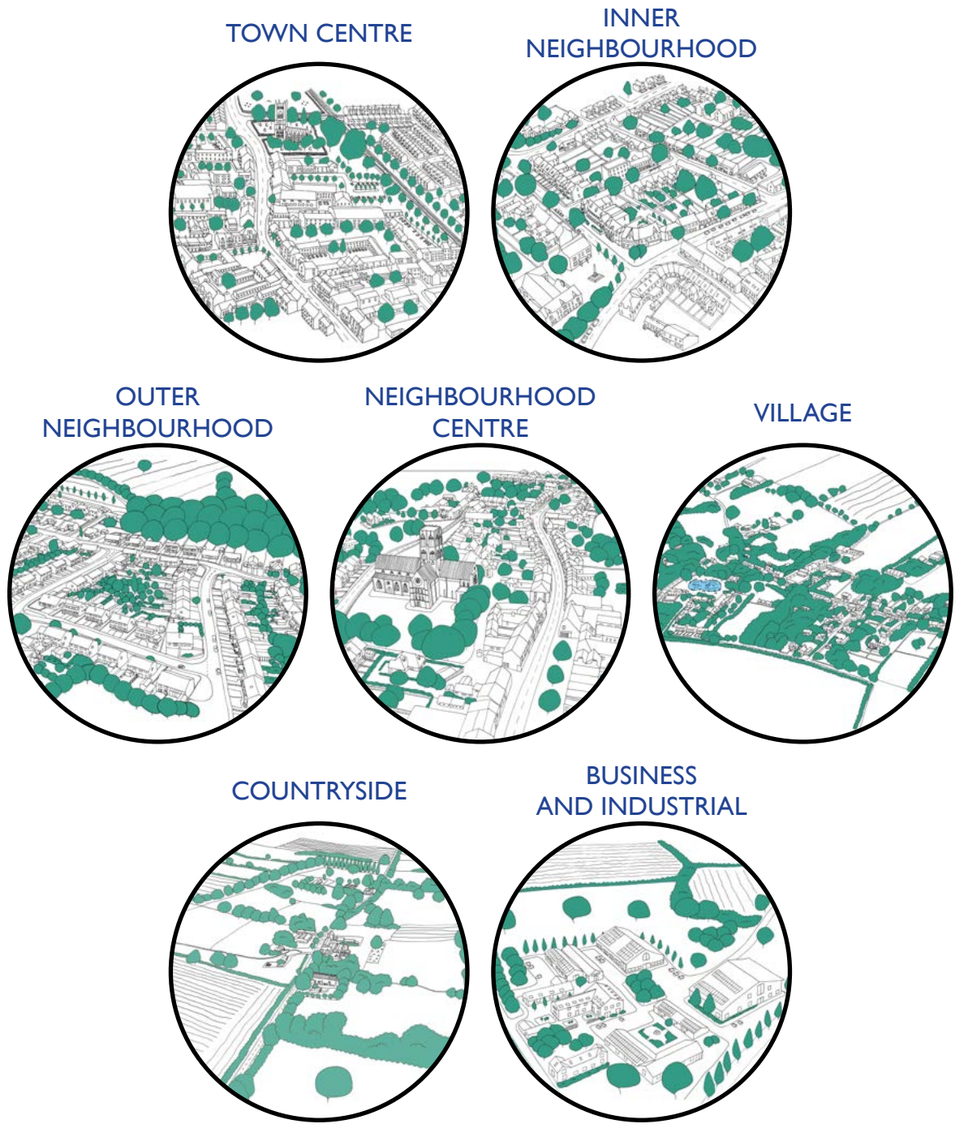


Figure 11 Place types overview

Some codes in this document have different requirements according to the place type the application site is in. A vision for how each of the place types will evolve and develop is set out in the following pages. The codes in this document are designed to help achieve these visions.

Where one place type transitions to another the tolerances within most codes should allow for the change to happen gradually forming part of the design of the place.

For more information about how to choose the right place type for an application please see section **1.5**.

2.3 Place Type: Town Centre

Town centres are places with a rich culture, history and significance. They provide a central location for retail and services such as public transport hubs, libraries and doctors' surgeries. Town centres are often concentrated around a primary street, or marketplace, with levels of connectivity to this central location.



Figure 12 Example town centre image

VISION FOR TOWN CENTRES

- A strong building line and sense of enclosure along high streets and public spaces, providing a degree of natural surveillance.
- High-quality, hard landscaped spaces supported by tree-lined streets and street furniture.
- Public spaces will include soft landscaping, limit the use of cars and integrate water and drainage management systems.
- A mix of uses to create a vibrant and active public realm.
- Easy and quick access to different public transport modes for all ages and abilities.
- Clear connections to wider neighbourhoods, through the orientation of buildings and framed views, and via pedestrian, cycle and vehicular links.
- Capitalise on any views of sea, river and the Wolds. Where there is sea or a river connected to the town, access to the waterfront should be enhanced.

2.4 Place Type: Inner Neighbourhood

Inner neighbourhoods typically surround town centres and have a relatively dense form with rectilinear street patterns and a high proportion of terraced buildings. Areas of inner neighbourhood can also be found close to the centre of larger villages in the East Riding. Streets are highly connected, and junctions are often characterised by more prominent buildings. Mature street trees are common features.



Figure 13 Example inner neighbourhood image

VISION FOR INNER NEIGHBOURHOODS

- Strong building lines that allow shops and other uses to front directly on to the street, with small setbacks between the front of residential properties and the street.
- A mix of parking solutions, with landscaping and street trees providing visual breaks between street parking.
- Predominantly residential uses with some mixed-use development.
- Limited variation in building scale and roof scape. Corners of blocks will have high levels of articulation. A mix of uses to create a vibrant and active public realm.
- Good levels of connectivity to the surrounding area including good public transport links and active travel opportunities.

2.5 Place Type: Outer Neighbourhood

Outer neighbourhoods are often found around the edges of towns and large villages. They have high levels of residential development and are less dense than inner neighbourhoods with larger plot sizes and a high proportion of semi-detached and detached buildings. Parking is often on plot with buildings set back within plots from the street. High levels of landscaping and mature trees are common features.



Figure 14 Example outer neighbourhood image

VISION FOR OUTER NEIGHBOURHOODS

- A clear transition between the urban and rural environments which is reflected in building scale, orientation and planting. High-quality, hard landscaped spaces supported by tree-lined streets and street furniture.
- A mix of property types including bungalows, semi-detached and detached properties. Short rows of terraces are also acceptable to ensure a good mix of different types of property.
- Mature tree and hedgerow planting to reinforce proximity to the rural edge.
- Parking predominantly on plot and positioned between buildings to not impact the street scene.
- Good connectivity with the surrounding area – including active travel routes which provide safe connections for accessing employment, education, services and leisure..
- Site edges which interface with the wider countryside, allowing the neighbourhood to sit sensitively in its location.

2.6 Place Type: Neighbourhood Centre

Neighbourhood centres are smaller than town centres but provide an important function providing local services for the surrounding community. They could be the historic core of a village or the centre of a neighbourhood on the edge of a town.



Figure 15 Example neighbourhood centre image

VISION FOR NEIGHBOURHOOD CENTRES

- A cluster of local shops and community services.
- Slightly increased density with respect to the surrounding context including first floor residential uses above ground floor commercial uses.
- Close proximity to local parks and play areas.
- A well-designed public realm associated with the Commercial area, including small public spaces, landscaping and comfortable areas to sit.
- Good access to public transport networks and active travel opportunities.
- Well integrated short stay parking.

2.7 Place Type: Village

The village place type has a high variety of different scale plot sizes and buildings with a mix of terrace, semi-detached and detached properties, all in close proximity. Within the East Riding villages are generally either linear in nature, formed predominantly along a main street, or formed around a green or prominent building such as a church. How the built form interacts with the surrounding rural land uses is highly important.

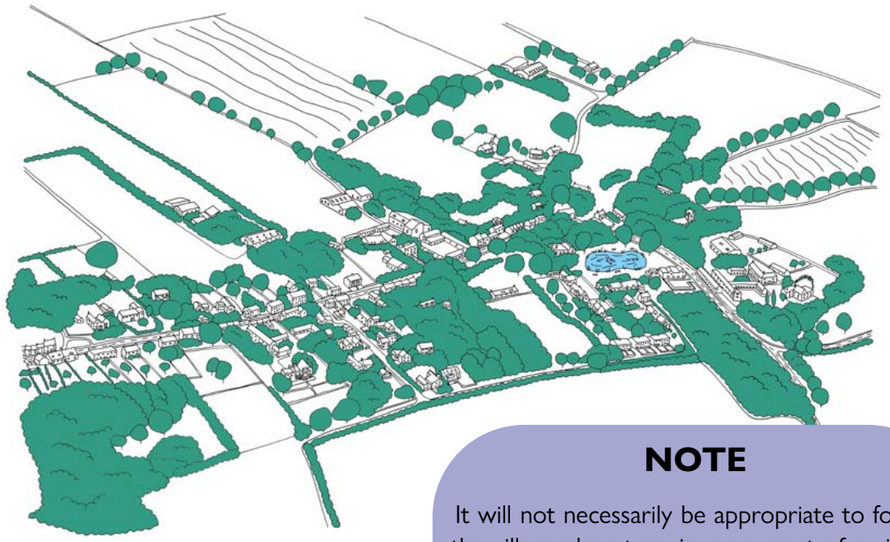


Figure 16 Example village image

NOTE

It will not necessarily be appropriate to follow the village place type in every part of a village. Especially in some larger villages there are likely to be areas where the neighbourhood centre, inner neighbourhood, and outer neighbourhood codes are more appropriate. To ensure the right place type is used please see section **1.5**.

VISION FOR VILLAGES

- Gentle density development which respects the rural context and character of the village.
- High levels of landscaping within plots and streets.
- Parking integrated within plots to the side or rear of buildings.
- Planted edges which integrate new development with the wider landscape setting.
- Gaps between buildings at the edge of villages, allowing for views towards the countryside.
- Good connectivity with the surrounding area – including active travel routes which provide safe connections for local education and services.

2.8 Place Type: Countryside

Countryside is a key feature of the East Riding of Yorkshire. There is wide variation in the rural nature of the landscape. The East Riding of Yorkshire has a strong agricultural heritage and large open fields divided by hedgerows are a common sight across the authority.



Figure 17 Example countryside image

NOTE

Policy allows for limited development within the countryside. In the countryside there is wide variation in landscape and any development which does take place is sensitive to its rural context.

Because of this the Design Code does not specify place type codes for development in the countryside, however non place type codes do still apply.

VISION FOR THE COUNTRYSIDE

- New buildings will be well integrated into the wider landscape setting and grouped with existing buildings where possible.
- Views across the landscape and both to and from settlements will be protected.
- Historic field patterns and boundary features will be retained with hedgerows and tree belts protected and enhanced.
- Active travel routes will be protected and enhanced.

2.9 Place Type: Business and Industrial

Areas of business and industry are most often contained in the countryside or on the fringes of settlements within the East Riding. The countryside setting is a significant characteristic. The relationship between the use and surrounding environment in terms of landscaping, but also movement, is vitally important.

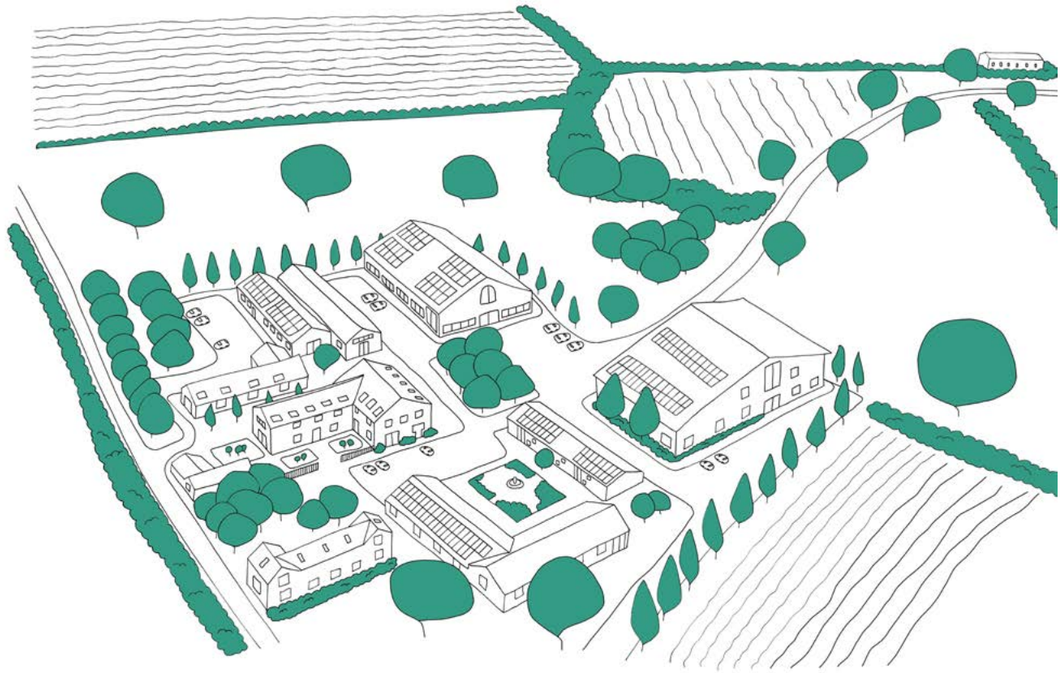


Figure 18 Example business and industrial development image

NOTE

Business and Industrial development benefits from specialist codes – see section **1.4**.

VISION FOR BUSINESS AND INDUSTRIAL

- Easy access to public transport network.
- Well integrated links with the wider footpath and cycle network.
- High quality hard and soft landscaping, especially along boundaries.
- Biodiversity within the landscape environment through the selection of native species, integration of SuDS and creation of diverse habitats.
- Integration of renewable energy solutions.

Chapter 3


Codes And Guidance:

Environment

Land within a site must meet multiple requirements. Consideration should be given early in the design process as to how biodiversity net gain, green infrastructure, drainage, public open space, and movement corridors can work together to make the best use of land within the site. Environmental concerns are as important for large strategic sites as they are for extensions to existing developments.

Chapter Contents

3.1	Green Infrastructure	35
3.2	Biodiversity	37
3.3	Trees And Hedges	39
3.4	Sustainable Drainage	41
3.5	Renewable Energy	45

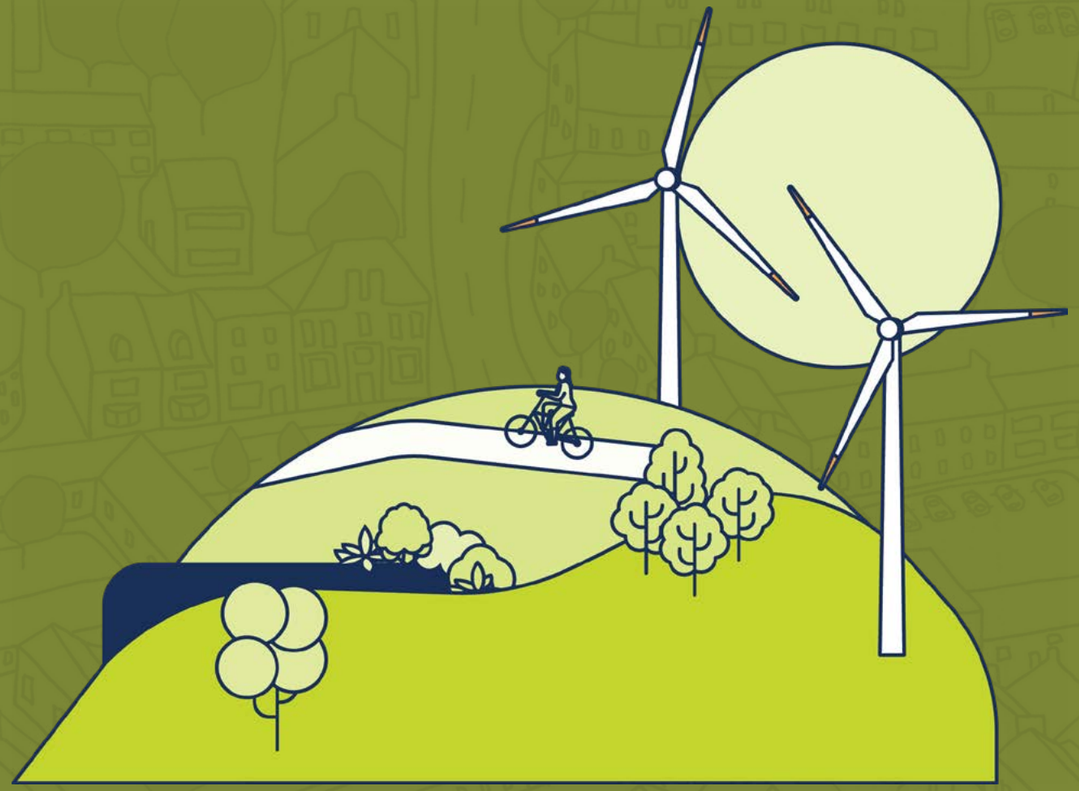

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Site Plan
- Layout Plan
- Tree Survey
- Biodiversity Survey and Report
- Landscaping Scheme
- Green Infrastructure Plan
- Drainage Plan
- Elevation Plan (G4)
- Transport Statement/Assessment
- Travel Plan

3.1 Green Infrastructure

Green infrastructure provides multiple benefits using nature-based solutions. It helps nature to thrive creating prosperous communities and beautiful places that improve our connection with nature and contribute to well-being and healthier lifestyles. It supports natural habitats and biodiversity, improves water quality and creates resilience to climate change. It is important that green infrastructure is designed to maximise these benefits throughout the site.

***DEFINITION:** Green infrastructure **(GI):** A network of multi-functional green and blue spaces and other natural features, urban and rural, which is capable of delivering a wide range of environmental, economic, health and wellbeing benefits for nature, climate, local and wider communities and prosperity. (NPPF 2024)*

KEY GUIDANCE

G1 H 1 2 3 4 F A B C

Designing green infrastructure to perform multiple functions will deliver schemes that make efficient use of land and are cost effective. Combining recreation, movement, drainage and enhancing biodiversity in the same space will maximise benefits and make the best use of space available.

A well-connected and multifunctional green infrastructure system should be integrated holistically into the landscape design. This should incorporate:

- *public open spaces (see **Chapter 5**);*
- *movement network (see **Chapter 4** and **Chapter 7**);*
- *SuDS network (see section **3.4 Sustainable Drainage**);*
- *wildlife habitat network (see section **3.2 Biodiversity**), and;*
- *development edges, to blend seamlessly with green infrastructure outside of the site.*

(For a more comprehensive list see table 9 of the East Riding Local Plan.)

Green infrastructure should be designed to integrate existing neighbouring areas and future developments. Public open spaces and streets should include new trees and landscaping elements that complement and enhance existing features while mitigating any negative impacts caused by the new development.

Connecting green infrastructure will maximise benefits, create resilience and provide continuous corridors for wildlife and movement of people.

The green infrastructure system should connect existing and proposed natural and semi-natural spaces, including:

- *open spaces;*
- *wooded areas;*
- *tree belts and hedgerows;*
- *wildlife habitats;*
- *green corridors;*
- *SuDS and water bodies.*

Further information on integrating quality green infrastructure into development can be found in Building with Nature.

The National Urban Greening Factor should be met as follows:

- *0.3 for commercial development;*
- *0.4 for residential development, and;*
- *0.5 for residential greenfield development.*

Guidance on using the urban greening factor is set out in **Natural England's Green Infrastructure Framework**. For the urban greening factor, the evidence of calculations should be submitted with applications.

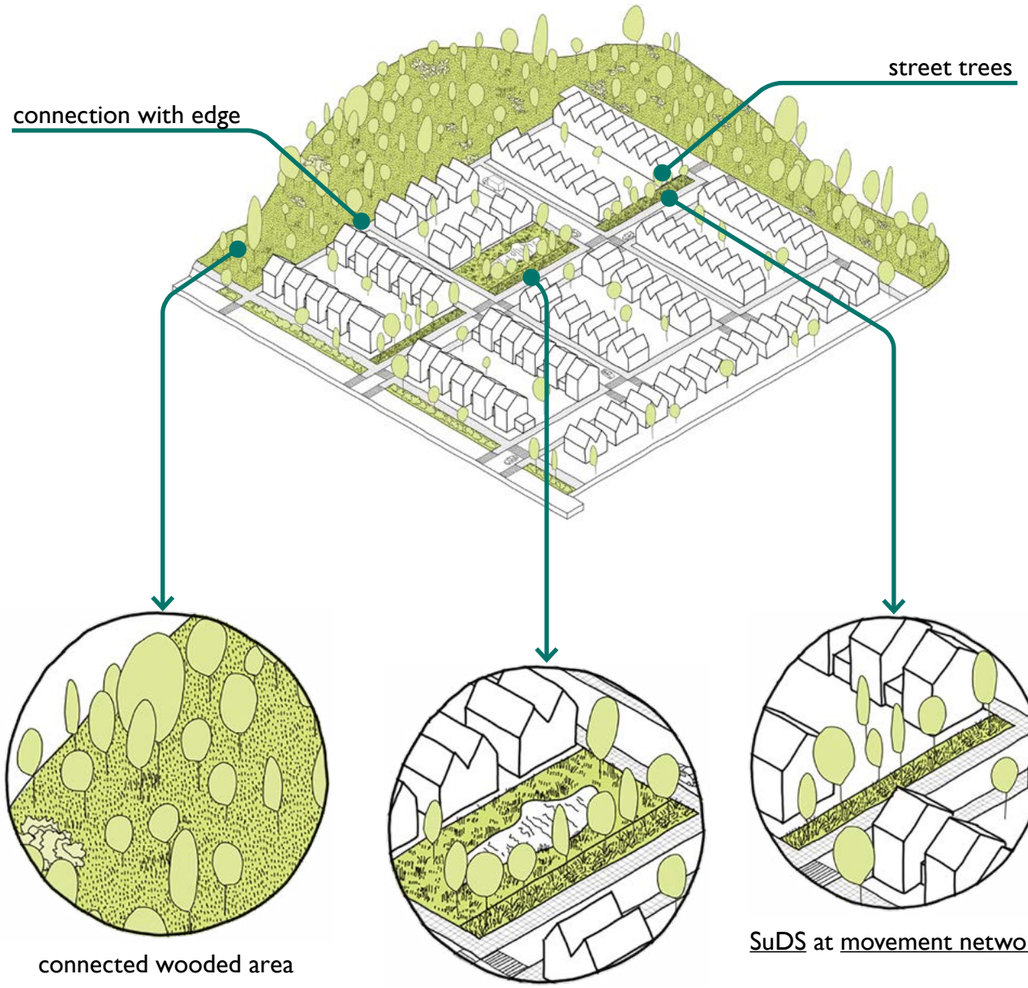


Figure 19 Examples of green infrastructure opportunities

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Green Infrastructure Planning and Design Guide	Policy ENV1
Urban Greening Factor for England User Guide	Policy ENV5
Building with Nature Standards Framework (BwN 2.0)	Policy S9

3.2 Biodiversity

Biodiversity is essential for a healthy environment that is resilient to climate change and supports healthier environments for people.

Policy requires that biodiversity net gain (BNG) be achieved with new development. It is important that this is done in a way that integrates with blue and green infrastructure, public open space and movement networks.

KEY GUIDANCE

G2 H 1 2 3 4 F A B C


To improve biodiversity on site, a network should be created, that connects existing and proposed wildlife habitats. These should be integrated into the green and blue infrastructure network.

Throughout the whole site, including public and private spaces, development should:

- *retain, protect and enhance existing natural features such as trees, hedgerows, wildflower meadows and water courses;*
- *protect and create wildlife habitats and corridors through whole sites, connecting to green infrastructure outside of the site boundary (see section **3.1 Green Infrastructure**);*
- *use existing hedgerows, amending any gaps, to define boundaries and create wildlife corridors linking these to other wildlife habitats;*
- *include native trees and plants in landscaping schemes;*
- *enhance resilience by including climate-resistant trees and plants in landscaping schemes;*
- *use retained trees and include additional trees in car parking, communal areas inside blocks and into streets;*
- *integrate sustainable drainage plans with landscaping and use the SuDS solutions designed into the site to promote biodiversity;*
- *Consider integrating green walls and green roofs;*
- *Consider use of brown roofs;*
- *include locally appropriate wildflower and species-rich planting;*
- *include integrated bat and swift bricks supplemented with species specific nest boxes where appropriate. The use of generic bird boxes is discouraged.*

Biodiversity Net Gain (BNG) metrics must be submitted with applications to comply with policy.

BEFORE

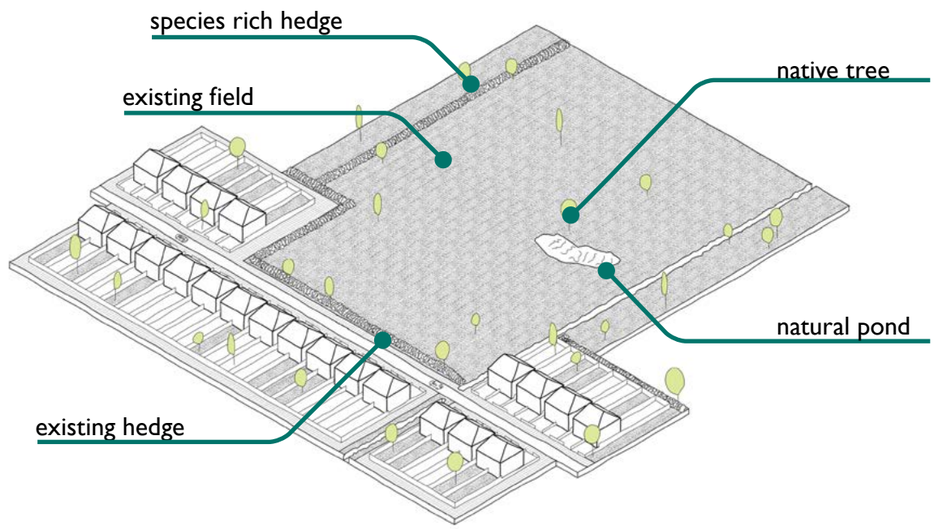

AFTER

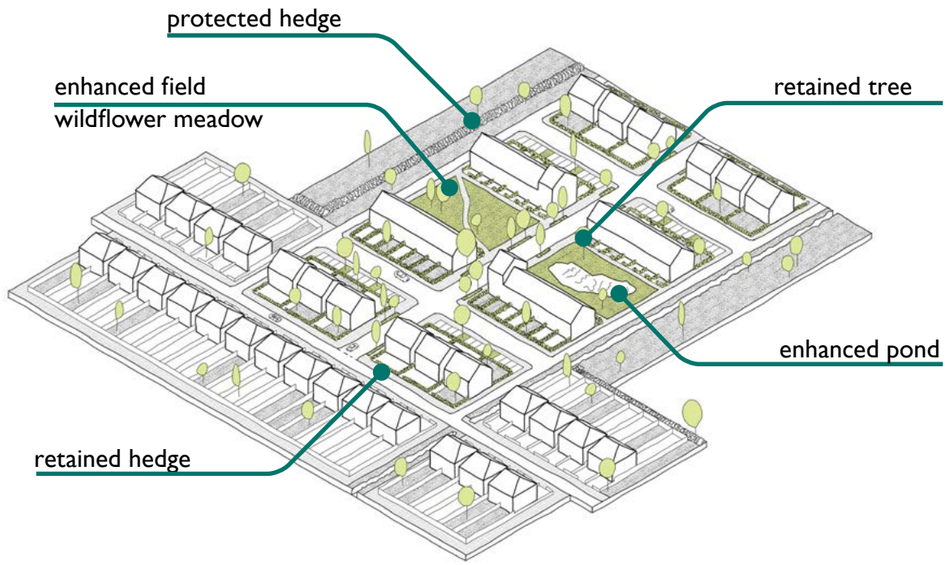


Figure 20 Before and after development highlighting biodiversity enhancements

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Statutory Biodiversity Metric User Guide	Policy ENV1 Policy ENV4 Policy S9

3.3 Trees and Hedgerows

Trees and Hedgerows are a significant part of the natural environment. They contribute greatly to a high-quality built environment, providing multiple benefits. Planting trees along streets helps slow down cars protecting more vulnerable users, helps improve air quality, and reduce noise levels. Trees also help mitigate climate change effects by capturing and storing atmospheric carbon, managing rainwater, reducing flood risk and minimising urban heat effects. Trees create beautiful landscapes that provide a place for recreation and relaxation.

KEY GUIDANCE

G3 H 1 2 3 4 F A B C

Trees and hedgerows should be retained and their provision should be increased wherever possible, for their holistic benefits to the function and performance of both the built and natural environment, as well as physical and mental wellbeing.

Tree planting should reflect native and climate resistant species (see **The Trees and Design Action Group**, ***TDAG***, for further information).

CODES

C1 H 1 2 3 4 F A B C

Existing category A and B trees within the development site must be retained.

GUIDANCE: *In addition to Category A and B trees, Category C trees should be retained where possible to support biodiversity (see section **3.2 Biodiversity**). The removal of any trees must be justified within the supporting documents.*

C2 H 1 2 3 4 F A B C

When there is the need to remove existing trees (of any category) they must be replaced on-site on a 1:2 ratio.

GUIDANCE: *Replacement trees should be planted no later than the next available planting season upon completion of the relevant phase of development.*

The size of tree planted will depend on species selection and location. On streets, extra heavy or heavy standard trees will be the most suitable size for replacement trees. Please contact the local planning authority for pre-application advice if further information is required.

C3 H 1 2 3 4 F A B C

A minimum of 75% of new trees planted as part of landscaping proposals must be within the public realm.

GUIDANCE: *Planting within the public realm, including public streets, will ensure the retention and management of trees throughout their lifespan. The position of new trees and hedgerows can help strengthen existing green infrastructure and provide new.*

C4 H 1 2 3 4 F A B C

New streets must be tree-lined.

GUIDANCE: *Trees should be planted on streets in a way which will protect their future growth as well as the surrounding highway infrastructure. See the **TDAG guidance on street trees**.*



Figure 21 Youth Photography Competition winning entry 'Reflective Walk' by Katie Thompson

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Trees, Planning and Development: A Guide for Delivery	Policy ENV1
Trees in Hard Landscapes	Policy ENV4
First Steps in Trees and New Developments	Policy ENV5

3.4 Sustainable Drainage

Sustainable Drainage Systems (SuDS) help mitigate flood risk, moderate microclimate, benefit ecology and biodiversity, and provide water quality benefits alongside conserving water. Whilst providing these functions, SuDS which are integrated into the site can also contribute to creating great places and enhance and influence the character of a development and area.

CODE

C5 H1 H2 H3 H4 HF A B C

Sustainable Drainage Systems (SuDS) must be embedded in the site layout and be fully integrated within the green infrastructure system.

GUIDANCE: *The SuDS should be incorporated into individual plots, streets, public open spaces and wildlife networks. The design of SuDS should also:*

- *take advantage of the site's natural topography to minimise the need for mechanical measures;*
- *effectively manage run-off;*
- *enhance natural filtration and infiltration to improve water quality and;*
- *include provisions for water storage for irrigation to reduce the demand for additional water supply.*

There are different methods for including SuDS in a development. Which method is most appropriate will depend on the type of development, scale of development and ground conditions. Where possible, SuDS should be designed to maximise biodiversity value. ***Table 3*** *sets out some possible SuDS methods.*

On sites with nutrient neutrality issues SuDS may not be appropriate. A site-specific approach based on mitigation guidance should be taken.

SUDS METHOD	SUITABILITY		LOCATION		
	Commercial	Residential	Plot	Street	Public Open Space
Rainwater harvesting	●	●	●		
Water Butts		●	●		
Green roofs and walls	●	●	●		
Soakaways	●	●	●		
Permeable surfaces and pavements	●	●	●	●	●
Infiltration basins	●	●			●
Ponds	●	●			●
Wetlands	●	●			●
Swales	●	●		●	●
Tree pits	●	●		●	●
Bioretention systems and rain gardens	●	●	●	●	●
Attenuation storage tanks	●	●		●	●

Table 3 SuDS methods and suitability to development type and location (C5)

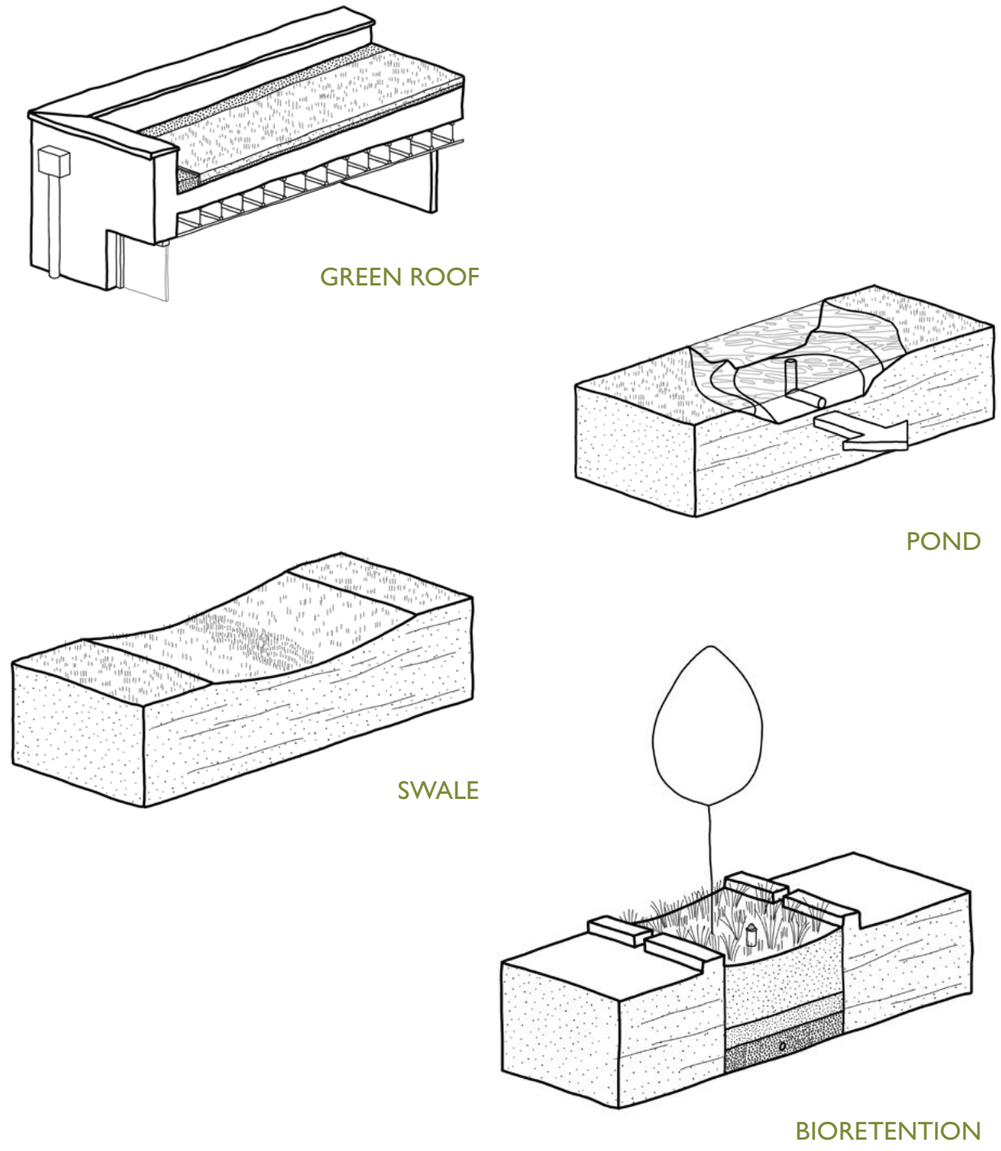


Figure 22 Potential SuDS methods for new development

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Sustainable Drainage Systems (SuDS) and Surface Water Drainage for New Developments	Policy ENV1
The SuDS Manual	Policy ENV4
Sustainable Drainage Systems (SuDS) Design Guidance	Policy ENV6
	Policy S9

3.4 Sustainable Drainage (Glossary)

SuDS METHOD	DESCRIPTION	BENEFITS INCLUDE
Attenuation storage tanks	Below ground structures that store water temporarily before infiltration, slow release or connect with rainwater harvesting systems.	• Can store a high volume of water • Installed underground for efficient use of space • Can be linked with other SuDS
Bioretention systems and rain gardens	Shallow planters that pond temporarily and filter the water through vegetation and soil before infiltration or storage. Can be constructed in private gardens, along streets or other public spaces. Rain Gardens are smaller, simple bioretention systems, normally associated with individual properties.	• A range of scales possible • Visual amenity and biodiversity benefits • Slow flow and clean water
Brown roofs	A roof covered in local soil which is allowed to self seed with local vegetation.	• Ecological benefits • Reduce pollution, noise and energy usage
Green roofs and walls	Roofs or walls covered by vegetation that help retain, attenuate and treat runoff.	• Do not need additional land • Visual and ecological benefits • Reduce pollution, noise and energy usage • Can provide some the same health benefits as gardens
Infiltration basins	Dry and shallow basins that can store large amounts of water during events allowing for sediments to settle before infiltration.	• Can be part of multifunctional spaces for recreation • Can include shrubs and trees to improve biodiversity and visual amenity. Planting also helps clean water • Keeps rainfall on-site helping to reduce runoff and prevent flooding
Permeable/ pervious surfaces and pavements	Gaps between surface materials allow for the infiltration of water to an underlying layer before infiltration to ground. There are different types of permeable surfaces including paving, gravel and woodchip. Pervious pavements are suitable for pedestrians and vehicle use	• Reduce and slow run-off • Low maintenance • Allow for activity on surface • A choice of materials to fit with the visual amenity of the area
Ponds	Permanent pools with vegetation, that store runoff temporarily for attenuation and treatment, allowing sediments to settle.	• Can vary in scale • Can add to visual amenity • Can incorporate planting to boost biodiversity
Rainwater harvesting	Systems that collect rainwater within the boundaries of a property to use on-site.	• Use for toilet flushing, irrigation and watering reducing demand for potable water • Keeps rainfall on-site helping to reduce runoff and prevent flooding
Soakaways	Hollow underground structures filled with draining material, such as gravel, allow for water collection and slow infiltration. Low maintenance and suitable for gardens.	• Slow the flow of water • Do not occupy surface space • Can be integrated into garden design
Swales	Shallow, vegetated channels which provide temporary storage, infiltration and conveyance of water.	• Ideal for use along streets and in car parks and other permeable and impermeable surfaces as part of landscaping scheme to improve visual amenity. • Clean surface water run off • Biodiversity benefits (when combined with trees and species rich plants
Tree pits	Tree pits can be provided along streets and car parking to collect and attenuate runoff.	• Visual amenity and biodiversity benefits • Can be combined well with other SuDS • Collect, clean and infiltrate surface water run off
Water butts	A smaller scale method of rainwater harvesting. Water butts can be attached to down pipes and used for watering gardens.	• Affordable, simple to build, install and maintain • Reduces need for fresh water for gardening
Wetlands	Ponds densely covered with vegetation with shallow areas that allow the plants that are rooted in the bottom to grow enhancing water treatment.	• Visual amenity • Slows flow and cleans water • High ecological value

Table 4 Glossary of SuDS methods and their benefits

3.5 Renewable Energy

The impacts of climate change are being felt globally. Integrating renewable and efficient energy supplies are one-way new development can seek to mitigate some of the environmental impact it has.

Renewable energy can be delivered in many ways and at different scales. The heating and energy sources needed for a site must be considered in the early stages of development and integrated into proposals in a way which respects the context and character of the surrounding area.

KEY GUIDANCE

G4 H 1 2 3 4 F A B C

Domestic properties in the East Riding account for approximately 18% of the county's greenhouse gas emissions. For development taking place in existing buildings the retrofitting of insulation and technology to make the buildings as energy efficient as possible is recommended.

CODE

C6 H 1 2 3 4 F A B C

At least one form of on-site renewable energy must be delivered where development includes new buildings.

GUIDANCE: *The inclusion of on-site renewable energy is part of the councils Climate Change Strategy 2022-2030 to reduce carbon emissions in the authority. This can be done on an individual plot basis or using larger scale solutions to provide heating and energy across a site. When installing renewable technology, it is important that they fit in with the surrounding context and do not look overbearing, are screened from view. and do not cause noise pollution. It is also important to ensure individual buildings are designed to be as energy efficient as possible to make the best use of the energy needed to run them.*

Photovoltaic Panels (PV) *should be designed holistically with the building form. On roofs that front a street, or are considered visually prominent one or more of the following methods should be used:*

- *photovoltaic tiles, bonded with the surrounding roof tiling;*
- *PV's set into the roof structure where this does not dominate the roof plane.*

Where not on visually prominent roofs, methods of fixing other than those listed above can be considered.

Solar Water Heating *should be considered in addition to Photovoltaic Panels.*

Air Source Heat Pumps *should be located where they are not visually prominent from outside of the plot of the building they are connected with. As the screening of heat pumps can impact their use it is recommended they are placed to the side or rear of a building where possible.*

The location of pumps in relation to the windows of neighbouring properties, due to noise pollution, should also be considered.

Ground Source Heat Pumps *should be considered as an alternative to air source heat pumps to minimise visual impact.*

Community heat networks *redistribute heat from one place to others and are an efficient way of heating many places from waste heat or a centralised low carbon source.*

Small wind energy systems *should only be considered where they can be screened from view and do not cause noise pollution.*

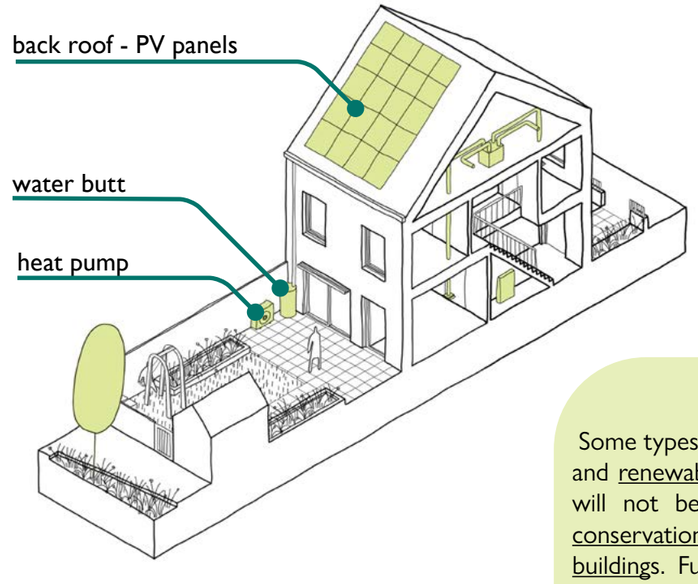


Figure 23 Potential on-site renewable energy options

NOTE

Some types of insultation retrofit and renewable energy production will not be suitable for use in conservation areas and on listed buildings. Further information on renewable energy and heritage assets, and on adapting historic buildings for energy efficiency can be found on the Historic England website.



Figure 24 Precedent images illustrating on-site renewable energy incorporation

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Adapting Historic Buildings for Energy and Carbon Efficiency Climate Change Strategy 2022-2030 Sustainable Traditional Buildings Alliance	Policy ENV1

Chapter 4

Codes And Guidance:

Layout



Well-planned layouts create legible networks of connected streets, places and spaces. Whether delivering new mixed-use neighbourhood centres, or extending or linking existing networks, layouts should reinforce positive characteristics from a locality, utilising and working with the existing natural features.

Chapter Contents

4.1	Respecting The Local Context	49
4.2	Legibility	51
4.3	Street Hierarchy	53
4.4	Connectivity	57
4.5	Development Mix	59

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Heritage Statement
- Site Plan
- Layout Plan
- Landscaping Scheme
- Transport Plan
- Elevation Plan

4.1 Respecting the Local Context

The built environment and its relationship with the surrounding landscape is reflected on a locality's unique character (i.e. context). New development should work within this context to respect and positively evolve these characteristics for the enjoyment of present and future generations. See **1.8** for further information on context and good design.

KEY GUIDANCE

G5 H 1 2 3 4 F A B C

The scale, proportions and urban grain of new development should have regard to surrounding development and the place type visions set out in **Chapter 2**. In some cases, such as close to services and transport hubs, gently increasing density compared to surrounding uses may be appropriate. Information on appropriate block and plot sizes for different place types can be found in **chapters 6 and 8**.

Where instances of existing development are considered out of character, and to detract from the existing local context, they should not be used as a precedent to justify new development. This should be clarified through pre-application discussions with the local authority for the avoidance of doubt.

Transitions between place types should be designed into the development to achieve a gradual change. Streets and public open space can also provide good transition points between place types.

The retention of existing habitats should be prioritised in the layout of a site. For further information, see sections **3.1 Green Infrastructure** and **3.2 Biodiversity**.

CODE

C7 H 1 2 3 4 F A B C

Views to and between identified landmarks (built and natural) must be preserved and enhanced by direct and indirect lines of sight.

GUIDANCE: *In addition to identified buildings and landscapes, consideration should be given to common views such as the termination of streets, ensuring attractive and/or prominent built or natural components occupy these spaces.*

Views from landmarks are also important and consideration should be given as to how any views outside of the site's red line might be impacted by the proposal.

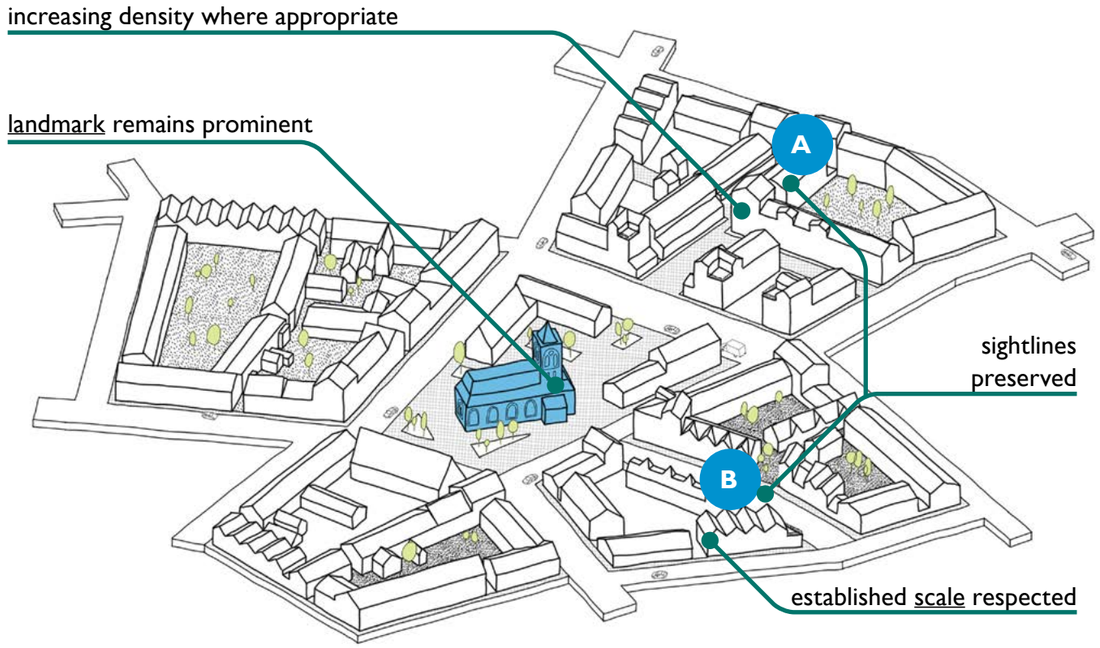


Figure 25 Example settlement layout highlighting important elements of local context to consider and protect

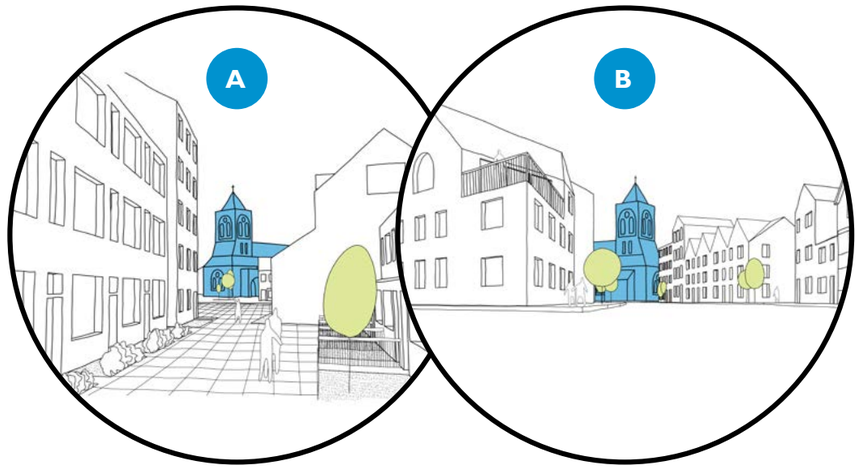


Figure 26 Preserving and enhancing views to and from identified landmarks

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Conservation Area Appraisals (Various)	Policy ENV1
Landscape Character Assessments (Various)	Policy ENV2
Understanding Place: Historic Area Assessments	Policy ENV3

4.2 Legibility

Clear definition and arrangement of a structured layout ensures that people of all abilities can navigate the public realm safely. Effective implementation of street hierarchies and logical arrangement of place and space facilitates ease of movement and increases activity and interaction.

See **Chapter 7: Streets** for further information on street design.

KEY GUIDANCE

G6 H 1 2 3 4 F A B C

All elements within a development should contribute towards optimising legibility and safe navigation for users.

Key services and social infrastructure, as well as landmark buildings and public open spaces, should be located on key travel routes (primary and secondary streets) and readily accessible for people of all abilities. The street hierarchy (section **4.3**) helps users navigate a place by directing them towards primary and connecting routes. The higher up the street hierarchy the larger the buildings generally are and the less variation there is in set back (see section **7.5**).

For larger sites the location of bus routes and stops need to be considered (see section **7.6** for width of bus routes). Active travel routes to bus stop should be direct. Bus stops should have space for resting and be overlooked by nearby uses (see sections **5.4 Safety and Surveillance** and **7.1 Active Frontages**).

Priority should be given to active travel users (pedestrians, wheelers, riders and cyclists), and their ease of navigation, when devising appropriate layouts.

CODE

C8 H 1 2 3 4 F A B C

Corner plots must include a form of articulation.

GUIDANCE: *Marking corners helps improve the legibility of a space and gives visual interest to a street. Corners can be emphasised either by creating a prominent building or by changing building or plot line.*

The articulation of building facades can be done by:

- *varying building height;*
- *recessed and projecting facade depth;*
- *materials detailing;*
- *window and door surrounds;*
- *landscaping ;*
- *setting back the building to create public space.*

*Higher priority corners need to include more articulation than lower priority. As a minimum it is important that on corners every elevation fronting a street or public space have windows and doors overlooking the public realm – see section **7.1 Active Frontages** for further information.*



Figure 27 Example settlement layout highlighting key aspects of legibility

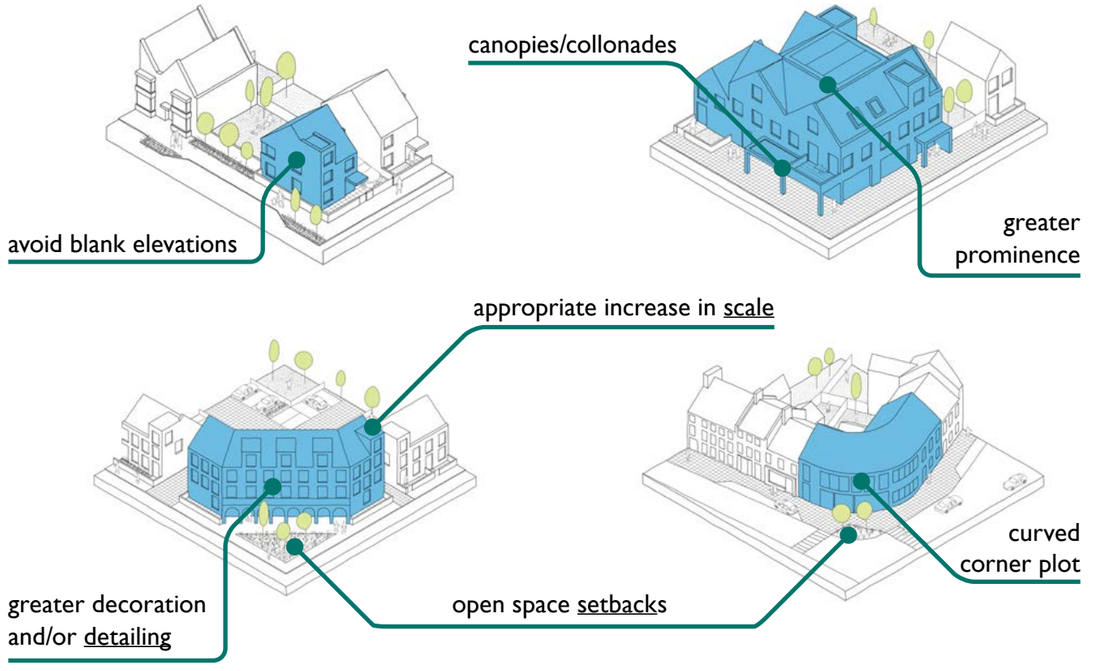


Figure 28 Potential options to activate and articulate building and/or plot corners

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy S8 Policy EC4 Policy ENV1

4.3 Street Hierarchy

A clear street hierarchy creates a coordinated approach to street design and movement. This will help to differentiate the role and character of a street, balance place and movement functions to align with the specific context and enable safe and secure movement for all.

CODES

C9 H 1 2 3 4 F A B C

Development must incorporate only the appropriate street types as per **Table 5**.

GUIDANCE: *A description of each street type can be found in* ***Table 6****.*

A clear street hierarchy supports intuitive wayfinding, guiding users towards key destinations, such as high streets.

Table 10 *in section* ***7.6 Carriageways*** *sets out technical details for the construction of different street types in the hierarchy ensuring streets are designed to be suitable for the level of use.*

C10 H 1 2 3 4 F A B C

Proposed streets must only connect to another street type which is in the same rank within the street hierarchy, or one hierarchy step up or down (see **Table 5** and **Table 6**).

GUIDANCE: *For ease of movement and safety of those not travelling by motorised vehicle, it is not appropriate for one street type to connect to another street type more than one step up or down the street hierarchy (e.g. a tertiary street to a primary street). Transitions through the street hierarchy should be gradual to optimise legibility and prioritise permeability and connectivity for active travel.*

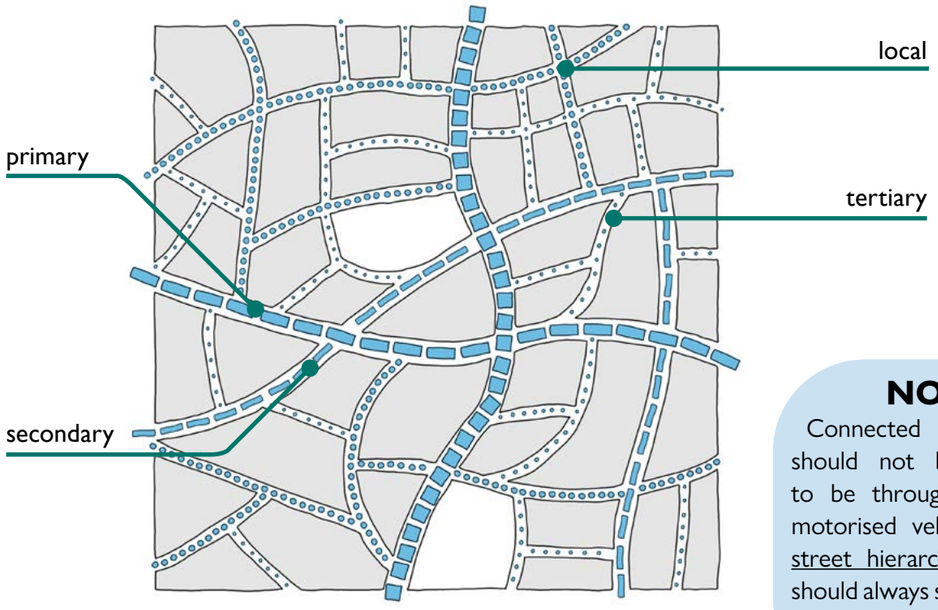


Figure 29 Interconnecting street hierarchy

NOTE

Connected streets should not be presumed to be through routes for motorised vehicles. Rather, street hierarchy transitions should always seek to include connections for walking, cycling, and wheeling.

PLACE TYPE	HIERARCHY	STREET TYPE
Town Centre	Primary	Local Distributor High Street
	Secondary	Local Connector
	Local	Delivery Street
Inner Neighbourhood	Primary	Local Distributor
	Secondary	Local Connector
	Local	Local Street
	Tertiary	Mews
Outer Neighbourhood	Secondary	Local Connector
	Local	Local Street
	Tertiary	Residential Access Street
Neighbourhood Centre	Primary	High Street
	Secondary	Local Connector
Village	Primary	Rural and Costal Roads and Lanes High Street
	Secondary	Local Connector
	Local	Local Street Rural Edge Road
	Tertiary	Residential Access Street Rural Residential Lane
Industrial, Storage and Distribution	Secondary	Industrial Connector
	Local	Industrial Street
Minor Commercial	Secondary	Local Connector
	Local	Commercial Access Street
Major Commercial	Secondary	Local Connector
	Local	Commercial Access Street
	Local	Delivery Street

Table 5 Types of street within the hierarchy and place types in which they will be supported

4.3 Street Hierarchy

HIERARCHY	STREET TYPE	DESCRIPTION
Primary	Local Distributor	Primary routes which pass traffic through settlement areas. Often connect to the high street or acting as the main movement corridor which passes through the settlement area. High movement function. Serves 400+ dwellings.
	Rural and Coastal Roads and Lanes	Routes which connect settlement areas. High movement function.
	High Streets	The main street through a town or village, usually providing high levels of services. Very high place function, often with a high movement function (unless pedestrianised).
Secondary	Local Connector	Secondary routes for traffic to pass through settlement areas and key connectors for active travel. These support the local distributor transferring traffic from the local/ residential street network. High movement and place function. Can serve 201-400 dwellings.
	Industrial Connector	A spine street through an industrial area providing access for all traffic and active travel from primary routes to locations within the site.
Local	Local Street	Streets which link tertiary residential streets to the rest of the network. Medium movement function. Can serve 51-200 dwellings.
	Industrial Street	Streets which connect industrial connector through to industrial sites. Industrial streets serve fewer units than a industrial connector.
	Commercial Access Street	Provide public access by car or active travel to commercial units.
	Delivery Street	Provide access for deliveries to commercial units. Commercial developments should have access routes for deliveries which are separate to the public access.
Tertiary	Mews	A row or courtyard of houses. Low movement function. Should not serve more than 50 dwellings.
	Residential Access Street	Smaller streets intended for local traffic. Low levels of motor traffic, high active travel function. Low movement function. Should not serve more than 50 dwellings.
	Rural Edge Roads	Quiet roads on the edge of settlements. Low levels of motor traffic, high active travel function. Provide a local movement function into/out of the rural settlement. Low movement function. Should not serve more than 50 dwellings.
	Rural Residential Lane	Low significance of traffic. Access only. Low levels of motor traffic, high active travel function. Very low movement function. Should not serve more than 50 dwellings.
Any of the above street types can be multifunctional in their use.		

Table 6 Street hierarchy with corresponding street types and descriptions



Figure 30 Examples of the street hierarchy across the East Riding

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Streets for a Healthy Life	Policy S8 Policy EC4 Policy ENV1

4.4 Connectivity

Clear, safe and direct routes encourage walking, cycling and other forms of active and sustainable travel. Linking new travel networks with existing ones is important to avoid creating isolated, car-dependent new developments. Integrating green infrastructure (see **3.1 Green Infrastructure**) in travel networks can serve to prioritise sustainable travel and improve safety by controlling motorised travel speeds.

CODES

C11 H 1 2 3 4 F A B C

Development must integrate with the existing street, footpath and cycle network. Space to facilitate future connections, using an appropriate street in the hierarchy, must be included.

GUIDANCE: *New development layouts must avoid overly long routes that unnecessarily increase travel distances and times for all modes of transport, particularly for active travel methods.*

New streets should be laid out so that gradients are no more than 10%.

Layouts must leave sufficient space between buildings at the edge of the site, to allow connections through to potential future streets. It is important that the ends of streets left open for future potential connections are either primary, secondary or local street types to ensure they can support an increased volume of movement in the future. To avoid areas with no purpose at the end of streets space left for connection could include landscaping, temporary public open space provision or additional visitor parking.

C12 H 1 2 3 4 F A B C

Accessible footways and cycle paths (connecting to existing adjoining networks) must be delivered on all new streets.

GUIDANCE: *Space for active travel must be a fundamental component of new streets to encourage healthy travel choices. New streets must allow direct and safe pedestrian, wheeler, rider and cycle routes that seamlessly integrate with, and improve the existing street network in respect of safe active travel connectivity.*

Table 12 *(in section **7.6 Carriageways**) sets out cycle path requirements in accordance with the street hierarchy - see section **4.3 Street Hierarchy**.*

*See also sections **7.2 Footways, Footpaths and Crossings** and **7.6 Carriageways**, for further relevant details.*

Active travel routes should follow desire lines and connect places people want to be.

Development proposals should protect and enhance public rights of way and access. Existing public rights of way should not be removed by new development. Where possible they should be retained through a green corridor with new connections to the development made.

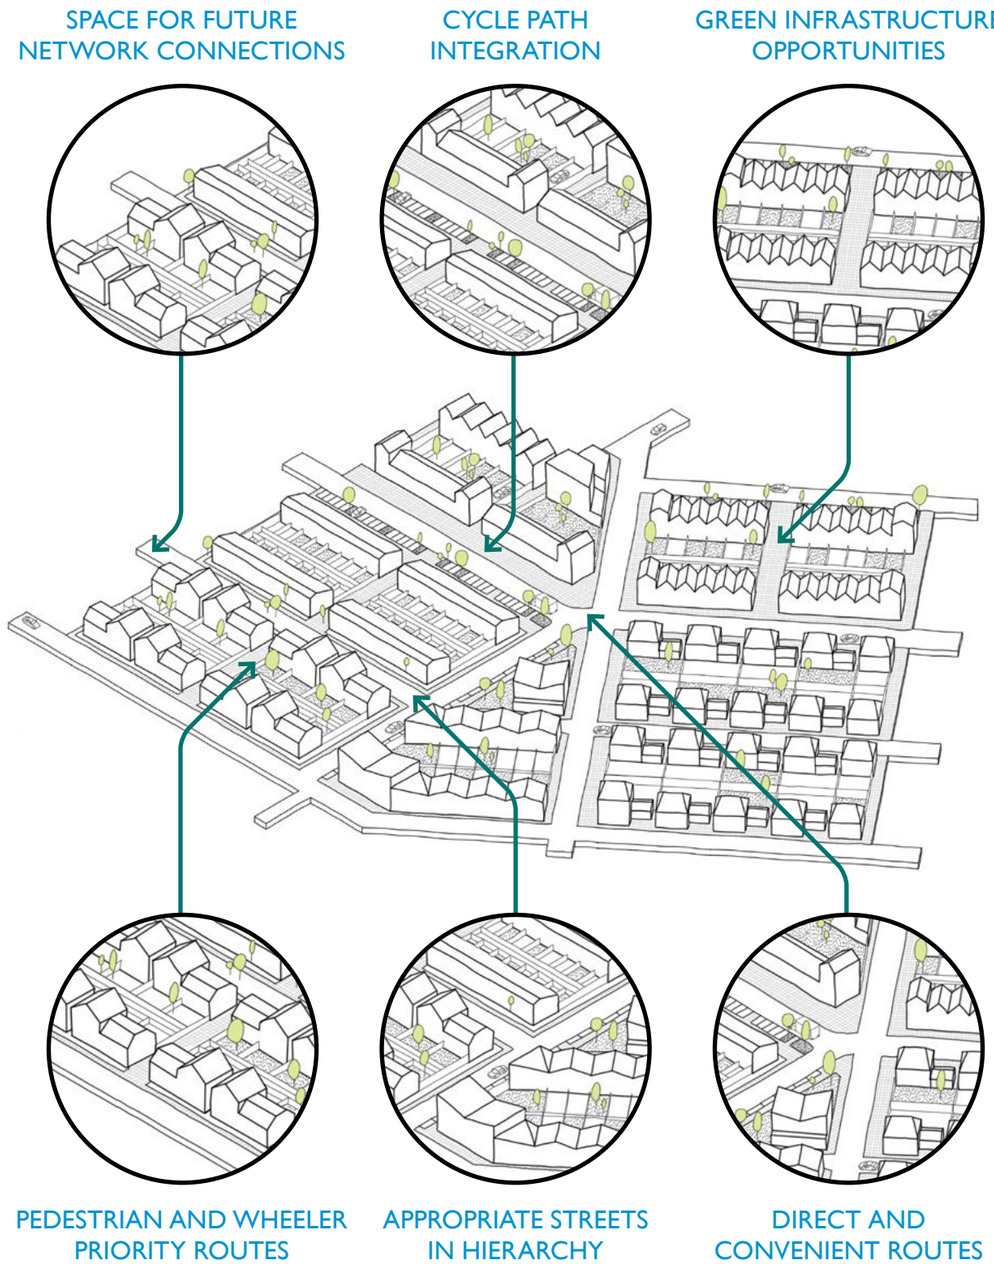


Figure 31 Example settlement layout highlighting good practice to optimise connectivity

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Active Design	Policy S8
Public Rights of Way and Planning Guidance	Policy EC4
Local Cycling and Walking Infrastructure Plans	Policy ENV1
Outdoor Accessibility Guidance	Policy H4
Cycle Infrastructure Design - Local Transport Note (LTN) 1/20	

4.5 Development Mix

Successful places are diverse and vibrant. A mix of house types in residential areas, unit sizes in commercial and industrial areas and uses create diversity. **Chapter 2** sets out visions for different places types and the mix of uses and housing types expected.

Locating an appropriate mix and amount of complementary uses in a town or neighbourhood centre provides residents with services and facilities in walking distance of their homes, whilst providing local businesses with an immediate customer base. Integration of affordable units and tenures also ensures that these locations remain socially and economically diverse.

KEY GUIDANCE

G7 H 1 2 3 4 F A B C

In Town and Neighbourhood Centres increased floor to ceiling heights are recommended at ground level in new development, to give flexibility for future uses. Increased ceiling heights allow for additional heating, cooling and ventilation equipment to serve non-residential uses. A taller building height also helps distinguish the street in terms of street hierarchy, assisting with legibility of place – see sections **4.2 Legibility** and **4.3 Street Hierarchy**.

Outside of Town Centre and Neighbourhood Centre place types, and specialist development types, provision of units which could be easily converted to non-residential purposes should be considered on primary streets and corner locations.

CODE

C13 H 1 2 3 4 F A B C

Affordable units (residential and non-residential) must be fully integrated and not differentiated by siting or design.

GUIDANCE: *Affordable units are a policy requirement and important for creating sustainable and mixed communities. It is important that the siting of affordable units is considered early in the layout of a site to ensure they are fully integrated. Some specialist type of units may have other siting requirements, for example housing for older people being located close to services and transport links or the siting of affordable workshop units where they will have limited noise impact for nearby residential uses.*

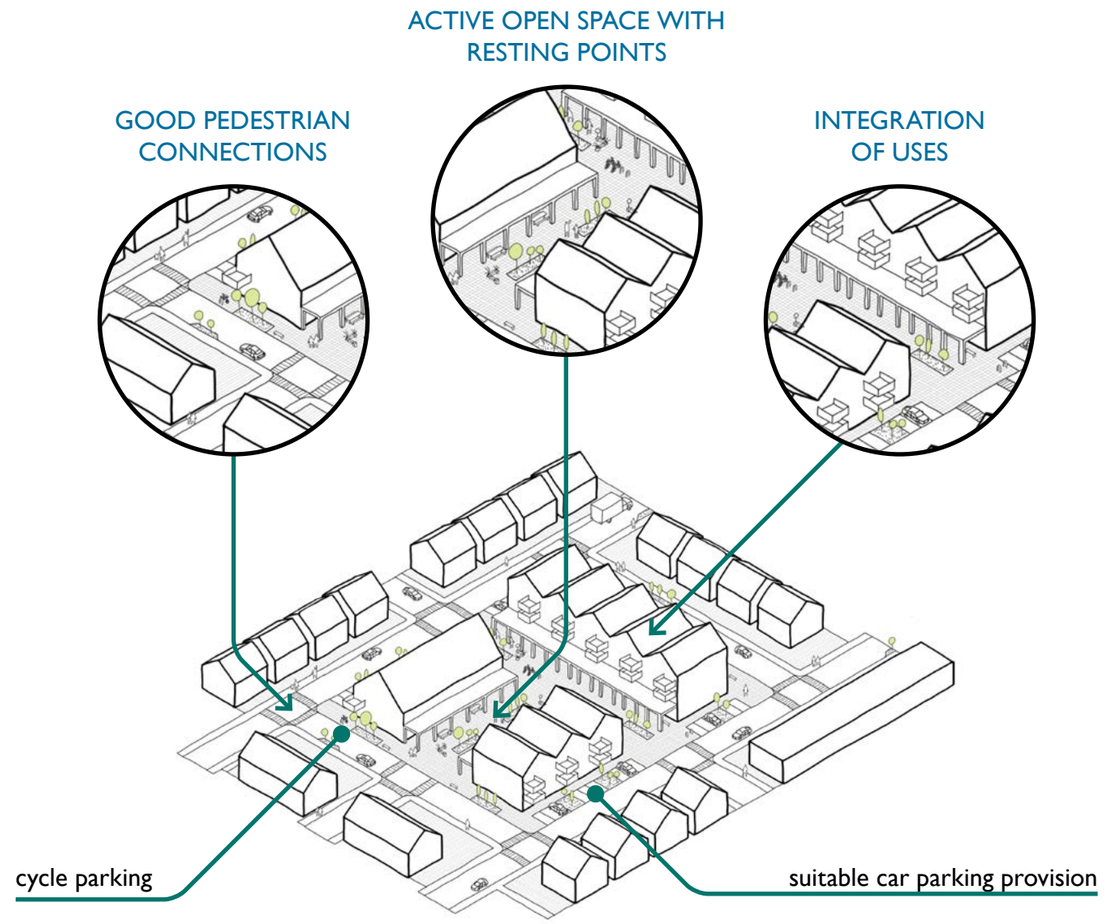


Figure 32 Ways of creating a successful development mix

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy H2 Policy ENV1

Chapter 5

Codes And Guidance: Public Open Space



Public open space must be located within access of safe and comfortable routes and close to key destinations, such as shops, transport hubs and schools. It is important that public space is safe and accessible for all users. Public open space should link coherently with existing and proposed green and blue infrastructure.

Chapter Contents

5.1	Public Open Space Character	65
5.2	Design For All	67
5.3	Play Facilities	69
5.4	Safety and Surveillance	70

Key Values



Where To Demonstrate Compliance

- Design and Access Statement
- Site Plan
- Layout Plan
- Landscaping Scheme

Public Open Space Overview



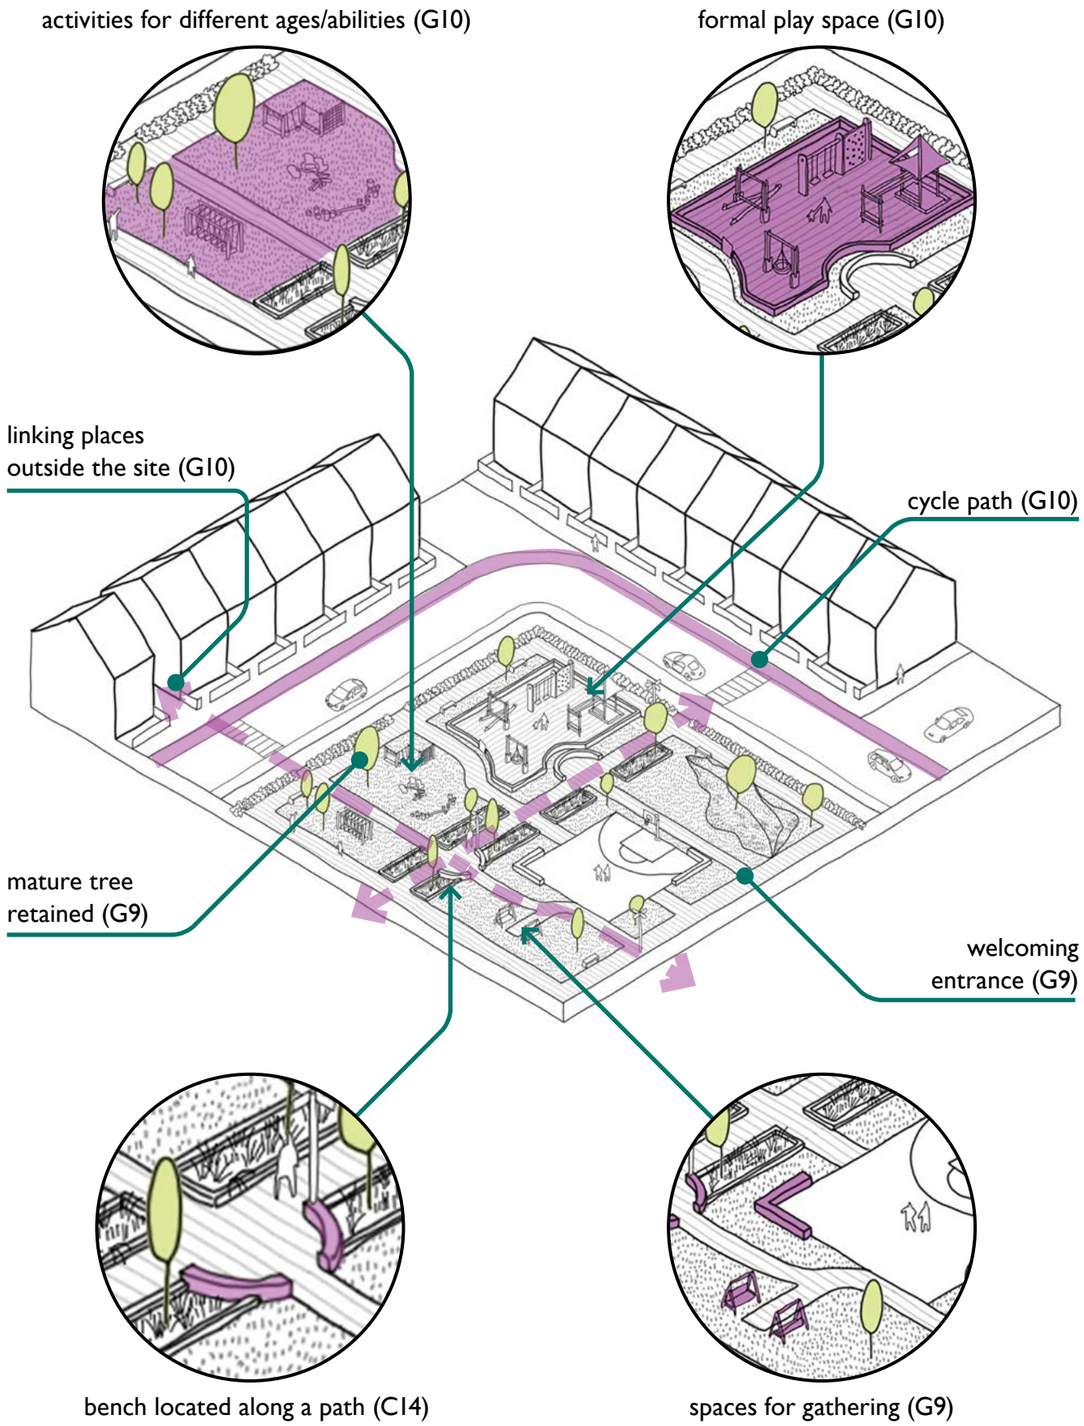



Figure 33 Important features to incorporate within public open space

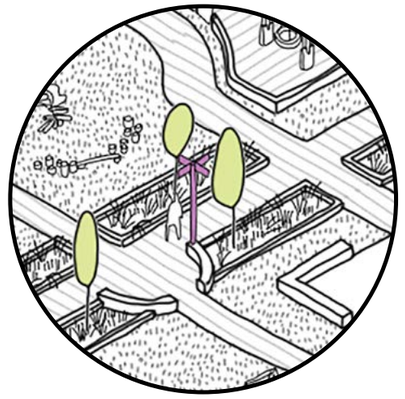


WELL-LIT PUBLIC SPACE (G9/G16)

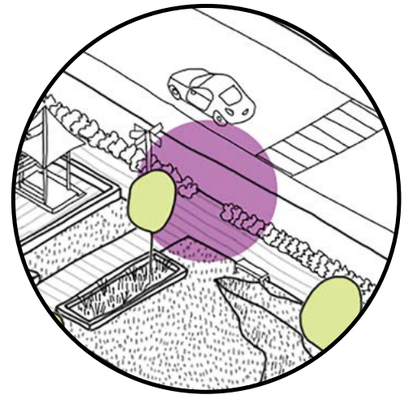


DIRECT ACCESS FROM FOOTPATH (G9)

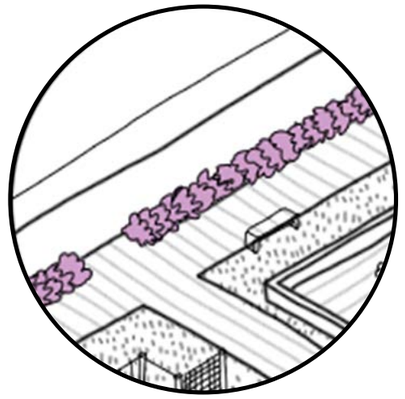


RETAINED HEDGE (LOW HEIGHT) (G16)

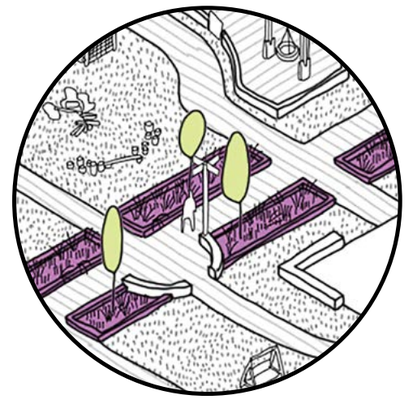

OPPORTUNITY FOR SUDS (G9)

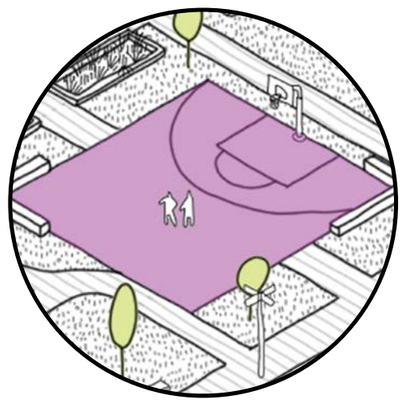

ACTIVE LEISURE (G11)

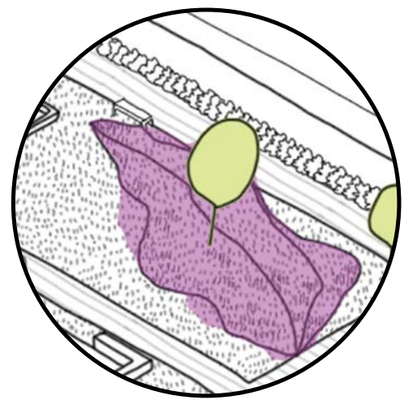

INFORMAL PLAY OPPORTUNITIES (G11)

5.1 Public Open Space Character

Public open space is important for setting the character of a place as well as providing important spaces for play, exercise and social interactions. New public open space plays a key role in blue and green infrastructure plans (see section **3.1 Green Infrastructure**). Maintaining and enhancing existing landscape features such and trees, hedgerows and watercourses is important to this.

Different types of public space provide different functions which should be considered during the design of public open space.

KEY GUIDANCE

G8 H 1 2 3 4 F A B C

The design of public spaces should reflect local character and draw from well-designed local references, in particular, the following:

- *level of formality;*
- *enclosure;*
- *the arrangement of features;*
- *plant species, and;*
- *boundary treatments.*

The design of public spaces should incorporate trees, hedgerows and SuDS and be included in the green infrastructure proposals - see section **3.1 Green Infrastructure**. Public open spaces create opportunities to include ponds and water features.



Figure 34 Public spaces with different character in the East Riding

Figure 35 Public open space character in different places

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Open Space Supplementary Planning Document	Policy ENV1 Policy ENV5 Policy ENV6 Policy C3

5.2 Design For All

Public spaces are for everyone. New public open space must be designed to be accessible for all in-terms of its navigation and facilities provided. Different types of public space provide different functions which should be considered during the design of open space.

KEY GUIDANCE

G9 H 1 2 3 4 F A B C

Public open space can take many different forms and perform different functions however all provide space for social gatherings and interactions.

The following design requirements should be followed for all new public space:

- *Located in areas of easy access for all including those outside of the application boundary;*
- *Create new connections between different places and streets;*
- *Be designed to benefit from high levels of natural surveillance from surrounding uses;*
- *Strong, identifiable character;*
- *Frequent and well-signed points of access onto well-overlooked streets;*
- *Visible and welcoming entrances that give direct access to users entering from active travel paths;*
- *Include a range of spaces for different activities, gatherings or contemplation;*
- *Provide spaces for sun exposure and shaded areas;*
- *Provide seating and resting options located in areas with confortable microclimate and good views;*
- *Include sustainable urban drainage;*
- *Good signage and waymarking;*
- *Be well lit;*
- *Retain mature landscape features;*
- *Include soft landscaping and planting.*

The type of public open space and scale will affect what is important for the design of the space. **Table 7** sets out design requirements which should also be considered when designing different types of public spaces.

CODES

C14 H 1 2 3 4 F A B C

Benches must be provided in public parks and gardens at a minimum of every 100 metres along main footpaths and 300 metres on other routes.

GUIDANCE: *Benches should be used as resting points where possible however more informal perches may be used if space does not allow for a bench.*

Benches and resting points should:

- *be visually appealing;*
- *made of a material which is warm to sit on;*
- *be placed along high footfall routes and in areas with high levels of natural surveillance;*
- *be placed in a way which will not hinder movement along the footpath;*
- *allow space to the side for wheelchair users;*
- *be incorporated into the landscaping plan.*

In larger public open spaces a variety of different seating options should be included including picnic benches, sheltered seating and seats facing each other to allow for group conversations.

C15 H 1 2 3 4 F A B C

Gradients to footpaths must be less than 1:20.

GUIDANCE: *Resting points and landings should be provided for every 0.75 metre change in level. Landings should be at least the same length of the width of the path and include accessible seating .*

Footpath design must follow codes in section ***7.2 Footways, Footpaths and Crossings.***

	PARKS AND GARDENS	POCKET PARKS	NATURAL AND SEMI-NATURAL GREEN SPACE	GREEN CORRIDORS	OUTDOOR SPORTS FACILITIES AND PLAYING PITCHES	VILLAGE GREENS	PROVISION FOR CHILDREN AND YOUNG PEOPLE	CIVIC SPACES
Provide a choice of routes for different levels of mobility	●				●	●	●	●
Segregated foot and cycle paths, connected to the wider movement network	●				●			
Public transport routes, with stops close to entrances	●			●	●			●
Accessible parking. Include disabled and parent and child parking. Located either to the side or back of the POS with a clear accessible path to an entrance.	●				●			●
Introduce new planting and habitats to support biodiversity	●		●	●		●		
Directional lighting minimising disturbance to wildlife			●	●				
Opportunities for community food growing	●	●				●		
Sport opportunities	●				●	●	●	
Buffer zones for play and sport	●				●			

Table 7 Design features encouraged for inclusion in different types of public open space

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Open Space Supplementary Planning Document	Policy ENV1
Active Design Guidance	Policy C3
Inclusive Mobility	
Outdoor Accessibility Guidance	

5.3 Play Facilities

Play facilities should be designed to ensure the needs of all children are met and to encourage use by providing a variety of opportunities and equipment to encourage interaction.

KEY GUIDANCE

G10 H 1 2 3 4 F A B C

Public open space should be designed to offer both formal and informal play opportunities, aligning their location with the needs of different user groups. A holistic design concept should be developed for dedicated play areas that:

- *include diverse types of play;*
- *considers different ages, abilities and genders;*
- *include accessible and inclusive play equipment;*
- *are designed to be used in all weathers;*
- *are built in materials which are hard wearing and easy to maintain.*

The Play Investigation! by Scope compiled a list of questions to test whether a play area had good universal design to ensure it was accessible to everyone. These questions create a useful reference point for anyone designing a children's play area.

G11 H 1 2 3 4 F A B C

The design of Outdoor Sports Facilities/Playing Pitches should:

- *include changing facilities close to pitches and mitigate their visual impact;*
- *provide accessible parking for cars and bicycles located at a maximum of 300 metres from pitches and changing facilities.;*
- *mitigate the impact of floodlighting into residential areas;*
- *follow guidance from Sports England.*



Figure 36 Images of play facilities in the East Riding

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Open Space Supplementary Planning Document	Policy ENV1
Active Design Guidance	Policy C3
The Play Investigation	
Fields in Trust Standards	
Design for Play	
Outdoor Accessibility Guidance (Part B)	

5.4 Safety And Surveillance

Public spaces should be designed so that all users feel safe and comfortable. Overlooking spaces creates passive surveillance which is one way of making public spaces feel safe. Also important are the ways that lighting schemes are designed and that paths through public spaces are direct and offer multiple route options.

Different types of public space provide different functions which should be considered during the design of open space.

CODES

C16 H 1 2 3 4 F A B C

Public Open Spaces must be overlooked directly by neighbouring buildings, and their frontages must address the public open space. Boundary treatments must not stop visibility.

GUIDANCE: *Ways of supporting passive surveillance include:*

- *windows and doors from a variety of uses overlooking public spaces and access;*
- *low level boundary features;*
- *no dead ends or blind corners created;*
- *communal parking facilities;*
- *Lighting.*



Figure 37 Surrounding uses providing passive surveillance of public open spaces

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Open Space Supplementary Planning Document	Policy ENV1
Secured By Design Homes Guide	Policy C3

Chapter 6

Codes And Guidance:

Blocks



The layout and grouping of blocks are important in identifying development patterns across the East Riding. Whilst having a significant effect and impact on the character of the streetscape and area, the use of the block is key to defining public and private spaces, in organising structures and promoting well overlooked, comfortable and vibrant areas, spaces and streets.

Chapter Contents

6.1	Block Form and Typologies	73
6.2	Block Size	75

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Site Plan
- Layout Plan

6.1 Block Form and Typologies

The built environment is usually structured in blocks. How they are designed and brought together is an integral aspect of creating attractive and successful places which are easy to navigate and feel safe. Block typologies can comprise of several forms depending on their local context and character.

CODE

C17 H 1 2 3 4 F A B C

The block type used must be appropriate for the place type in which the development site is located, as set out in **Table 8**.

GUIDANCE: *Forms of block development distinguish and reinforce the positive characteristics of respective place types. To maintain this distinction, only select block forms will be supported in each place type.*

		PLACE TYPE					
		TOWN CENTRE	INNER NEIGHBOURHOOD	OUTER NEIGHBOURHOOD	NEIGHBOURHOOD CENTRE	VILLAGE	COUNTRYSIDE
BLOCK TYPES	Perimeter Block	●	●	●	●	●	
	Terraced Block	●	●				
	Courtyard Block	●	●		●		
	Irregular Block			●		●	

Table 8 Block types and the place types in which they will be supported

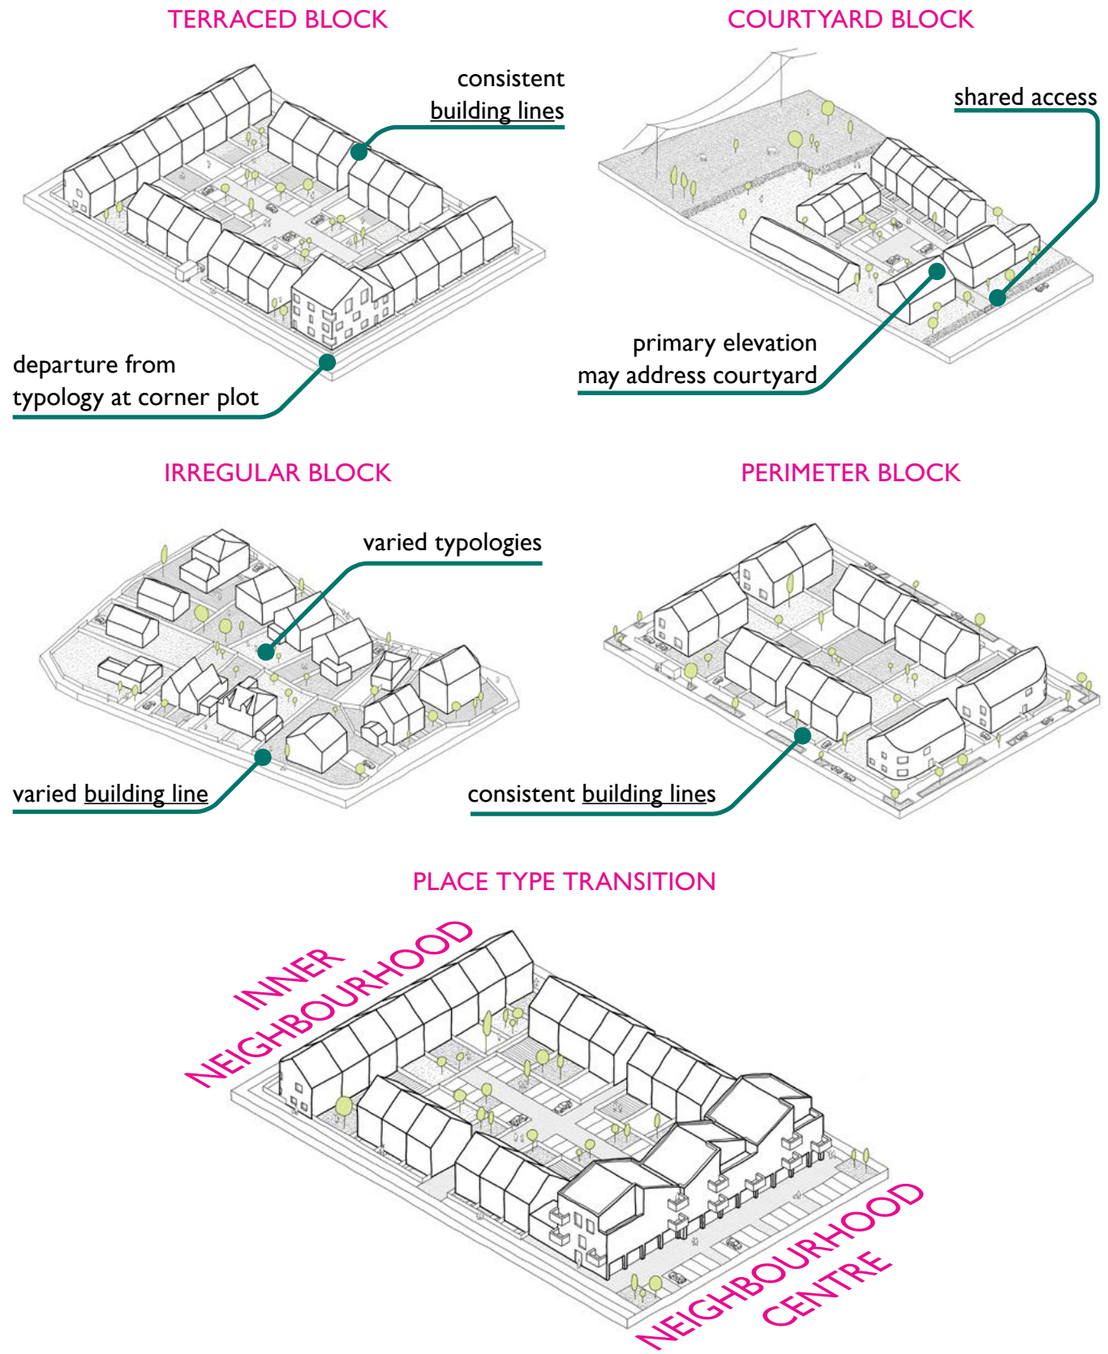


Figure 38 Example illustrations of supported block types in the East Riding

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

6.2 Block Size

In addition to the block type, the size and scale of any block is also key in delivering places that function successfully. Appropriately sized blocks facilitate a diverse mix of uses, and promote walkability and safe, pedestrian-friendly environments.

CODES

C18 H 1 2 3 4 F A B C

Block lengths must not exceed 160 metres.

GUIDANCE: *Block sizes should optimise connectivity, particularly for pedestrians, cyclists and wheelers, and be guided by the size of existing adjacent blocks. Greater flexibility (though always remaining below 160 metres) can be justified in transition areas between place types, but should still be suitable to the locality as a whole.*

Block widths should be determined by appropriate plot depths, that provide a good standard of private amenity for occupants, as well as any shared access/ servicing alleys. If central courtyards are proposed, their size should not be excessive, but create a pleasant environment and function safely for all users; views from rear habitable room windows should ensure the whole courtyard is well overlooked.

Figure 40 *includes labels to clarify length and width of a block; length and width measurements should extend to the appropriate plot boundary.*

C19 H 1 2 3 4 F A B C

Breaks in the block for public active travel access must be located centrally along the block at maximum distances of 80 metres from a parallel street.

GUIDANCE: *Snickets, alleyways and ginnels, depending on the part of the authority you are in, play an important role in the urban grain of place. Breaks through blocks can make active travel options quicker and more attractive to users. It is important that access through blocks are well designed so that they are legible as a public route and feel safe to all users.*

C20 H 1 2 3 4 F A B C

Any breaks in a block, including for private access only, must benefit from passive surveillance.

GUIDANCE: *Ways of supporting passive surveillance include:*

- *windows and doors overlooking communal and public space within the block including access;*
- *low level boundary features within the block and along routes;*
- *no dead ends or blind corners created;*
- *communal parking facilities within block;*
- *lighting.*

Private access to blocks may be permitted for residential and commercial purposes, but they should be limited in number, with shared access points being used instead where possible. For private access, gates should be considered as a way to distinguish public from private space.

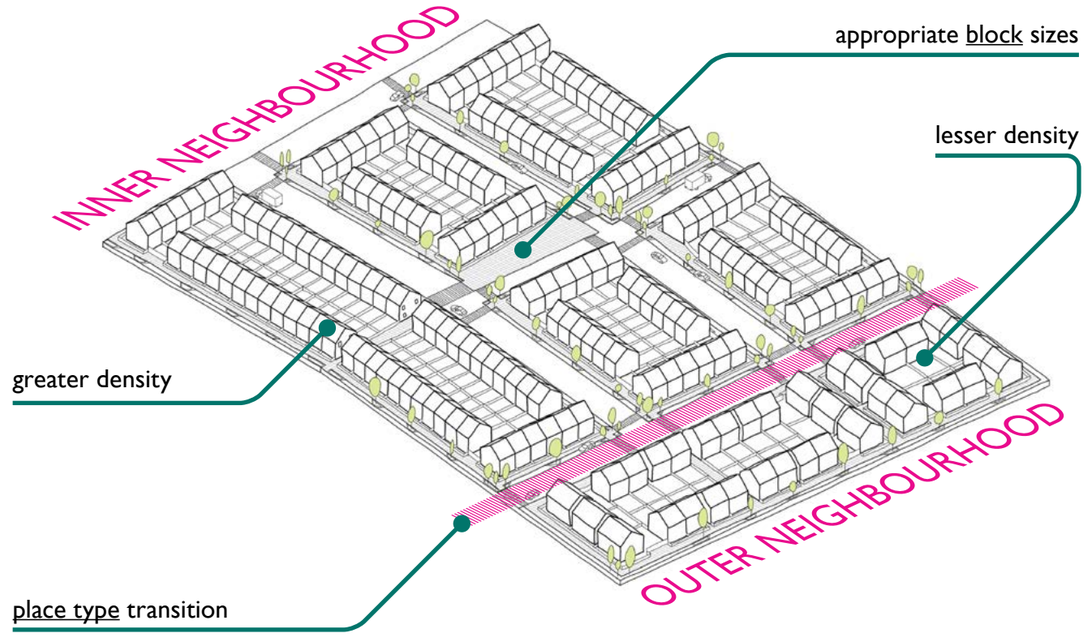


Figure 39 Example of block size limits and transitions between place types

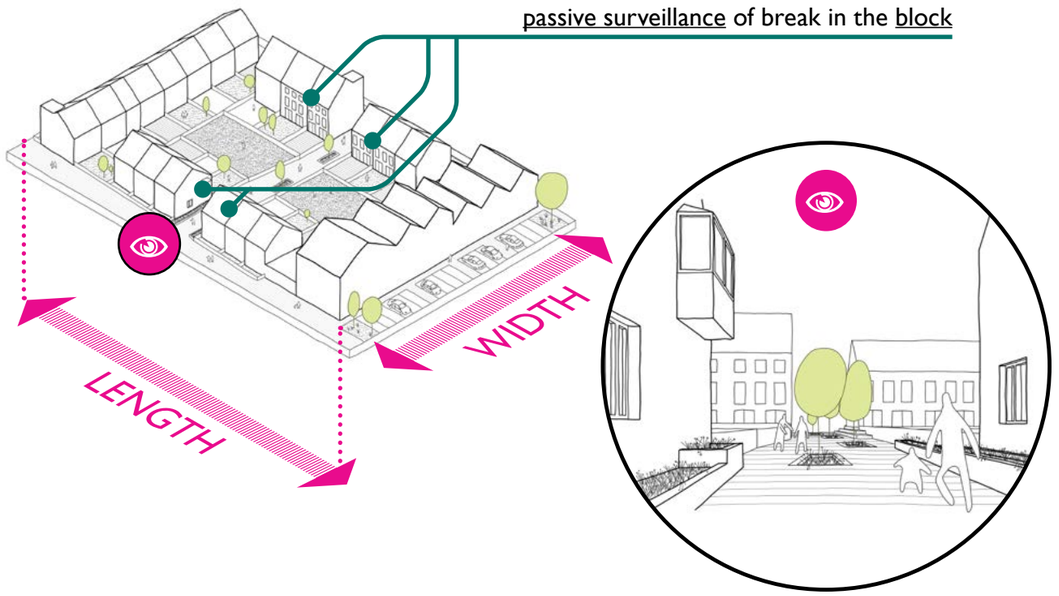


Figure 40 Incorporating passive surveillance into breaks in a block

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Secured by Design Homes Guide	Policy S8 Policy ENV1

Chapter 7

Codes And Guidance:

Streets



Allowing people to get from one place to another, whether they are walking, wheeling, riding, cycling or in a motor vehicle, is one of the key functions of public space and streets. It is important that streets are considered spaces and not only movement corridors. Streets should be designed to be welcoming and safe as well as efficient for every mode of travel.

Local context is just as important in the design of streets as it is in the design of buildings. How a street is designed and connects with streets around it can help bed new development into a place.

Chapter Contents

7.1	Active Frontages	79
7.2	Footways, Footpaths and Crossings	81
7.3	Resting Points	83
7.4	Enclosure	85
7.5	Building Line	87
7.6	Carriageways	89
7.7	Methods of Reducing Speed	93
7.8	Parking Standards	95
7.9	Residential Parking Solutions	101

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Site Plan
- Layout Plan
- Elevation Plan
- Transport Plan/Travel Plan
- Street Section Plan

7.1 Active Frontages

Bringing together appropriate activities to ensure streets are active and overlooked contributes to the feelings of safety and comfort for users.

CODE

C21 H 1 2 3 4 F A B C

Buildings must have active frontages.

GUIDANCE: *Streets in town and neighbourhood centres are likely to provide the highest level of active frontages. Shops, cafes, restaurants, community uses, studios and workshops all help create active uses at ground floor level along streets. At first floor level residential and office uses can also provide activity and natural surveillance.*

In town and neighbourhood centres development should:

- *have active uses at ground floor level;*
- *ensure main entrances and windows for development types face the street;*
- *have high proportions of glazing for ground floor commercial uses;*
- *have balconies, where appropriate, or windows above ground floor level which overlook the street. Balconies are likely to not be appropriate within conservation areas.*

In residential areas it is important that doors and windows be provided on an elevation facing a street to provide natural surveillance.



Figure 41 Successful active frontages across the East Riding

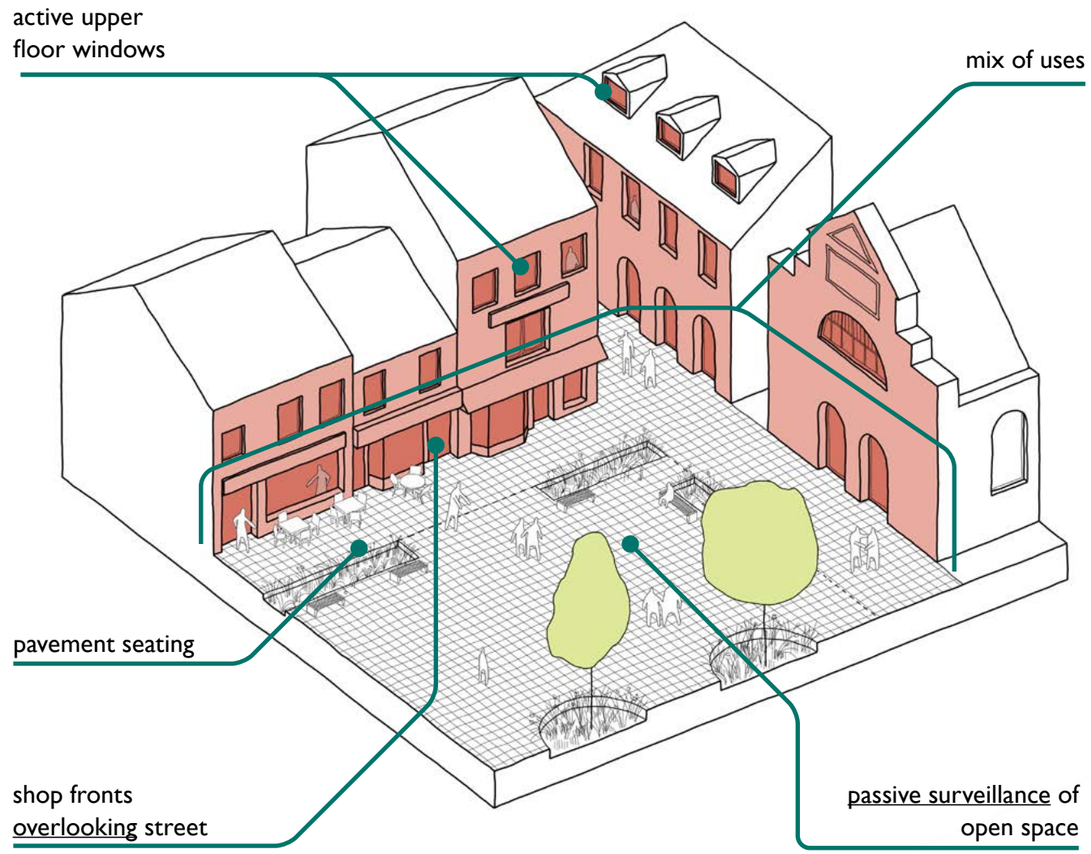


Figure 42 Active frontages to enable interaction with the street

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

7.2 Footways, Footpaths and Crossings

Streets accommodate many uses. It is important that they are designed in a way which protects the most vulnerable users first. This includes pedestrians, wheelers, cyclists and equestrians.

The design of streets impacts how they are used. Safe and attractive streets promote more active uses and increased opportunities for social interactions.

CODES

C22 H 1 2 3 4 F A B C

New footways must be a minimum width of 2 metres. Any sections of footway which are narrower than 2 metres in width must not be less than 1m in width. The narrow section must not continue for more than 6 metres.

GUIDANCE: *These are minimum widths. Code **C31** and **Table 12** set out additional details for where footpaths and cycleways are shared.*

To keep footways safe and accessible the following should be included in the design of streets:

- *Utility access points must be located as to avoid high footfall areas;*
- *Dropped kerbs provided at all junctions and desire lines;*
- *tactile paving should be provided at all road crossings and junctions;*
- *street furniture should be sited to maintain a clear width of 2 metres on footways;*
- *Desirable gradient of no more than 5%;*
- *Steps should not be included without an accompanying ramp access;*
- *Vertical clearance of 2.6 metres.*

Planted verges along carriageways can increase feelings of safety, improve biodiversity and surface water drainage and discourage parking on the footway.

C23 H 1 2 3 4 F A B C

A continuous levelled footway with a minimum width of 1.2 metres must be provided to the rear of a dropped kerb.

GUIDANCE: *Changes in path level can make movement difficult for those with impaired vision, wheeling or pushing a pram.*

C24 H 1 2 3 4 F A B C

Continuous crossings must be used at the mouth of junctions of lower order streets in Town Centres and Neighbourhood Centres.

GUIDANCE: *In Inner Neighbourhoods, Outer Neighbourhoods and Villages, continuous crossings should be used at the mouth of junctions with lower order streets, especially when the route is expected to be heavily used (i.e. a key route to a school, shop or park).*

The surface used on the continuous crossing should be the same as the that used on surrounding footways and should be the same width. The crossings must be designed to prioritise pedestrians and lower vehicle speeds. This can be done using ramps to bring the carriageway to the same level as the footway and by narrowing of the carriageway. Tactile paving should be used so that those who are partially sighted understand that they are approaching a crossing..

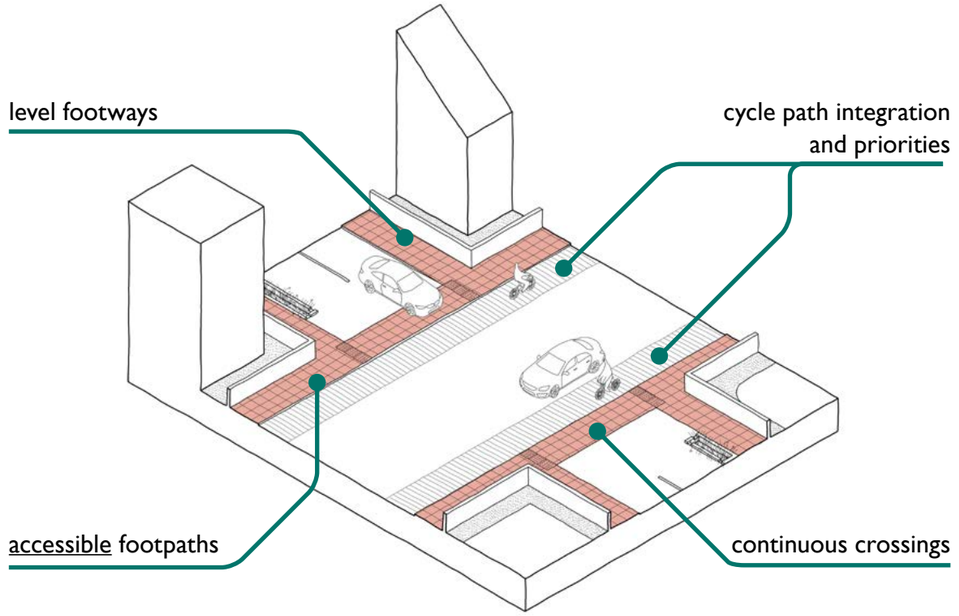


Figure 43 Footways and crossing that pioritise pedestrians and pedestrian flow



Figure 44 Examples of pedestrian prioritisation

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Streets for a Healthy Life	Policy S8
Inclusive Mobility	Policy ENV1
Crossing Selector Tool User Manual	Highways Design Guide (p.26 and p.28)
Manual for Streets	
Public Rights of Way and Planning Guidance	
Key Principles of Inclusive Street Design	
Active Design Guidance	
Inclusive Design at Continuous Footways	
Outdoor Accessibility Guidance (Part A)	

7.3 Resting Points and Street Furniture

Streets should be designed to support users of all abilities. The provision of frequent and well-placed resting points in safe locations will support this as well as facilitating increased social interactions.

CODES

C25 H 1 2 3 4 F A B C

A minimum of one bench every 100 metres must be provided in town centres.

GUIDANCE: *Benches should be used as resting points where possible however more informal perches may be used if space does not allow for a bench.*

Benches and resting points should:

- *be visually appealing;*
- *be made of a material which is warm to sit on;*
- *be incorporated into the landscaping plan;*
- *be placed along high footfall routes and in areas with high levels of natural surveillance;*
- *be placed in a way which will not hinder movement along the footpath (see code **C22** for minimum widths);*
- *allow space to the side for wheelchair users.*

C26 H 1 2 3 4 F A B C

Any street furniture must be located a minimum of 0.45 metres from the edge of the highway and maintain a minimum of 1 metre unobstructed footway.

GUIDANCE: *This is to ensure street furniture is located in a way that the street remains safe and accessible for all users. For further information see code **C22**.*



Figure 45 Examples of resting points and street furniture

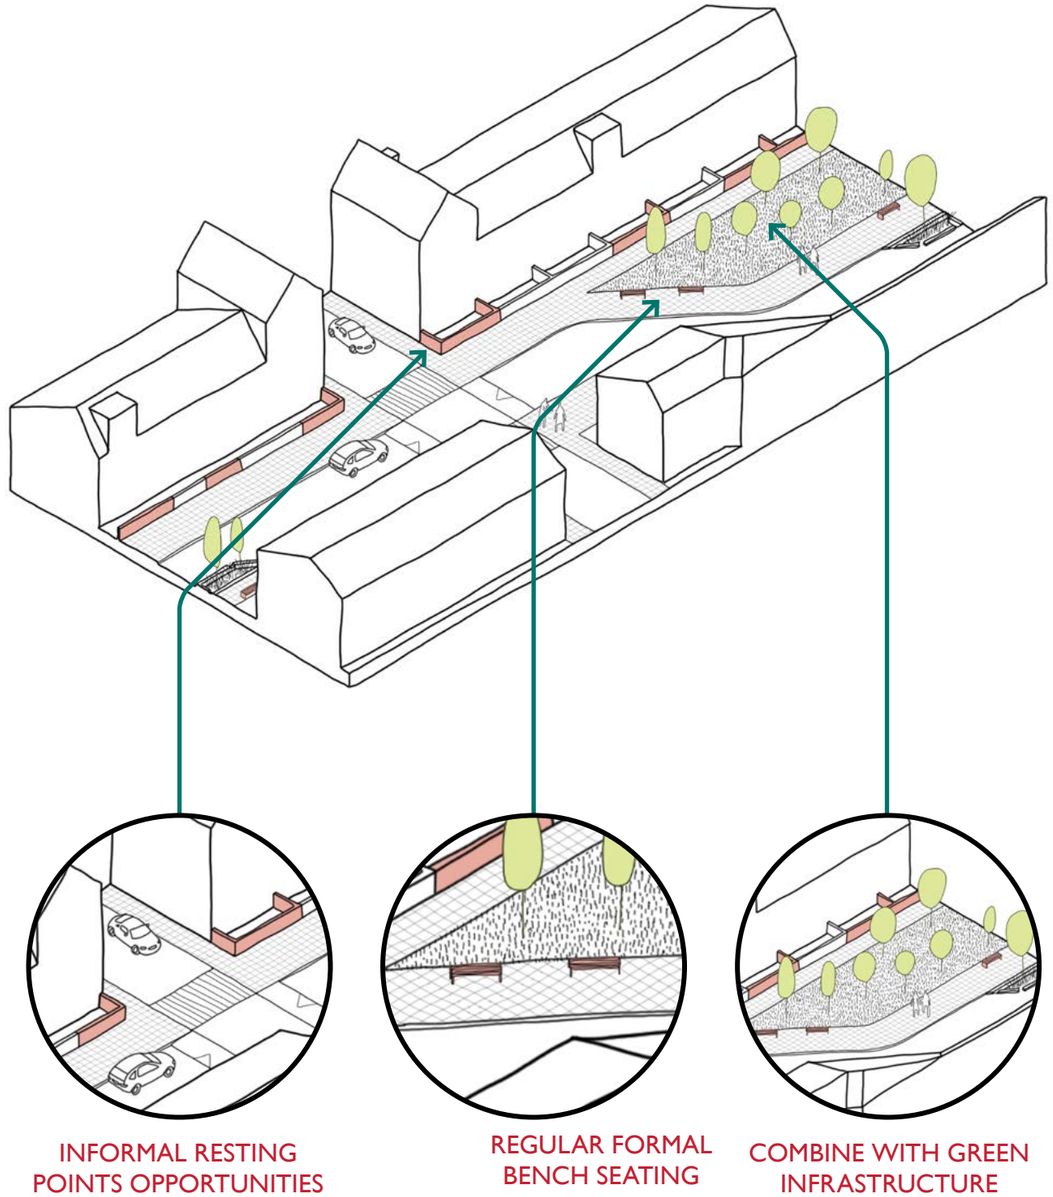


Figure 46 Opportunities to include resting points and street furniture in new development

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Manual for Streets	Policy S8
Inclusive Mobility	Policy ENV1
Outdoor Accessibility Guidance (Part B)	

7.4 Enclosure

Enclosure is formed by the width of a space in relation to the heights which mark the edge of that space, often buildings or trees. Enclosure impacts how a space feels improving the sense of safety and comfort, and how it functions. It also contributes to the character of a place. Higher levels of enclosure are often seen in the centres of towns and villages with lower levels towards the edge of settlements.

KEY GUIDANCE

G12 H 1 2 3 4 F A B C

The level of enclosure should be the highest possible once all other functions, footways, cycleways and parking, required by the Design Code have been taken into consideration.

Buildings and street trees can be used to form enclosure however boundary treatments are not considered a suitable method of enclosure.

In conservation areas the level of enclosure should match the surrounding context.



Figure 47 Examples of historic enclosure

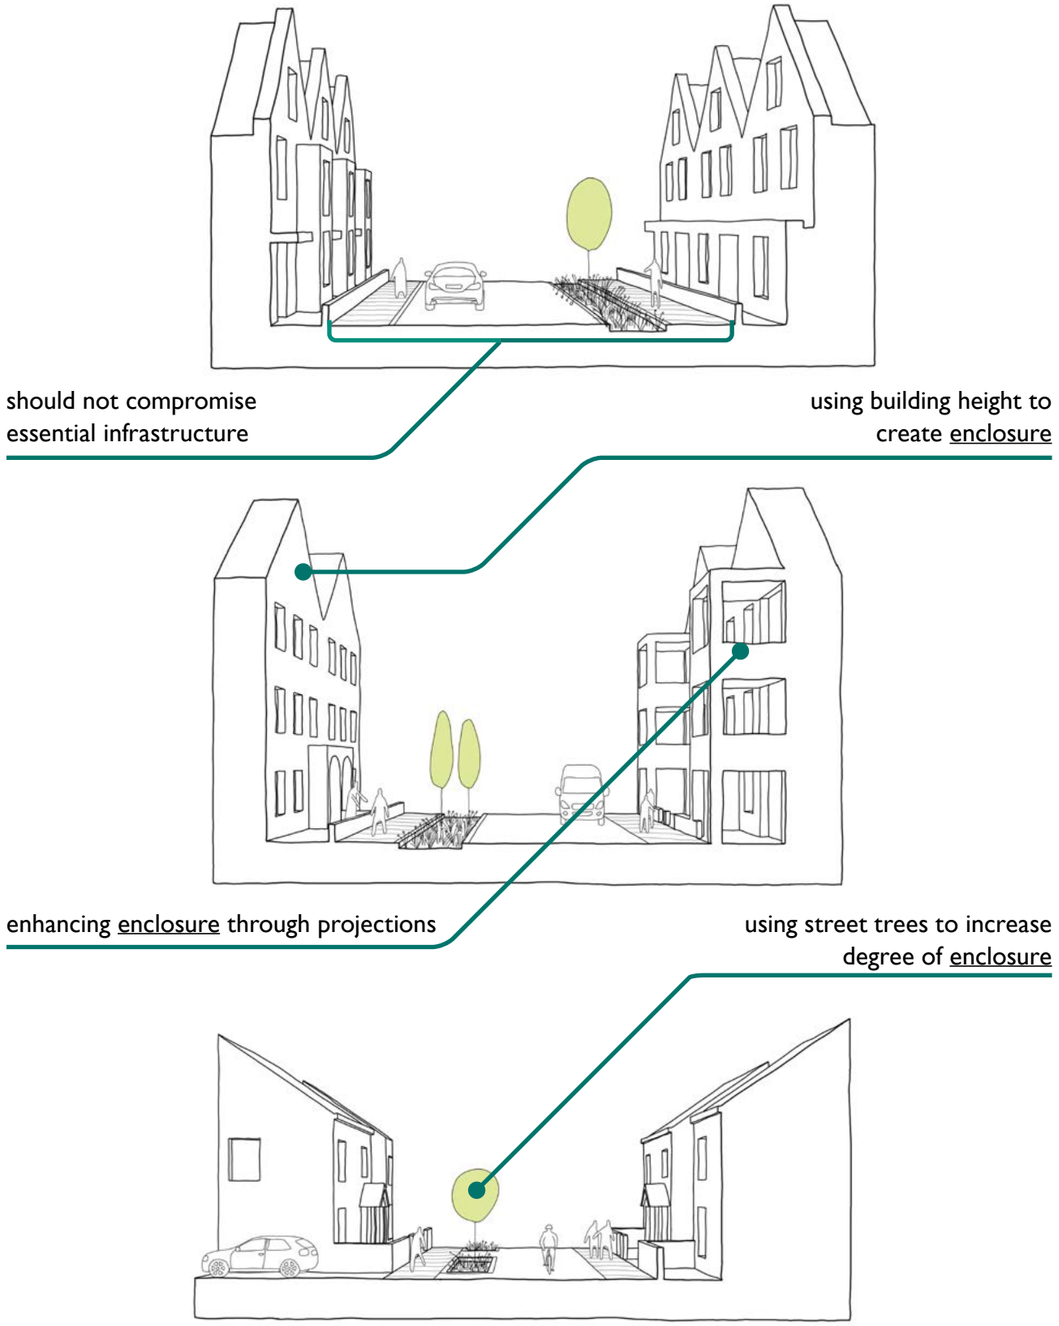


Figure 48 Options to create a comfortable sense of enclosure for residents and passersby

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

7.5 Building Line

A prominent building line, defined by how buildings front the street, can usually be identified in existing development. New development will respect building alignment in its surroundings to ensure a consistent approach, and appearance within the streetscape. This will also reduce the potential for any adverse impact on neighbouring properties.

CODES

C27 H 1 2 3 4 F A B C

Where there is a universal building line on a street, any infill development must match the existing building line.

C28 H 1 2 3 4 F A B C

Where there is a varied building line any variation from the predominant building line must be as set out in **Table 9**.

GUIDANCE: *Variations in building line can contribute to the character of an area. Variations are encouraged at either regular, or irregular intervals along streets, unless code **C27** is relevant.*

Terraced blocks generally have tighter building line variation, therefore in Neighbourhood Centres there is an exception for terraced blocks.

*All buildings should have their principal elevation front the building line. See section **7.1 Active Frontages**.*

C29 H 1 2 3 4 F A B C

Where there is no existing building line, a new building line must be set back from the front of the plot as set out in **Table 9**.

GUIDANCE: *Where there is no existing building line a new one will need to be created and the code followed according to the designated place type.*

*There is generally less variation in building lines the higher up the street hierarchy a street is with primary streets having the least variation. How setbacks help contribute to legibility (see section **4.2**) should be considered when setting new building lines.*

PLACE TYPE	VARIATION FROM BUILDING LINE - C28	MAXIMUM NEW BUILDING LINE SETBACK - C29
Town Centre	+/- 0.5 metres	0.5 metres
Inner Neighbourhood	+/- 0.5 metres	1.5 metres
Outer Neighbourhood	+/- 3 metres	5 metres
Neighbourhood Centre	+/- 1 metres*	1 metres
Village	+/- 3 metres	3 metres
*with the exception of terraced blocks which have a maximum variation of +/- 0.5 metres.		

Table 9 Supported building line variations (C28) and new building line maximum setbacks (C29)

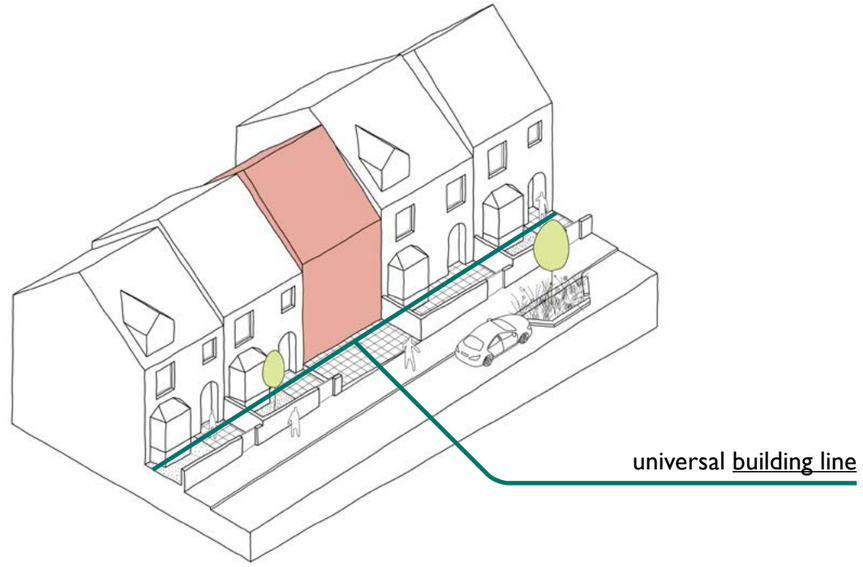


Figure 49 Example of a 'universal' building line (top) and a varied building line (bottom)

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

7.6 Carriageways

Streets must be designed with the hierarchy of movement in mind to make sure the needs of the most vulnerable users are considered first.

CODES

C30 H 1 2 3 4 F A B C

Carriageway widths and radii must be as set out in **Table 10**.

GUIDANCE: *The minimum effective width and radii should be used once other code requirements, based on the street type, are taken into account. Table 10 also sets out minimum vehicle and pedestrian access points, minimum junction spacing and construction details. Visibility should be considered as set out in* ***Table 11****.*

Cul-de-sacs should be avoided. Where a through route is not possible, an individual cul-de-sac should have no more than 35 dwellings, and a turning area should be provided.

For schemes involving new primary and secondary distributor roads pre-application discussions should take place with the council's public transport officer and local bus operators to discuss if a bus route is required. Space for bus stops should then be designed into the scheme.

Any exceptions to the code must be justified through the ***compliance checklist*** *along with appropriate supporting documents.*

C31 H 1 2 3 4 F A B C

Cycleways must be as set out in **Table 12**.

GUIDANCE: *Cycle lanes should be integrated into the wider network and should not come to an abrupt stop without clear sign posting as to where cyclists should go.* ***LTN 1/20*** *sets out that segregated cycle routes should be physically separate from motorists and pedestrians.*

Planting beside cycle lanes can improve feelings of safety, improve biodiversity and surface water drainage, and make for a nicer environment to travel. However, consideration needs to be given to landscaping around cycle lanes to avoid planting species which could cause safety issues. Safety issues include dropping of sharp spikes and quick growing species which migh obstruct they cycle lane.

HIERARCHY	STREET TYPE	WIDTH* (METRES)	RADII (METRES)	MINIMUM VEHICLE ACCESS POINTS	MINIMUM PEDESTRIAN ACCESS POINTS	MINIMUM JUNCTION SPACING (METRES)	CONSTRUCTION
Primary	Local Distributor	5.5-6.3	6-9	2	3	30 (same side) 15 (opposite)	Typical construction
	Rural Costal Roads and Lanes						
	High Street	Max. 5	2-5				
Secondary	Local Connector	5.5-6.3	2-6	2	3		
	Industrial Connector	Max. 7.3	6-12				
Local	Local Street (101-200 dwellings)	5-6.3	2-6	2	2	25 (same side) 12 (opposite)	
	Local Street (51-100 dwellings)			1	2	20 (same side) 12 (opposite)	
	Delivery Street	Max. 7.3	6-12		N/A		
	Commercial Access Street	Max. 5.5	2-6		1**		
	Industrial Street	Max. 6.75	6-12				
Tertiary (1-50 dwellings)	Mews	5 shared surface with 2 metres service strip (as a minimum)	2-6	1	1	20 (same side) 12 (opposite)	Block paved with soft landscaped service strip
	Residential Access Street						
	Rural Residential Lane						
	Rural Edge Road						

*Bus routes have a minimum width of 6.75 metres.
**Dependent on development size

Table 10 Supported carriageways widths and other requirements by street type and hierarchy (C30)

DESIGN SPEED	JUNCTION VISIBILITY* (METRES)	FORWARD VISIBILITY* (METRES)
20 miles per hour	2.4 x 25	25
30 miles per hour	2.4 x 43	43
40 miles per hour	4.5 x 120	120
50 miles per hour	4.5 x 160	160
60 miles per hour	4.5 x 215	215
*Visibility should be measured at a height of 1.05m below 40mph and 0.6m 40mph and above		

Table 11 Supported junction and forward visibility by design speed (C30)

HIERARCHY*	STREET TYPE	MINIMUM FOOTPATH/CYCLE PATH REQUIREMENTS
Primary	Local Distributor	Segregated to LTN 1/20 requirements
Primary	Rural and Coastal Roads and Lanes	Segregated, off-road or shared footway where possible (Otherwise see LTN 1/20)
Primary	High Streets	Segregated to LTN 1/20 requirements
Secondary	Local Connector	Shared 3 metre wide path on one side and 2 metre wide path on opposite side.
Local	Local Street	2 metre wide footpath on both sides of carriageway. When serving over 100 dwellings, it is suggested that one side of footpath is 3 metres wide. (Delivery, commercial and industrial roads may use either option).
Tertiary	Mews	Shared surface with 2 metre wide soft landscaped service strip.
Tertiary	Residential Access Street	
Tertiary	Rural Edge Roads	
Tertiary	Rural Residential Lane	
* See section **4.3 Street Hierarchy** for further information		

Table 12 Cycle lane provision and requirement by street type (C31)

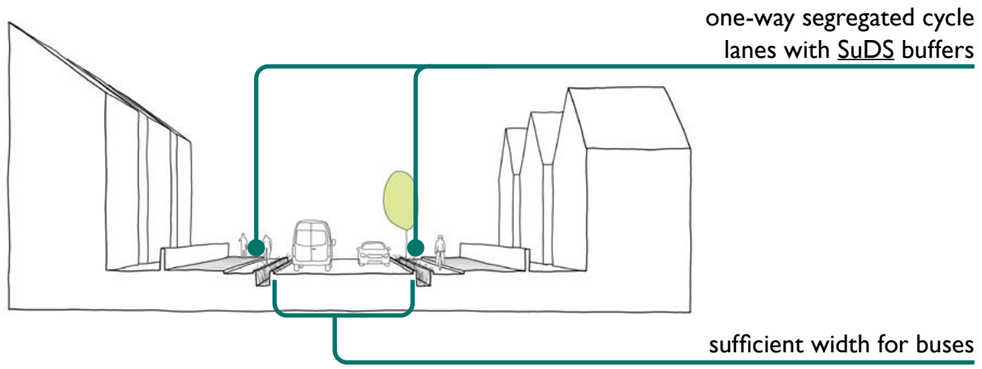


Figure 50 Example carriageways and features encouraged for incorporation

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Sustainable Transport Supplementary Planning Document Manual for Streets Manual for Streets 2 Cycle Infrastructure Design - Local Transport Note 1/20 (LTN 1/20)	Policy EC4 Policy ENV1

7.7 Methods of Reducing Speed

The speed vehicles travel at has an impact on the safety and comfort of other street users. In areas with high potential for walking, wheeling, riding and cycling it is important the streets are designed to include measures which reduce vehicle speed to facilitate active travel.

CODE

C32 H 1 2 3 4 F A B C

On high streets, local streets and tertiary streets a minimum of one method to reduce speed must be designed into the street.

GUIDANCE: *Traffic calming measures should also be used close to schools, playing fields and parks, community facilities and bus stops.*

The following methods should be incorporated, at the distances recommended in ***Table 13****, to reduce vehicle speed:*

- *Changes in road alignment;*
- *Staggered junction by no more than 1 metre from tangent;*
- *Regular spacing of junctions and crossings;*
- *Reduced carriageway widths;*
- *Build outs for trees and SuDs (see sections* ***3.3 Trees and Hedgerows*** *and* ***3.4 Sustainable Drainage****);*
- *Designated on street parking with landscaping;*
- *Shared surfaces.*

Speed bumps should be a last resort for lowering speed.

STREET TYPE	DISTANCE RECOMMENDED BETWEEN TRAFFIC CALMING MEASURES
Primary	80 metres
Secondary	
Local (101-200 dwellings)	
Local (51-100 dwellings)	60 metres
Tertiary	40 metres

Table 13 Traffic calming separation distance requirements by street type



NARROWING/ LANDSCAPING | CROSSINGS AND SHARED SURFACES | CHANGES IN ROAD ALIGNMENT

Figure 51 Examples of speed reduction methods across the East Riding

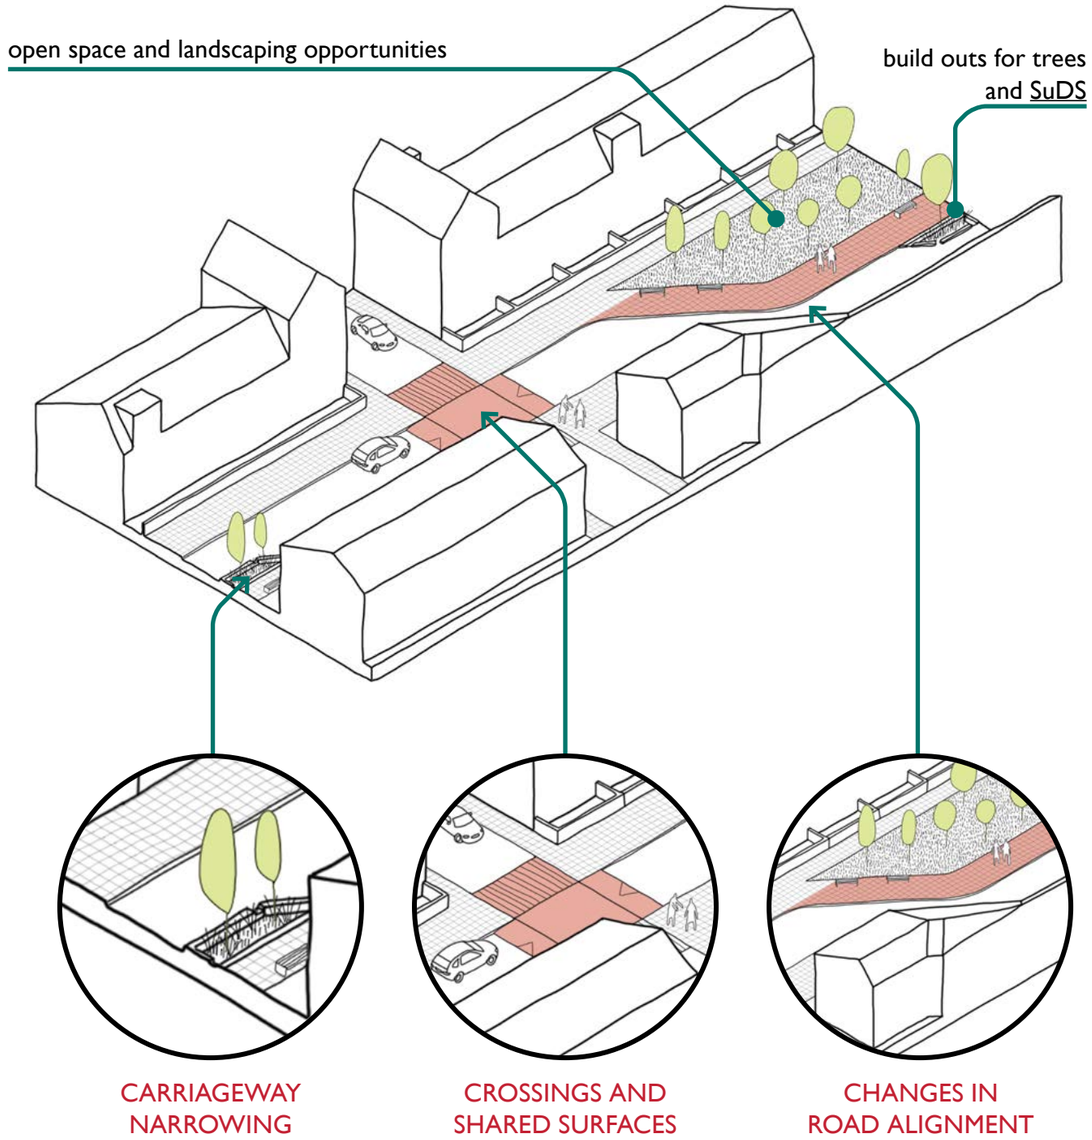


Figure 52 Options to incorporate speed reduction features on new or upgraded streets

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Manual for Streets	Policy EC4
Manual for Streets 2	Policy ENV1
Active Design Guidance	
Cycle Infrastructure Design - Local Transport Note (LTN) 1/20	

7.8 Parking

All new development must provide a sufficient level of parking that is fully integrated into the design. Where car parking is required, it must be appropriate in terms of location, nature and scale. Over provision of parking can cause inefficient car use and result in an ineffective use of land, while under provision can result in adverse impacts including congested streets and highway safety implications.

CODES

C33 H 1 2 3 4 F A B C

Parking must be provided as set out in **Table 15**.

GUIDANCE: *Public car parks should be designed to meet the requirements of the Park Mark scheme.*

C34 H 1 2 3 4 F A B C

Landscaping must be incorporated to reduce the visual impact of parking.

GUIDANCE: *Landscaping must be incorporated in to plans, both in public areas and on private plots, to reduce the visual impact of parking. The landscaping should be low maintenance and be designed as to not impact on visibility. There is an opportunity for including SuDS with landscaping – see section* ***3.4 Sustainable Drainage****.*

C35 H 1 2 3 4 F A B C

Non-residential and street parking bays must meet the minimum sizes as set out in **Table 14**.

GUIDANCE: *On street parallel bays should be included within a layby or widened carriageway so they do not impact on footways. On street parallel bays should be clearly marked out.*

Where new developments are close to services and facilities that are high level trip attractors, such as schools, hospitals and other key amenities, Traffic Regulation Orders (TRO) may need to be implemented. This would ensure the proposed parking is available for its intended use. TROs usually require a legal agreement be entered into with the local authority and involve a cost.

NOTE

While the code for parking spaces does not apply to household development, the number of spaces a house should have may be relevant if an extension results in the loss of a parking space.

PARKING BAY TYPE	BAY DIMENSIONS (METRES)	
	LENGTH	WIDTH*
Standard parking bay	5	2.5
Parallel bay	6	2
Parent and Child bay	6.6	3.6
Accessible bay	6.6	3.6
Motorcycle bay	2.5	2
*Parking bound by a wall/fence should have a minimum width of 3.2 metres		

Table 14 Non-residential parking bay dimension requirements by type (C35)

Table 15 (overleaf) Parking provision requirements by development type (C33) ▶

PROPOSED USE (AND TYPICAL THRESHOLD IN SQUARE METRES (m^2))		PLACE TYPE: TOWN CENTRE/ INNER NEIGHBOURHOOD/ NEIGHBOURHOOD CENTRE	PLACE TYPE: OUTER NEIGHBOURHOODS/ VILLAGES/ COUNTRYSIDE
Food retail	500m^2	1 space per 14-25m^2	1 space per 14-20m^2
Non-food retail	500m^2	1 space per 25-60m^2	1 space per 20-30m^2
Offices	500m^2	1 space per 35-60m^2	1 space per 35m^2
Restaurant/Cafe	200m^2	1 space per 25m^2	1 space per 15m^2
Class E Business	500m^2	1 space per 30-60m^2	1 space per 30m^2
B2 General Industry	500m^2	1 space per 50-75m^2	1 space per 30m^2
B8 Storage and distribution	n/a	1 space per 3 staff on duty at busiest time	1 space per 3 staff on duty at busiest time
C2 Residential Institutions	2,000m^2	1 space per 3 staff + 1 space per 4 daily visitors	1 space per 2 staff + 1 space per 3 daily visitors
C3 Housing	1 bedroom	1 space	1 space
	2 bedrooms	1 space	2 spaces
	3-4 bedrooms	2 spaces	3 spaces
	5+ bedrooms	3 spaces	4 spaces
	Affordable units	3 spaces per 2 units	On own merits
	Visitor spaces	1 space per 6 units	1 space per 4 units
	Flats	1 space per 2 bedrooms	1 space per bedroom
C4 Houses of Multiple Occupancy		1 space per 3 bedroom	1 space per 2 bedroom
Primary/ secondary schools	2,000m^2	1 space per 3 staff + 1 space per 15 pupils + drop-off / pick-up area	1 space per 2 staff + 1 space per 10 pupils + drop-off / pick-up area
Sixth forms / colleges	2,000m^2	1 space per 3 staff + 1 space per 10 students + drop-off / pick-up	1 space per 3 staff + 1 space per 7 students + drop-off / pick-up
Medical centres / doctors surgeries / dentists	2,000m^2	1 space per 3 staff + 1 space per 2 consulting rooms	1 space per 2 staff + 1 space per consulting room
Indoor sports facilities / leisure centres and other assembly and leisure	2,000m^2	1 space per 30-80m^2	1 space per 25m^2
Outdoor sports facilities	n/a	1 space per 4 participants + 1 space per 20 spectators	1 space per 2 participants + 1 space per 10 spectators
Cinema and conference centres	2,000m^2	1 space per 5-10 seats	1 space per 5 seats
Wedding venues	1,000m^2	1 space per 3 guests	1 space per 2 guests
Other developments		On their own merits, please contact Highway Development Management	
Development on local strategic route network		Some developments with facilities that act as a small service station shall have parking requirements assessed on their own merits	

CODES (continued)

C36 H 1 2 3 **4** F A **B** **C**

Secure motorcycle parking must be provided at non-residential uses of over 250 square metres. The number of spaces provided must be a minimum of 3% of the total car parking spaces required, or 4 spaces (whichever is greater).

C37 H 1 2 3 **4** **F** A **B** **C**

Accessible parking bays must be provided as set out in **Table 16**.

GUIDANCE: *An allowance for accessible parking should be made on streets in town and neighbourhood centres so that primary destinations are accessible for all.*

C38 H **1** **2** **3** **4** **F** A **B** **C**

Electric Vehicle charging points must be provided as set out in **Table 17**.

SIZE OF CAR PARK (NUMBER OF SPACES)	DESIGNATED ACCESSIBLE BAY PROVISION
1-50	2 bays +3% of total car park
51-200	3 bays +3% of total car park
201-500	4 bays +3% of total car park
501-1000	5 bays +3% of total car park
1001+	6 bays +3% of total car park

Table 16 Accessible parking bay requirements by total parking provision (C37)

DEVELOPMENT TYPE	PROVISION
Residential	Each housing unit should have one EV Car charging point as per Building Regulations Approved Document S
Non-residential buildings	5% Active + 5% Passive space of all spaces that comply with the above parking guidance (Minimum 1 accessible)
Employment developments	10% Active + 10% Passive space of all spaces that comply with the above parking guidance (Minimum 1 accessible)

Table 17 Electric vehicle charging point provision requirements by development type (C38)

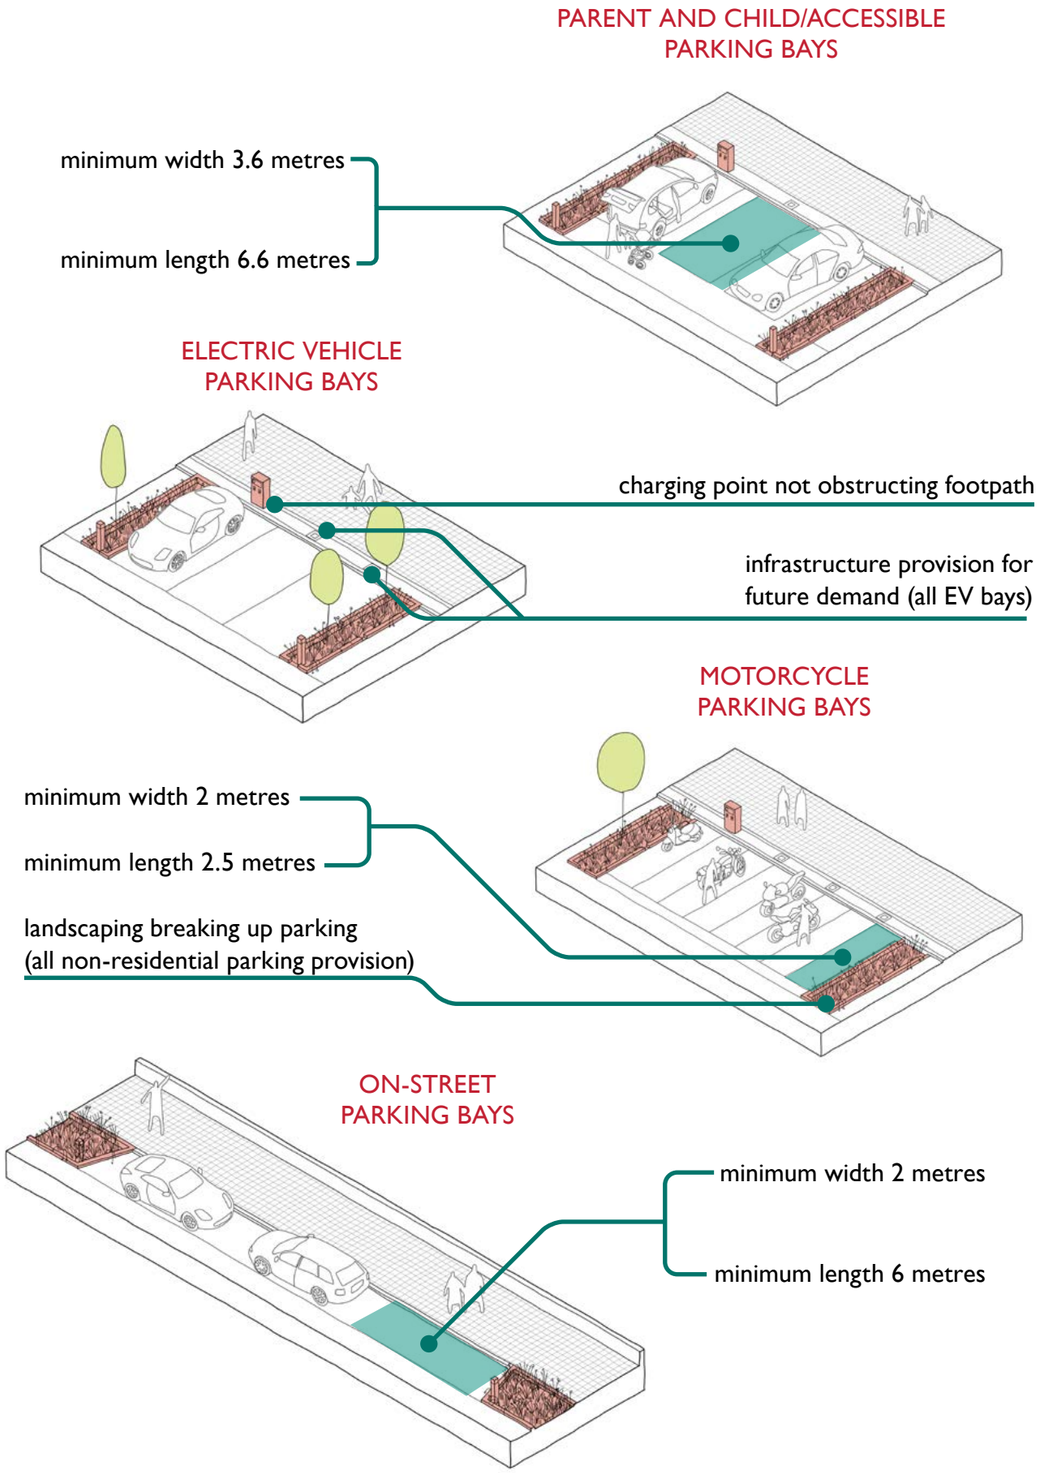


Figure 53 Examples of non-residential parking bay types and incorporation of permeable landscaping wherever possible

7.8 Parking (continued)

CODES (continued)

C39 H 1 2 3 **4** F A **B** **C**

Public cycle parking must be provided on the following streets:

- High Streets;
- Local distributors;
- Local connectors.

GUIDANCE: *All other street types should provide private cycle parking solutions appropriate to the context of the street type.*

In town and neighbourhood centres cycle parking should be located close to shops, services, public spaces and transport hubs. Cycle parking should be in clusters of 3-7 stands, be located in highly visible places within the street and ensure that it does not restrict a 2 metre wide footpath width. See section ***7.3 Resting Points and Street Furniture****.*

Cycle stands should be spaced at least 1.4 metres apart, with a spacing of 2 metres for non-standard cycles. 5% of all public provision must accommodate non-standard cycles and be orientated at right angles to any slopes.

For more information see ***Cycle Infrastructure Design - Local Transport Note 1/20 (LTN 1/20)*** *(Tables 11.1 and 11.2).*

C40 H 1 2 3 **4** F A **B** **C**

For non-residential development cycle parking must be provided for a minimum of 15% of overall number of car parking spaces, increased to 24% in town centres.

GUIDANCE: *Cycle parking should be located as close to the entrance of the building it serves as the closest car parking spaces. Cycle stands should be overlooked by the primary frontage of the building they serve, be well lit and have some form of protection from the elements.*

C41 H **1** **2** **3** **4** **F** A B C

All new residential units must include a minimum of one cycle parking space. Cycle parking must be secure, accessible and covered.

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Sustainable Transport Supplementary Planning Document	Policy EC4
Manual for Streets	Policy ENV1
Manual for Streets 2	Electric Vehicle Parking Policy
Cycle Infrastructure Design - Local Transport Note 1/20 (LTN 1/20)	Disabled Parking Policy



Figure 54 Cycle parking in Goole

7.9 Residential Parking Solutions

For residential development on-plot parking should be prioritised and incorporated with landscaping schemes so that streets do not appear car dominated. Any on street parking must be designed so that it does not dominate the street or create a barrier to access.

KEY GUIDANCE

G13 H 1 2 3 4 F A B C

Parking courts should be designed so:

- *Resident and visitor spaces are clearly distinguished through material choices, design and signage;*
- *Low maintenance landscaping is included which does not impact on visibility;*
- *SuDS are included and designed alongside landscaping – see section **3.4 Sustainable Drainage**;*
- *Natural surveillance is provided by surrounding buildings – see section **6.2 Block Size**.*

CODES

C42 H 1 2 3 4 F A B C

Residential parking spaces must meet the minimum sizes as set out in **Table 18**.

The minimum width for a private single driveway is 3.2 metres and a shared driveway is 5 metres. Pedestrian visibility of 2 metres x 2 metres (at a height of 1.05 metres) should be achieved.

C43 H 1 2 3 4 F A B C

Where front or rear boundary gates are proposed, on-plot parking provision must allow for inward swing of gates when all cars are parked.

***GUIDANCE:** Landscaping should be incorporated in to plans to reduce the visual impact of parking as set out in code C34.*

C44 H 1 2 3 4 F A B C

Garages and outbuildings must not sit further forward than the building line of the host building.

***GUIDANCE:** This code is to ensure that garages and outbuildings do not hinder natural surveillance along streets. Any justification for not complying with this code must demonstrate that the garage or outbuilding would not have a negative impact on the houses relationship with the street.*

Garages, and other outbuildings, should relate sympathetically to the host building in terms of materials, style and proportion.

There needs to be space within the site for a car to pull off of the street into the site and the garage door to be opened (minimum 6 metres).

NOTE

For on street parking spaces please see the guidance attached to code **C35**.

Table 18 (overleaf) Required residential parking bay dimensions (C42) ►

MINIMUM PARKING BAY DIMENSIONS	
Unless otherwise stated below the minimum parking space size is 2.5 metres x 5 metres	
Internal garage parking space	3 metres x 6 metres*
Parking space to side of house (or bound by a wall or fence)	Minimum width 3.2 metres
Spaces in front of garage	2.5 metres x 6 metres
EV charging spaces	Minimum width 2.8 metres
Parallel parking space	2 metres x 6 metres
*If a garage is to be used for cycle storage as set out in C41 additional space will be required.	

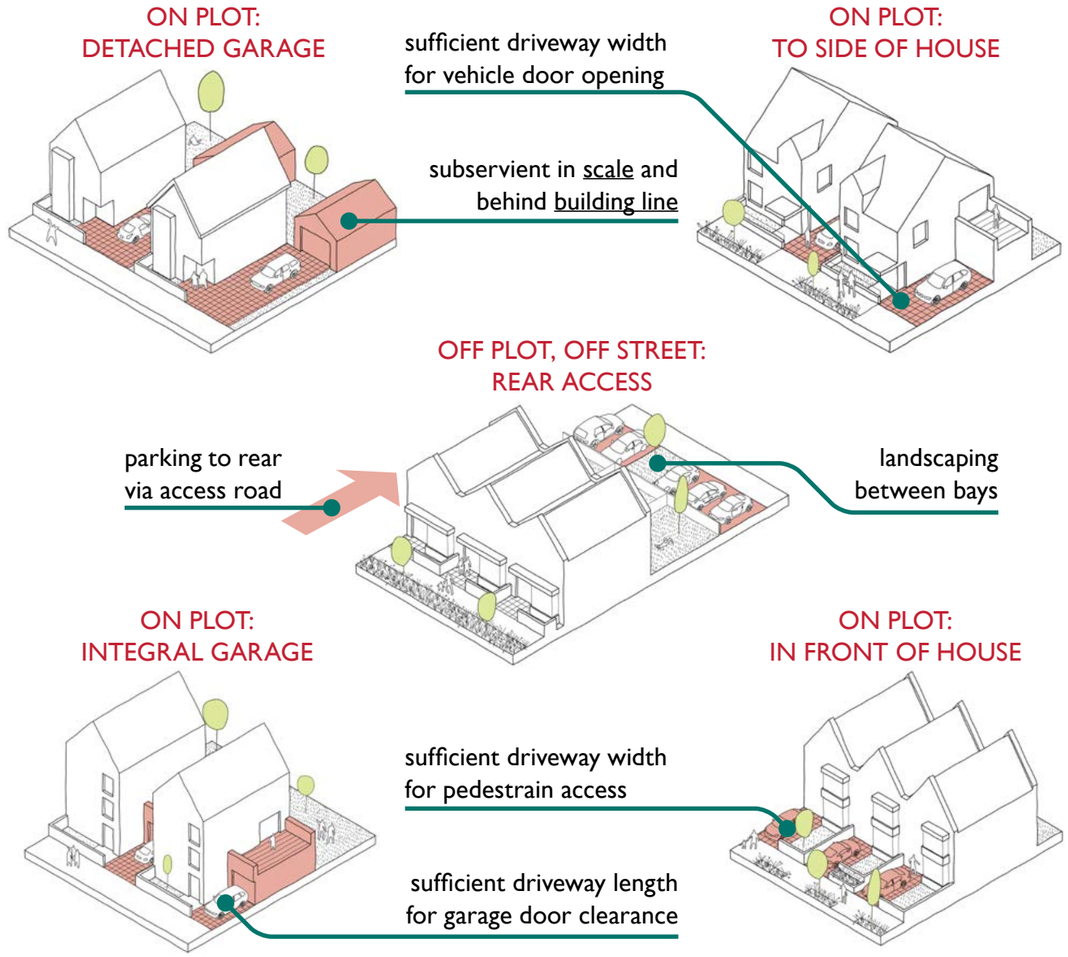


Figure 55 Methods to incorporate on-plot and off-street residential parking

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Sustainable Transport Supplementary Planning Document Manual for Streets Manual for Streets 2 Secured by Design Homes Guide	Policy ENV1

Chapter 8


Codes And Guidance:

Plots

Plots help clearly define ownership boundaries. The scale of plots helps create legibility in an area. The relationship between plots affects how an area functions. Boundary treatments and access need to be carefully considered, both for their aesthetic value and the safety and surveillance of the street. Private gardens offer practical space for food growing, washing and drying, bin and bike storage, but also space for play, rest and connecting with nature, all of which benefit wellbeing.

Chapter Contents

8.1	Plot Measurements	105
8.2	Scale of Extensions	108
8.3	Boundary Treatments	111
8.4	Private Gardens	113
8.5	Bin Storage	115

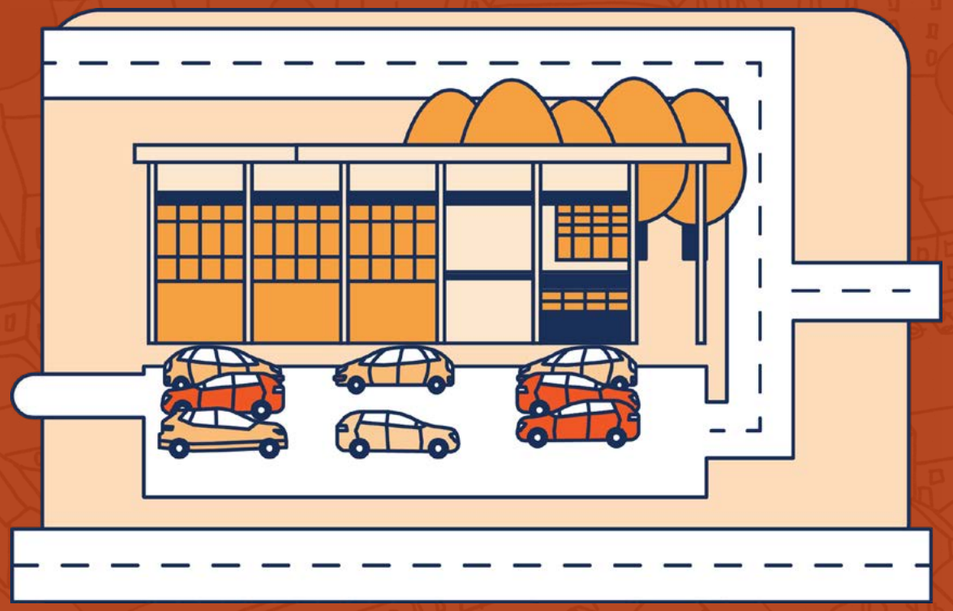

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Site Plan
- Layout Plan
- Site Section Plan
- Elevation Plan

8.1 Plot Measurements

The scale of plots generally varies depending on place type. In town centres and inner neighbourhoods plots are usually narrower than in more rural locations - adding to the character of place.

Plot sizes also impact the use of the site, for example the size of garden and how parking is arranged. Widths and separation distances vary by place type to assist new development in fitting well into its location and avoiding sites being overdeveloped.

KEY GUIDANCE

G14 H 1 2 3 4 F A B C

Overlooking and overshadowing are issues which can arise when new development happens close to existing. These issues impact surrounding uses on all sides of a development - not just back-to-back.

How shadows fall depends on the placement and orientation of a building. The 45-degree rule and the orientation in relation to the sun have to be taken into consideration for any exemptions to the separation distances.

Overlooking can be mitigated in some instances by the angle of any openings and by using obscure glazing and limited opening distances. When limiting how much a window can open Building Regulations need to be considered. Screening such as boundary treatments can also offer mitigation at ground floor level however planting which will not provide year-round privacy is not considered appropriate to provide screening.

G15 H 1 2 3 4 F A B C

Along streets there should be variations in plot widths. Villages and outer neighbourhoods typically have greater variation in plot width than inner neighbourhoods.

For infill development in conservation areas, it is important that historic plot patterns are respected.

G16 H 1 2 3 4 F A B C

Detached and semi-detached houses should include space for access and bin movement or space to park a car to the side of the property. The minimum width to the side of a property for parking a car is 3.2 metres (see code **C42**). The minimum width for access space down the side of a house is 0.9 metres or 1.2 metres for an access shared by multiple dwellings.

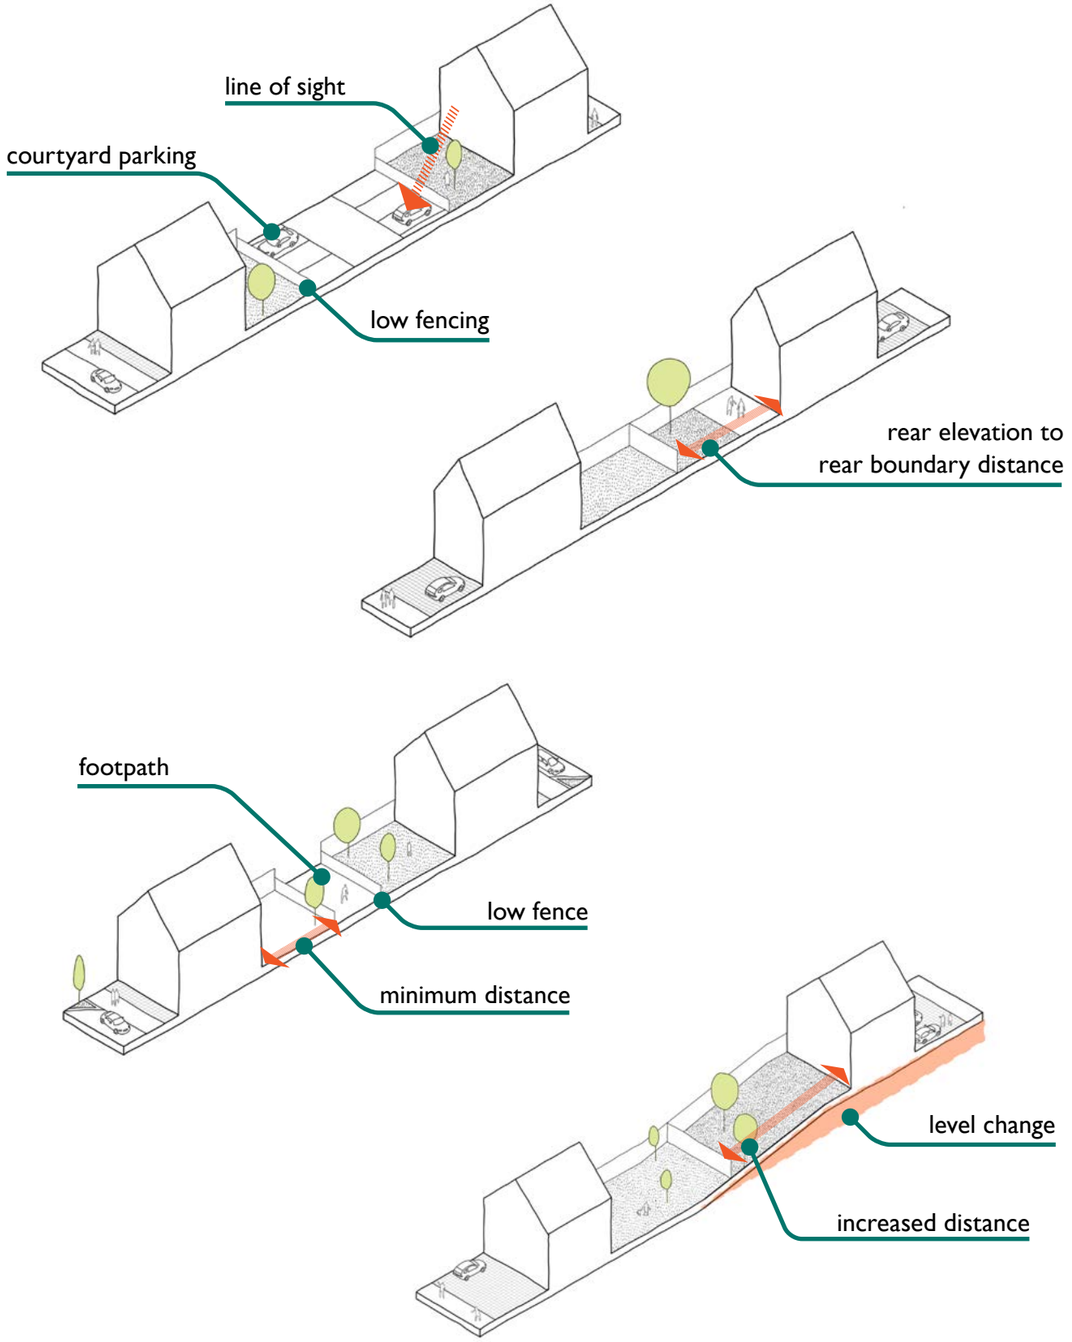


Figure 56 Different plot sizes and back to back distances

8.1 Plot Measurements

CODES

C45 H 1 2 3 4 F A B C

Where there is a distance of less than 20 metres between rear and side windows, on different plots, above ground floor level and 14 metres at ground floor level, mitigation must be included to ensure privacy.

GUIDANCE: *This code applies to development where there is to be a relationship between new and existing windows and also to development where there are multiple plots being built at the same time.*

*Design for privacy could include windows mounted at an angle or the use of obscure glazing and limited opening distances. For further advice on mitigating overlooking see key guidance **G14**.*

Balconies can also overlook neighbouring properties. The same considerations need to be taken in to account as with windows. However, distances to boundaries may need to be greater due to the difference in nature between windows and balconies.

C46 H 1 2 3 4 F A B C

The minimum distance between the rear wall and rear boundary must be as set out in **Table 19**.

C47 H 1 2 3 4 F A B C

Where there is a difference in ground level the total back-to-back distance must be increased by 2 metres for every 1 metre of height difference.

GUIDANCE: *The increase in separation distance is to mitigate the impacts of overlooking and overshadowing which can arise from a difference in ground levels.*

*Minimum back-to-back distance is double the rear elevation to rear boundary measurement in code **C46**.*

PLACE TYPE	REAR ELEVATION TO REAR BOUNDARY (METRES)
Town Centre	7
Inner Neighbourhood	9
Outer Neighbourhood	10
Neighbourhood Centre	7
Village	10
Countryside	10

Table 19 Minimum rear elevation to rear boundary distances by place type (C46)

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Site Layout and Planning for Daylight and Sunlight	Policy ENV1

8.2 Scale Of Extensions

The apperance of an extension should be considered in the context of a whole street as well as an individual plot. The design of an extension must ensure that it does not unreasonably reduce the privacy of, or overshaddow, neighbouring properties, including their private garden areas.

KEY GUIDANCE

G17 H 1 2 3 4 F A B C

Single storey extensions should not extend more than 3.5 metres, past the rear elevation of the neighbouring property, if directly adjoining a side boundary. Two storey extensions should not extend more than 1.5 metres, past the rear elevation of the neighbouring property, if directly adjoining a side boundary.

The length of the extension can be increased by any additional distance the extension is set in from the side boundary.

G18 H 1 2 3 4 F A B C

Extensions should be designed to appear as one with the main building and not dominate the original.

The eaves height of single storey extensions should not exceed 3 metres in height and the ridge 4 metres in height.

For single storey flat roof extensions it is recommended that a parapet wall is used to hide the roofing material.

For extensions of more than one storey the ridge line of the extension should be set below that of the original building, and eaves line set level or below that of the original building – see section **9.2.1 Roof Form** for further information.



Figure 57 Extension dimensions guidelines

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

8.2 Scale Of Extensions




SINGLE-STOREY REAR EXTENSION

- Not to exceed 3.5 metres (**G17**)
- Roof form to match existing
- Window materials should match existing (**G26**)
- Retain minimum 0.9 metres of space to side boundary for access (**G16**)

TWO-STOREY REAR EXTENSION

- Ridge line should be set below that of the original building (**G18**)
- Eaves line should be level with or lower than that of the original building (**G18**)
- Window materials should match existing (**G26**)



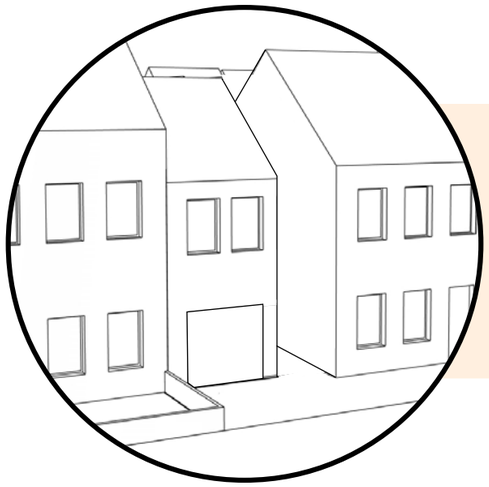



GARAGE EXTENSION

- Retain minimum 0.9 metres of space for access between properties (**G15**)
- Subservient in scale

FLAT ROOF REAR EXTENSION

- Parapet wall used to hide roofing material (**G18**)

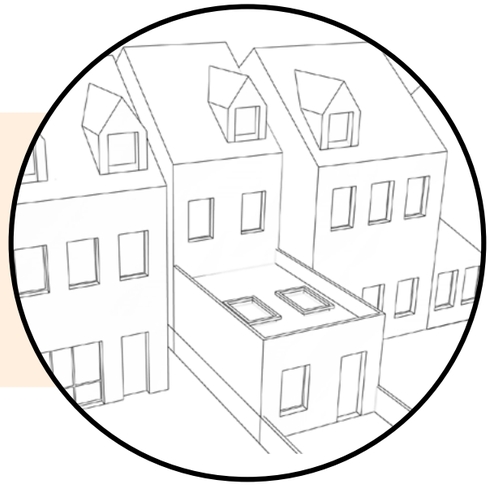

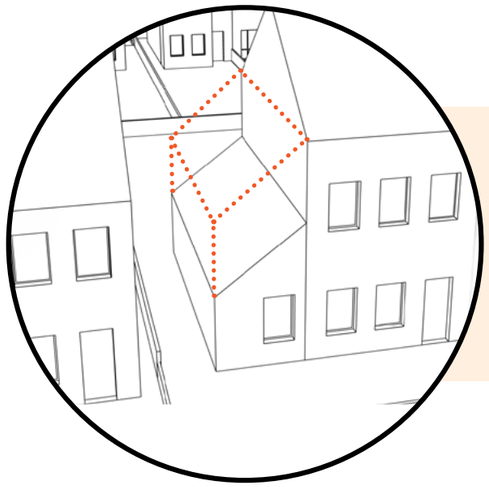

SIDE EXTENSIONS

- Appear as one with the main building and not dominate the original dwelling (**G18**)
- Ridge line should be set below original ridge; eaves line level or below original

WRAPAROUND EXTENSION

- Should appear as one with original building (**G18**)
- Retain minimum 0.9 metres of space to side boundary for access (**G15**)



Figure 58 Extension examples and criteria for appearance, scale and access

NOTE 1

The sizes set out in this subchapter are recommended to prevent unacceptable overshadowing and loss of light to the neighbouring property. The 45-degree rule may mean that larger, or smaller, extensions are appropriate for some sites. Justification for extensions which extended further than the guidance must be clearly set out within an application.

NOTE 2

Please see key guidance **G14** for further guidance on overlooking and overshadowing. Key guidance **G15** should also be considered for extensions which alter the side access to a property. Parking requirements set out in **Table 15** and in section **7.9 Residential Parking Solutions** need to be considered where an extension would impact the existing parking arrangements.

8.3 Boundary Treatments

Boundary treatments can be practical, providing a break between public and private space, as well as adding to the character and appearance of an area

KEY GUIDANCE

G19 H 1 2 3 4 F A B C

Appropriate boundary treatments for residential property boundaries which front the public realm include:

- *Green and living boundaries;*
- *Brick or chalkstone walls (also to include optional appropriate coping and piers);*
- *Dwarf brick walls (with or without railings or hedge);*
- *Low timber fence with hedgerow;*
- *Metal railings (with or without hedgerow).*

If boundary treatments are required, the character of the surrounding area should be considered when choosing an appropriate solution. Appropriate examples include:

- *Thin profile V-Mesh fencing;*
- *Gabion Walls;*
- *Natural or living boundary treatments integrated into development, either in front or behind fencing.*

Boundary treatments for side and rear boundaries which adjoin the public realm should be low level to support passive surveillance (see code **C20** for further information).

G20 H 1 2 3 4 F A B C

For business and industrial areas, preference would be to use landscaping to distinguish boundaries between sites.

Where security measures are required, these should be screened by green and living boundaries. Maintaining an active frontage as set out in code **C21** should be considered when choosing an appropriate boundary treatment.

CODE

C48 H 1 2 3 4 F A B C

Boundary treatments for residential properties fronting public realm must not exceed 1.2 metres in height.

GUIDANCE: *High boundary features next to footpaths can lead to an increased sense of enclosure and reduce natural surveillance of the street*


High boundary features next to accesses can reduce visibility for those leaving or entering the plot.

Where there are existing boundary features within an established street which exceed 1.2 metres, a justification for a higher boundary may be acceptable in parts of the site. Justifications must ensure visibility for those leaving and entering the plot has been addressed and that the plot still has a. good relationship with the street, including an element of overlooking for natural surveillance.


NOTE

Please see **C42** (section **7.9**) for further information on visibility for residential driveways.


LOW TIMBER FENCE

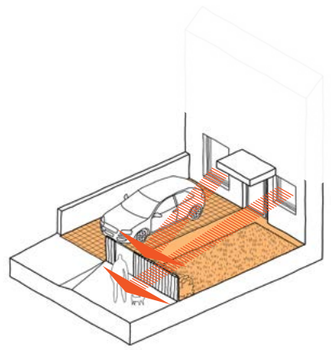


LOW BRICK WALL

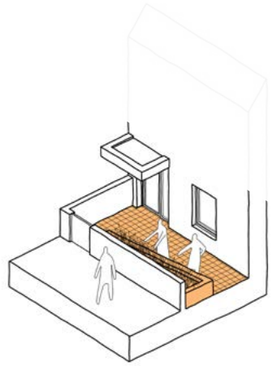


PLANTING



BRICK AND METAL RAILING



PLANTING

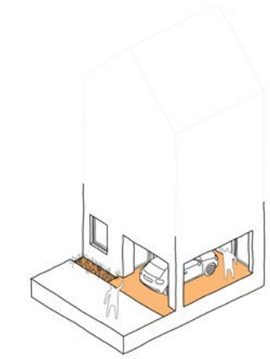

METAL RAILING

SUDS AND METAL RAILING

BRICK WALL AND PLANTING

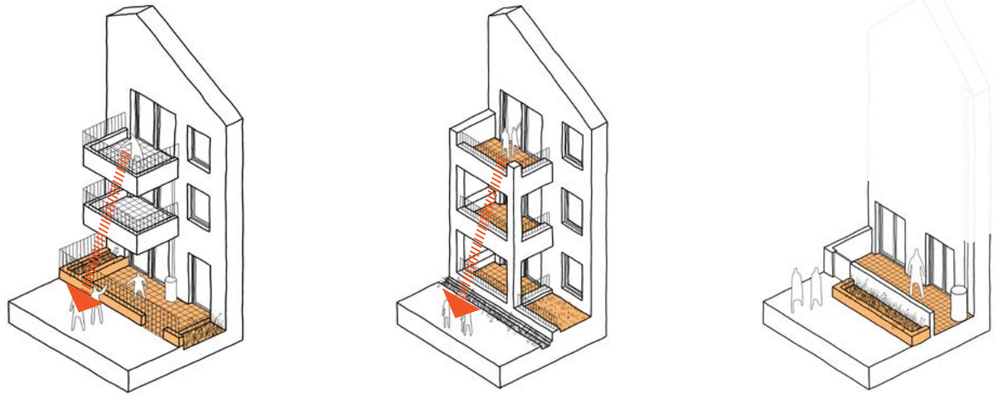


Figure 59 Suitable front boundaries

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

8.4 Private Gardens

Private gardens provide important amenity space which supports well-being. They can also offer other benefits including additional biodiversity and on-site water management (see sections **3.2 Biodiversity** and **3.4 Sustainable Drainage**).

KEY GUIDANCE

G21 H 1 2 3 4 **F** A B C

For blocks of flats, a combination of balconies and communal amenity space should be included to make sure each home has the benefits of outdoor space.

G22 H **1 2 3 4 F** A B C

All gardens should include grass, planting and other forms of vegetation to cover at least 50% of the area.

Planting improves the appearance of homes and gardens, bringing nature into the built environment. Other benefits of planting include:

- *supporting wildlife;*
- *providing food;*
- *helping infiltration of surface water;*
- *carbon capture from the air;*
- *production of oxygen;*
- *providing closer contact with nature.*

Green and living boundaries are one way to increase vegetation cover (see section **8.2 Boundary Treatments**).

CODE

C49 H **1 2 3 4** F A B C

There must be a minimum space standard for all private gardens, excluding gardens to the front of properties of:

- *25 square metres - 1-3 bed;*
- *60 square metres - 4+ bed.*

GUIDANCE: *Private amenity space gives space for play, growing food and practical activities such as drying washing. Private garden space can be to the rear or side of a property. Back to boundary distances set out in section **8.1 Plot Measurements** must also be adhered to.*

NOTE

Please see **C44** (section **7.9**) for further information on garages and outbuildings.

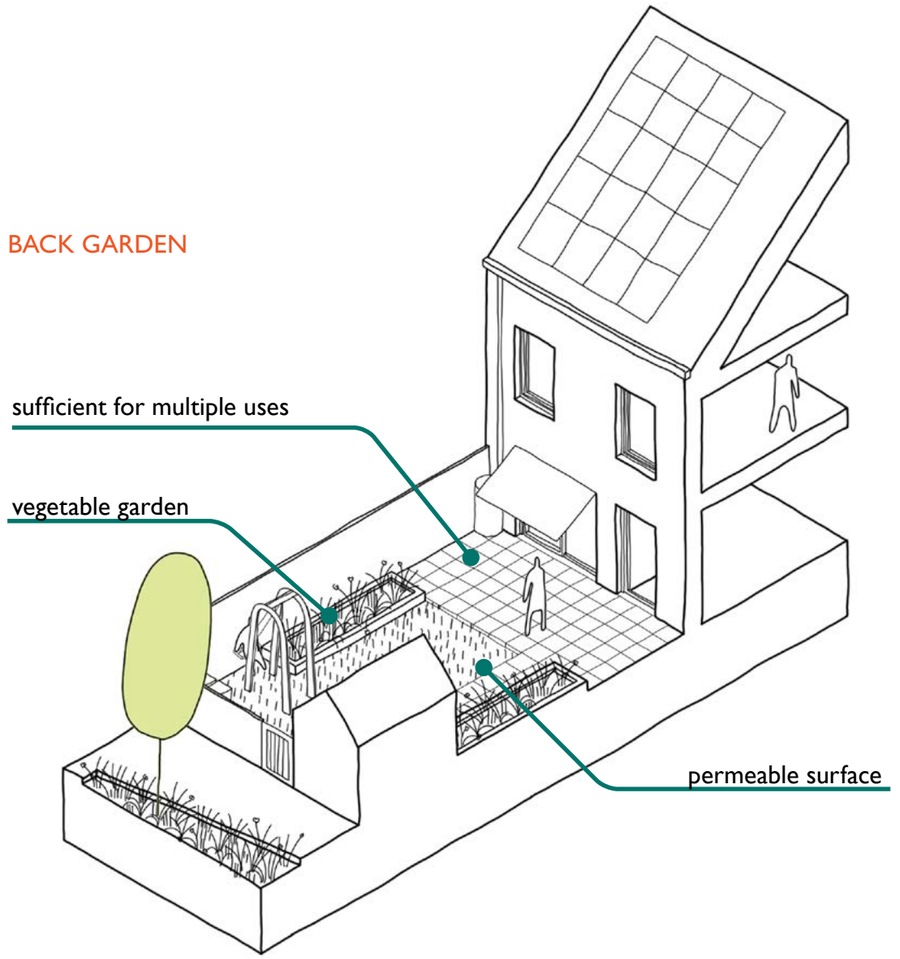


Figure 60 Private gardens with sufficient amenity space with various forms of soft landscaping

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

8.5 Bin Storage

Provision for the tidy and accessible storage of bins must be provided to avoid unnecessary clutter and harm to the character of an area.

CODES

C50 H 1 2 3 4 F A B C

Suitable bin storage of at least 1.5 square metres must be provided per housing unit.

GUIDANCE: *The bin storage should:*

- *Be within 45 metres of a suitable collection point on the highway;*
- *Be within a rear garden or to the side of a building.*

OR, if at the front of a plot:

- *Be screened from public view by a suitable boundary treatment, OR;*
- *Incorporated into the design of the building.*

The required size is based on three wheelie bins per household. The minimum width for access space down the side of a house is 0.9 metres or 1.2 metres for an access shared by multiple dwellings. (see key guidance G16).

C51 H 1 2 3 4 F A B C

Communal waste bins must be stored securely in centralised areas within 45 metres of a suitable collection point on the highway.


GUIDANCE: *Plans for screening communal bin storage should be considered alongside the landscaping of the site.*

Consideration needs to be given to the proximity of the communal bin store to any residential buildings. Noise mitigation should be included in the plans.



SEDUM ROOF TIMBER CONSTRUCTION

Figure 61 Examples of appropriate materials and approaches to bin storage

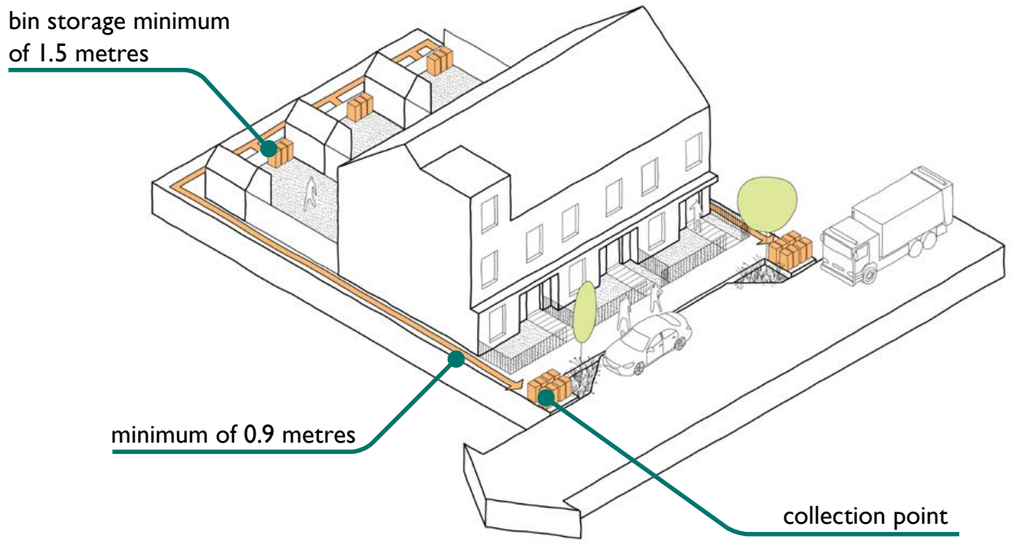

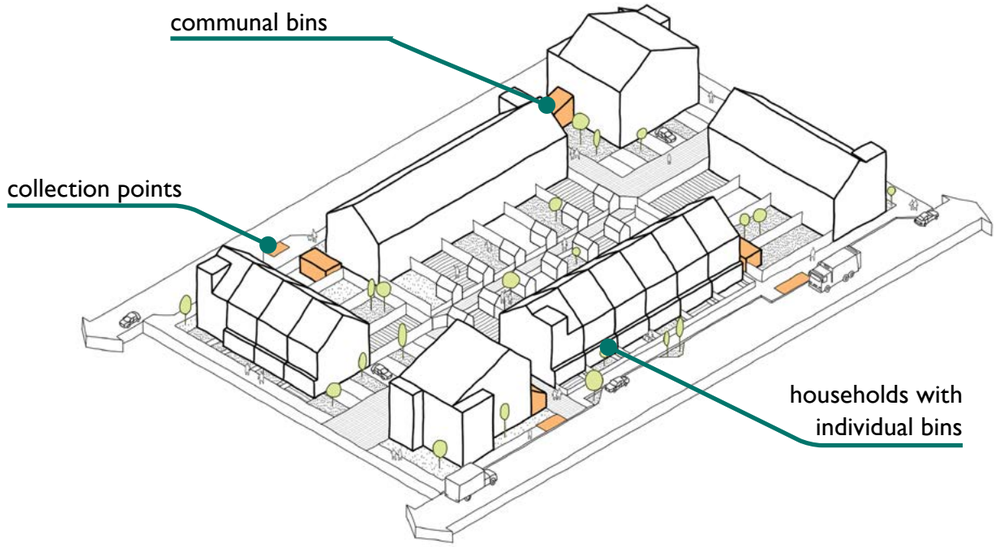



Figure 62 Optimal bin storage, travel distances, and bin collection methods

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

Chapter 9

Codes And Guidance:

Buildings

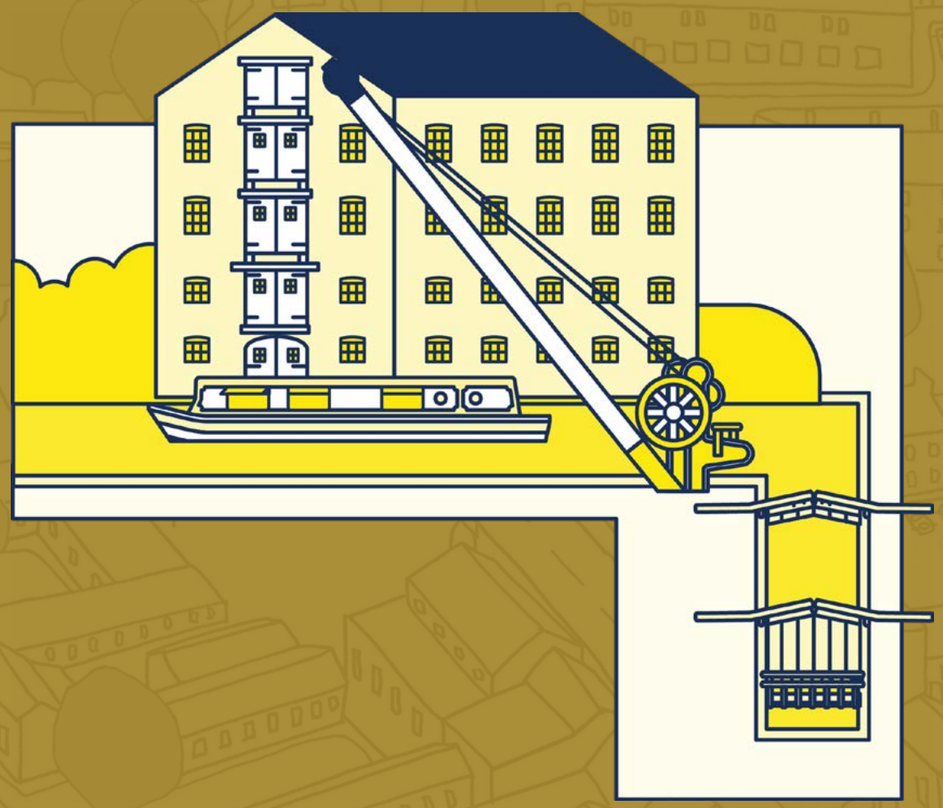

Buildings help give places their detail and character. The right details can help new development feel rooted in its place, whether this is an extension to an existing home, a new agricultural development, or the conversion of an existing building

Chapter Contents

9.1	Materials	119
9.2	Elevational Features And Proportions	121
9.3	Frontages: Shops, Bars And Eateries	127
9.4	Residential Conversions	129
9.5	New Agricultural Buildings	131
9.6	New Industrial, Storage, Distribution, Commercial Buildings	133

Key Values

CONNECTED

LANDSCAPE LED

SUSTAINABLE

DISTINCTIVE AND CONTEXTUAL

INCLUSIVE AND SAFE

Where To Demonstrate Compliance

- Design and Access Statement
- Heritage Statement
- Elevation Plan
- Floor Plan
- Site Section Plan
- Detail Plans
- Roof Plan

9.1 Materials

Materials and detailing help root buildings in their location and also help to create visual interest in a street. It is important that character and context are considered when choosing the materials and external detailing of new development as this can impact the overall feel and quality of a place.

Appropriate materials will vary depending on the scale of development. Any departures from the codes must be justified in the **compliance checklist**.

NOTE ON MATERIALS

Neighbourhood plans, conservation area appraisals and identity and context documents can offer more detail on locally suitable materials.

For contemporary development a wider choice of materials may be appropriate. These should still be considered in the context of traditional materials (for example colour and texture) to find the most suitable material for the design and location The application must include justification for any choice of materials which do not comply with codes **C52** and **C53**.

The size, coursing, bonding, finish and method of pointing are all as important as the material used. For a traditional look these should match local examples. Using traditional materials but varying the way it is used is a way to make a contemporary design which still feels rooted in its location.

Details such as lintels over doors and windows, eaves finishes, brick corbels and quoins are seen constructed in various ways across the authority. Using local details like these is another way to root a building in its place.

CODES

C52 H 1 2 3 4 F A B C

When extending an existing building, proposed elevational and roofing materials must match the existing colour, size, and texture of the host building.

GUIDANCE: *Materials must match in terms of type, colour and method of construction. If not possible a contrasting or complementary material may be discussed with officers and justified within the application.*

On some houses, design details are used at the junction between one material and another, often around eaves or around doors and windows. Recreating these details in extensions can be one way to link the new with the original. Where possible, design details should use the original method of construction, this is especially relevant when the proposal involves a heritage asset.

C53 H 1 2 3 4 F A B C

For a new building or buildings, materials must follow the prevailing colour, size, and texture of materials to create a cohesive palette.

GUIDANCE: New buildings *– materials must fit those used in the surrounding area. For infill development it would be appropriate to look to those used on the same street.*

Large strategic site *– it would be appropriate to look to the wider settlement. A cohesive palette for the site should be developed as part of a site design code. Complementary, but varying, palettes can be a useful way to distinguish different phases of a development.*

New industrial buildings *– a variety of building materials should be considered. The use of different hues or shades/tones may be considered, i.e. darker colours against the landscape and lighter shades against the sky (see **9.6**).*

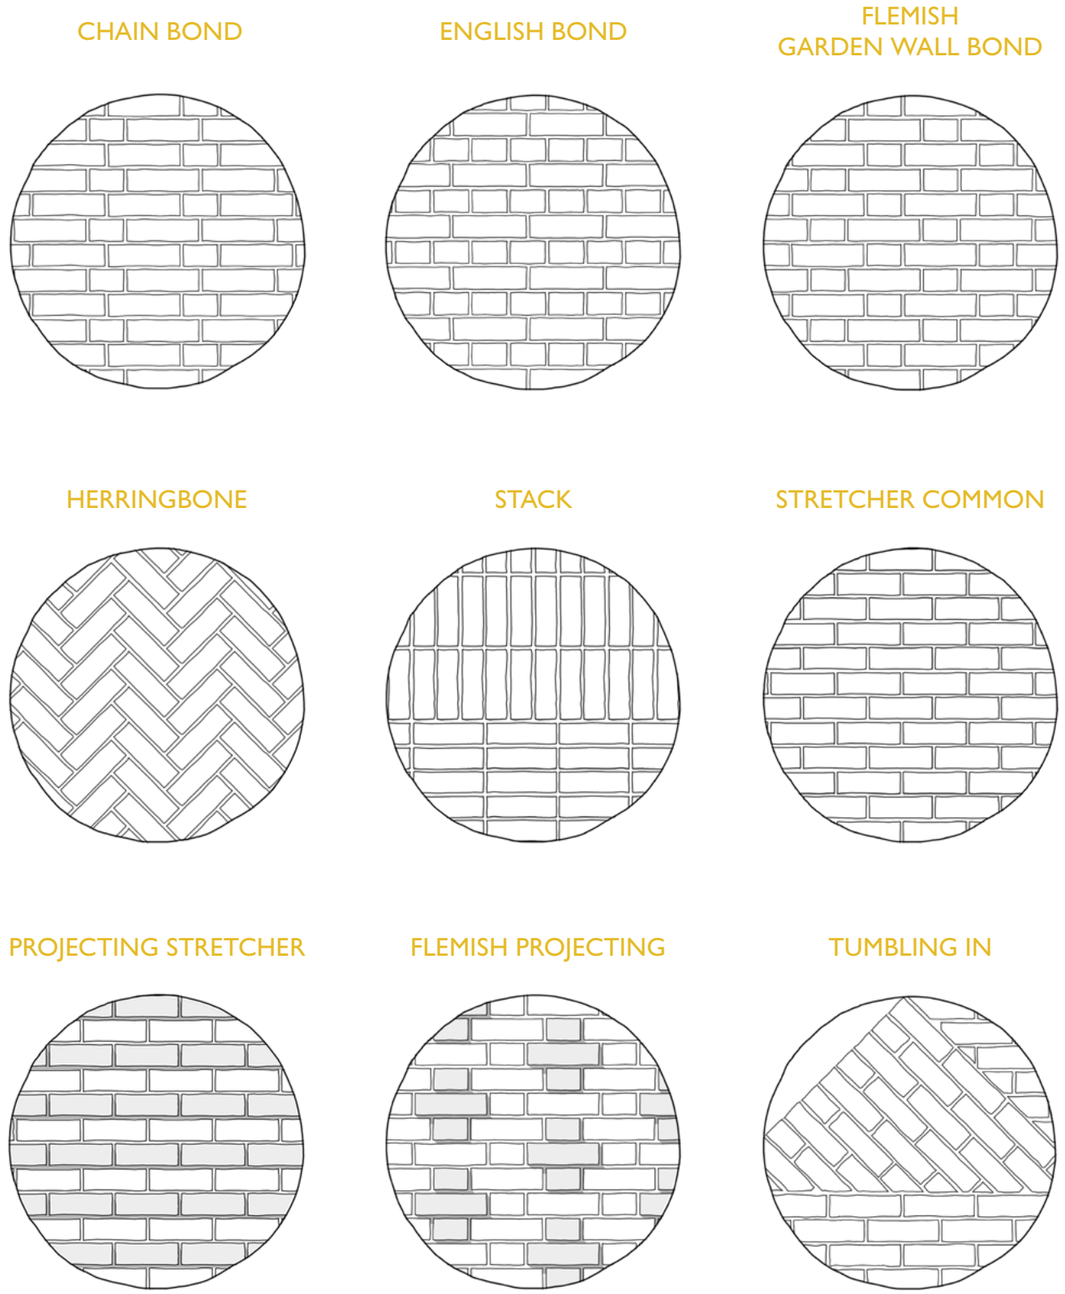


Figure 63 Examples of brick coursing (suitability subject to location and local context)

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance Conservation Area Appraisals	Policy ENV1

9.2 Elevational Features and Proportions

Elevational features and their proportions can enhance the physical appearance of buildings. Windows, porches, roof types and chimneys can all help a new development reflect local character whilst varying these elements adds interest and character to a street.

With conservation areas and listed buildings the right approach must be chosen to preserve and enhance the individual heritage asset in line with policy. Any exceptions to the codes must be justified through the **compliance checklist**.

9.2.1 Roof Form

Variations in roof form add to the interest of a streetscape and is often a feature in conservation areas where buildings have been constructed at different times.

KEY GUIDANCE

G23 H 1 2 3 4 F A B C

To get the roof pitch right for a new development, consideration needs to be given to the surrounding context. For infill development the amount of variation in roof pitch and height appropriate will depend on the existing variety in the streetscene. For large strategic sites a range of roof heights and pitches should form part of a site design code.

G24 H 1 2 3 4 F A B C

Any two-storey extension to an existing building should have a roof form similar to that of the original building, with a slope at a similar angle. It is recommended that the ridge height is set below that of the original building (with eaves level or below that of the original) so that the new extension appears subservient and new and old materials are not sat directly next to each other.

G25 H 1 2 3 4 F A B C

Chimneys are generally a feature in traditional areas and can add to the character of a new development, helping it to sit comfortably within its place. Chimneys should be included in new residential buildings where there are a high proportion of buildings nearby with chimneys.



Figure 64 Appropriate elevation features and roof forms within the East Riding

9.2.2 Windows And Doors

The scale, position and design of windows and doors can be important features in setting the character of a development. Whether a traditional or contemporary approach is appropriate will depend on the setting of the proposal.

KEY GUIDANCE

G26 H 1 2 3 4 F A B C

For changes to existing buildings the proportions and design of new windows and doors should match those of the existing windows. New window openings should align horizontally and vertically with existing windows where possible, through a centre point. Any exceptions must be justified in the appropriate evidence document and clearly referenced in the **compliance checklist**.

CODES

C54 H 1 2 3 4 F A B C

The primary elevation must front the street. It must include the front door and windows on all levels. Any other elevation addressing the street must contain windows overlooking the street.

C55 H 1 2 3 4 F A B C

On buildings with two or more storeys, windows must align vertically through a centre point. No window should exceed the width or height of the window on the floor below.

GUIDANCE: *Windows should be proportioned so that all habitable rooms have adequate natural light.*

C56 H 1 2 3 4 F A B C

All window and doors must have a minimum reveal of 70 millimetres.

GUIDANCE: *An exception to this is changes to existing buildings where the reveal of doors and windows should match those in the existing building. If this is the case, details of the existing reveals should be set out in the application.*

C57 H 1 2 3 4 F A B C

Bay windows, or other window projections, must project a maximum of 1 metre from the front elevation.

See overleaf for illustrated indicative window and door design requirements **(Figure 66)** ▶

9.2.3 Porches And Front Extensions

KEY GUIDANCE

G27 H 1 2 3 4 F A B C

Extensions to the front of a building are likely to be particularly prominent in the streetscene. It is therefore essential that they are designed to appear as one with the existing building and relate well to the character of the area. Front extensions should normally be small in scale and repeat the window, door and roof detailing of the main building.

CODES

C58 H 1 2 3 4 F A B C

Porches and canopies must not obstruct or overhang the public domain, or compromise visibility splays of the highway.

GUIDANCE: *Porches should be designed to complement, and not dominate, the host building.*

For new large scale developments a mix of porch types should be considered to provide variety to standard house types.



Figure 65 Examples of porches and front extensions

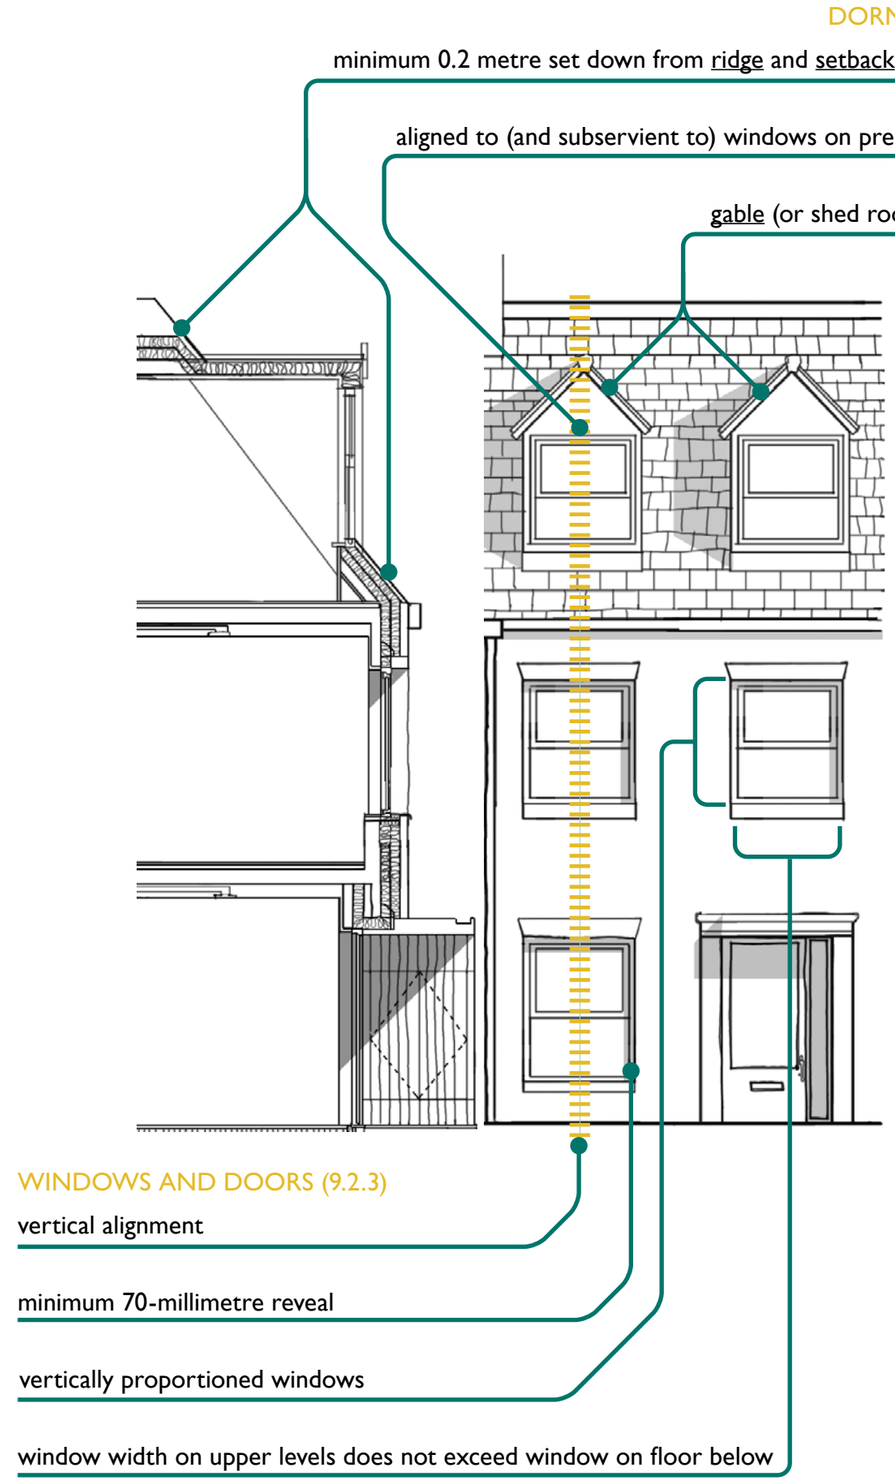


Figure 66 Indicative window and door design requirements

9.2.4 Dormers

Dormers can be a useful way to create additional living space in an existing building, or add character to a new build. Dormers should appear as a feature within the roof and not dominate the building.

KEY GUIDANCE

G28 H 1 2 3 4 F A B C

The primary face of a dormer should be predominantly glazed. A dormer should usually only contain one window which is centrally placed within the dormer.

Consideration needs to be given to the impact of a dormer on the privacy of neighbouring properties (see key guidance **G14**).

G29 H 1 2 3 4 F A B C

Dormers should not dominate a roof. By being small in scale, aligning with existing windows and using matching materials a dormer window should achieve this. Where dormers are added as an extension it is important that they appear as one with the existing building (see section **8.2** for further information on extensions).

Areas which include heritage assets can be more sensitive to change. Where the addition of a dormer may impact a heritage asset, or its setting, the proposal needs to take the preservation and enhancement of the asset in to consideration (see sections **1.7** and **1.8** for further details).

For contemporary development, exceptions to the Design Code must be justified through the **compliance checklist**.



Figure 67 Examples of gable dormers, and a contemporary dormer in a traditional setting



Figure 68 Examples of 'shed roof' dormers

CODES

C59 H 1 2 3 4 F A B C

Dormers on front roof slopes must have gable or shed roofs.

GUIDANCE: *Small scale flat roofed dormers may be acceptable where there is a precedent in the streetscene. Any exceptions to the code must be justified in the appropriate evidence document and clearly referenced in the* ***compliance checklist****.*

C60 H 1 2 3 4 F A B C

Dormers must be set down from the main roof ridge by a minimum of 0.2 metres and back from the eaves by a minimum of 0.2 metres.

C61 H 1 2 3 4 F A B C

Dormers on adjoining properties must not be, or appear to be, physically connected.

GUIDANCE: *It is recommended that dormers are set in a minimum of 0.2 metres from the boundary with an adjoining property in order to maintain a distinction between properties.*

C62 H 1 2 3 4 F A B C

Dormer window(s) must be vertically aligned to the window(s) on the floor below; or, symmetrically aligned to the centre line of the roof.

C63 H 1 2 3 4 F A B C

Dormers must not exceed the width of any window on the floor below.

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

9.3 Frontages: Shops, Bars and Eateries

The design of shop fronts plays a significant role in shaping and maintaining attractive town, neighbourhood, and village centres. It is important that shop fronts are well designed to create a feeling of vibrancy and legibility.

Many high streets within the East Riding of Yorkshire are designated conservation areas. In these places the approach should be to preserve and enhance the traditional appearance of shop fronts. This includes reinstating traditional shop fronts where they have previously been lost. Outside of conservation areas a more contemporary approach to shopfronts can be taken however the proportions and details set out in the Design Code remain important to support the legibility of the use.

CODES

C64 H 1 2 3 **4** F A B **C**

Principal signage must be located at the fascia.

C65 H 1 2 3 **4** F A B **C**

Fascia signage must be limited to one per bay of unit frontage.

C66 H 1 2 3 **4** F A B **C**

Hanging signs must be located no higher than first floor level and project no more than 0.75 metres forward of the unit frontage.

GUIDANCE: *Any method of signage should be carefully considered to ensure there is no unacceptable harm to the character and appearance of the building and surrounding area, in particular to listed buildings or in conservation areas. 'Low profile'/less obtrusive methods of illumination should be considered.*

Appropriate methods include:

- *halo illumination;*
- *small spot lights;*
- *compact strip lighting.*

Other methods including external trough lighting and internally illuminated lettering and box signs will likely introduce more harm, but the use of individually illuminated letters may be considered less intrusive or harmful than a box sign in some locations.

C67 H 1 2 3 **4** F A B **C**

Windows on frontages must have vertically proportioned panels and be fixed between the stall riser and the transom bar or fascia.

GUIDANCE: *Windows should be provided on all floors as per code **C54**.*

C68 H 1 2 3 **4** F A B **C**

Frontages must include a legible door access.

GUIDANCE: *Door recesses should be used to improve legibility, reflecting traditional arrangements.*

C69 H 1 2 3 **4** F A B **C**

Stall risers must be between 0.2-0.9 metres in height and are an integral feature of the elevation.

C70 H 1 2 3 **4** F A B **C**

Security shutters must be internal and must be a grill or mesh.

GUIDANCE: *Grill or mesh shutters maintain visibility between the shop and the street, improving perceptions of safety and contributing to the vitality of the place.*

NOTE

In some cases, existing shop fronts may not comply with elements of the codes. Where there is a strong precedent along a high street this may be justification for not complying with an element of the codes. Any departures from the codes must be justified in the appropriate evidence document and clearly referenced in the **compliance checklist**.

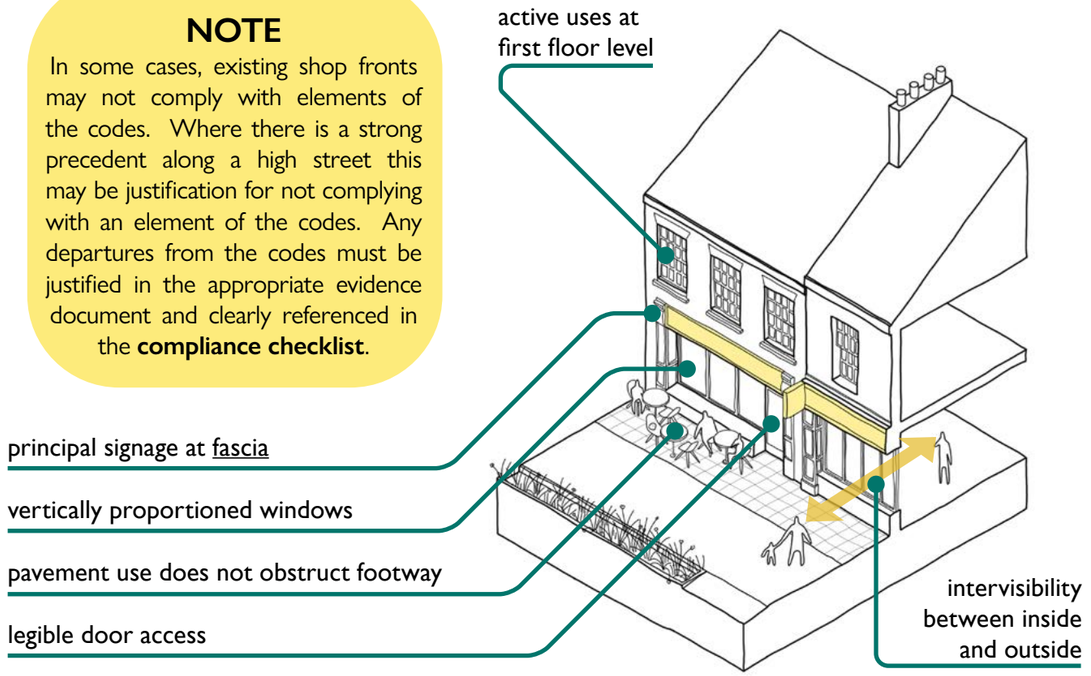


Figure 69 Example activated frontage with appropriate proportions

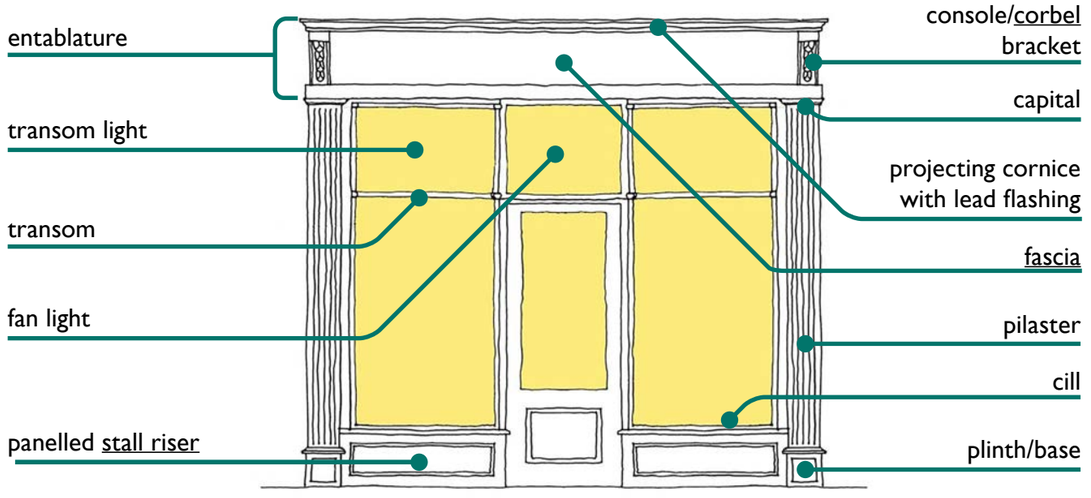


Figure 70 Supported frontage features

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
See references for general guidance	Policy ENV1

9.4 Building Conversions

Converting buildings to a new use when they are no longer suitable for their original intended use is a good way to protect the heritage of an area and reducing the environmental impact of creating a new building. Conversions must be sympathetically carried out in a way which does not erase the previous history of the site. Work to a heritage asset will require additional design consideration (see section **1.7**).

Not every building will be suitable for a new use. New uses must be carefully considered to make sure they are appropriate for the existing building.

CODES

C71 H 1 2 3 4 F A B C

Floor plates must not be positioned across existing window openings.

GUIDANCE: *This is to prevent the external appearance of openings being compromised.*

C72 H 1 2 3 4 F A B C

Original openings in the external elevations must be retained.

C73 H 1 2 3 4 F A B C

New wall and roofing materials must match those in the existing building.

GUIDANCE: *To comply with policy any form of conversion must not create a significant alteration or extension. Materials should either match the existing or contrast to clearly show the difference between old and new. Where contrasting materials are being used the way the old and new materials join needs to be carefully considered.*

GUIDANCE: *Where roof lights are proposed to be added to a conversion they should be traditional in design with a low profile to minimise their appearance in the roof.*

C74 H 1 2 3 4 F A B C

Features including lintels, key stones, brick coursing and brick types must be matched to the original.

GUIDANCE: *Where possible it is best to repair existing features rather than replacing.*

C75 H 1 2 3 4 F A B C

New boundary features must reflect existing boundary features such as hedgerows, stone and brick walls, or footpaths.

GUIDANCE: *Where there are no existing boundary features historic records should be looked at to see if any boundary features previously existed. Boundary features around similar buildings in the area may also be used.*

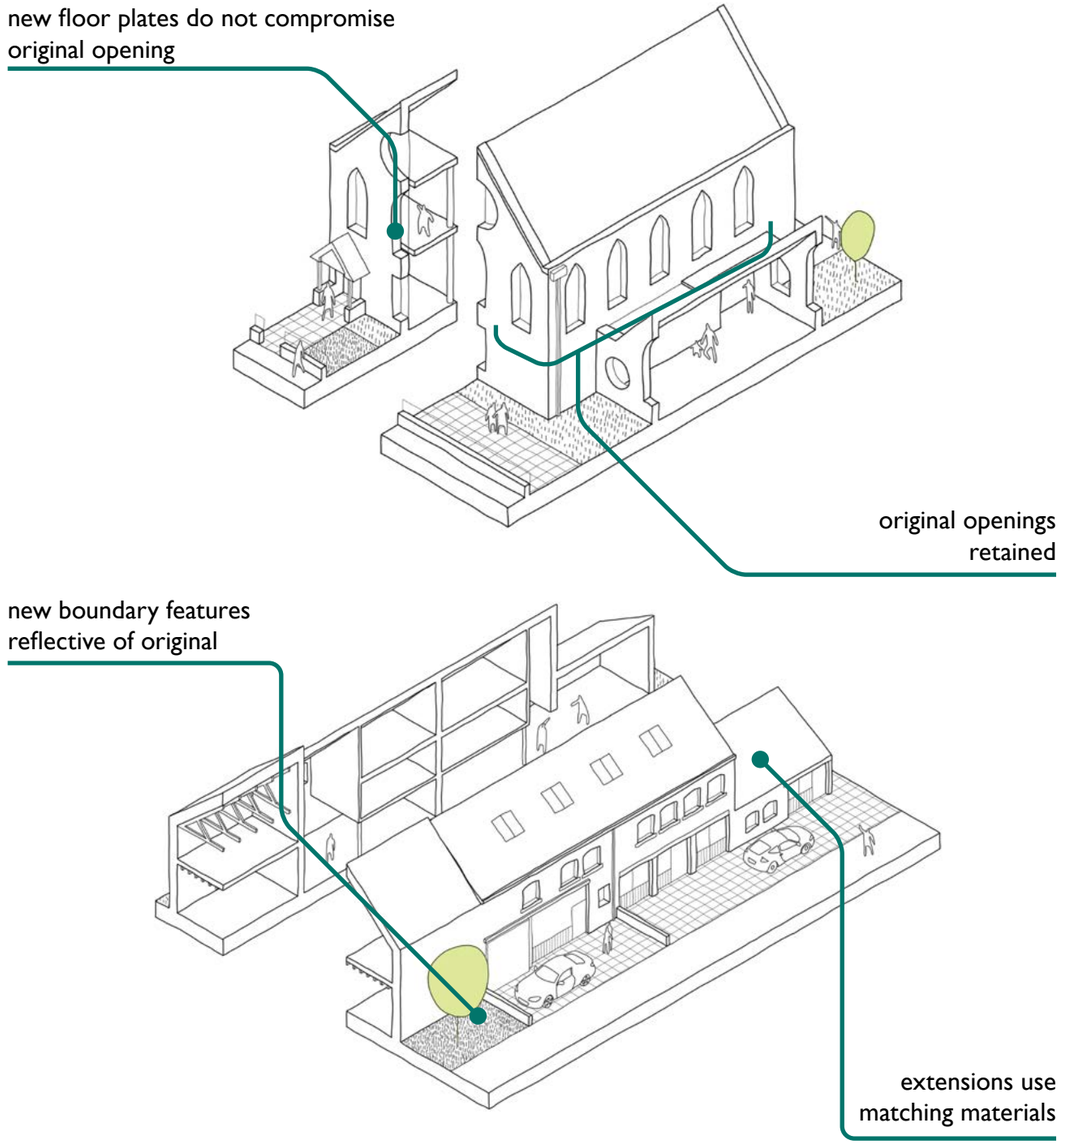


Figure 71 Example building conversion approaches

SUPPORTING DOCUMENTS	LOCAL PLAN POLICY LINKS
Adapting Traditional Farm Buildings (Historic England)	Policy S4 Policy ENV1 Policy ENV3

9.5 New Agricultural Buildings

New working agricultural buildings should be designed to ensure that the character of the whole site and its surroundings are conserved, and any adverse impacts are minimised. This will be achieved by considering the following:

- Layout;
- Orientation of buildings;
- Material and fenestration;
- Detailing;
- Open Space/nature of the site;
- Planting.

KEY GUIDANCE

G30 H 1 2 3 4 F **A** B C

The impact of development on views from within the site, and from roads, footpaths, nearby properties (in and outside of immediate vicinity) and from upland areas all need to be considered.

Suitable methods for reducing the visual impact of buildings include:

- *Low lying roof shape/roofline which is reflective of the landscape and topography, whether this be in a valley, on a hilltop or on a flat landscape;*
- *The use of coloured materials to reduce the visual contrast within the setting e.g. darker colours against the landscape and grey/blue tones against the sky;*
- *Consideration of appropriate landscaping to create screening e.g. tree belts and hedgerows (please see **Chapter 3: Environment** and section **8.3 Boundary Treatments** for further guidance). Alongside improving the general appearance of the area, the benefits of landscaping and natural screening also include:*
  - *Softening the outline of a building;*
  - *Providing an active point of interest, particularly in an open landscape;*
  - *Enhancing wildlife;*
  - *Control of soil erosion by reducing wash and run-off;*
  - *A windbreak and shelter for stock.*

G31 H 1 2 3 4 F **A** B C

Agricultural buildings should be grouped together as to create a clearly defined plot group. Traditionally farmsteads would be formed around a farmyard and this approach should be taken with new development where practical.

G32 H 1 2 3 4 F **A** B C

The materials should be appropriate for the location and use of the building. Appropriate materials (and colours) may include:

- *Metal cladding (green or grey) The use of different hues or shades/tones of these colours may be considered, i.e darker colours against the landscape and lighter shades against the sky;*
- *Brick or stone to match local vernacular;*
- *Yorkshire boarding.*

Darker more muted colours for cladding are generally more effective in blending new and larger structures into the surrounding landscape, especially where there is established landscaping.

G33 H 1 2 3 4 F **A** B C

New lighting on rural buildings should be designed to minimise light pollution.

Lighting should be kept to a minimum and consideration should be given to how lighting will be viewed from the wider landscape, particularly on buildings which are set upon hillsides or in areas with low levels on landscaping

Lighting should be set down as low as possible, and harsh spotlights and large-scale floodlighting should avoided.

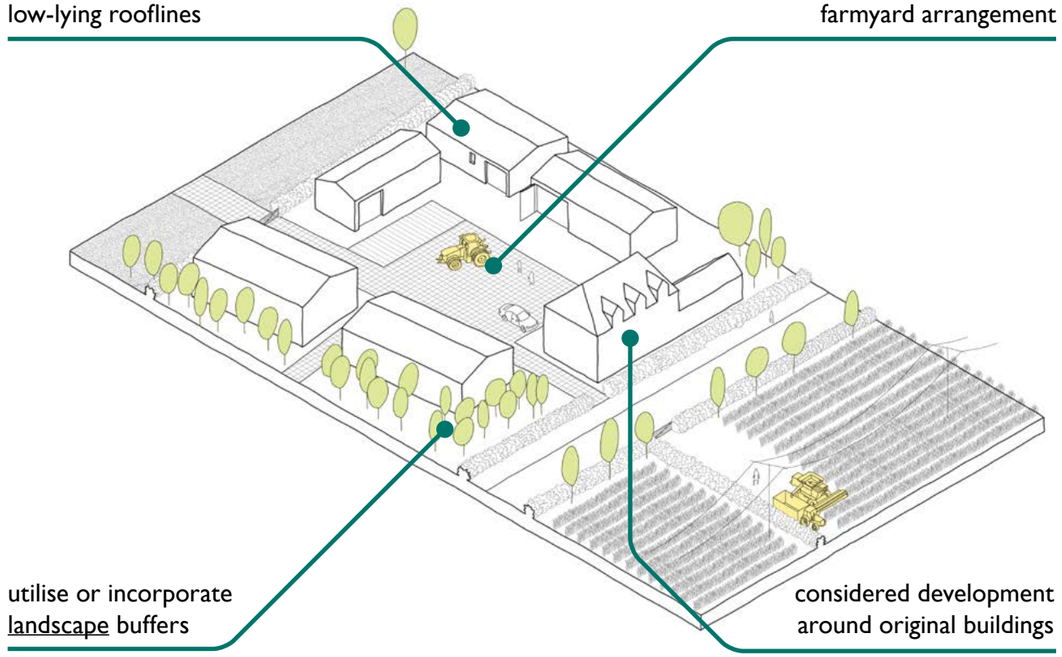


Figure 72 Appropriate layout of new agricultural buildings

SUPPORTING DOCUMENTS AND REFERENCES	LOCAL PLAN POLICY LINKS
Bats and Artificial Lighting at Night	Policy ENV1

9.6 New 'ISDC' Buildings

New industrial, storage and distribution, and commercial buildings should be designed to ensure that the character of the whole site complements its surroundings, and any adverse impacts are minimised.

KEY GUIDANCE

G34 H 1 2 3 **4** F A B C

The impact of development on views from inside and outside of the site need to be considered.

In rural settings new buildings should be designed to have minimal impact on the surrounding landscape. In more urban areas, such as edge of town business parks, a more contemporary approach may be acceptable.

Consideration should be given as to how the following elements work with the surrounding context:

- *Layout of site and orientation of buildings (see **Chapter 4: Layout** and key guidance **G31**);*
- *Roof shape;*
- *Materials (see section **9.1**);*
- *Fenestration;*
- *Landscaping;*
- *Boundary treatments (see key guidance **G20**).*

For more information on context and good design see section **1.8**.

G35 H 1 2 3 **4** F A B C

Buildings should be grouped together as to create a clearly defined plot group.

G36 H 1 2 3 **4** F A B C

The materials should be appropriate for the location and use of the building. Appropriate materials (and colours) may include:

- *Metal cladding (green or grey) The use of different hues or shades/tones of these colours may be considered, i.e darker colours against the landscape and lighter shades against the sky;*
- *Brick or stone to match local vernacular;*
- *Yorkshire boarding;*
- *Brick, concrete, steel and glass may be appropriate in more urban areas such as business parks.*

Darker more muted colours for cladding are generally more effective in blending new and larger structures into the surrounding landscape, especially where there is established landscaping.

G37 H 1 2 3 **4** F A B C

New lighting should be designed to minimise light pollution. Consideration needs to be given as to how lighting will impact any surrounding residential properties or nearby wildlife habitats.

Lighting should be set down as low as possible, and harsh spotlights and large-scale floodlighting should avoided.

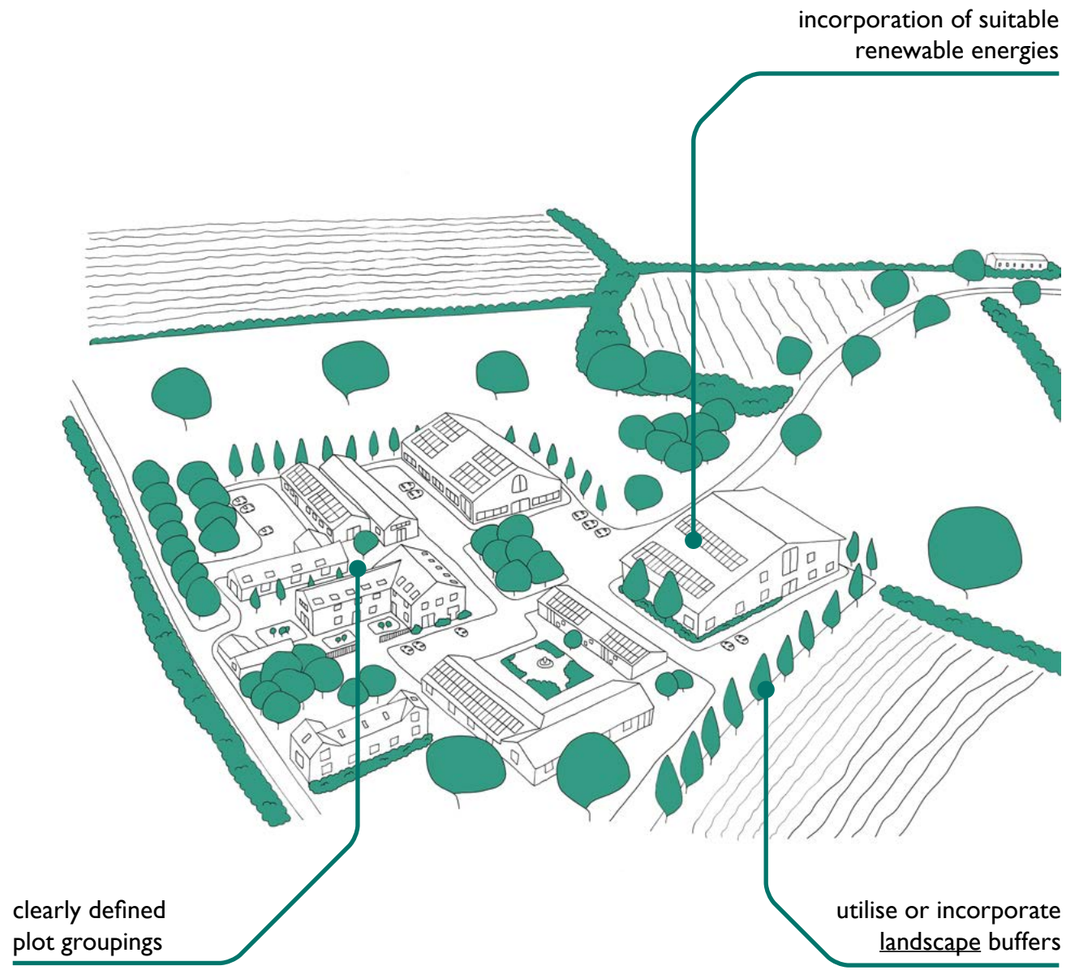


Figure 73 Appropriate layout of new industrial, storage and distribution, and commercial buildings

SUPPORTING DOCUMENTS AND REFERENCES	LOCAL PLAN POLICY LINKS
Bats and Artificial Lighting at Night	Policy ENV1

Appendices



Chapter Contents

A	Glossary	137
B	Reference List	145
C	List of Figures and Tables	147
D	Code and Policy Reference Matrix	151
E	Settlement Network	161

Separate Documents (Follow Links Below)

F	Allocated Sites Place Type Designations
G	Compliance Checklists

Appendix A Glossary

Accessibility (Accessible)
Accessibility, or being accessible, refers to the design, construction, development, and maintenance of environments in a way that ensures they can be used by as many people as possible, including those with disabilities.

Active frontage
Active frontage refers to the design of buildings and spaces along streets or public areas in such a way that promotes engagement, interaction, and activity at the ground level.

Active travel
Active travel refers to modes of transportation that involve physical activity, such as walking or cycling, as the primary means of getting from one place to another.

Biodiversity
The term given to the variety of life on earth, encompassing all life, from the smallest micro-organisms to the largest mammals and plants.

Biodiversity Net Gain (BNG)
Biodiversity Net Gain (BNG) is a principle that aims to leave biodiversity in a better state than before. This approach ensures that any development activity results in an overall increase in biodiversity, rather than just mitigating the impacts of the development.

Block
A block is a defined area of land within a settlement that is bounded by streets or other physical boundaries. It is the basic unit of urban land use and typically consists of a collection of buildings.

Boundary treatment
Boundary treatments are the methods and materials used to define, enhance and manage the edges or borders of a property or a specific area.

Building line
A building line is the line formed by the frontages of buildings along a street.

Built form
Built form refers to the physical characteristics, layout, and arrangement of buildings, structures, and other constructed elements within a particular area or built environment.

Character
Character refers to the distinctive and unique qualities that define the identity, atmosphere, and overall feel of a specific area or locality. It encompasses a combination of physical, cultural, historical, and social attributes that give a place its sense of personality, charm, and authenticity.

Codes
Codes are requirements (mainly quantifiable) that the designer can apply with confidence that they will be acceptable to the Authority without further discussion.

Context
Context refers to the physical, cultural, historical, and social conditions and elements that surround and influence a particular location or environment.

Conservation area
An area of special architectural or historic interest, the character or appearance of which it is desirable to preserve or enhance. There are over 100 conservation areas in the East Riding. These are shown on the Policies Map.

Conservation Area Appraisal
A Conservation Area Appraisal is a document prepared by local authorities to assess the special architectural and historic interest of a designated conservation area.

Corbel
A corbel is an architectural element that projects from a wall and is used to support a structure above it, such as a beam, arch, balcony, or cornice.

Coursing
Coursing refers to the arrangement or pattern in which bricks are laid in a wall or other structure. Common types of brick coursing patterns include:

1. Stretcher bond: The most common pattern, where bricks are laid lengthwise in a single row, with each brick overlapping the one below it by half its length.
2. Header bond: In this pattern, bricks are laid with their short end (header) facing outwards, creating alternating rows of headers and stretchers.
3. Flemish bond: A pattern where bricks are laid alternately as stretchers and headers in each row, creating a checkerboard-like appearance.
4. English bond: Similar to Flemish bond, but with alternating rows of stretchers and headers.

Design and Access Statement (DAS)
A Design and Access Statement (DAS) is a document that accompanies planning applications for development proposals in the United Kingdom. It provides a comprehensive explanation and justification of the design principles, rationale, and considerations underlying the proposed development, as well as how the design addresses access requirements and enhances inclusivity.

Design code
A design code is a tool used to improve the quality of places, buildings, and spaces, helping to ensure the design quality meets the expectations of the local community for the type, scale, and location of the development.

Detailing
Detailing refers to the specific design elements, features, and ornamentation that are incorporated into the construction of a building or structure.

Dormer
A dormer is an architectural feature that projects from a sloped roof, typically containing a window or windows and often having its own small roof.

Eaves
Eaves are the horizontal edges of a roof that overhang the walls of a building.

Electric vehicle (EV) charging
Electric vehicle (EV) charging refers to the process of supplying electrical energy to recharge the batteries of electric vehicles. Common types of EV charging include:

1. Level 1 Chargers: Typically use a standard 120-volt household outlet, providing a charging rate of about 2 to 5 miles of range per hour of charging.
2. Level 2 Chargers: Operate on 240 volts, typically providing around 10 to 30 miles of range per hour of charging.
3. DC Fast Chargers (Direct Current): DC fast chargers deliver high-power DC electricity directly to the EV's battery, bypassing the vehicle's onboard charger.
4. Wireless Chargers: Wireless charging technology enables EVs to charge without the need for physical cables.
5. Home Chargers: Level 2 charging stations installed at residential properties. They are typically wall-mounted units.

Enclosure
Enclosure refers to the creation of defined spaces or boundaries within the built environment. These spaces are typically formed by buildings, walls, or landscaping elements.

Fascia
A fascia is an architectural term that refers to a horizontal board or band located along the edge of a roof. It is typically mounted where the roof meets the outer walls of the building. It can also refer to a panel above a shop front where signage is usually displayed.

Fenestration
Fenestration refers to the arrangement, design, and placement of windows, doors, and other openings in a building's façade or envelope.

Appendix A Glossary

Gable
A gable is an architectural feature commonly found on the ends of pitched or sloping roofs. It typically forms a triangular shape and is created by the intersection of two roof slopes, with the highest point or peak of the gable called the "ridge".

Gentle density
Gentle density is an urban design concept that focuses on increasing the density of neighbourhoods in a gradual and incremental manner, while preserving the character, scale, and quality of the built environment.

Green corridor
A type of open space that includes linear features of open character including towpaths, riverbanks, cycle ways and disused railway lines. They are strategically planned and managed to facilitate ecological connectivity, biodiversity conservation, and sustainable urban development.

Green infrastructure
A network of new and existing multi-functional green space, both rural and urban, which is capable of delivering a wide range of environmental and quality of life benefits for local communities. Includes such as parks, forests, wetlands, green spaces, and water bodies, as well as engineered systems such as green roofs, permeable pavements, rain gardens, and bioswales.

Green space
Green space refers to areas of natural or planted vegetation within urban, suburban, or rural environments that are designated for recreational, aesthetic, ecological, or health benefits.

Hard landscape
Hard landscape refers to the non-living elements of a landscape design such as paving and surfacing, walls and fences, structures, water features, outdoor furniture, edging and borders, lighting, sculptures, and art.

Heritage
Heritage refers to the legacy of physical artifacts and intangible attributes inherited from past generations, maintained in the present, and preserved for the benefit of future generations.

Historic core
The historic core of a settlement refers to the central area that contains a concentration of historically and culturally significant buildings, structures, and landmarks.

Housing Needs Assessment
A Housing Needs Assessment is a detailed analysis used to determine the current and future housing requirements of a particular area or community.

House type
House type refers to the classification or categorisation of different types of residential buildings or dwellings based on common characteristics such as architectural design, layout, size, form, and function.

Identity and Context Document
An Identity and Context Document is a detailed report or guideline that aims to capture and convey the unique characteristics, history, and contextual factors of a specific place or community.

Inclusivity (Inclusive)
Inclusivity refers to ensuring that all individuals or groups, regardless of their differences or backgrounds, feel valued, respected, and included in various social, cultural and economic contexts.

Infill development
Infill development refers to the process of developing vacant, underused, or undeveloped parcels of land within existing built areas that are already largely developed.

Key Guidance
Guidance includes desirables that will help achieve a high standard of design which the Authority would like to see demonstrated as part of applications.

Landmark
A landmark is a prominent or significant feature, structure, location, or object that serves as a point of reference, recognition, or cultural significance within an area.

Landscape
Landscape refers to the visible features of an area of land, including natural elements such as terrain, vegetation, bodies of water, and climate, as well as human-made elements such as buildings, roads, and infrastructure.

Landscape Character Assessment
Identifies areas of landscape character, making judgements about the quality, value, sensitivity and capacity for new development in each area.

Layout
Layout refers to the spatial arrangement or organisation of various elements within a settlement or site. This includes the distribution of buildings, land uses, transportation networks, public spaces, infrastructure and amenities.

Legibility
Legibility refers to the clarity, coherence, and ease of understanding of the spatial organisation and layout of a place. It involves how well the physical environment communicates information to people, allowing them to navigate, interpret, and comprehend their surroundings effectively.

Linear
Linear typically refers to a spatial arrangement or feature that is elongated and extends in a straight or nearly straight line.

Lintel
A lintel is a horizontal structural element that spans an opening, such as a door, window, or fireplace, and supports the weight of the construction above it.

Listed building
A listed building is a structure or building that has been officially designated as having special architectural, historical, or cultural significance. There are three categories of listing in the UK: Grade I (buildings of exceptional interest), Grade II* (particularly important buildings of more than special interest), and Grade II (buildings of special interest).

Material consideration
A material consideration is a factor that planning authorities may legally take into account when making decisions on planning applications or development proposals.

Microclimate
A microclimate refers to the climate conditions that prevail within a relatively small or localised area, such as a garden, park, street, or building courtyard.

Mixed-use
Mixed-use refers to the development of land that allows for multiple complementary land uses within a single area, building, or development project.

Modal choice
Modal choice refers to the decision-making process individuals undertake when selecting a mode of transportation for a particular journey.

Movement network
A movement network refers to a structured system or arrangement through which people move from one place to another.

Natural surveillance
Natural surveillance is a concept in urban design and crime prevention that involves designing environments in a way that maximises visibility and observation of public spaces by residents, workers, or passersby.

Neighbourhood Plan
A Plan prepared by a town or parish council which sets out a vision and local level planning policies in relation to the development and use of land within a designated Neighbourhood Plan Area. They can also be used to allocate land for new development.

Appendix A Glossary

Overlooking
To look over. Overlooking into public space contributes to natural and passive surveillance, benefitting feelings of safety. Overlooking into private space can impact upon privacy.

Passive surveillance
Passive surveillance refers to the design of built environments to enhance safety and security through passive means. It involves creating physical environments that encourage visibility, natural monitoring, and informal social control by residents, workers, or other users of public spaces.

Permeability
Permeability refers to the ease with which people can move through an area or space. It is a measure of how accessible and navigable a place is, affecting both pedestrian and vehicular movement.

Place type
Place type refers to a classification system to categorise areas based on their physical characteristics, land use patterns, and social functions.

Pocket park
A pocket park is a small open space typically situated on a single plot or irregularly shaped plot of land within a built-up area.

Primary frontage
Primary frontage refers to the main façade or frontage of a building or property that faces the principal street or public space.

Public open space
All open space of public value, including land and areas of water (such as rivers, canals, lakes and reservoirs) which offer important opportunities for sport and recreation and can act as a visual amenity.

Public realm
This is the space that is visible and accessible to members of the public. It includes; streets, pedestrianised areas, promenades, squares, river and sea frontages, parks and areas of open space.

Quoin
Masonry blocks at the corner of a wall. Quoins can perform a structural function as well as being decorative.

Radii
Radii refers to the line segment that extends from the centre of a circle or sphere to any point on its circumference or surface, measuring the distance between the centre and that point. The smaller the radii the tighter a corner of a junction will be.

Renewable energy
Energy derived from a natural source which can be continually replenished, for example wind or solar power.

Ridge
A ridge refers to the horizontal line formed by the intersection of the highest points of a roof where two sloping roof planes meet at their peak.

Scale
Scale refers to the relative size, proportion, and spatial dimensions of elements within the built environment, including buildings, streets, blocks, and entire neighbourhoods.

Security shutter
A security shutter is a protective device installed over windows and doors to enhance security and prevent unauthorised access.

Setback
A setback refers to the minimum distance required between a building or structure and the property line, street, or other designated boundary.

Social infrastructure
Social infrastructure refers to the physical spaces and facilities that support social services and community activities, enabling individuals and communities to access essential services, participate in social, cultural, and recreational activities, and enhance their overall well-being.

Soft landscape
Soft landscape refers to the use of natural elements within outdoor spaces to enhance their aesthetic appeal, functionality, and environmental quality.

Staggered junction
A staggered junction is a type of road intersection where the crossroads of two streets or roads do not align directly opposite each other, but instead are offset or staggered along the main thoroughfare.

Stakeholder
A stakeholder is any individual, group, organisation, or entity that has a vested interest, concern, or influence in a particular outcome. Typical stakeholders in development projects can include government agencies, local authorities, members of the community and the private sector.

Stall riser
A stall riser is the solid, often decorative, panel or base located at the bottom of a shopfront window.

Streetscene/streetscape
Streetscene/streetscape refers to the visual appearance, character, and overall design of a street or roadway, including its physical elements, architectural features, landscaping and street furniture.

Street furniture
Street furniture refers to a variety of functional and aesthetic objects installed along streets, pavements, and other public spaces to enhance the comfort, convenience, safety, and visual appeal of urban environments. Key examples of street furniture include benches and seating, bins, cycle storage, bus shelters, streetlights, signage, planters and tree guards, public art installations and wayfinding markers.

Street hierarchy
A street hierarchy is a classification system that categorises streets and roadways into distinct types or classes based on their function, design, capacity, and importance within the overall transportation network.

Supplementary Planning Document (SPD)
A document used to elaborate on policies or proposals in the Local Plan. Used to provide further guidance for development on specific sites, or on particular issues. SPDs do not comprise part of the development plan.

Surface water runoff
Surface water runoff refers to the movement of rainwater, snowmelt, or other precipitation over the land surface, eventually flowing into streams, rivers, lakes, or oceans. It occurs when precipitation exceeds the infiltration capacity of the soil or when the ground is saturated.

Sustainability
Sustainability refers to the ability to meet the needs of the present generation without compromising the ability of future generations to meet their own needs. It involves balancing economic, environmental, and social considerations to ensure that human activities are conducted in a way that preserves natural resources, minimises negative impacts on ecosystems and communities, and promotes long-term well-being and resilience.

Sustainable drainage systems (SuDS)
A wide range of sustainable approaches to surface-water drainage management which aim to mimic natural drainage processes and remove pollutants from urban run-off at source.

Tactile paving
Tactile paving consists of a pattern of raised or textured surfaces installed on pedestrian walkways, train platforms, or other public spaces to assist individuals with visual impairments or mobility disabilities in navigating safely and independently.

Transom bar
A transom bar is a horizontal structural element that is used in the design and construction of windows and doors. It is typically positioned above the main window or door frame.

Appendix A Glossary

Tree pit
A tree pit is an excavated area in the ground specifically designed to accommodate the planting and growth of trees in built environments.

Urban grain
Urban grain refers to the characteristics that define the pattern, scale, and texture of built form within a built area. It encompasses the arrangement, density, and diversity of buildings, streets, blocks, and open spaces that collectively shape the physical fabric of built environments.

View
A view refers to a visual perspective or sightline from a specific vantage point typically encompassing views of natural or built features such as landscapes, landmarks, buildings, public spaces, and streetscapes.

Wayfinding
Wayfinding is the process of orientating and navigating through an environment, typically unfamiliar or complex, to reach desired destinations efficiently and effectively.

Wildlife network
A wildlife network refers to a connected system of natural habitats that facilitates the movement, dispersal, and genetic exchange of wildlife populations within a landscape.

PAGE INTENTIONALLY LEFT BLANK

Appendix B Reference List

GENERAL GUIDANCE

Buildings for a Healthy Life
Birkbeck, D., Kruczkowski, S., Jones, P., Singleton, D. and McGlynn, S.
(June 2020)

National Design Guide
Ministry of Housing Communities and Local Government
(January 2021)

National Model Design Code
Ministry of Housing Communities and Local Government
(June 2021)

SUPPORTING DOCUMENTS

Active Design
Sport England
(May 2023)

Adapting Historic Buildings for Energy and Carbon Efficiency: Historic England Advice Note 18
Historic England
(July 2024)

Adapting Traditional Farm Buildings: best practice guidelines for adaptive reuse
Historic England
(2017)

Bats and Artificial Lighting at Night. Guidance Note 08/23
Institution of Lighting Professionals
(2023)

Building with Nature Standards Framework (BwN 2.0)
Building with Nature
(2022)

Climate Change Strategy 2022-2030
East Riding of Yorkshire Council
(2022)

Conservation Area Appraisals *(Various)*
East Riding of Yorkshire Council

Crossing Selector Tool User Manual
Active Travel England
(2024)

Cycle Infrastructure Design - Local Transport Note 1/20 (LTN 1/20)
Department for Transport
(July 2020)

Design for Play
Play England
(2008)

Fields in Trust Standards
Fields in Trust
(2024)

First Steps in Trees and New Developments
Trees and Design Action Group
(2022)

Green Infrastructure Planning and Design Guide
Natural England
(2023)

Inclusive design at continuous footways
Living Streets
(October 2023)

Inclusive Mobility
Department for Transport
(December 2021)

Key Principles of Inclusive Street Design
Royal National Institute of Blind People

Landscape Character Assessments *(Various)*
East Riding of Yorkshire Council

Local Cycling and Walking Infrastructure Plans *(Various)*
East Riding of Yorkshire Council
Local Tansport Plan

Manual for Streets
Department for Transport
(2007)

Manual for Streets 2
The Chartered Institute of Highways and Transportation
(September 2010)

Open Space Supplementary Planning Document
East Riding of Yorkshire Council
(2016)

Outdoor Accessibility Guidance
Sensory Trust
(2023)

Planning for Sport Guidance
Sport England
(June 2019)

Play Investigation
Scope
(2023)

Public Rights of Way and Planning Guidance
East Riding of Yorkshire Council

Secured by Design Homes Guide
Secured by Design
(2024)

Streets for a Healthy Life
Homes England
(July 2022)

Site layout and planning for daylight and sunlight
Building Research Establishment
(2022)

Sustainable Drainage Systems (SuDS) and Surface Water Drainage for New Developments
East Riding of Yorkshire Council
(September 2016)

Sustainable Drainage System (SuDs) Design Guidance
Yorkshire Water
(2021)

Sustainable Traditional Buildings Alliance
https://stbauk.org/

Sustainable Transport Supplementary Planning Document
East Riding of Yorkshire Council
(April 2016)

The Brightness of Illuminated Advertisements including Digital Displays. Professional Lighting Guide 05/22
Institution of Lighting Professionals
(2023)

The Statutory Biodiversity Metric User Guide
Department for Environment Food and Rural Affairs
(February 2024)

The SuDS Manual. C753
CIRIA
(2015)

Trees in Hard Landscapes: A guide for delivery
Trees and Design Action Group
(2014)

Trees, Planning and Development: a guide for delivery *(sections one and two)*
Trees and Design Action Group
(2023)

Understanding Biodiversity Net Gain
Department for Environment Food and Rural Affairs
(https://www.gov.uk/guidance/understanding-biodiversity-net-gain)

Understanding Place: Historic Area Assessments
Historic England
(April 2017)

Urban Greening Factor for England User Guide. Green Infrastructure Standards Framework- Principles and Standards for England
Natural England
(January 2023)

NOTE: *With the exception of links to East Riding of Yorkshire Council documents, links provided in this reference list are to third-party websites. As such, East Riding of Yorkshire Council is not responsible for the content of or links contained in any third-party website. Broken links can be reported to* ***planningdesign@eastriding.gov.uk***.

Appendix C List of Figures and Tables

TABLES

1	Development scales and definitions with explanatory text	9
2	Development types, corresponding scales and compliance checklist form numbers	16
3	SuDS methods and suitability to development type and location	41
4	Glossary of SuDS methods and their benefits	43
5	Types of street within the hierarchy and place types in which they will be supported	54
6	Street hierarchy with corresponding street types and descriptions	55
7	Design features encouraged for inclusion in different types of public open space	68
8	Block types and the place types in which they will be supported	73
9	Supported building line variations and new building line maximum setbacks	87
10	Supported carriageways widths and other requirements by street type and hierarchy	90
11	Supported junction and forward visibility by design speed	91
12	Cycle lane provision and requirement by street type	91
13	Traffic calming separation distance requirements by street type	93
14	Non-residential parking bay dimension requirements by type	95
15	Parking provision requirements by development type	96
16	Accessible parking bay requirements by total parking provision	97
17	Electric vehicle charging point provision requirements by development type	97
18	Required residential parking bay dimensions	102
19	Minimum rear elevation to rear boundary distances by place type	107
20	Code and Policy Reference Matrix	151

FIGURES

Figure copyright key

East Riding of Yorkshire Council ● Harper Perry ● AECOM ● Other ●

1	Beverley terrace	●	3
2	Design Code contents structure	●	4
3	Policy context	●	6
4	Typical Design Code subchapter page layout	●	7
5	Indicative place type boundaries	●	10
6	Flow charts to identify the place type for your proposal site	●	11
7	Full planning applications compliance checklist extract	●	15
8	Outline Planning/Reserved Matters application compliance checklist extract	●	16
9	Characteristics of a well-designed place (adapted from National Model Design Code)	●	21
10	Withernsea Lighthouse and residential street	●	22
11	Place types overview	●	25
12	Example town centre image	●	26
13	Example inner neighbourhood image	●	27
14	Example outer neighbourhood image	●	28
15	Example neighbourhood centre image	●	29
16	Example village image	●	30
17	Example countryside image	●	31
18	Example business and industrial development image	●	32
19	Examples of green infrastructure opportunities	●	36
20	Before and after development highlighting biodiversity enhancements	●	38
21	Youth Photography Competition winning entry 'Reflective Walk' by Katie Thompson	●	40
22	Potential SuDS methods for new development.	●	42
23	Potential on-site renewable energy options	●	46
24	Precedent images illustrating on-site renewable energy incorporation	●	46
25	Example settlement layout highlighting important elements of local context to consider and protect	●	50
26	Preserving and enhancing views to and from identified landmarks	●	50
27	Example settlement layout highlighting key aspects of legibility	●	52
28	Potential options to activate and articulate building and/or plot corners	●	52
29	Interconnecting street hierarchy	●	53
30	Examples of the street hierarchy across the East Riding	●	56
31	Example settlement layout highlighting good practice to optimise connectivity	●	58
32	Ways of creating a successful development mix	●	60
33	Important features to incorporate within public open space	●	63
34	Public Spaces with different character in the East Riding	●	65
35	Public open space character in different places	●	66
36	Images of play facilities in the East Riding	●	69
37	Surrounding uses providing passive surveillance of public open spaces	●	70
38	Example illustrations of supported block types in the East Riding	●	74
39	Example of block size limits and transitions between place types	●	76
40	Incorporating passive surveillance into breaks in a block	●	76
41	Successful active frontages across the East Riding	●	79
42	Active frontages to enable interaction with the street	●	80
43	Footways and crossing that pioritise pedestrians and pedestrian flow	●	82
44	Examples of pedestrian prioritisation	●	82
45	Examples of resting points and street furniture	●	83
46	Opportunities to include resting points in new development	●	84
47	Examples of historic enclosure	●	85
48	Options to create a comfortable sense of enclosure for residents and passersby	●	86
49	Example of a 'universal' building line and a varied building line	●	88
50	Example carriageways and features encouraged for incorporation	●	92
51	Examples of speed reduction methods across the East Riding	●	93
52	Options to incorporate speed reduction features on new or upgraded streets	●	94
53	Examples of non-residential parking bay types and incorporation of landscaping wherever possible	●	98
54	Cycle parking in Goole	●	100

Appendix C List of Figures and Tables (continued)

FIGURES (continued)

55	Methods to incorporate on-plot and off-street residential parking	102
56	Different plot sizes and back to back distances	106
57	Extension dimensions guidelines	108
58	Extension examples and criteria for appearance, scale and access	109
59	Suitable front boundaries	112
60	Private gardens with sufficient amenity space with various forms of soft landscaping	114
61	Examples of appropriate materials and approaches to bin storage	115
62	Optimal bin storage, travel distances, and bin collection methods	116
63	Examples of brick coursing (suitability subject to location and local context)	120
64	Appropriate elevation features and roof forms within the East Riding	121
65	Examples of porches and front extensions	123
66	Indicative window, door, and dormer window design requirements	124
67	Examples of gable dormers, and a contemporary dormer in a traditional setting	125
68	Examples of 'shed roof' dormers	126
69	Example activated frontage with appropriate proportions	128
70	Supported frontage features	128
71	Example building conversion approaches	130
72	Appropriate layout of new agricultural buildings	132
73	Appropriate layout of new industrial, storage and distribution, and commercial buildings	134

PAGE INTENTIONALLY LEFT BLANK

Appendix D Code and Policy References

The below table (**Table 20**) brings together each code and piece of key guidance and the corresponding relevant scales and types of development, relevant place types (where applicable), and relevant Reserved Matters with respect to outline planning applications.

Furthermore, each code and piece of key guidance is accompanied by relevant policies from the local plan. The main policy number is given in bold text, with the specific pertinent criteria within that policy given in italic text.

	Name of Chapter	Code No.	Key Guidance No.	Development Scale and Type: Householder	1-2 Units	3-9 Units	10+ Units	Mixed use	Flats	Agricultural	Ind, Storage and Dist	Commercial	Adv Consent	Place Type Codes and Guidance: Town Centre	Inner Neighbourhood	Outer Neighbourhood	Neighbourhood Centre	Village	Countryside	Ind, S&D and Comm	Outline Applications: Appearance	Means of Access	Landscaping	Layout	Scale	Relevant Local Plan Policies (Policy number in Bold, sub-policy numbers in Italics)
ENVIRONMENT																										
3.1	Green Infrastructure		G1			•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV5** *A1*, **ENV5** *A2*, **S9** *A*, **S9** *B*
3.2	Biodiversity		G2		•	•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV5** *A1*, **ENV5** *A2*, **ENV5** *C*, **S9** *A*, **S9** *B*
3.3	Trees and Hedgerows		G3		•	•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV2** *A3*, **ENV2** *A4*
		C1			•	•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV2** *A3*, **ENV2** *A4*
		C2			•	•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV2** *A3*, **ENV2** *A4*
		C3				•	•	•	•		•	•											•	•		**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV5** *A*
		C4				•	•	•	•		•	•										•	•			**ENV1** *B16*
3.4	Sustainable Drainage	C5		•	•	•	•	•	•	•	•	•											•	•		**ENV1** *B15*, **ENV1** *B18*, **ENV2** *A5*, **ENV6** *D*, **ENV1** *B17*, **S9** *A*, **S9** *B*
3.5	Renewable Energy		G4	•					•	•	•	•									•			•		**ENV1** *A2*, **ENV1** *B9*, **ENV1** *B18*, **ENV1** *B19*, **ENV1** *C*
		C6			•	•	•	•	•	•	•	•									•			•		**ENV1** *A2*, **ENV1** *A3*, **ENV1** *B5*, **ENV1** *B9*, **ENV1** *B18*, **ENV1** *B19*, **ENV1** *C*
LAYOUT																										
4.1	Respecting the Local Context		G5		•	•	•	•	•		•	•									•			•	•	**ENV1** *A1*, **ENV1** *B1*, **ENV1** *B21*, **ENV2** *A2*, **ENV2** *A6*, **ENV3** *A*
		C7			•	•	•	•	•	•	•	•												•	•	**ENV1** *B1*, **ENV1** *B21*
4.2	Legibility		G6			•	•	•	•		•	•										•		•		**EC4** *A*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **ENV1** *B14*, **S8** *A*, **S8** *I*
		C8			•	•	•	•	•		•	•									•			•	•	**ENV1** *B3*
4.3	Street Hierachy	C9				•	•	•	•		•	•										•		•		**EC4** *A2*, **ENV1** *B7*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **ENV1** *B15*, **S8** *A*, **S8** *I*
		C10				•	•	•	•		•	•	•	•	•	•	•					•		•		**ENV1** *B12*, **ENV1** *B15*
4.4	Connectivity	C11				•	•	•	•		•	•										•		•		**EC4** *A2*, **ENV1** *B7*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **ENV1** *B15*, **H4** *D1*, **S8** *A*, **S8** *I*

Appendix D Code and Policy References (cont.)

	Name of Chapter	Code No.	Key Guidance No.	Development Scale and Type: Householder	1-2 Units	3-9 Units	10+ Units	Mixed use	Flats	Agricultural	Ind, Storage and Dist	Commercial	Adv Consent	Place Type Codes and Guidance: Town Centre	Inner Neighbourhood	Outer Neighbourhood	Neighbourhood Centre	Village	Countryside	Ind, S&D and Comm	Outline Applications: Appearance	Means of Access	Landscaping	Layout	Scale	Relevant Local Plan Policies (Policy number in Bold, sub-policy numbers in Italics)
4.4	Connectivity (continued)	**C12**				•	•	•	•		•	•										•		•		**ENV1** *B7*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **ENV1** *B15*, **S8** *A*, **S8** *I*
4.5	Development Mix		**G7**		•	•	•	•	•			•		•	•	•	•	•			•			•		**ENV1** *B2*, **ENV1** *B7*
		C13					•	•	•			•									•			•		**H2** *F*
PUBLIC OPEN SPACE																										
5.1	Public Open Space Character		**G8**				•	•	•		•	•											•	•		**C3** *A*, **ENV1** *A1*, **ENV1** *B1*, **ENV1** *B10*, **ENV1** *B14*, **ENV1** *B15*, **ENV5** *A*, **ENV6** *D*
5.2	Design for All		**G9**				•	•	•		•	•										•		•	•		**C3** *A*, **ENV1** *B5*, **ENV1** *B7*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **ENV1** *B13*, **ENV1** *B15* **ENV1** *B18*
		C14					•	•	•			•												•	•		**C3** *A*, **ENV1** *B12*
		C15					•	•	•		•	•													•		**C3** *A*, **ENV1** *B12*
5.3	Play Facilities		**G10**				•	•	•			•												•	•		**C3** *A*, **ENV1** *B8*, **ENV1** *B12*, **ENV1** *B13*
			G11				•	•	•			•													•		**C3** *A*, **ENV1** *B8*, **ENV1** *B12*, **ENV1** *B13*
5.4	Safety and Surveillance	**C16**		•	•	•	•	•	•		•	•												•	•		**C3** *A*, **ENV1** *B8*, **ENV1** *B12*, **ENV1** *B13*
BLOCKS																										
6.1	Block Form and Typologies	**C17**				•	•	•	•		•	•		•	•	•	•	•	•					•	•	**ENV1** *A1*, **ENV1** *B1*, **ENV1** *B3*
6.2	Block Size	**C18**				•	•	•	•		•	•		•	•	•	•	•						•	•	**ENV1** *A1*, **ENV1** *B1*, **ENV1** *B3*, **ENV1** *B11*, **ENV1** *B12*, **S8** *A*, **S8** *I*
		C19				•	•	•	•		•	•										•		•	•	**ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*
		C20		•	•	•	•	•	•		•	•										•		•		**ENV1** *B12*, **ENV1** *B13*
STREETS																										
7.1	Active Frontages	**C21**			•	•	•	•	•		•	•									•			•		**ENV1** *B13*
7.2	Footways, Footpaths and Crossings	**C22**				•	•	•	•		•	•										•		•		**ENV1** *B11*, **ENV1** *B12*, **S8** *A*, **S8** *I*
		C23		•	•	•	•	•	•		•	•										•		•		**ENV1** *B11*, **ENV1** *B12*
		C24				•	•	•	•			•		•	•	•	•	•				•		•		**ENV1** *B11*, **ENV1** *B12*
7.3	Resting Points and Street Furniture	**C25**					•	•	•			•		•									•	•		**ENV1** *B12*, **ENV1** *B13*, **S8** *I*
		C26					•	•	•			•		•									•	•		**ENV1** *B12*
7.4	Enclosure		**G12**			•	•	•	•			•											•	•	•	**ENV1** *B1*, **ENV1** *B3*
7.5	Building Line	**C27**			•	•	•	•	•			•												•		**ENV1** *B1*, **ENV1** *B3*
		C28			•	•	•	•	•			•		•	•	•	•	•						•		**ENV1** *B1*, **ENV1** *B3*
		C29			•	•	•	•	•			•												•		**ENV1** *B1*, **ENV1** *B3*
7.6	Carriageways	**C30**				•	•	•	•		•	•										•		•		**EC4** *A2*, **ENV1** *B11*, **ENV1** *B12*
		C31					•	•	•		•	•										•		•		**EC4** *A2*, **ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*

Appendix D Code and Policy References (cont.)

Name of Chapter		Code No.	Key Guidance No.	Development Scale and Type: Householder	1-2 Units	3-9 Units	10+ Units	Mixed use	Flats	Agricultural	Ind, Storage and Dist	Commercial	Adv Consent	Place Type Codes and Guidance: Town Centre	Inner Neighbourhood	Outer Neighbourhood	Neighbourhood Centre	Village	Countryside	Ind, S&D and Comm	Outline Applications: Appearance	Means of Access	Landscaping	Layout	Scale	Relevant Local Plan Policies (Policy number in Bold, sub-policy numbers in Italics)
7.7	Methods of Reducing Speed	**C32**				•	•	•	•		•	•										•		•		**ENV1** *B8*, **ENV1** *B11*, **ENV1** *B12*, **EC4** *A2*
7.8	Parking (continued)	**C33**			•	•	•	•	•		•	•		•	•	•	•	•						•		**EC4** *C*
		C34			•	•	•	•	•		•	•											•	•		**ENV1** *B10*, **ENV1** *B15*
		C35			•	•	•	•	•		•	•												•		**ENV1** *B12*
		C36						•			•	•												•		**EC4** *C*
		C37						•	•		•	•												•		**EC4** *C*, **ENV1** *B12*
		C38			•	•	•	•	•		•	•												•		**EC4** *C*, **ENV1** *A3*
		C39						•			•	•												•		**EC4** *A2*, **ENV1** *B8*, **ENV1** *B11*
		C40						•			•	•		•										•		**EC4** *A2*, **ENV1** *B8*, **ENV1** *B11*
		C41			•	•	•	•	•															•		**EC4** *A2*, **ENV1** *B8*
7.9	Residential Parking Solutions		**G13**			•	•	•	•												•		•	•	•	**ENV1** *B12*, **ENV1** *B13*, **ENV1** *B15*
		C42		•	•	•	•	•	•															•		**ENV1** *B12*
		C43		•	•	•	•	•	•												•		•	•		**ENV1** *B12*
		C44		•	•	•	•	•	•												•			•	•	**ENV1** *B3*, **ENV1** *B12*
PLOTS																										
8.1	Plot Measurements		**G14**	•	•	•	•	•	•												•			•	•	**ENV1** *B4*, **ENV1** *B5*, **ENV1** *B6*
			G15		•	•	•	•	•						•	•		•			•			•	•	**ENV1** *B1*, **ENV1** *B3*
			G16	•	•	•	•	•	•															•	•	**ENV1** *B8*, **ENV1** *B9*
		C45		•	•	•	•	•	•						•	•		•			•					**ENV1** *B4*, **ENV1** *B5*, **ENV1** *B6*
		C46			•	•	•	•	•					•	•	•	•	•	•		•			•	•	**ENV1** *B3*, **ENV1** *B5*, **ENV1** *B6*
		C47			•	•	•	•	•					•	•	•	•	•	•		•			•	•	**ENV1** *B3*, **ENV1** *B5*, **ENV1** *B6*
8.2	Scale of Extensions		**G17**	•																	•			•	•	**ENV1** *B3*, **ENV1** *B4*, **ENV1** *B5*, **ENV1** *B6*
			G18	•																	•				•	**ENV1** *B3*, **ENV1** *B4*, **ENV1** *B5*, **ENV1** *B6*
8.3	Boundary Treatments		**G19**	•	•	•	•	•	•												•		•			**ENV1** *B10*
			G20					•		•	•	•									•		•		•	**ENV1** *B10*
		C48		•	•	•	•	•	•												•		•		•	**ENV1** *B10*, **ENV1** *B12*, **ENV1** *B13*
8.4	Private Gardens		**G21**						•												•		•			**ENV1** *B7*, **ENV1** *B8*
			G22		•	•	•	•	•																	**ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*
		C49			•	•	•	•																•		**ENV1** *B7*, **ENV1** *B8*
8.5	Bin Storage	**C50**		•	•	•	•	•													•			•		**ENV1** *B9*
		C51			•	•	•	•	•												•			•		**ENV1** *B9*

Appendix D Code and Policy References (cont.)

Name of Chapter		Code No.	Key Guidance No.	Development Scale and Type: Householder	1-2 Units	3-9 Units	10-24 Units	Mixed use	Flats	Agricultural	Ind, Storage and Dist	Commercial	Adv Consent	Place Type Codes and Guidance: Town Centre	Inner Neighbourhood	Outer Neighbourhood	Neighbourhood Centre	Village	Countryside	Ind, S&D and Comm	Outline Applications: Appearance	Means of Access	Landscaping	Layout	Scale	Relevant Local Plan Policies (Policy number in Bold, sub-policy numbers in Italics)
BUILDINGS																										
9.1	Materials	**C52**		•					•	•	•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *C*
		C53			•	•	•	•	•	•	•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *C*
9.2	Elevational Features and Proportions																									
9.2.1	*Roof Form*		**G23**		•	•	•	•	•												•				•	**ENV1** *B1*, **ENV1** *B3*
			G24	•					•												•				•	**ENV1** *B3*
			G25		•	•	•	•	•												•					**ENV1** *B1*
9.2.2	*Windows and Doors*		**G26**	•					•												•					**ENV1** *B3*
		C54		•	•	•	•	•	•												•					**ENV1** *B13*
		C55			•	•	•	•	•												•					**ENV1** *B3*
		C56		•	•	•	•	•	•												•					**ENV1** *B3*
		C57		•	•	•	•	•	•												•					**ENV1** *B3*
9.2.3	*Porches and Front Extensions*		**G27**	•					•												•				•	**ENV1** *B1*, **ENV1** *B3*
		C58		•	•	•	•	•	•												•				•	**ENV1** *B12*
9.2.4	*Dormer Windows*		**G28**	•	•	•	•	•	•												•					**ENV1** *B3*
			G29	•	•	•	•	•	•												•				•	**ENV1** *B3*
		C59		•	•	•	•	•	•												•					**ENV1** *B3*
		C60		•	•	•	•	•	•												•					**ENV1** *B3*
		C61		•	•	•	•	•	•												•					**ENV1** *B3*
		C62		•	•	•	•	•	•												•					**ENV1** *B3*
		C63		•	•	•	•	•	•												•					**ENV1** *B3*
9.3	Frontages: Shops, Bars and Eateries	**C64**						•				•	•								•					**ENV1** *B3*
		C65						•				•	•								•					**ENV1** *B3*
		C66						•				•	•								•					**ENV1** *B3*
		C67						•				•									•					**ENV1** *B3*
		C68						•				•									•					**ENV1** *B12*
		C69						•				•									•					**ENV1** *B3*
		C70						•				•									•					**ENV1** *B13*
9.4	Building Conversions	**C71**		•					•		•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV3** *A*, **S4** *D1*
		C72		•					•		•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B20*, **ENV3** *A*, **S4** *D1*

Appendix D Code and Policy References (cont.)

Name of Chapter		Code No.	Key Guidance No.	Development Scale and Type: Householder	1-2 Units	3-9 Units	10+ Units	Mixed use	Flats	Agricultural	Ind, Storage and Dist	Commercial	Adv Consent	Place Type Codes and Guidance: Town Centre	Inner Neighbourhood	Outer Neighbourhood	Neighbourhood Centre	Village	Countryside	Ind, S&D and Comm	Outline Applications: Appearance	Means of Access	Landscaping	Layout	Scale	Relevant Local Plan Policies (Policy number in Bold, sub-policy numbers in Italics)
9.4	Building Conversions (continued)	**C73**		•					•		•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B20*, **ENV3** *A*, **S4** *D1*
		C74		•					•		•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B20*, **ENV3** *A*, **S4** *D1*
		C75		•					•		•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B10*, **ENV1** *B20*, **ENV3** *A*
9.5	New Agricultural Buildings		**G30**							•																**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B5*, **ENV1** *B10*, **ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *B21*
			G31							•																**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B21*
			G32							•																**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *C*
			G33							•																**ENV1** *B4*, **ENV1** *B5*, **ENV1** *B13*
9.6	New Industrial, Storage, Distribution and Commercial Buidlings		**G34**					•			•	•									•		•	•	•	**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B5*, **ENV1** *B10*, **ENV1** *B15*, **ENV1** *B17*, **ENV1** *B18*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *B21*
			G35					•			•	•									•			•		**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B21*
			G36					•			•	•									•					**ENV1** *B1*, **ENV1** *B3*, **ENV1** *B19*, **ENV1** *B20*, **ENV1** *C*
			G37					•			•	•									•					**ENV1** *B4*, **ENV1** *B5*, **ENV1** *B13*

Appendix E Settlement Network

Settlement network: Policy S3 East Riding Local Plan 2025
Retail boundary designation: Policies S7 and EC3
For boundaries, please see the local plan policy maps

MAJOR HALTEMPRICE SETTLEMENT (MHS)

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Anlaby		Local Centre
Cottingham	Train Station	District Centre
Hessle	Train Station Bus Station (The Square)	District Centre
Kirk Ella		
Willerby		Local Centre

PRINCIPAL TOWNS

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Beverley	Train Station Bus Station (Sow Hill Road)	Town Centre
Bridlington	Train Station Bus Station (Princess Terrace)	Town Centre/Local Centre
Driffield	Train Station	Town Centre
Goole	Train Station Bus Station (Edinburgh Street)	Town Centre

TOWNS

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Elloughton-cum-Brough	Train Station Bus Station (Stockbridge Road)	District Centre
Hedon		District Centre
Hornsea		District Centre
Howden	Train Station	District Centre
Market Weighton		District Centre
Pocklington	Bus Station (Station Road)	District Centre
Withernsea		District Centre

RURAL SERVICE CENTRES (RSC)

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Aldborough		
Beeford		
Bubwith		
Gilberdyke/Newport	Train Station	
Holme on Spalding Moor		Local Centre
Hutton Cranswick	Train Station	
Keyingham		Local Centre
Kilham		
Leven		
Middleton on the Wolds		
Patrington		Local Centre
Snaith	Train Station	Local Centre
Stamford Bridge		Local Centre
Wetwang		

PRIMARY VILLAGES

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Bilton		
Brandesburton		
Cherry Burton		
Dunswell		
Easington		
Eastrington		
Flamborough		

Appendix E Settlement Network

PRIMARY VILLAGES (continued)

SETTLEMENT	TRAIN/BUS STATION	S7/EC3 DESIGNATION
Leconfield		
Melbourne		
Nafferton	Train Station	
North Cave		
North Ferriby	Train Station	
Preston		
Rawcliffe	Train Station	
Roos		
Skirlaugh		
South Cave		
Swanland		
Thorngumbald		
Tickton		
Walkington		
Wawne		
Wilberfoss		
Woodmansey		

VILLAGES (as per Policy S4 A (Appendix B of Local Plan Update))

Airmyn	Coniston	Langtoft	Seaton
Allerthorpe	East Cottingwith	Laxton	Seaton Ross
Arnold	East Cowick	Lelley	Sewerby
Asselby	Ellerker	Little Driffield	Shiptonthorpe
Atwick	Ellerton	Little Weighton	Sigglesthorne
Bainton	Etton	Lockington	Skeffling
Barmby Moor	Everingham	Long Riston	Skelton
Barmby on the Marsh	Fangfoss	Low Catton	Skidby
Barmston	Foggathorpe	Lund	Skipsea
Bempton	Foston on the Wolds	Melton	Sproatley
Bishop Burton	Fridaythorpe	Millington	Sutton upon Derwent
Bishop Wilton	Full Sutton	New Ellerby	Swinefleet
Blacktoft	Garton on the Wolds	Newton upon Derwent	Thwing
Boynton	Goodmanham	North Dalton	Tibthorpe
Brantingham	Gowdall	North Frodingham	Ulrome
Breighton	Great Hatfield	North Newbald	Wansford
Broomfleet	Harpham	Old Ellerby	Watton
Buckton	Hayton	Ottringham	Welton
Bugthorpe	Hollym	Patrington Haven	Welwick
Burstwick	Holmpton	Paull	West Cowick
Burton Agnes	Hook	Pollington	West Ella
Burton Fleming	Hotham	Rawcliffe Bridge	Withernwick
Burton Pidsea	Huggate	Reedness	Wold Newton
Camerton	Humbleton	Rudston	Wressle
Carnaby	Kilnwick	Ryehill	Yapham
Catwick	Kirkburn	Sancton	Yokefleet

EAST RIDING
OF YORKSHIRE COUNCIL

harper perry

FORM Studio

AECOM