





	1	2	3	4	5	6	7	8
A	00_vehicle_input : 00_vehicle_input.kicad_sch		04_stm32 : 04_stm32.kicad_sch		14_can_connectors : 14_can_connectors.kicad_sch			A
B	00b_reverse_ov : 00b_reverse_ov.kicad_sch		05_debug_clock_uart : 05_debug_clock_uart.kicad_sch		15_gnss_ins : 15_gnss_ins.kicad_sch			B
	00c_auto_5v : 00c_auto_5v.kicad_sch		06_esp32 : 06_esp32.kicad_sch		16_barometer : 16_barometer.kicad_sch			
	01_usb_c : 01_usb_c.kicad_sch		07_esp_service : 07_esp_service.kicad_sch		17_gps_ports : 17_gps_ports.kicad_sch			
C	01a_usb_cc_supply : 01a_usb_cc_supply.kicad_sch		08_can_fd : 08_can_fd.kicad_sch		18_gps_protection : 18_gps_protection.kicad_sch			C
	01b_usb_lmit : 01b_usb_limit.kicad_sch		09_can_ft : 09_can_ft.kicad_sch		20_test_points : 20_test_points.kicad_sch			
	02_system_power : 02_system_power.kicad_sch		10_tx_gate : 10_tx_gate.kicad_sch		21_ota_reset : 21_ota_reset.kicad_sch			
D	03_reset : 03_reset.kicad_sch		11_phy_modes : 11_phy_modes.kicad_sch		22_ota_interlock : 22_ota_interlock.kicad_sch			D
	03b_phy_power : 03b_phy_power.kicad_sch		12_watchdog_latch : 12_watchdog_latch.kicad_sch		23_ota_recovery : 23_ota_recovery.kicad_sch			
	03c_auto_qualification : 03c_auto_qualification.kicad_sch		12b_latch_clear : 12b_latch_clear.kicad_sch		24_ota_test_points : 24_ota_test_points.kicad_sch			
E	19_gps_power : 19_gps_power.kicad_sch		13_arm_switch : 13_arm_switch.kicad_sch		SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open digitie/canview Sheet: / File: communicator.kicad_sch Title: CANView / communicator Size: A3Date: 2026–09–05Rev: R1 REVIEW KiCad E.D.A. 10.0.6Id: 1/33			E
F	1	2	3	4	5	6	7	8

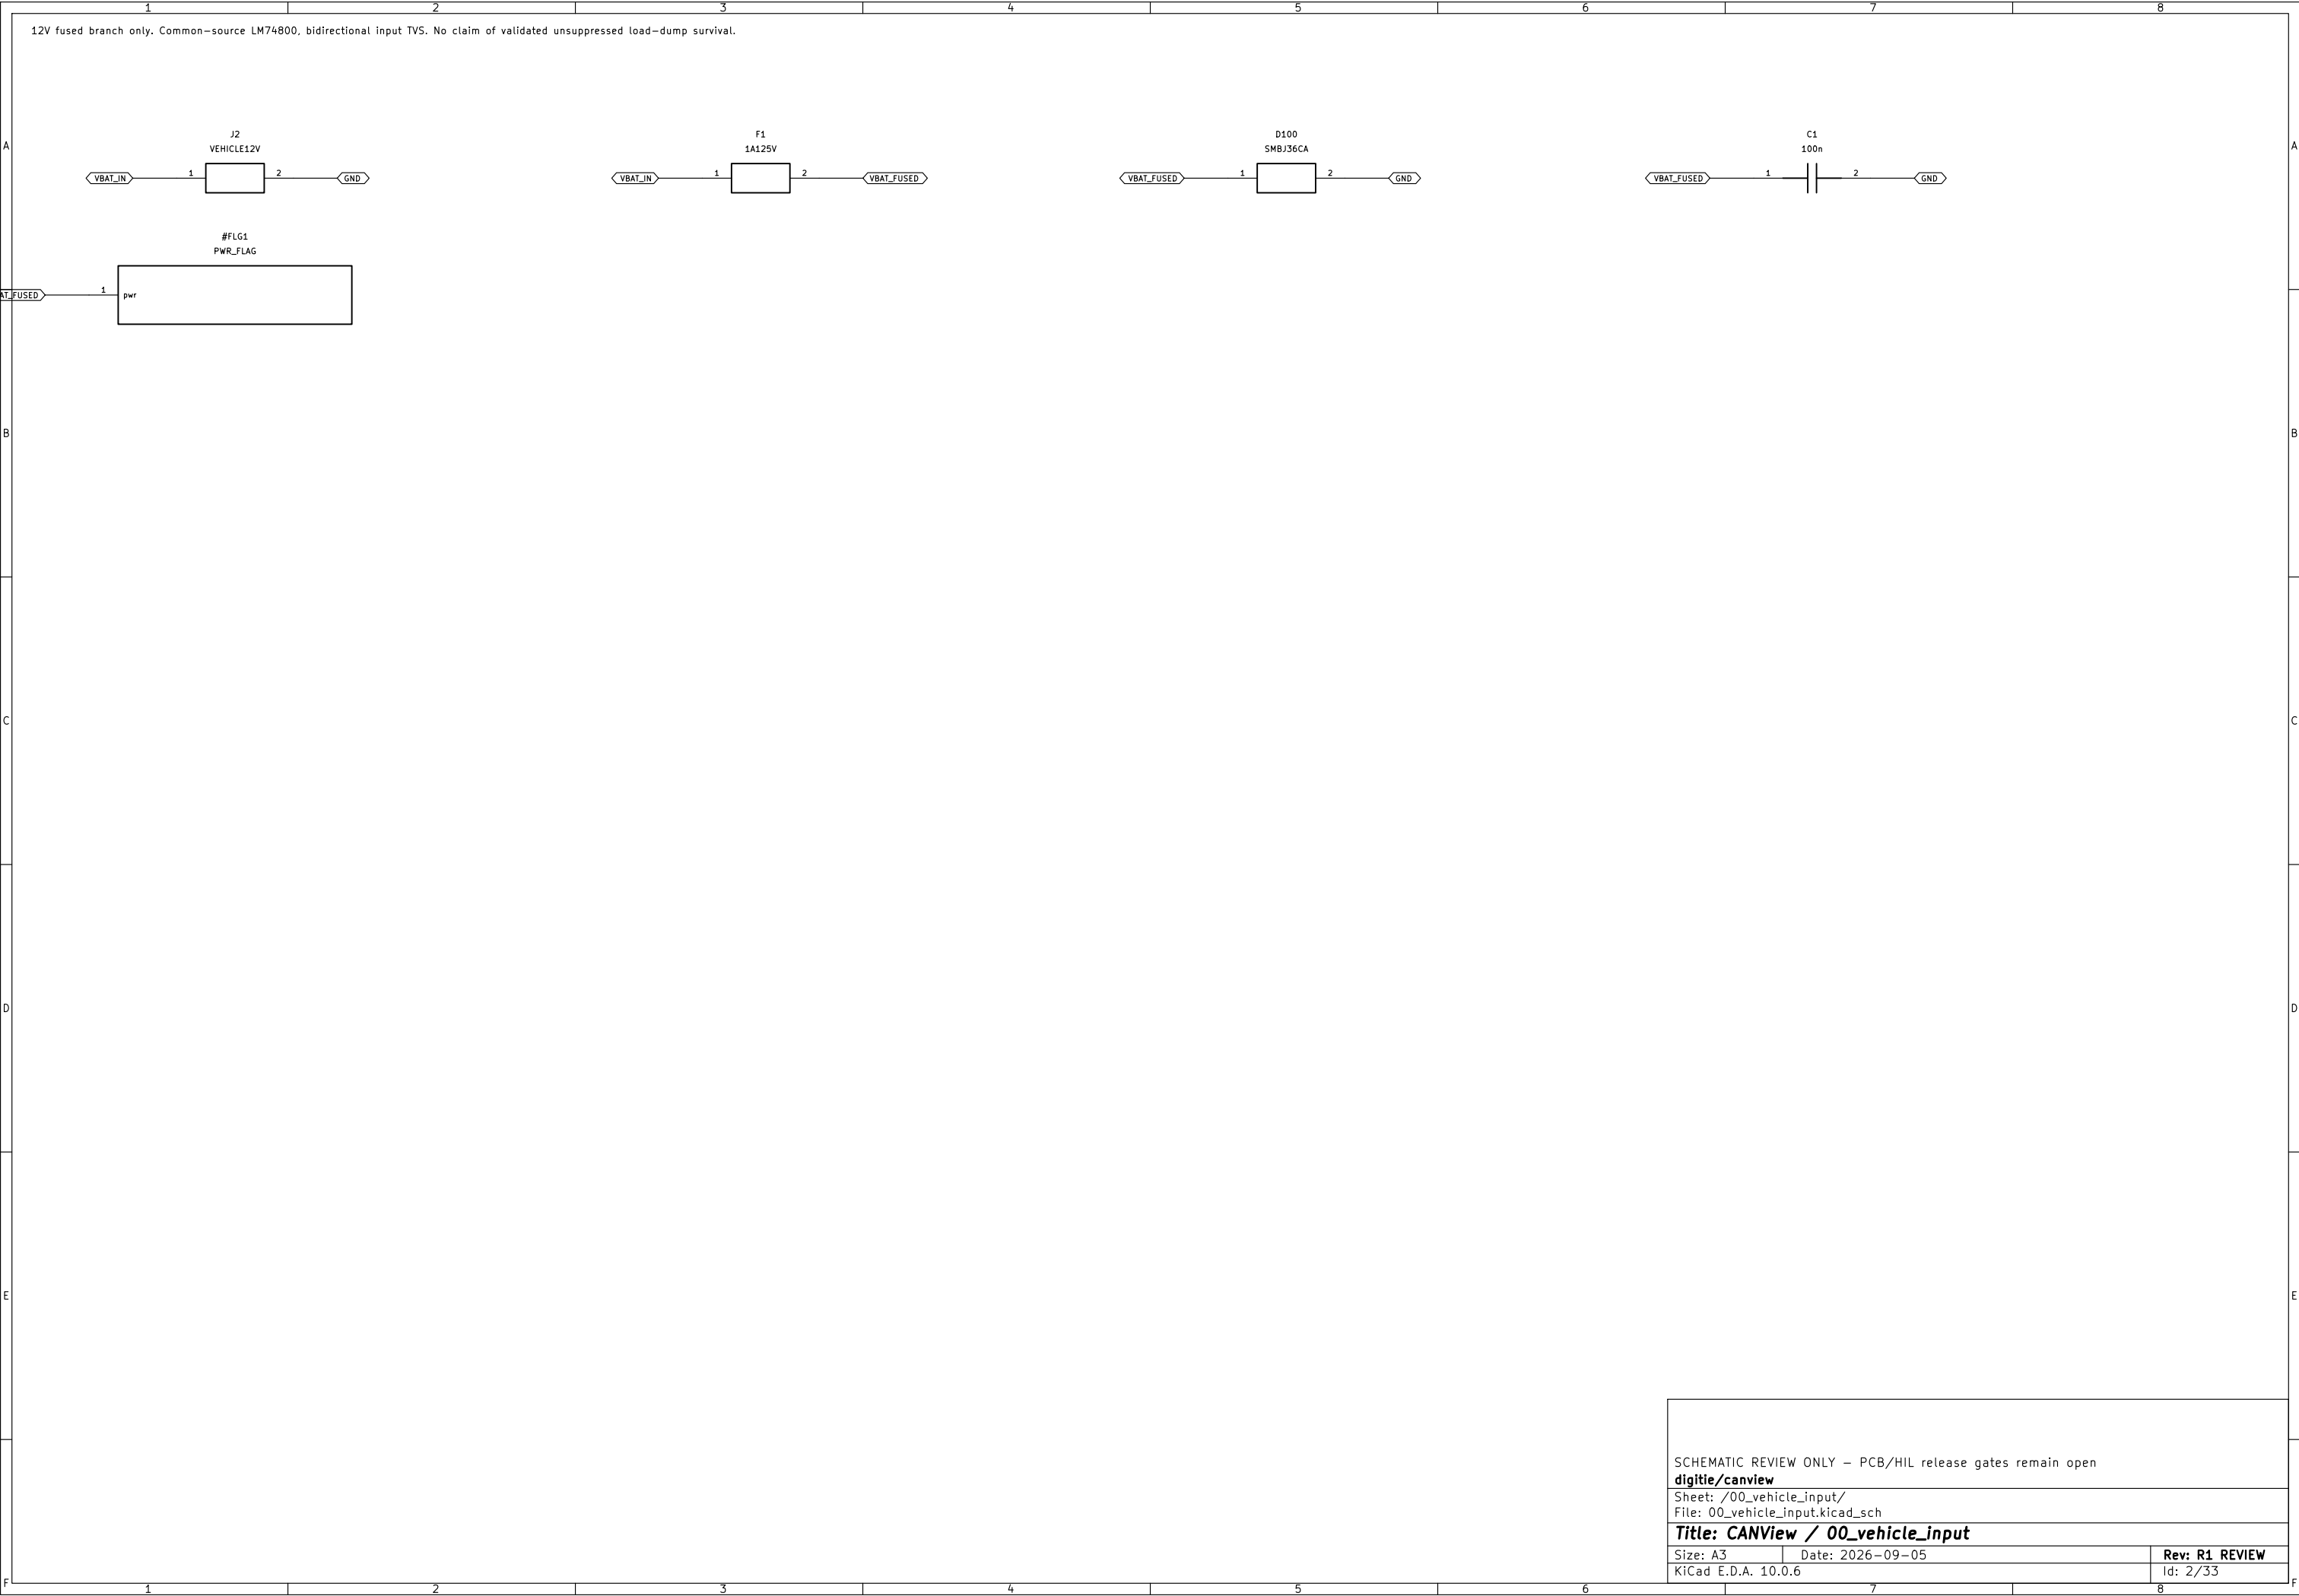


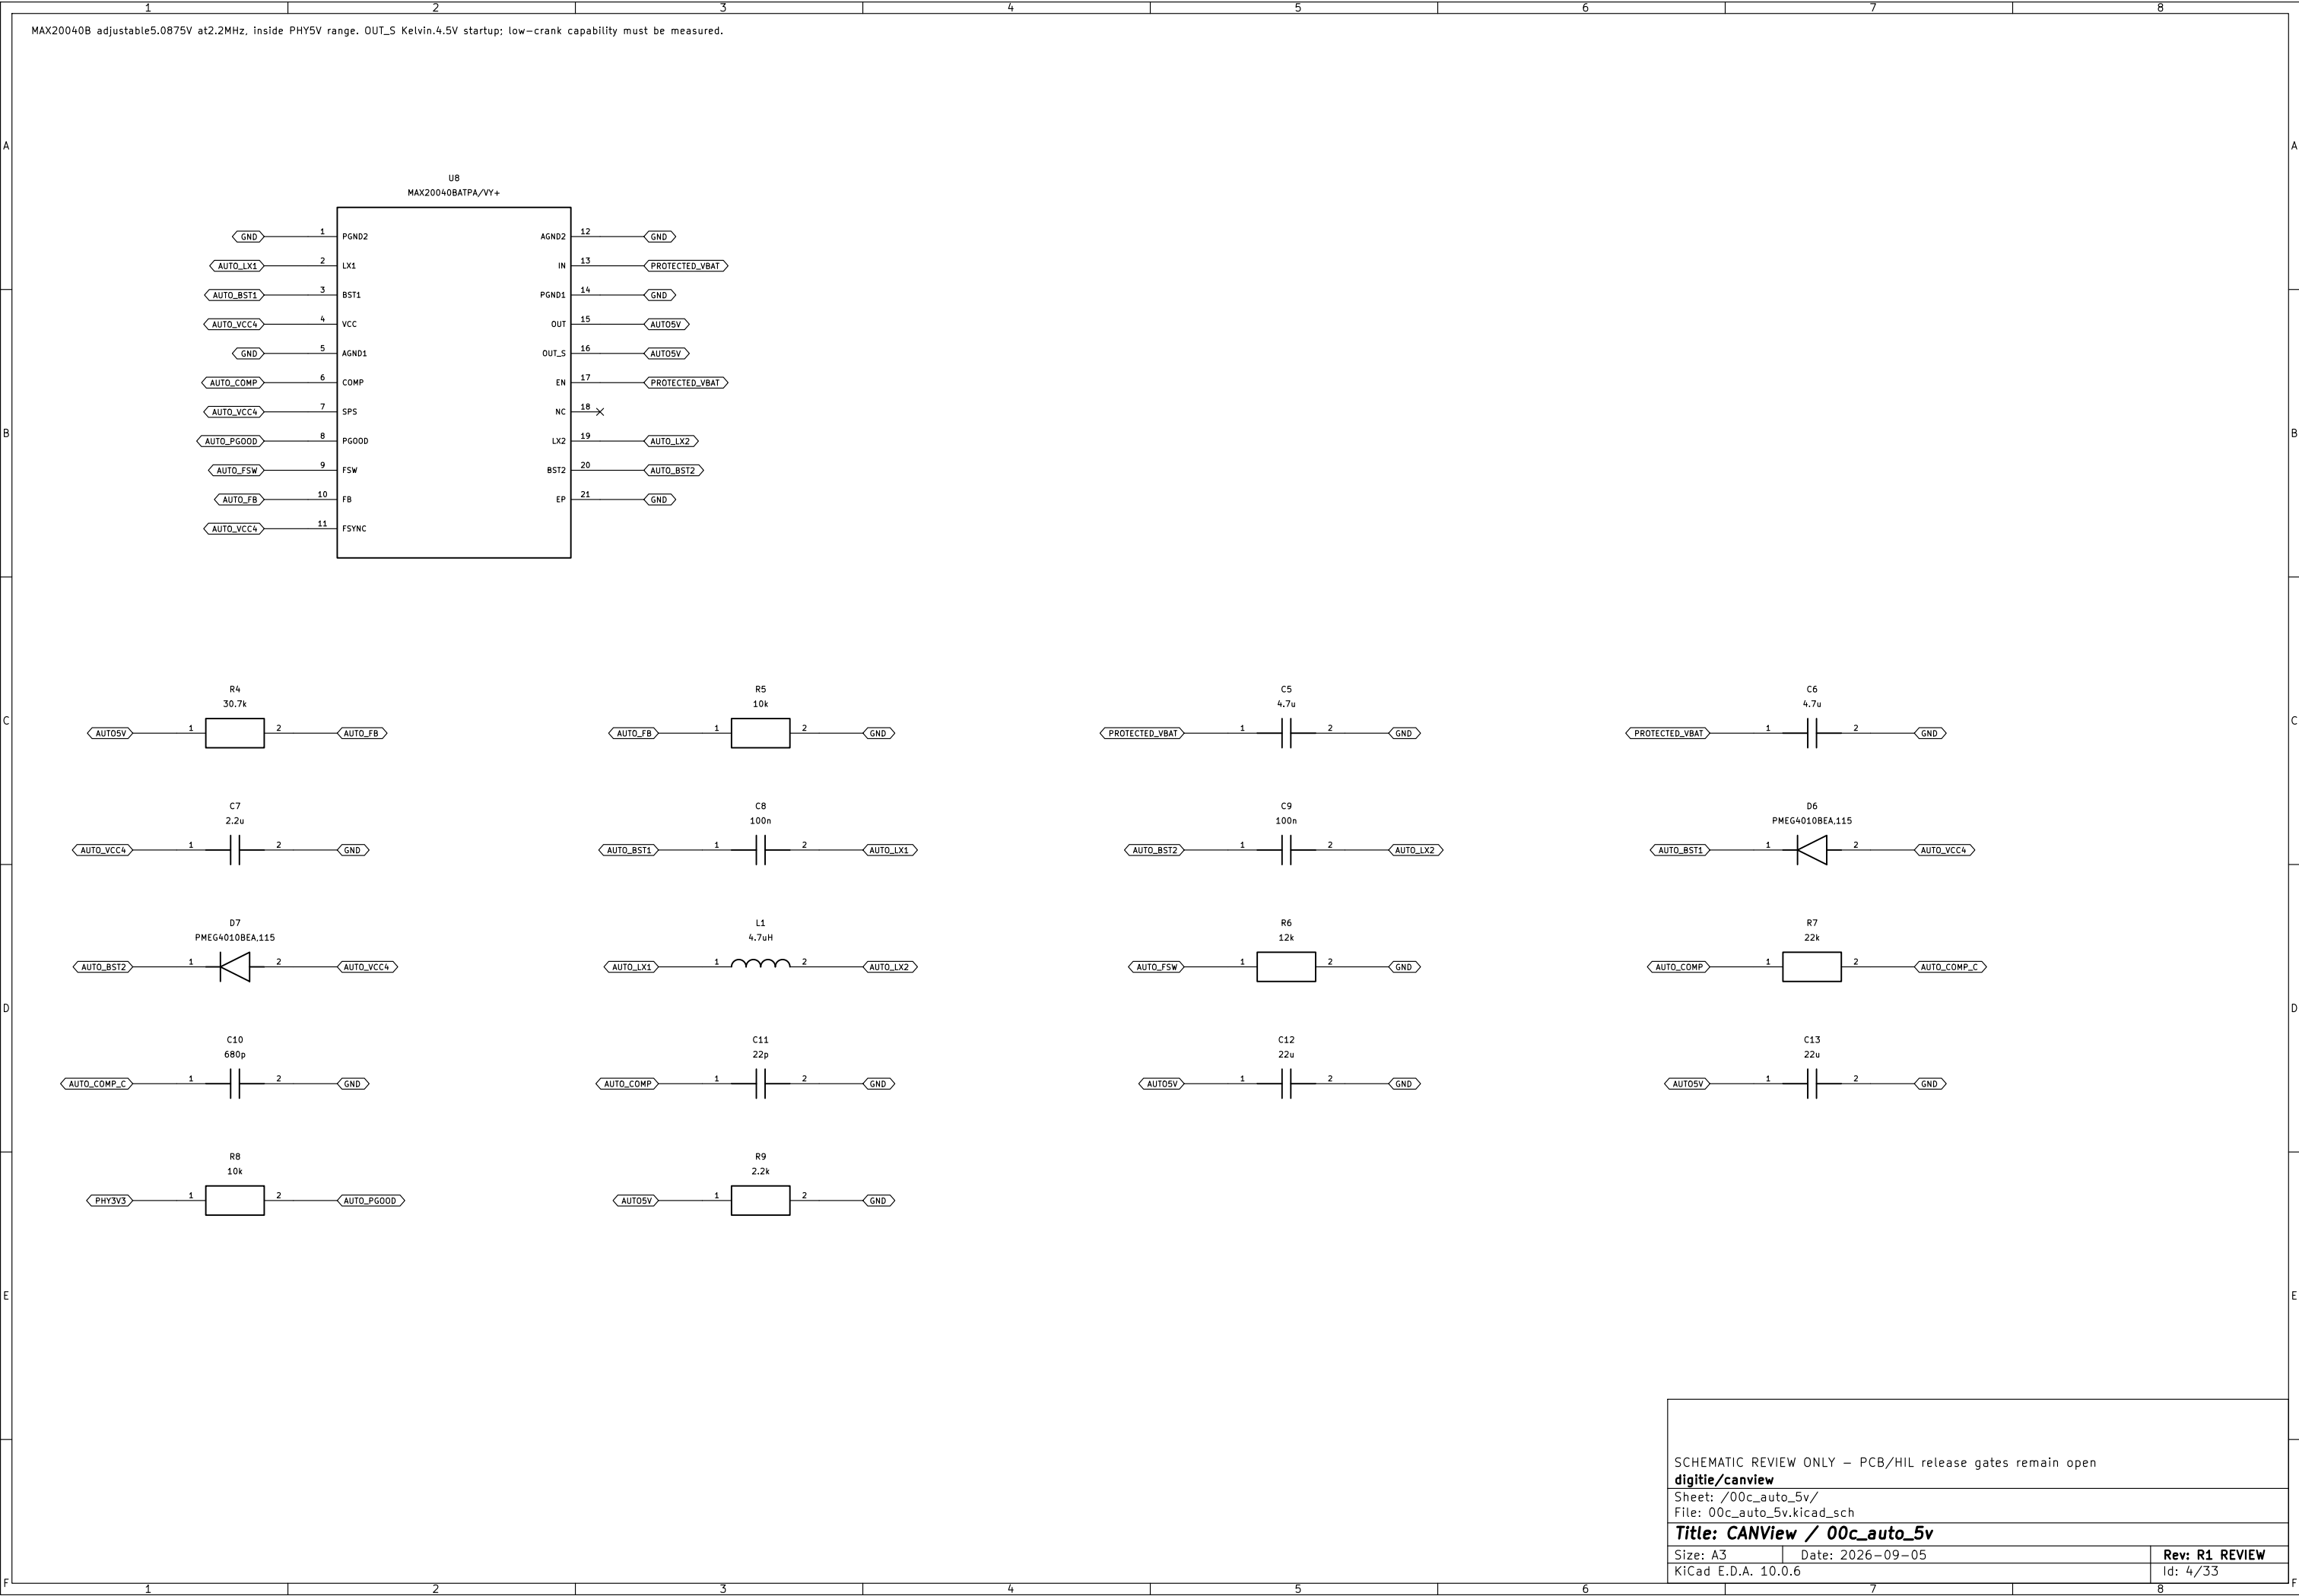






Size: A3	Date: 2020-09-03	REV: R1 R2
KiCad E.D.A. 10.0.6		Id: 5/33

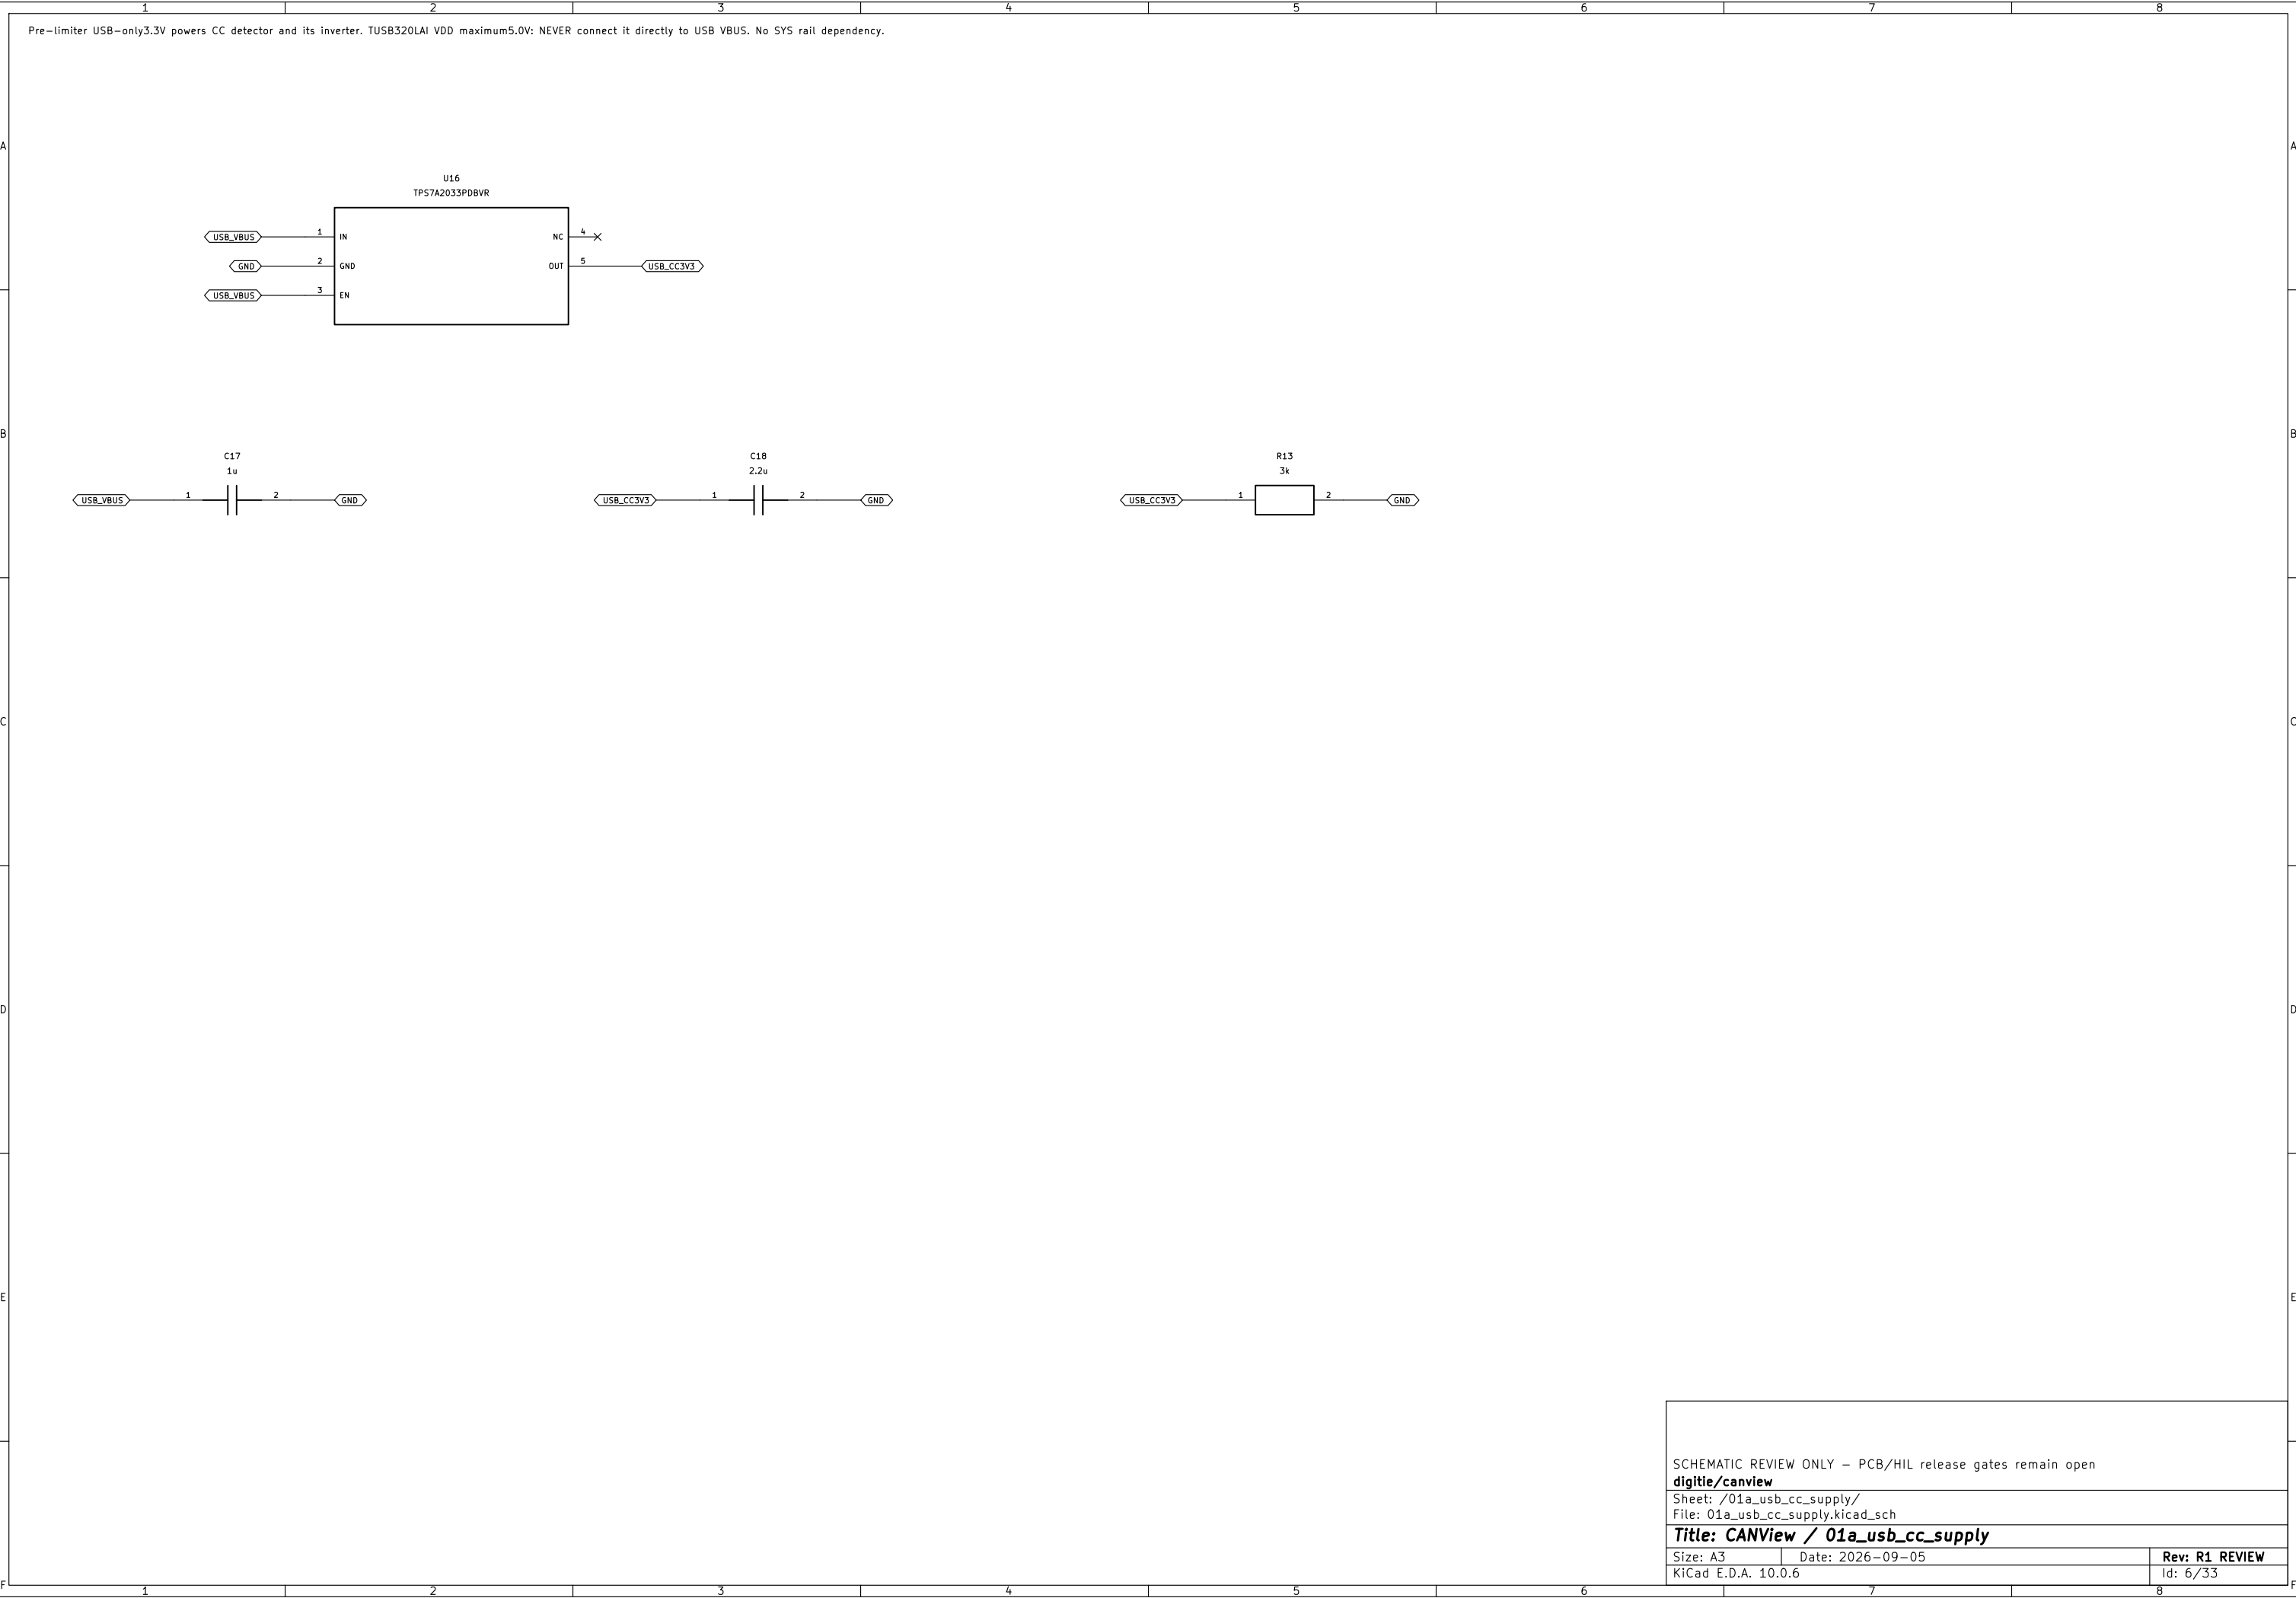













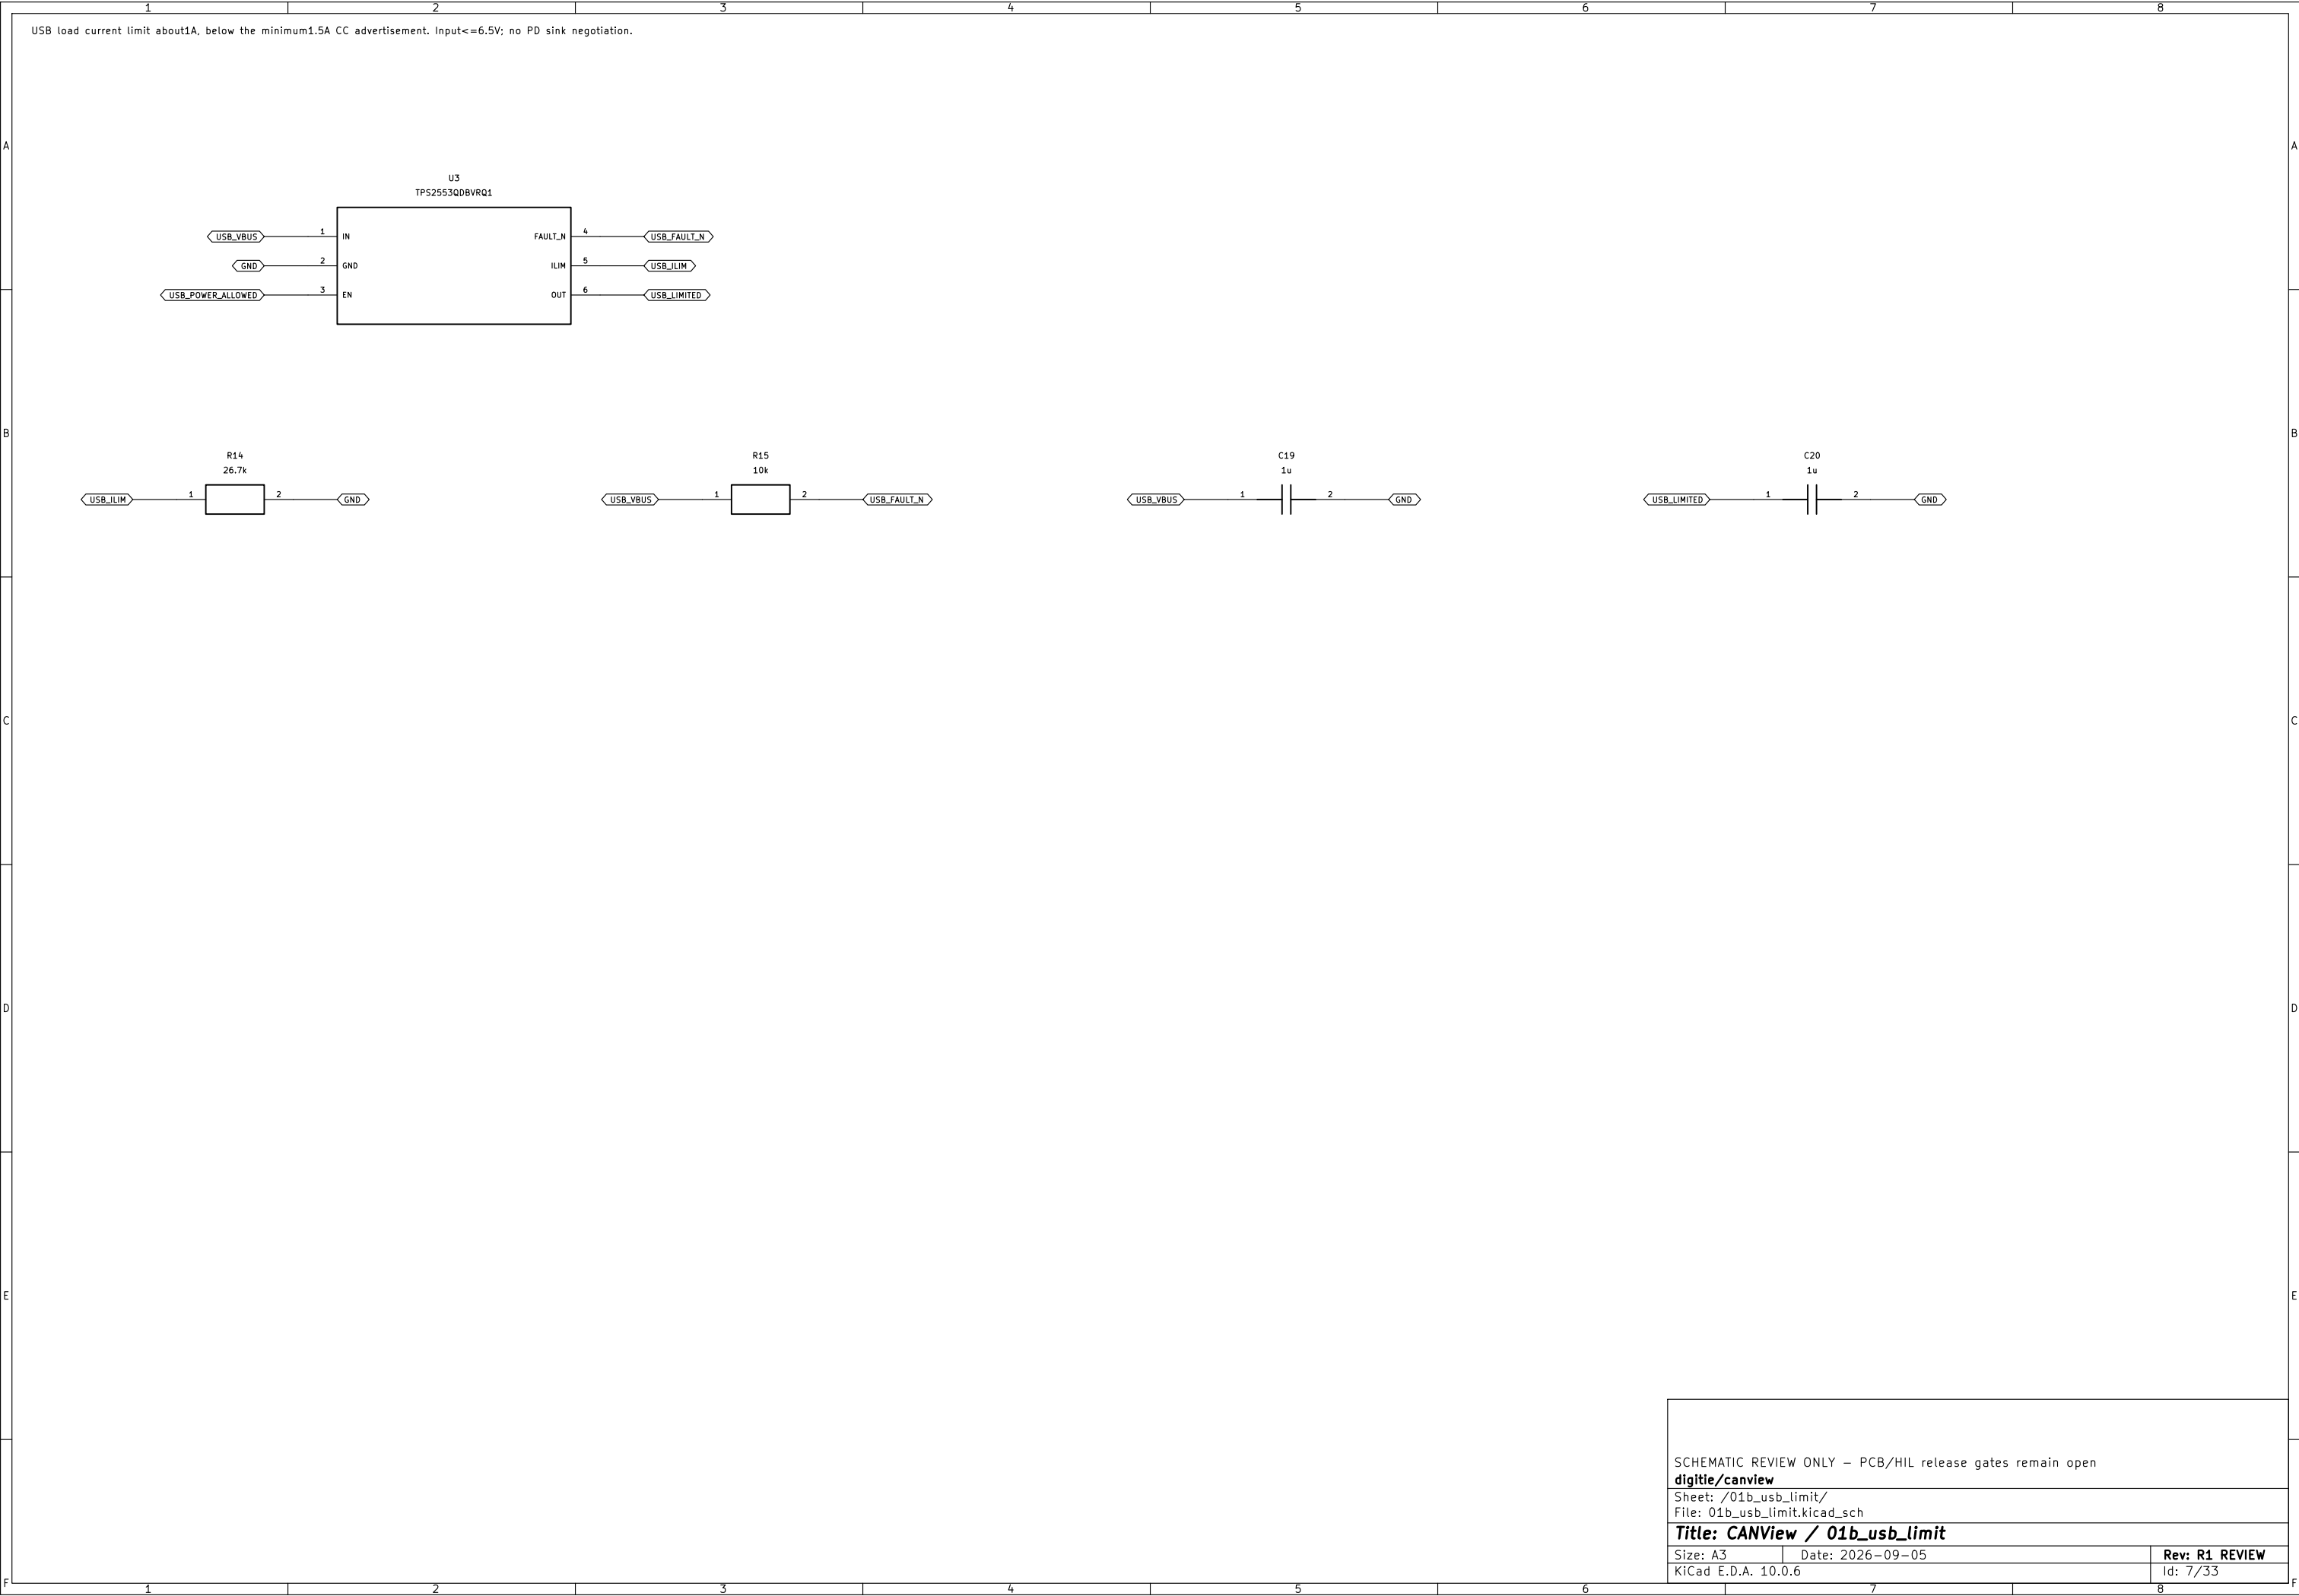


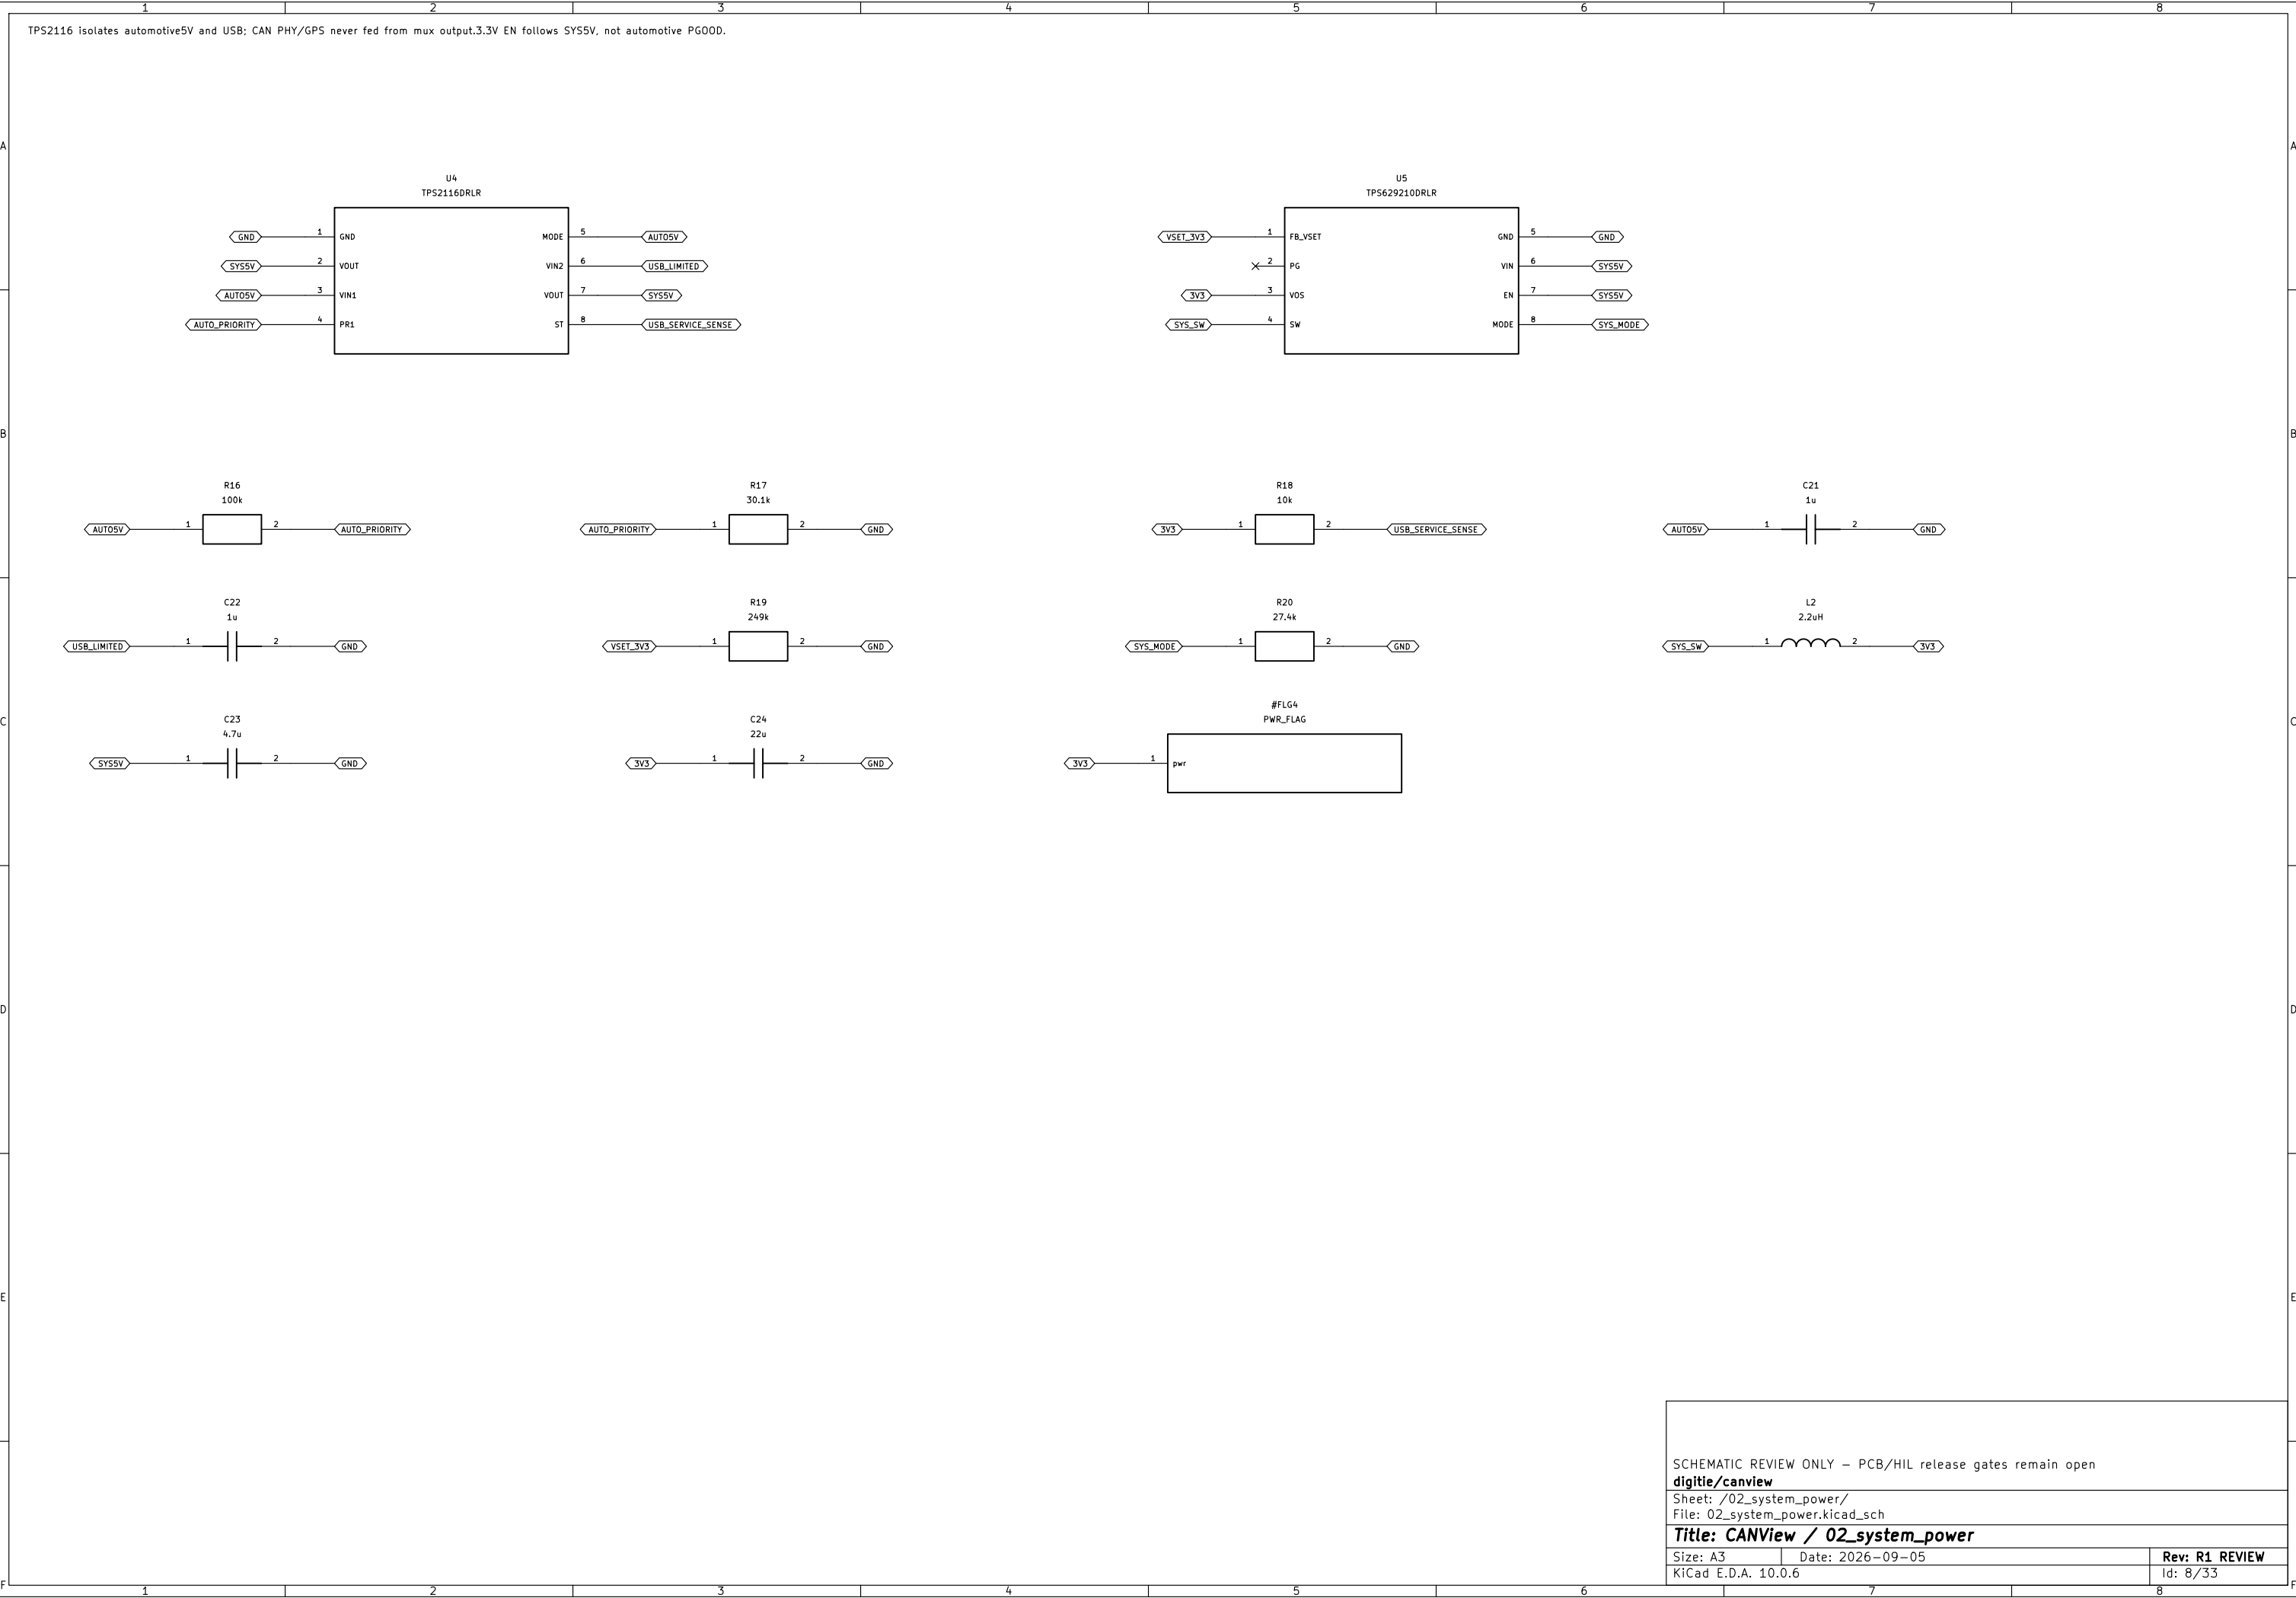

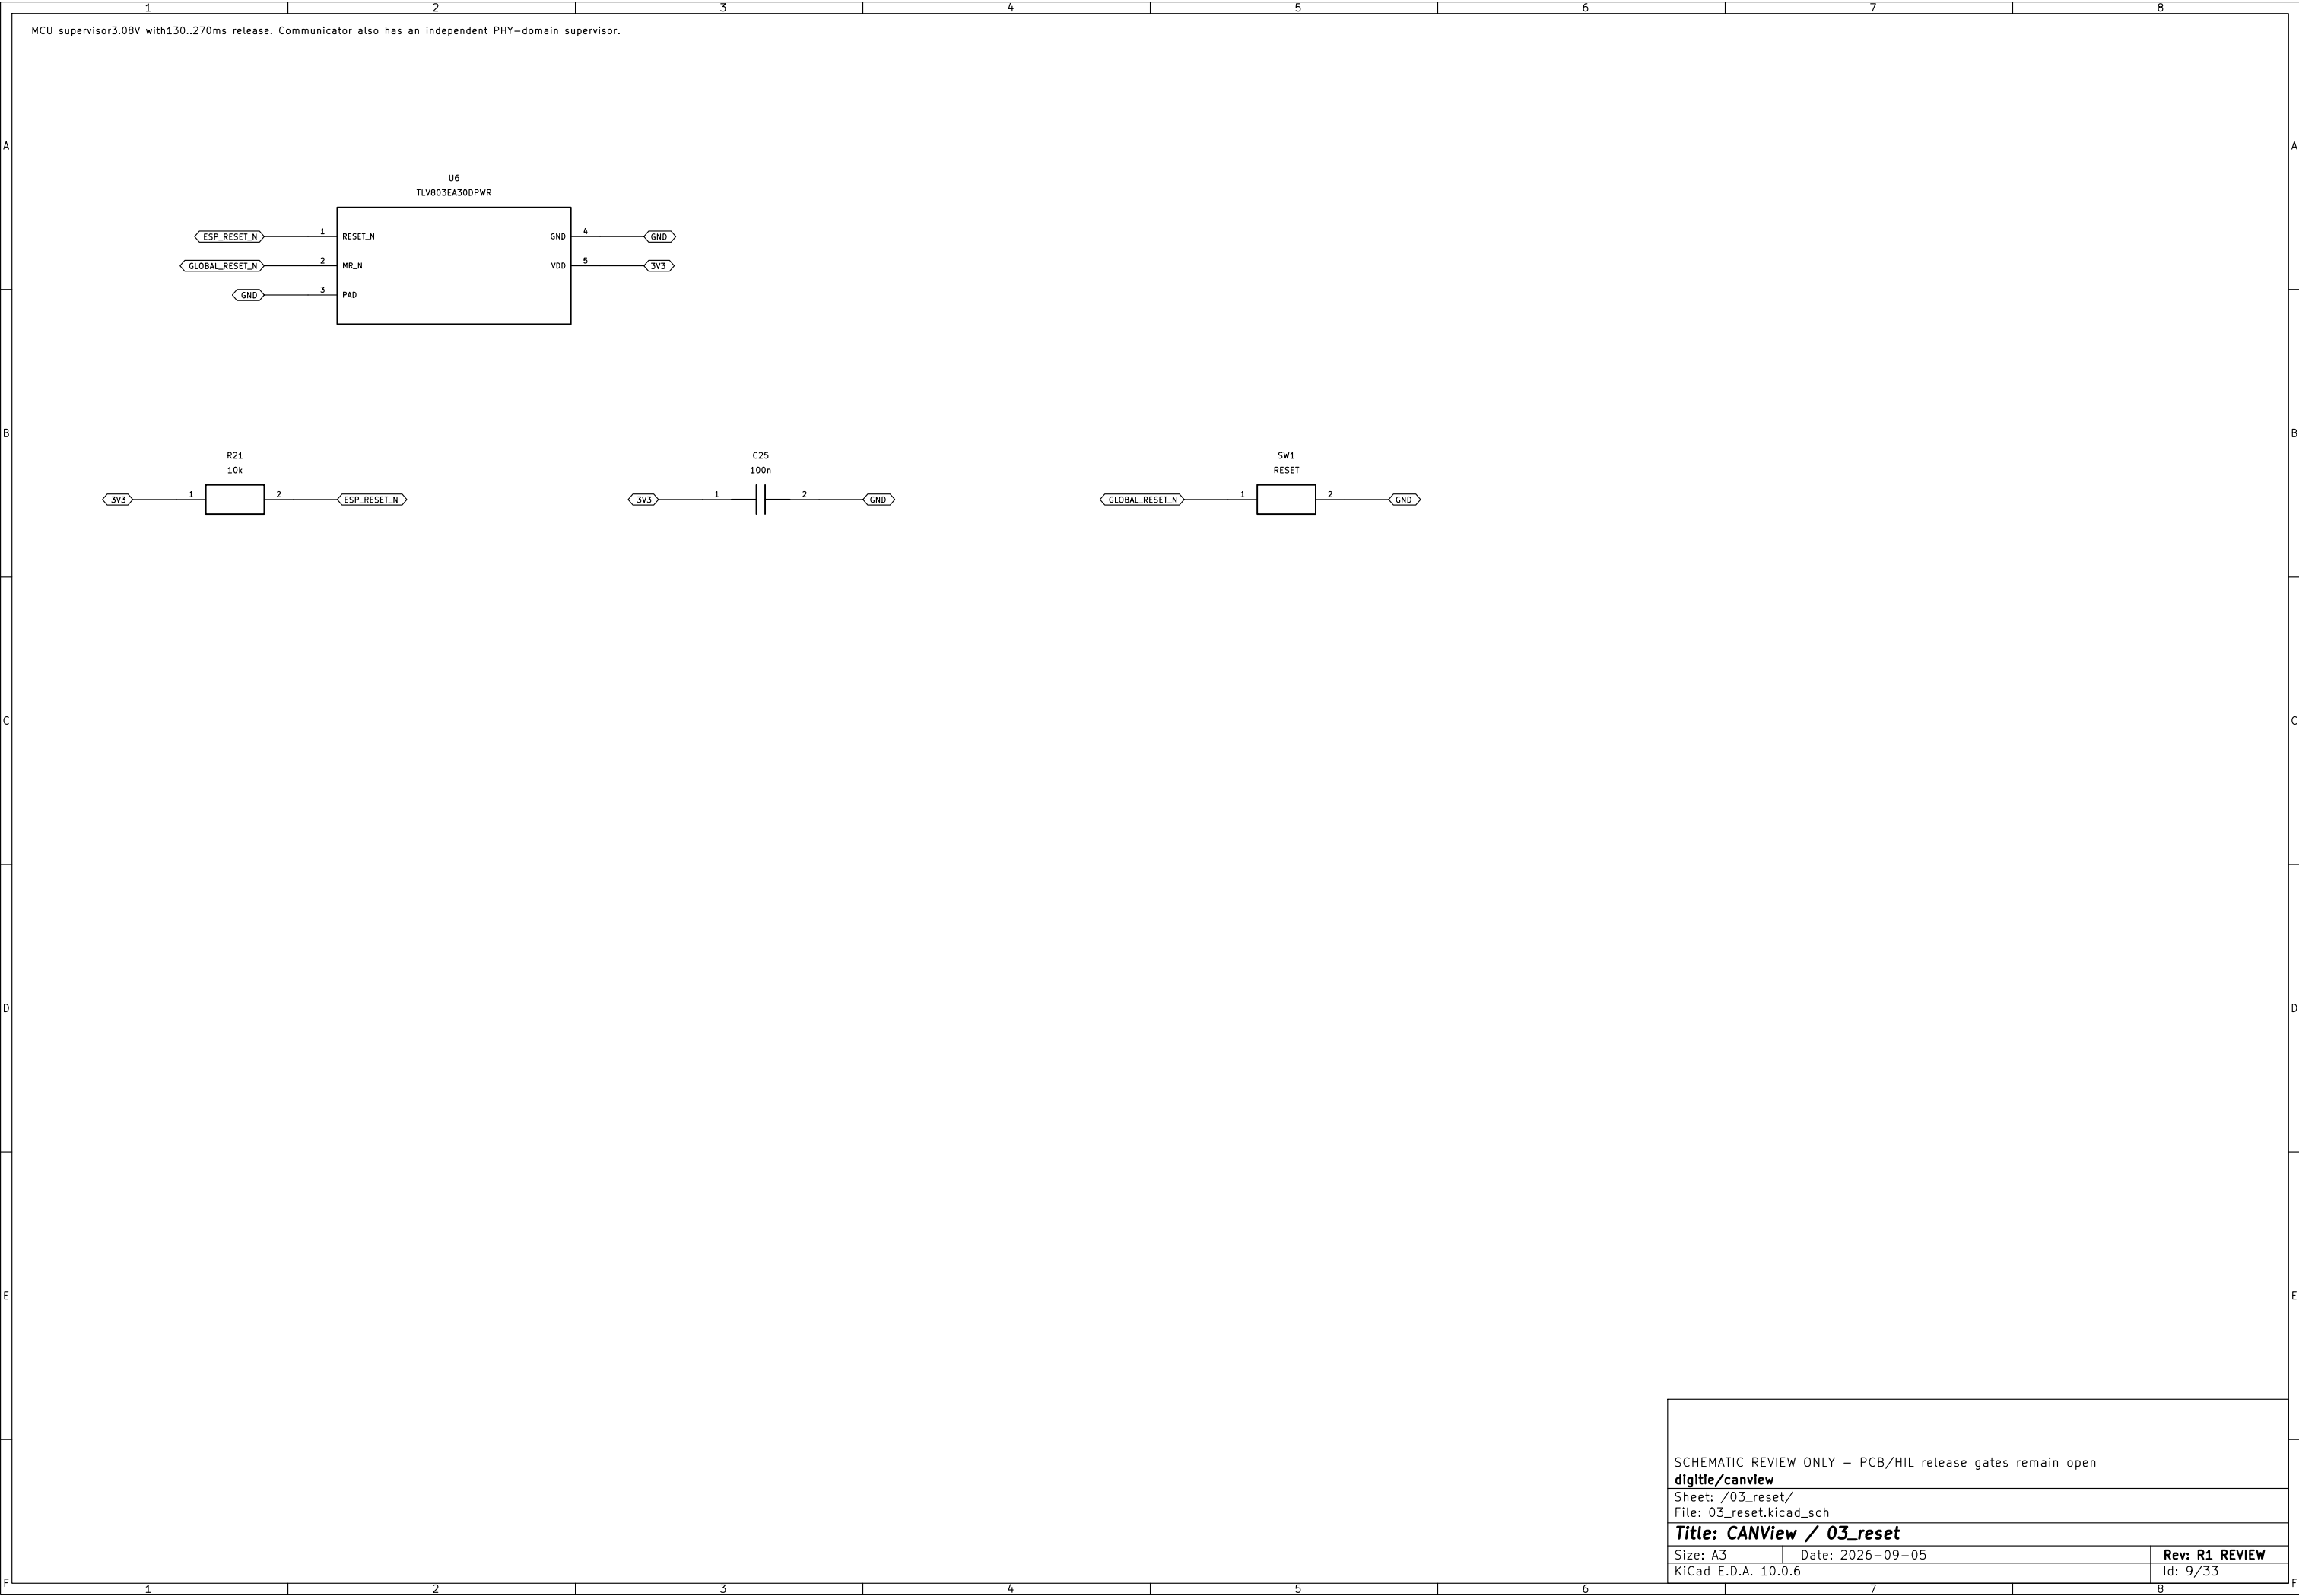

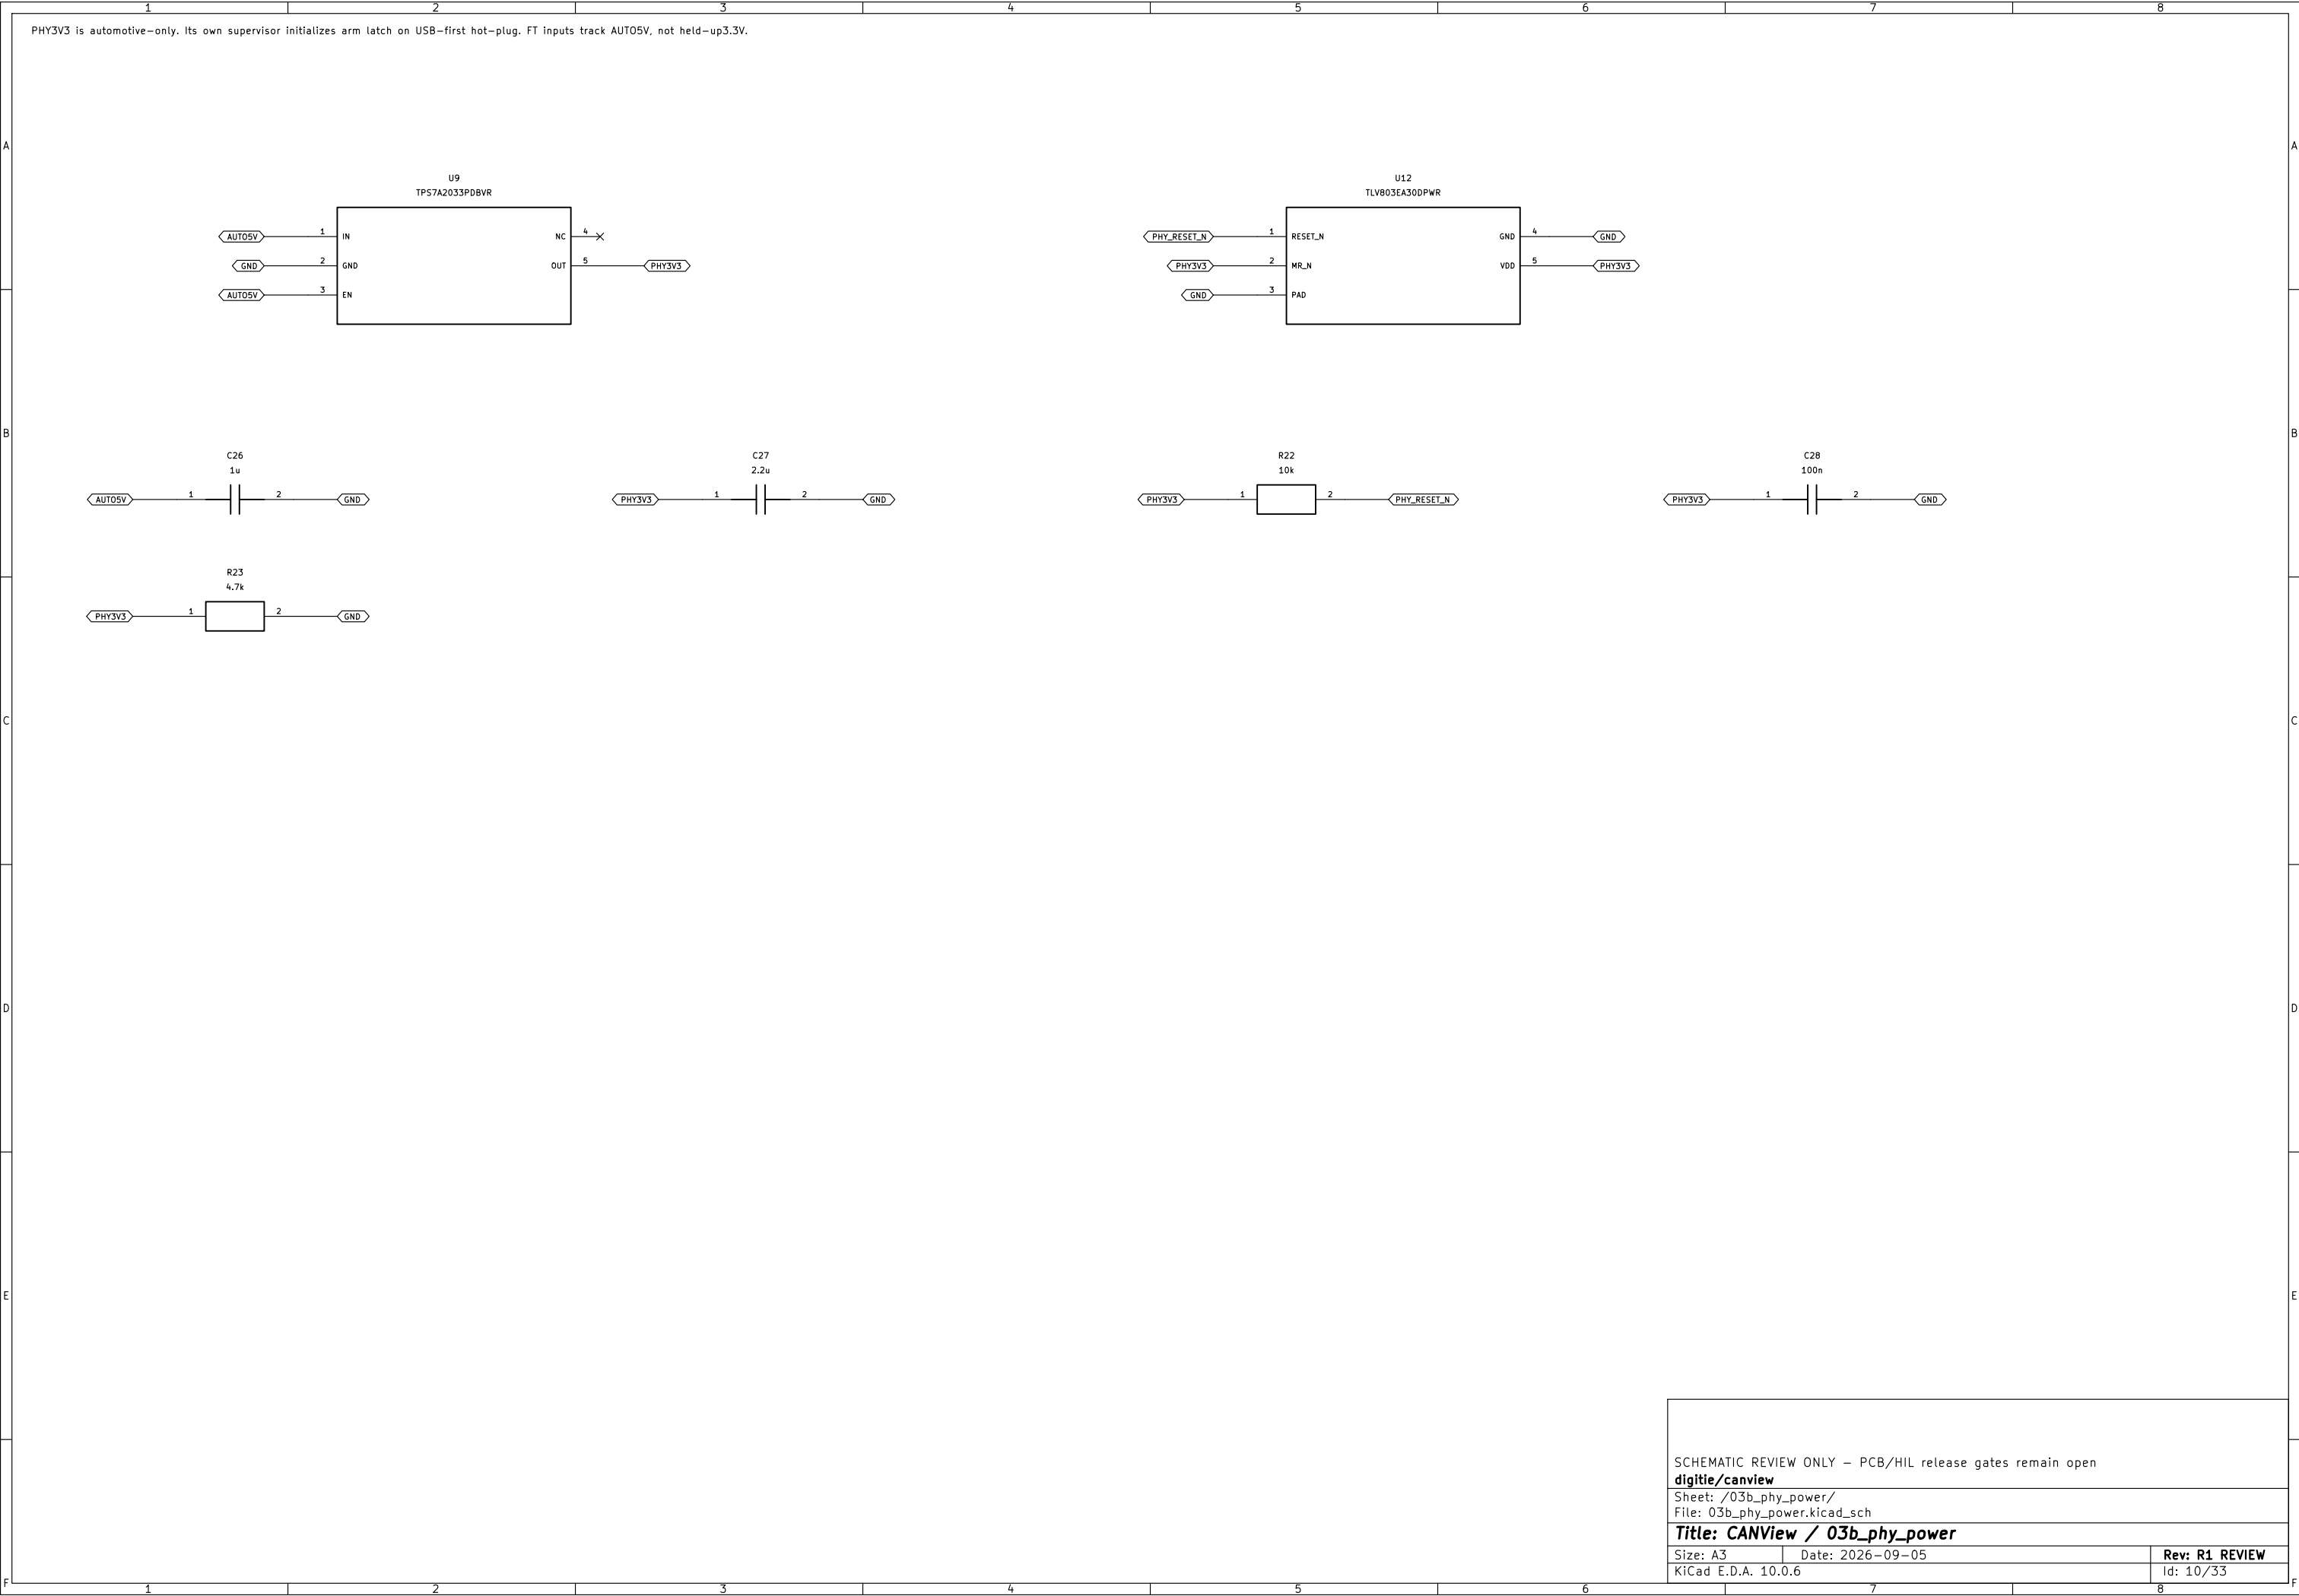

Independent battery threshold and real5V qualification. PGOOD alone is not sufficient for MAX3055. Threshold/latency worst cases remain test gates.

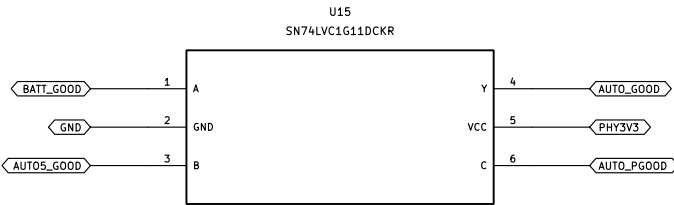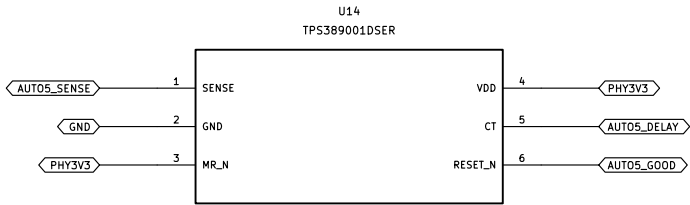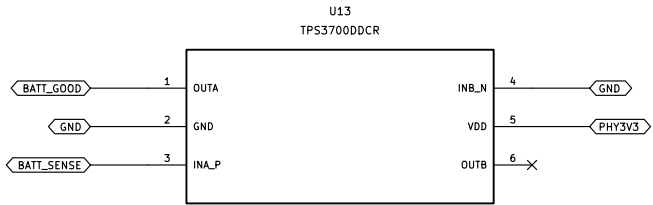

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /03c_auto_qualification/

File: 03c_auto_qualification.kicad_sch

Title: CANView / 03c_auto_qualification

Size: A3










Date: 2026-09-05

Rev: R1 REVIEW

KiCad E.D.A. 10.0.6

Id: 11/33

GPS automotive-only switched supply. Fault-current limit independent of ESP. Never enable in USB-only service.

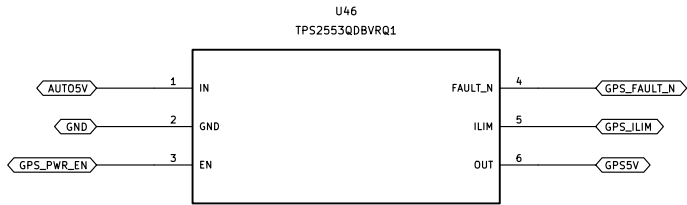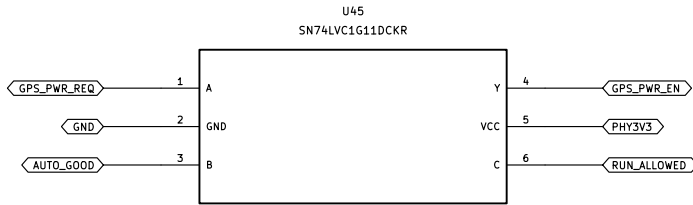

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /19_gps_power/

File: 19_gps_power.kicad_sch

Title: CANView / 19_gps_power


Size: A3

Date: 2026-09-05

Rev: R1 REVIEW

KiCad E.D.A. 10.0.6

Id: 12/33

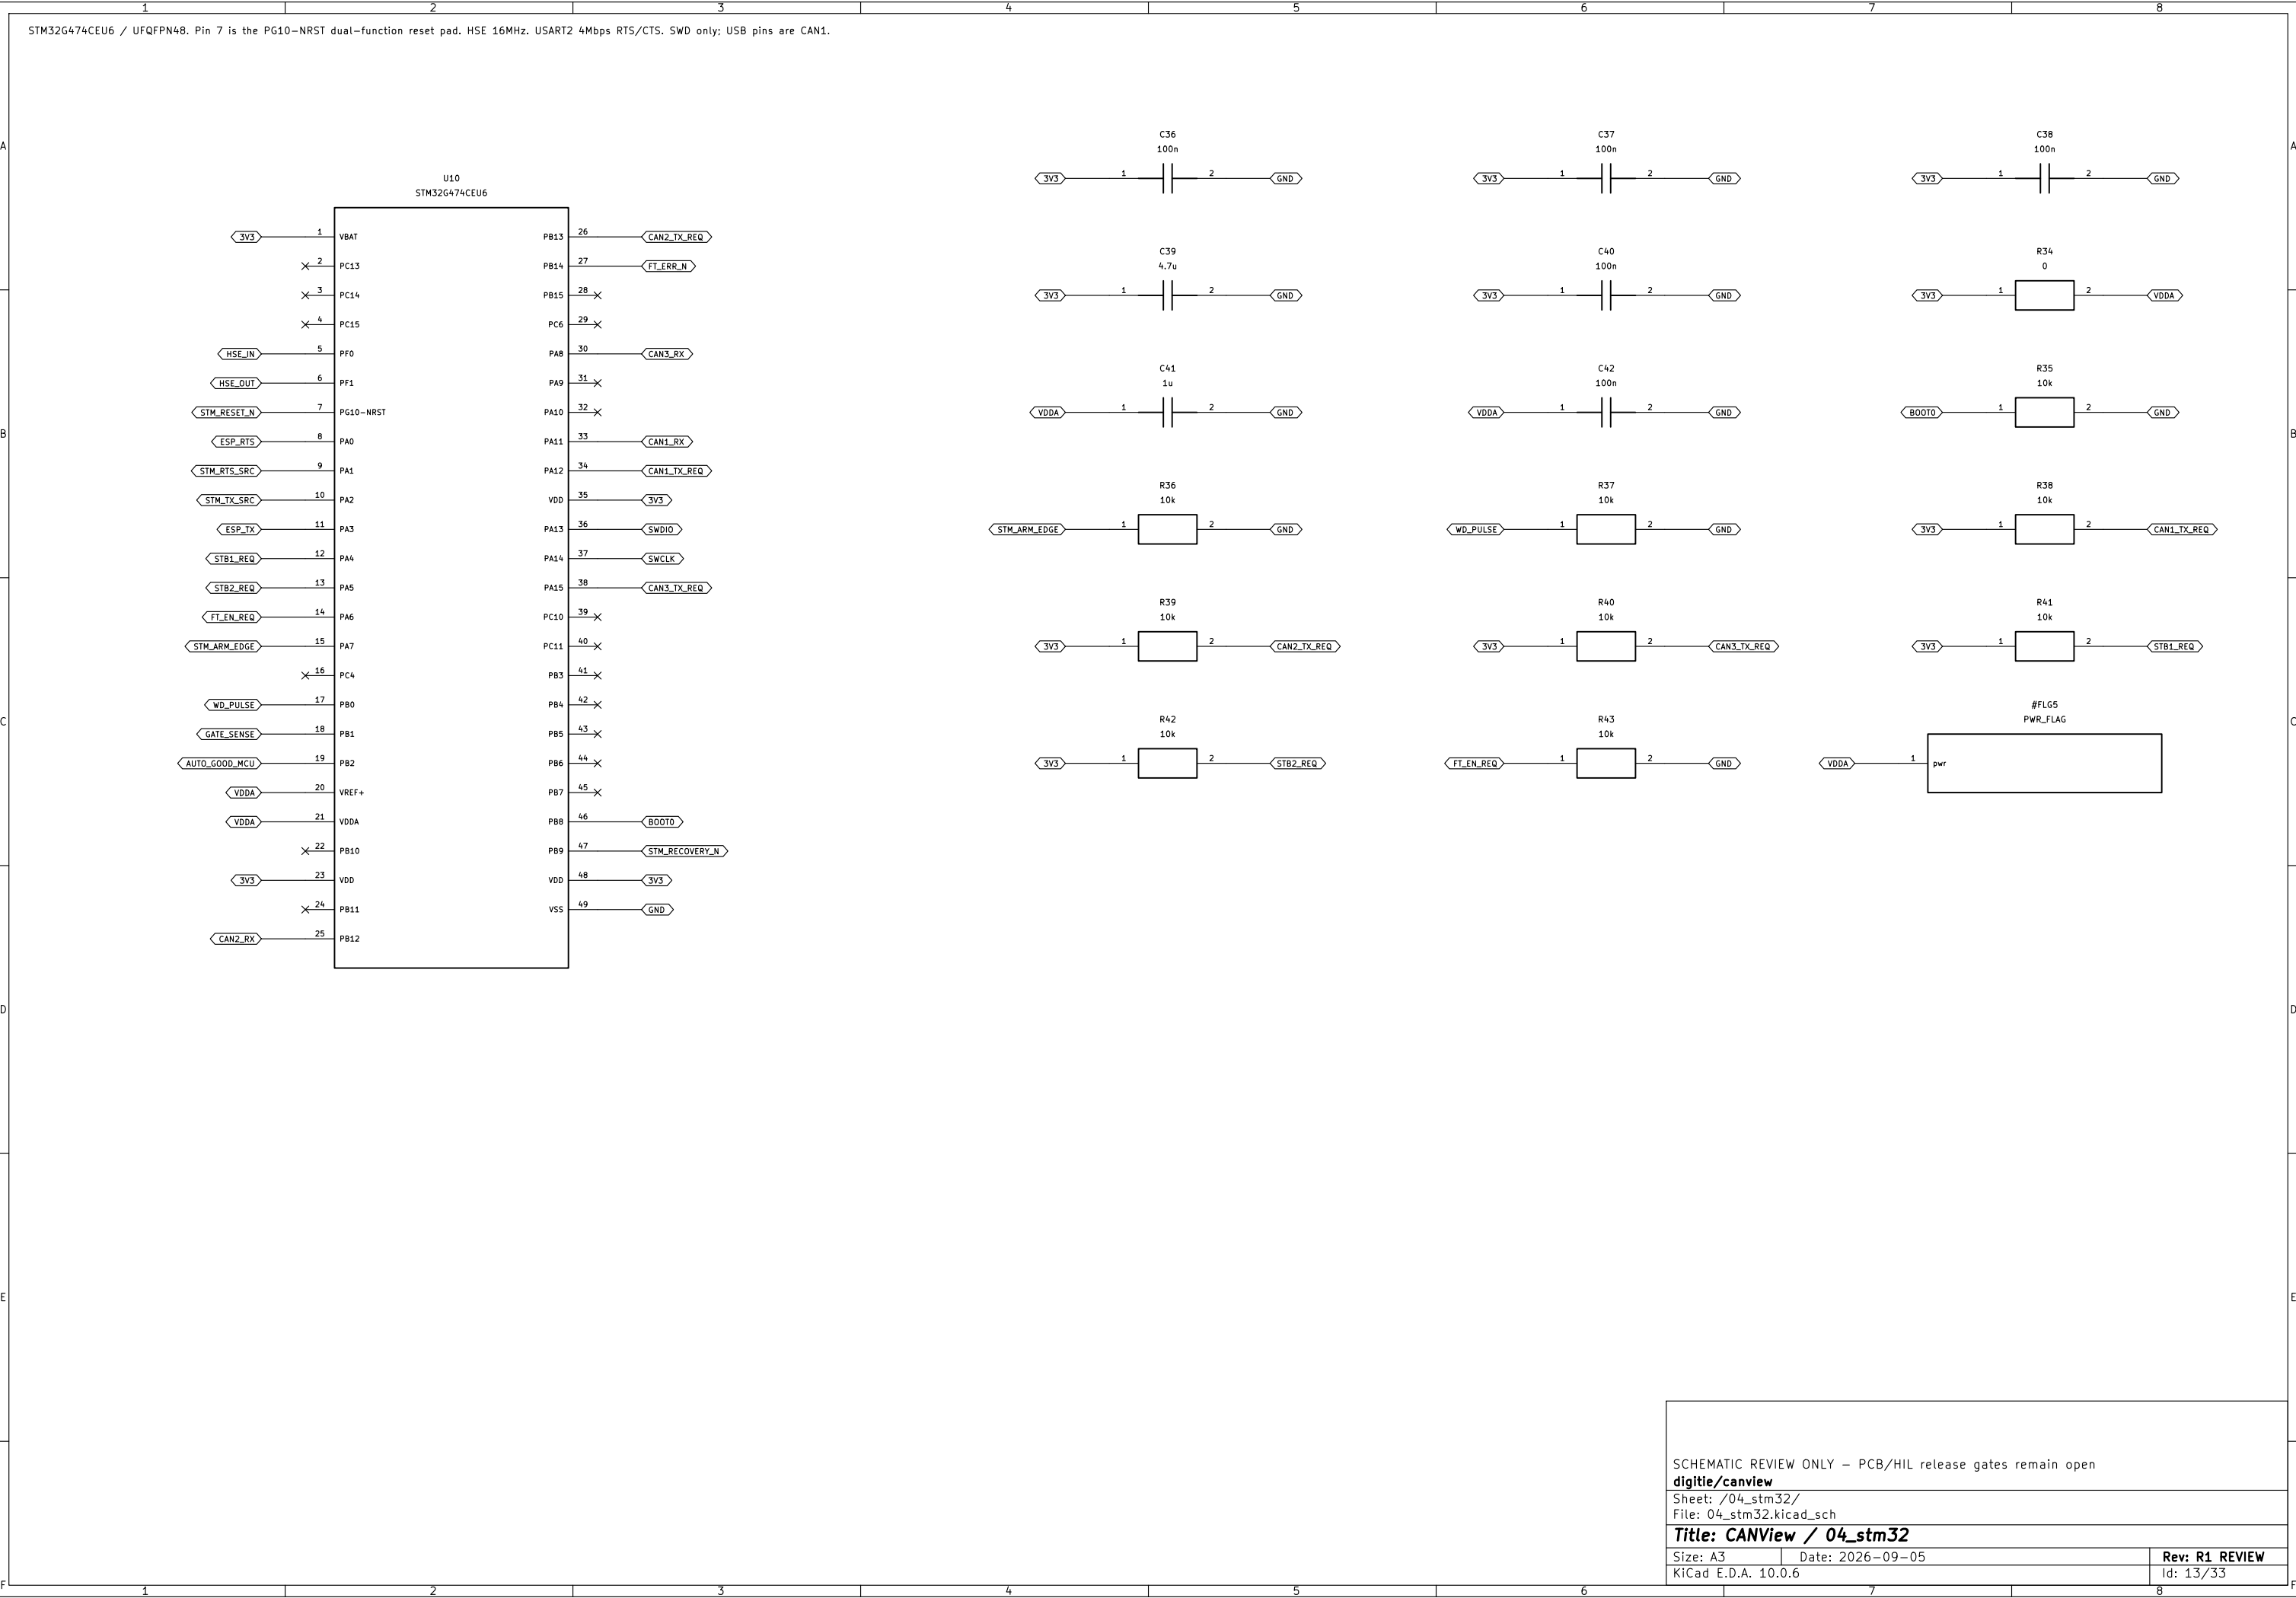

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /04_stm32/

File: 04_stm32.kicad_sch

Title: CANView / 04_stm32


Size: A3

Date: 2026-09-05

Rev: R1 REVIEW

KiCad E.D.A. 10.0.6

Id: 13/33

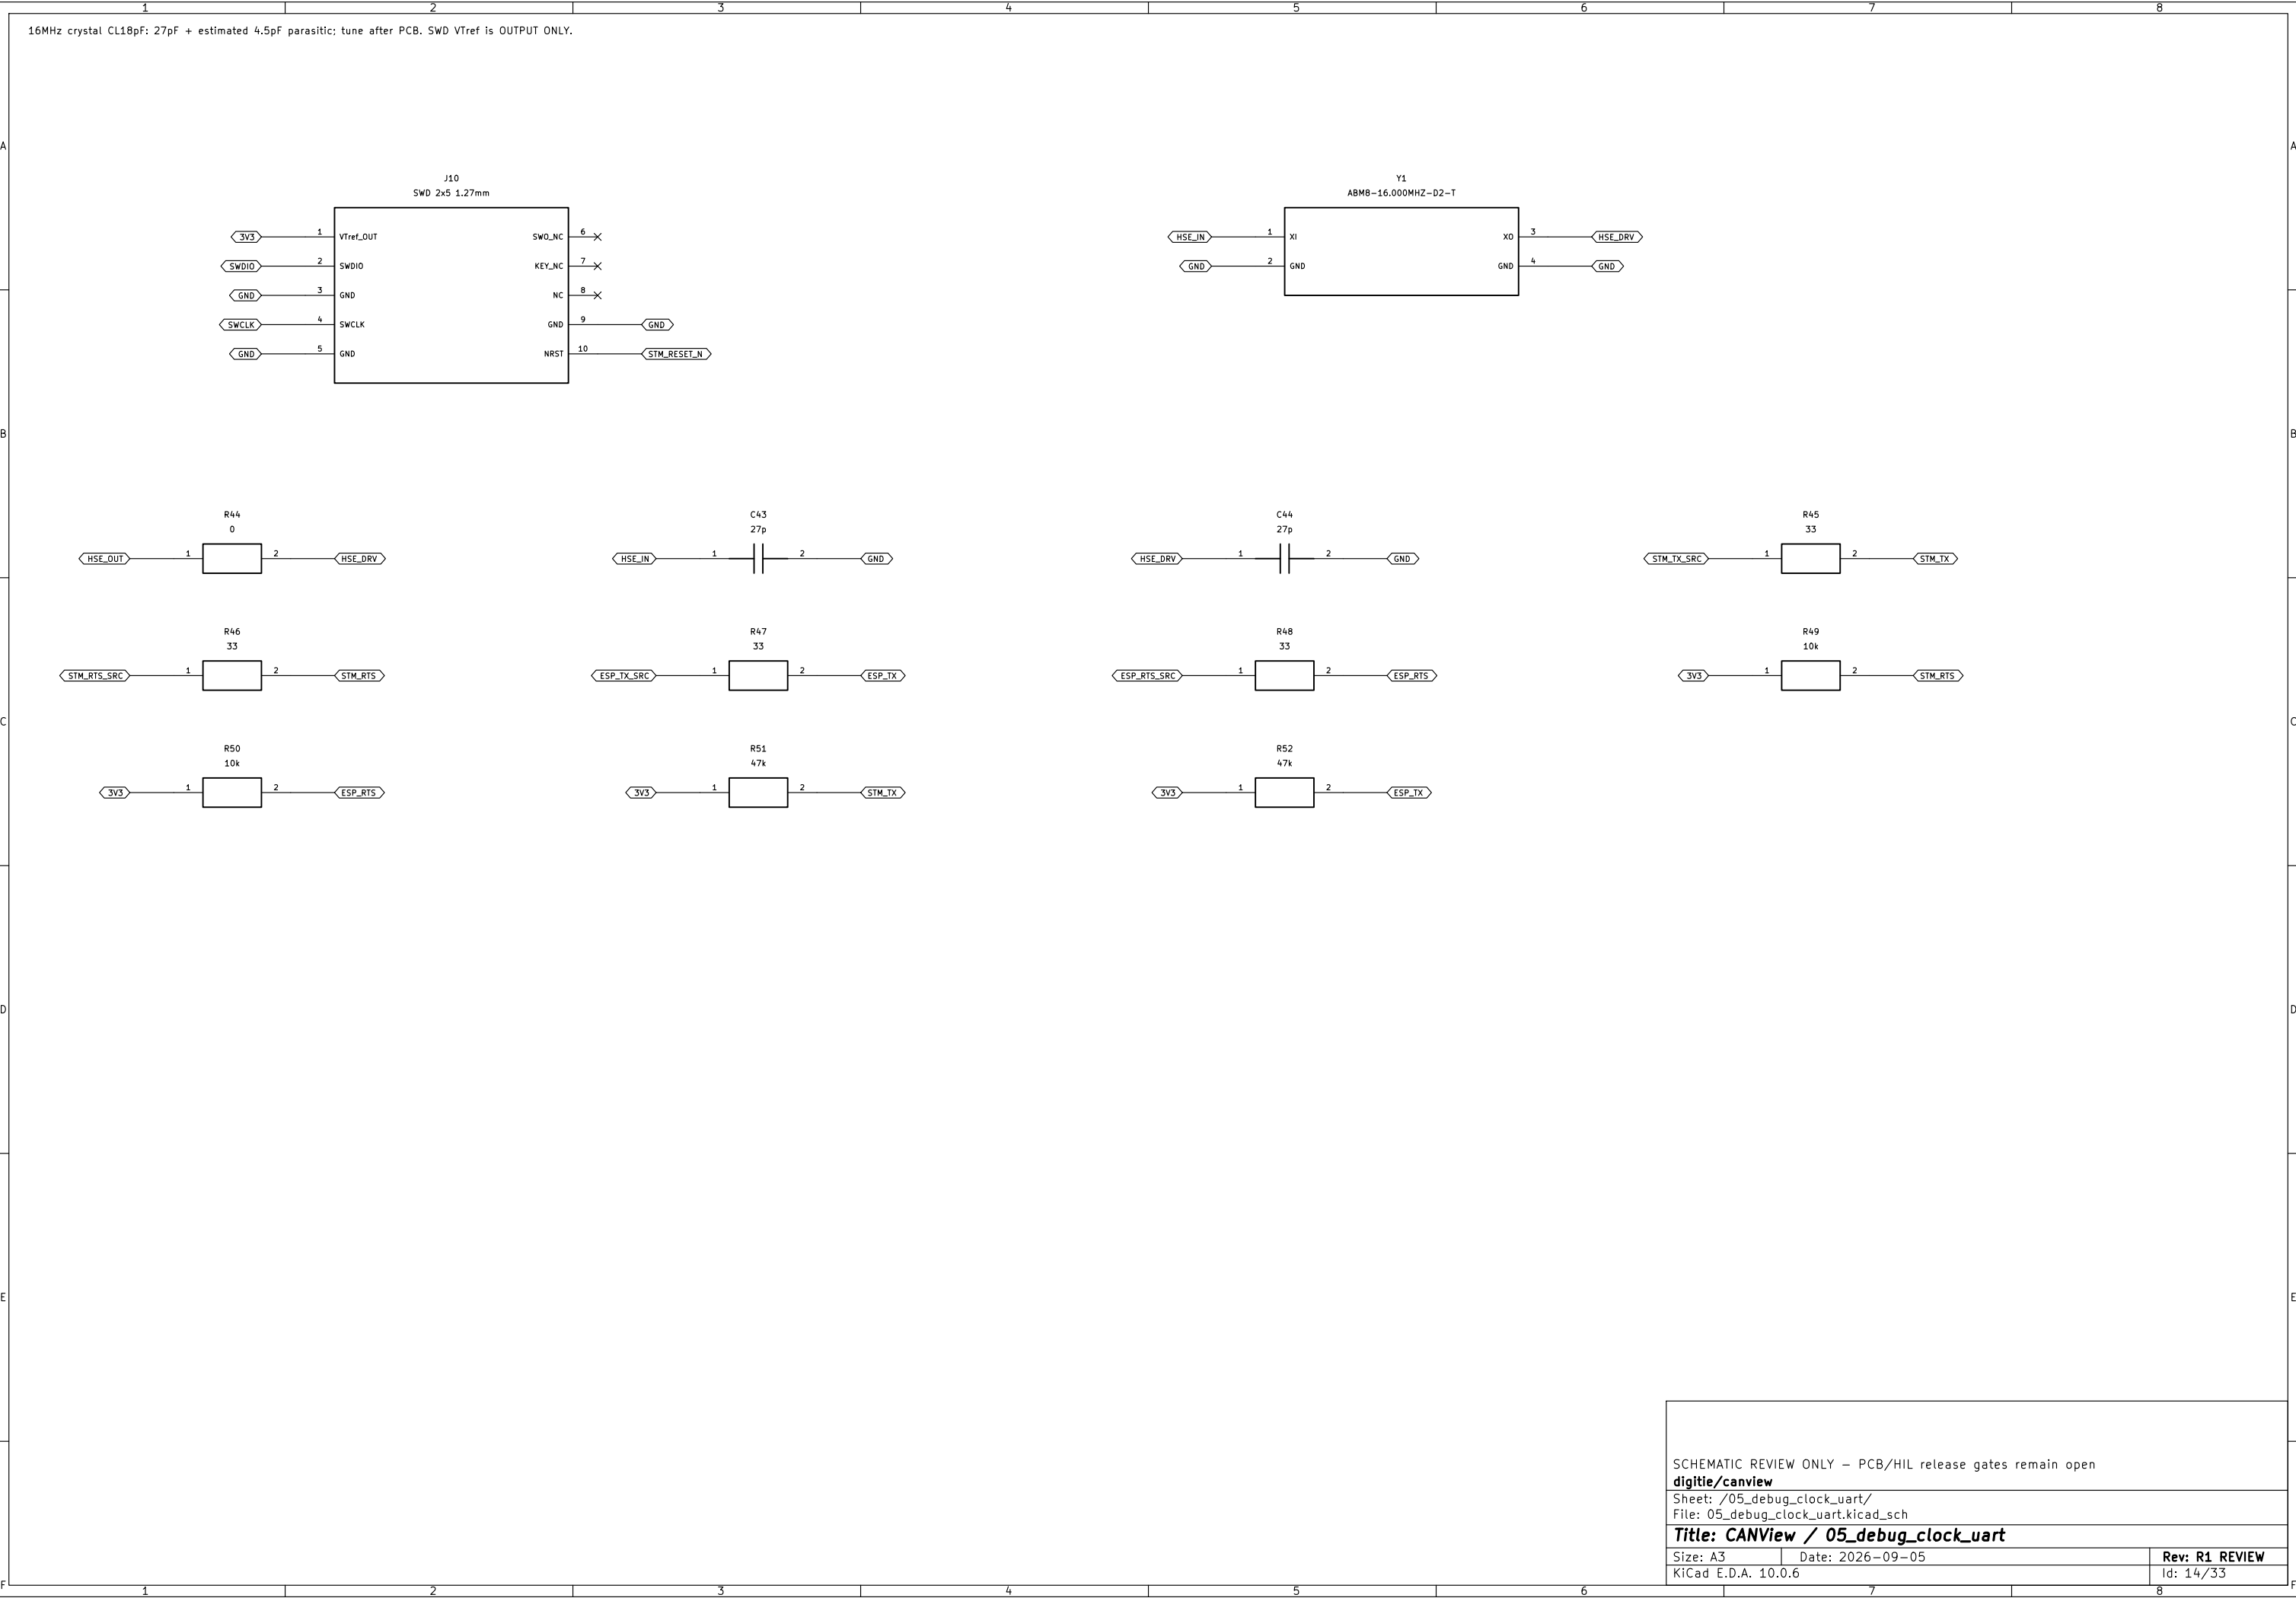

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /05_debug_clock_uart/

File: 05_debug_clock_uart.kicad_sch

Title: CANView / 05_debug_clock_uart


Size: A3


Date: 2026-09-05


Rev: R1 REVIEW


KiCad E.D.A. 10.0.6


Id: 14/33

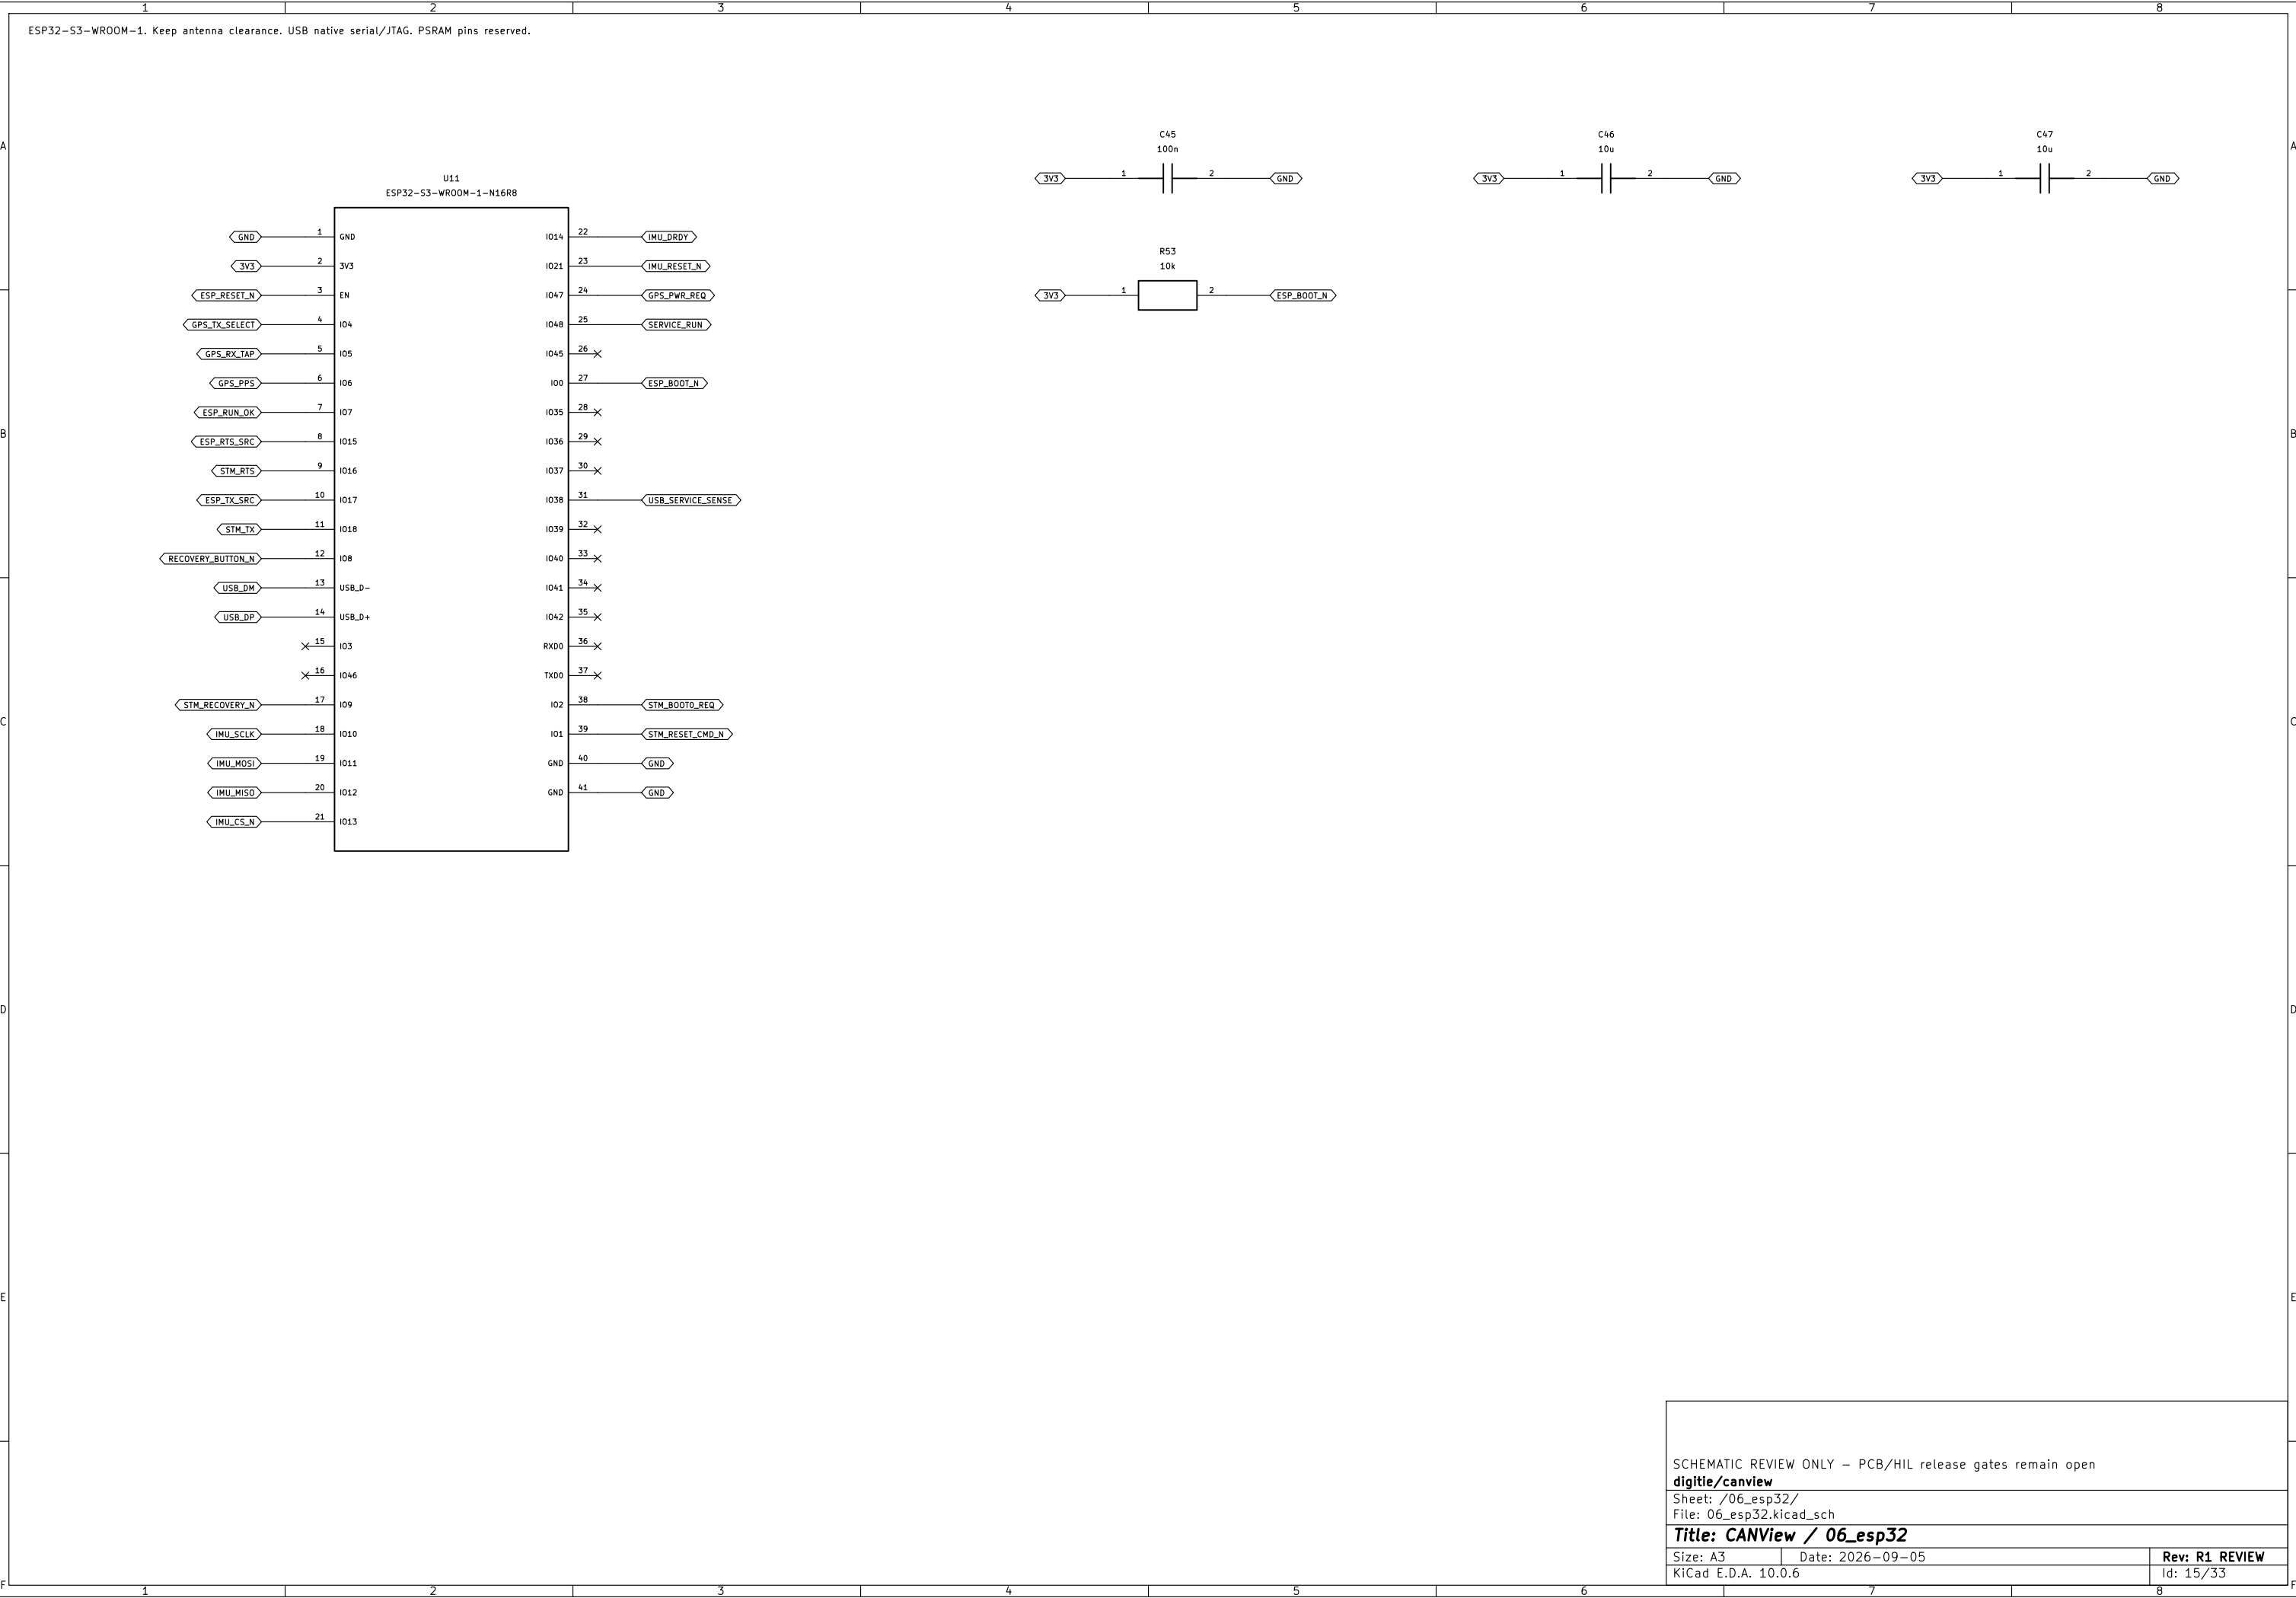






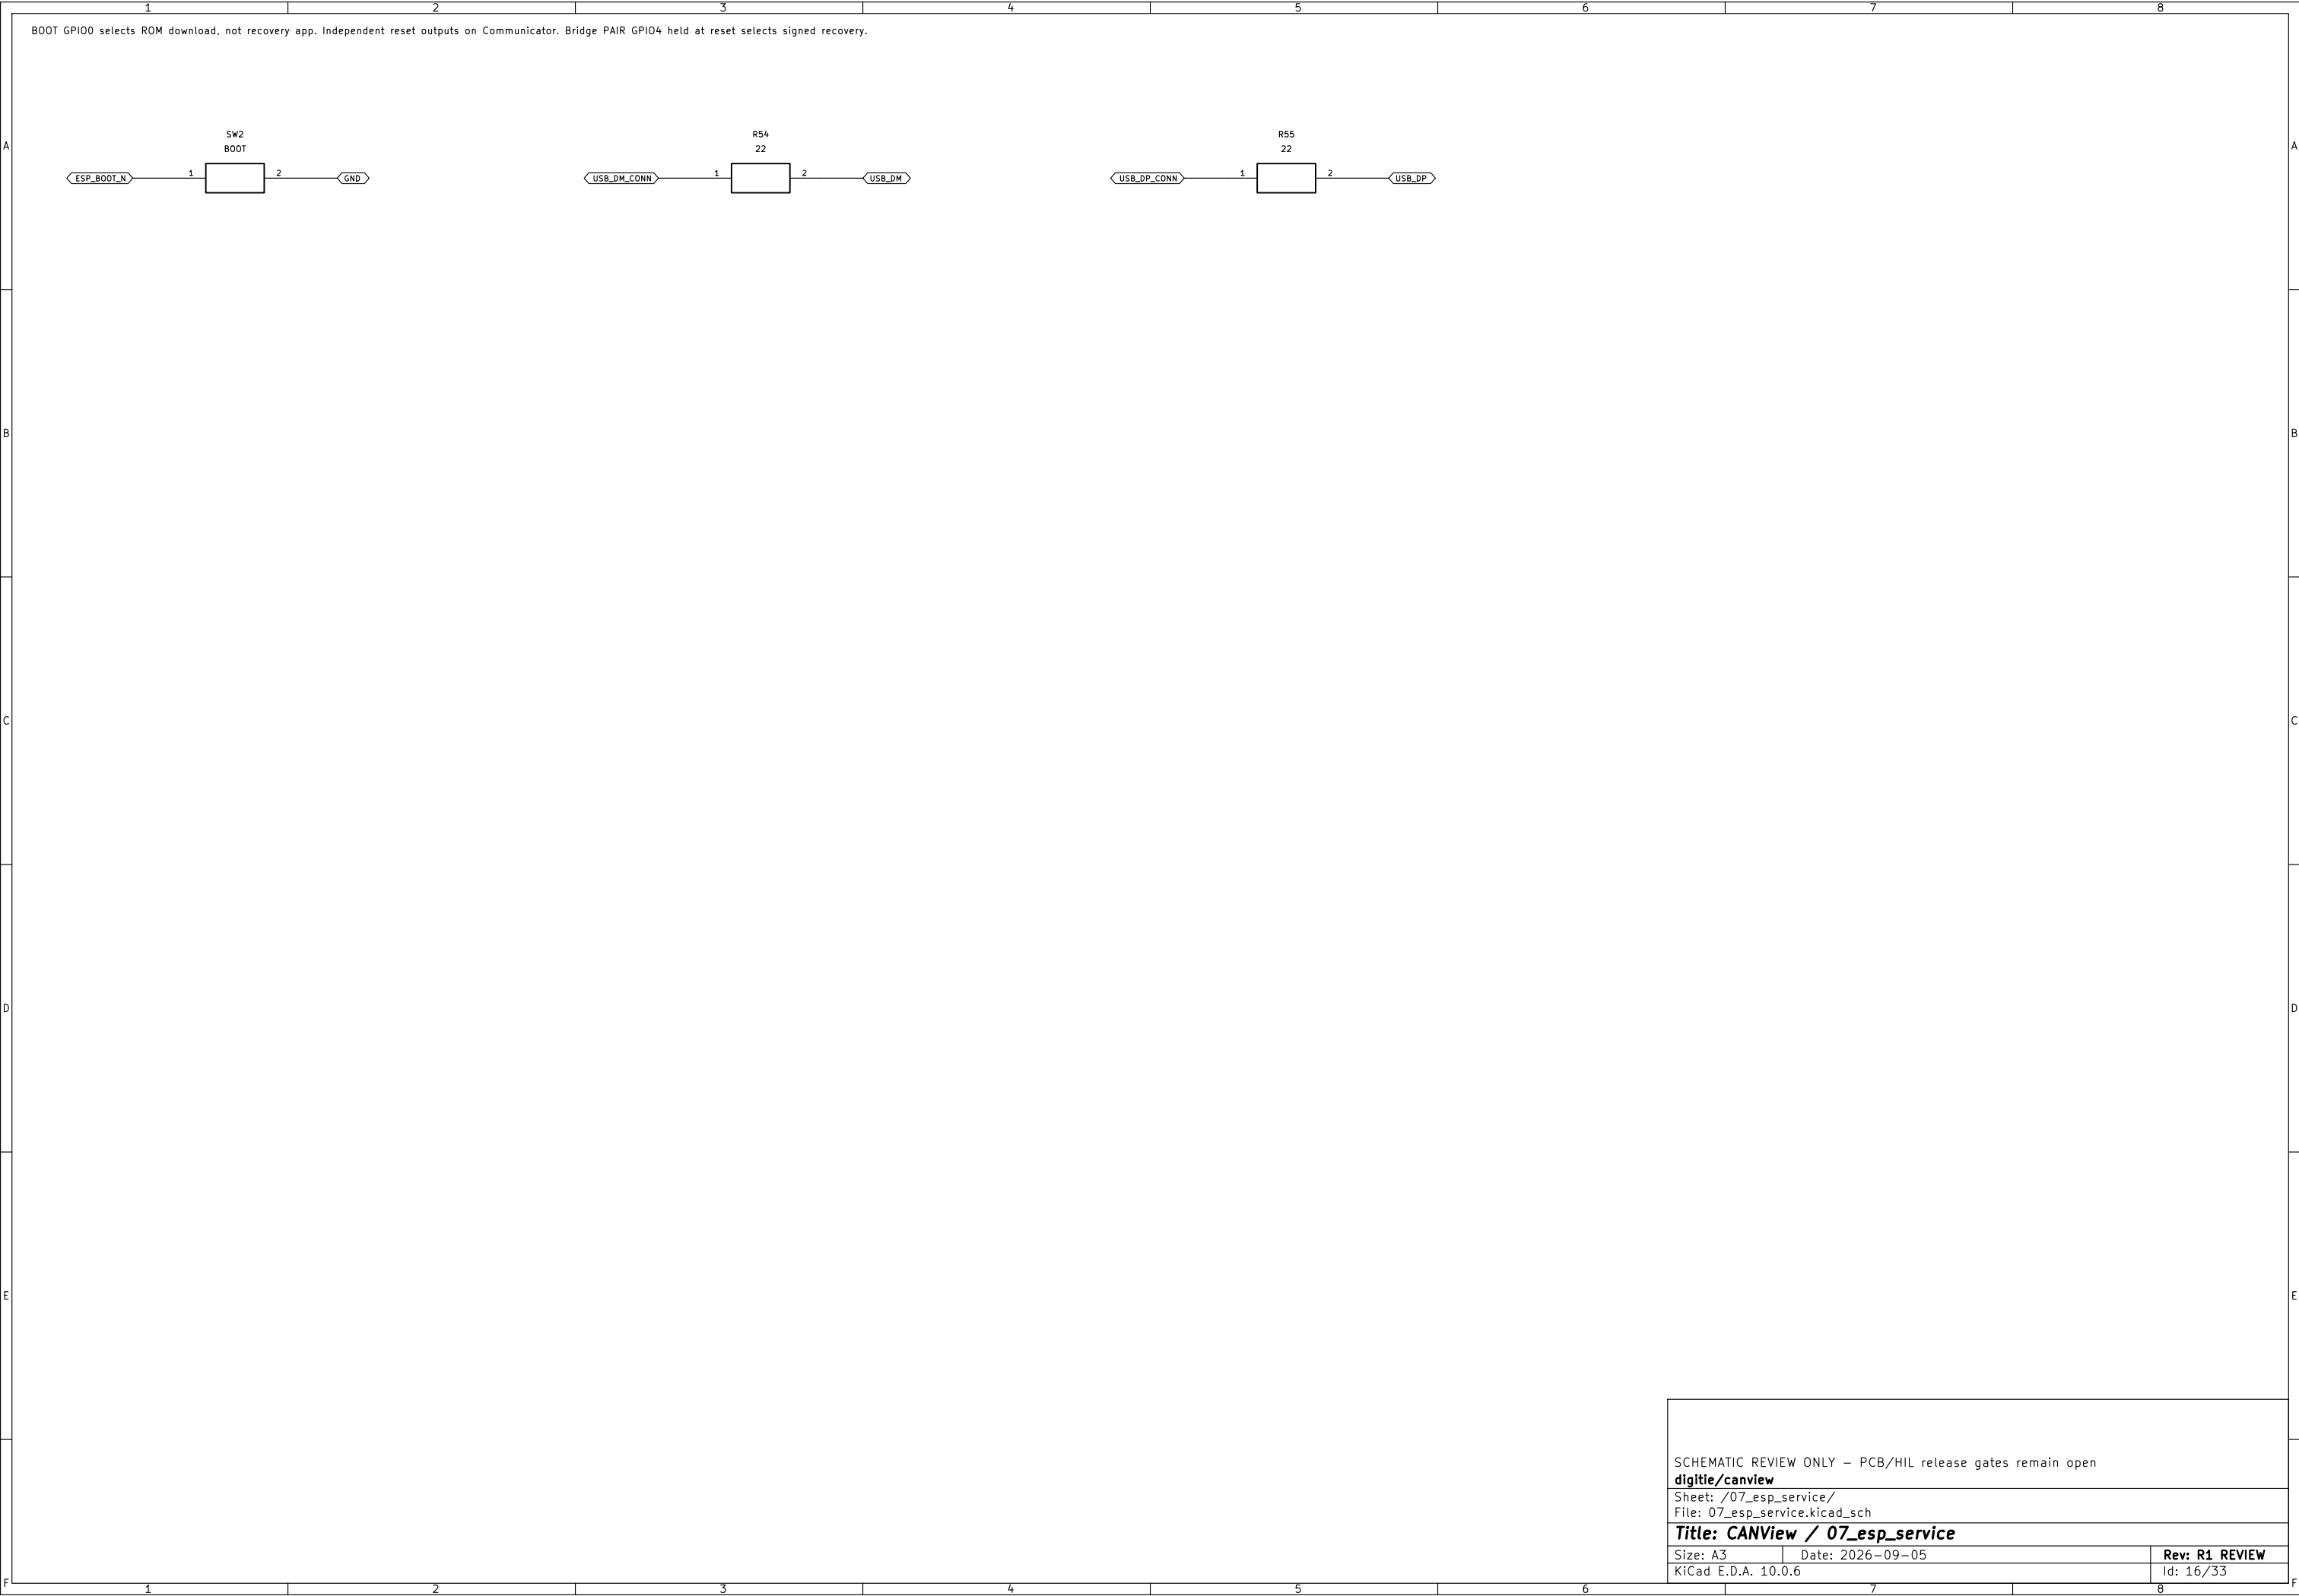


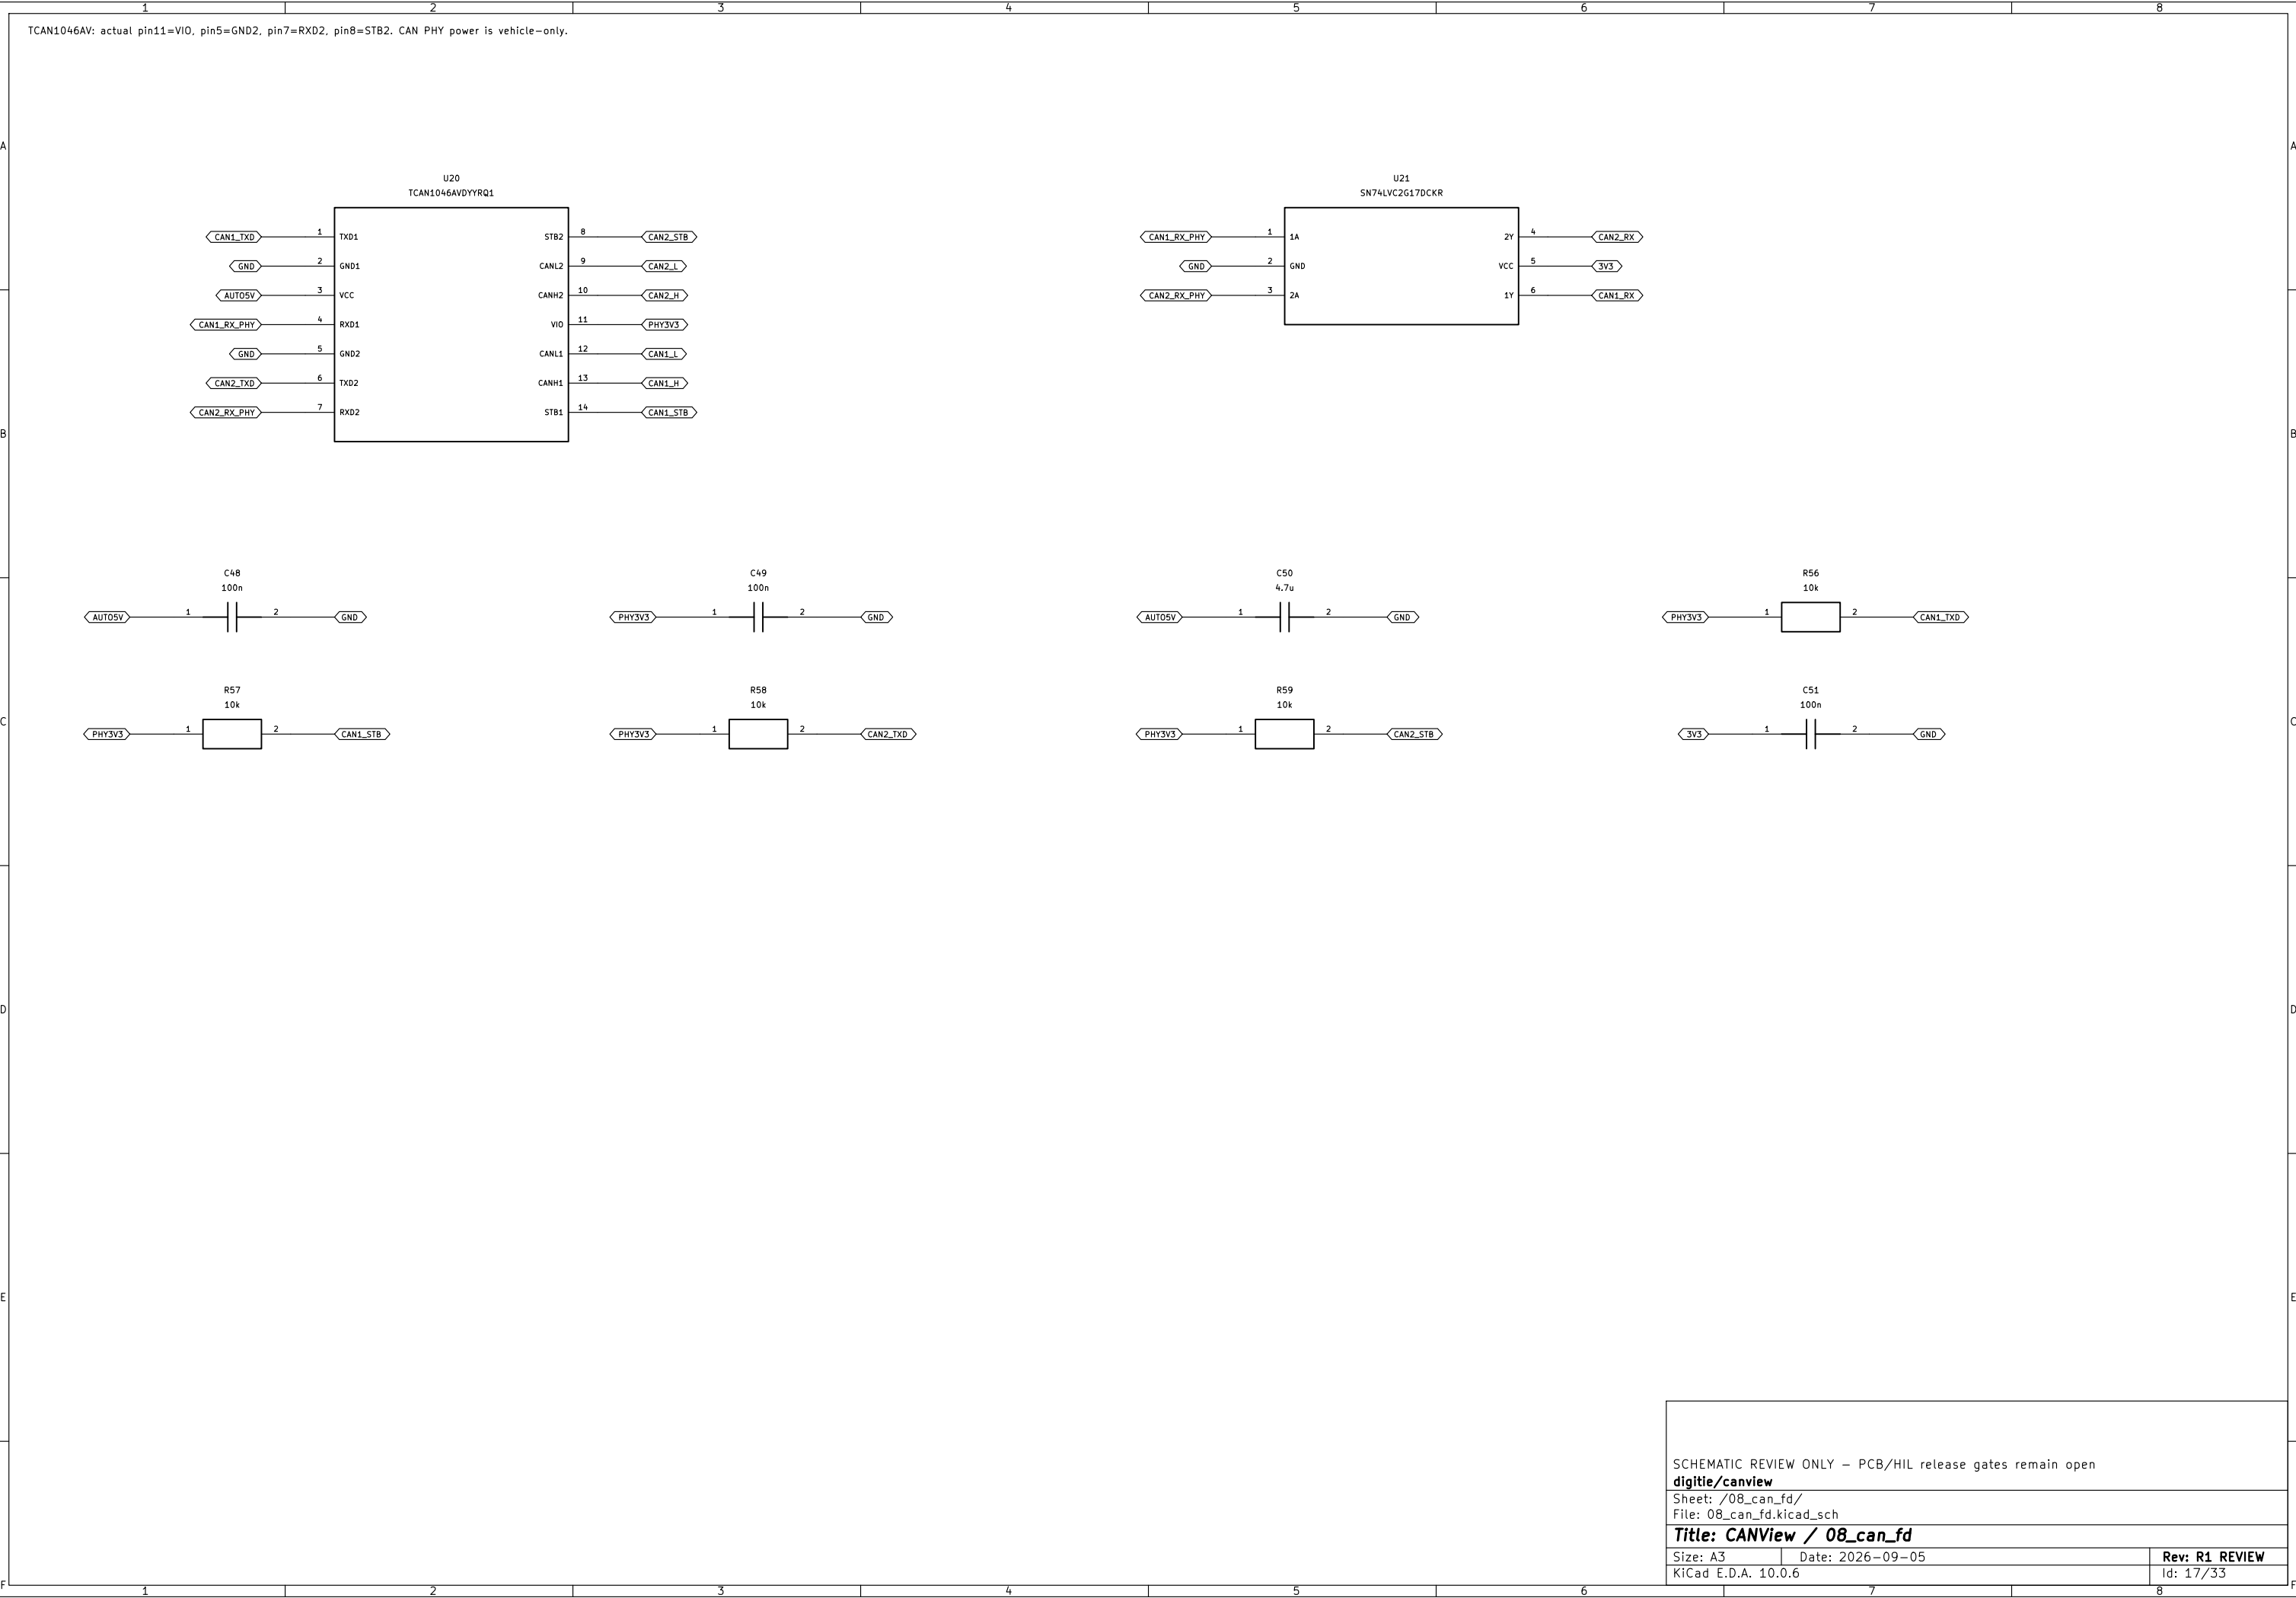

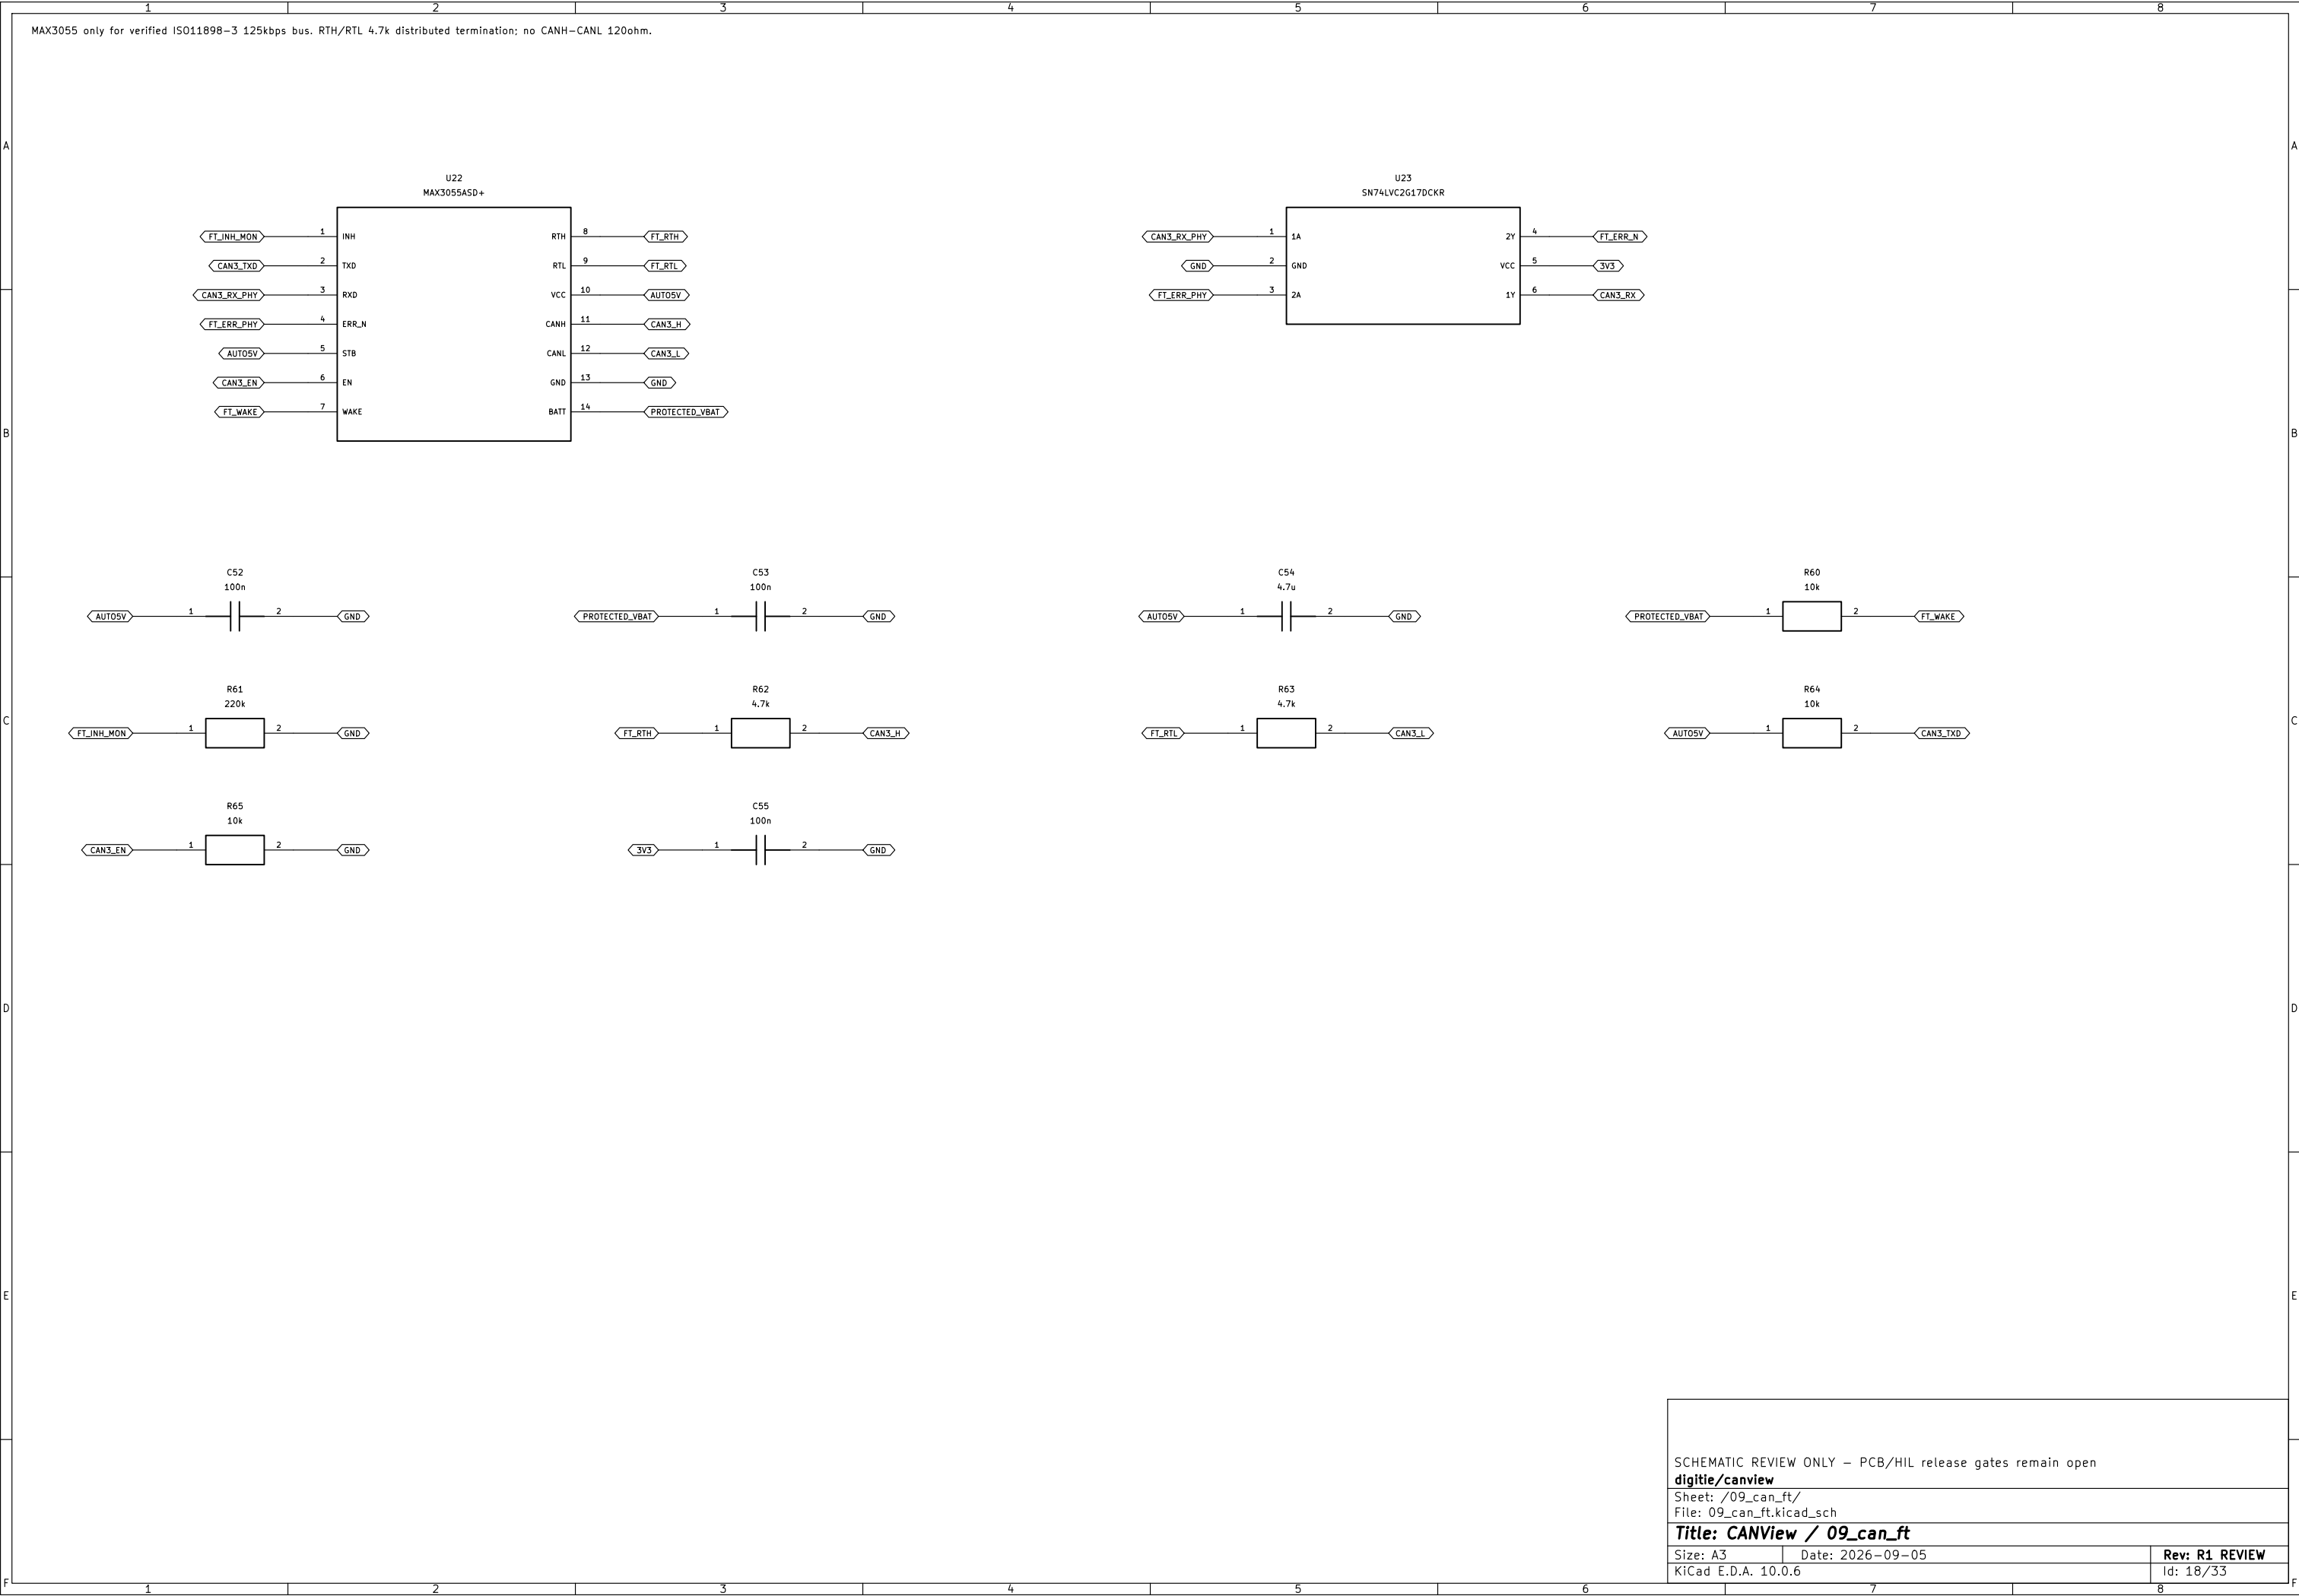

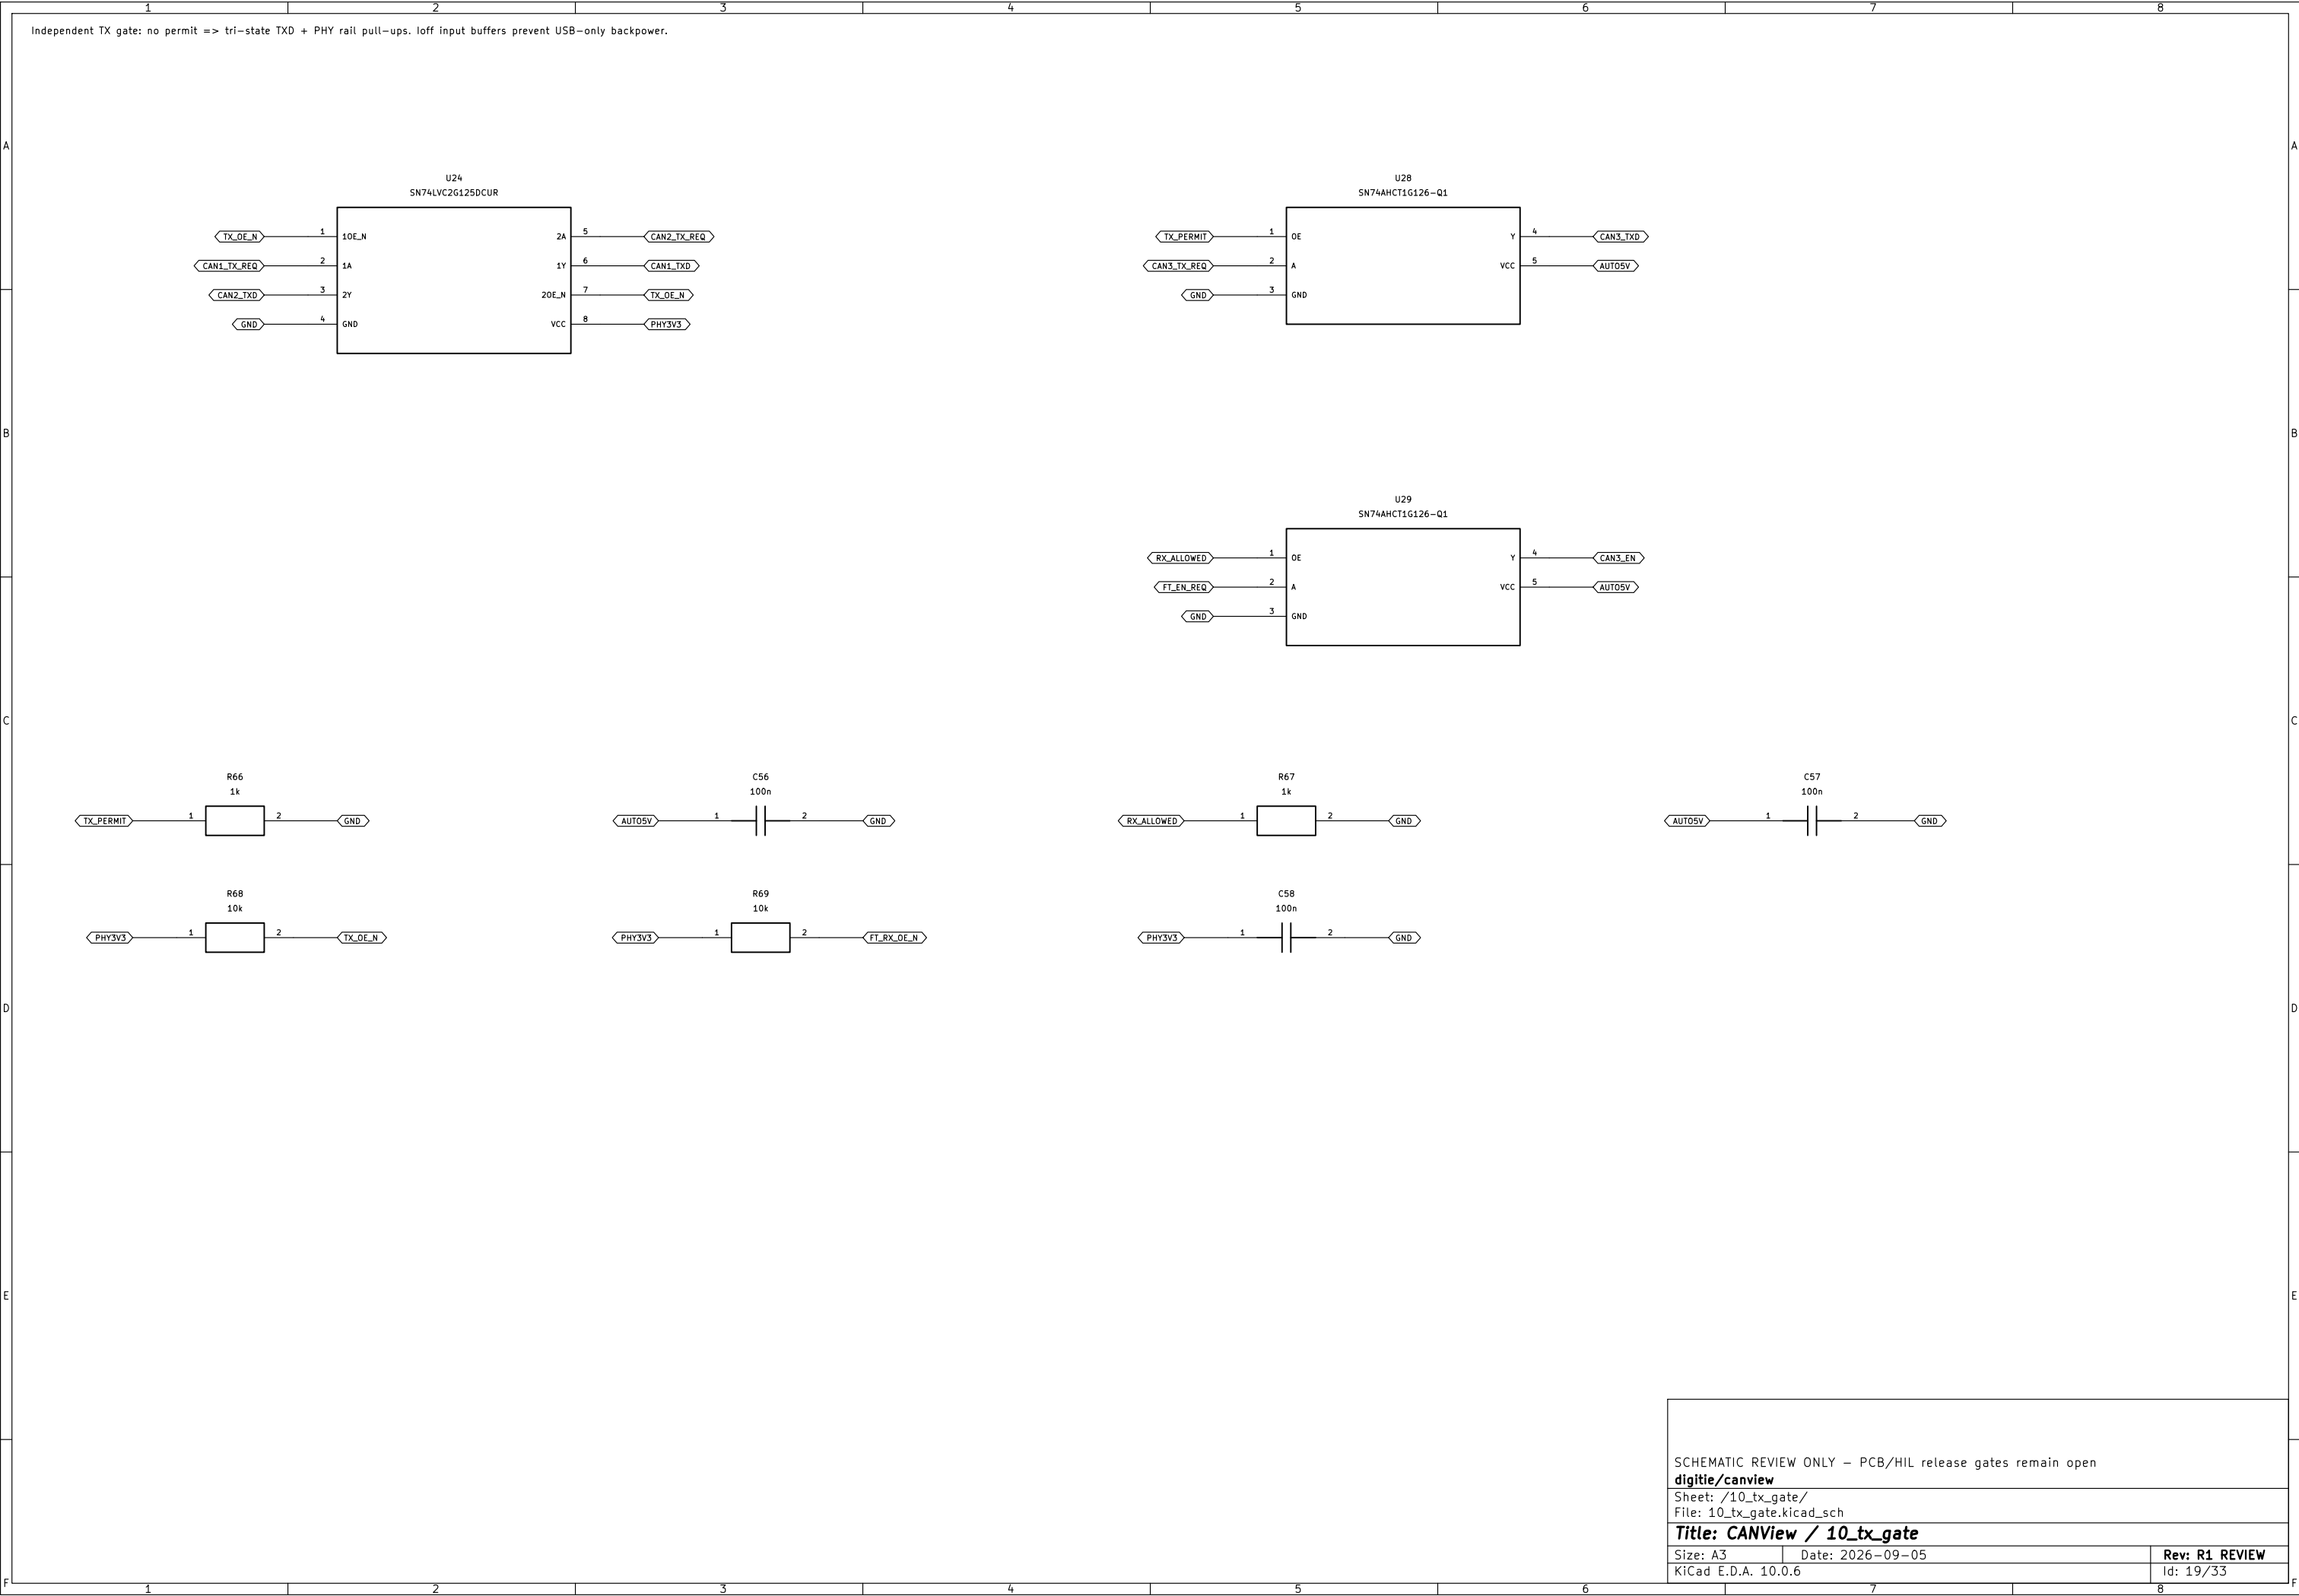

RX mode is independent of TX permit. On invalid automotive power all PHY enables return to hardware standby.

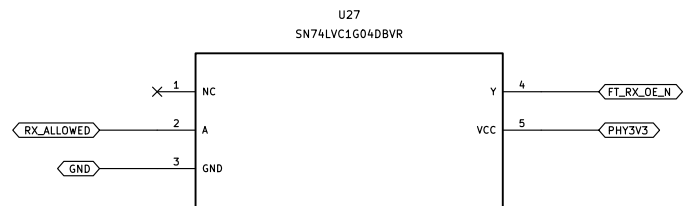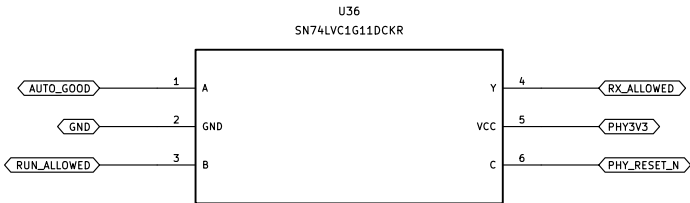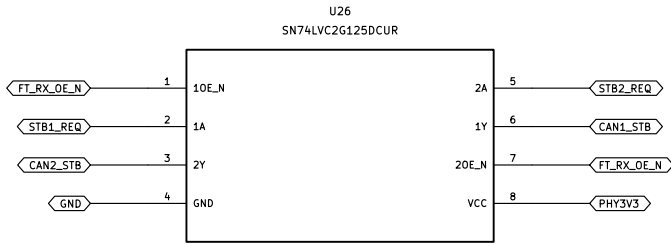

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /11_phy_modes/

File: 11_phy_modes.kicad_sch

Title: CANView / 11_phy_modes

Size: A3







Date: 2026-09-05

Rev: R1 REVIEW

KiCad E.D.A. 10.0.6

Id: 20/33

120pF gives64.288ms nominal watchdog; budget<72ms with5% C and10pF stray. WDO recovery CANNOT re-arm TX; new ARM edge required.

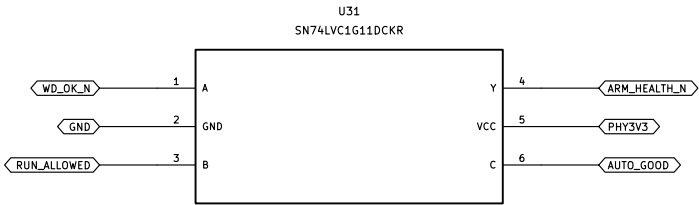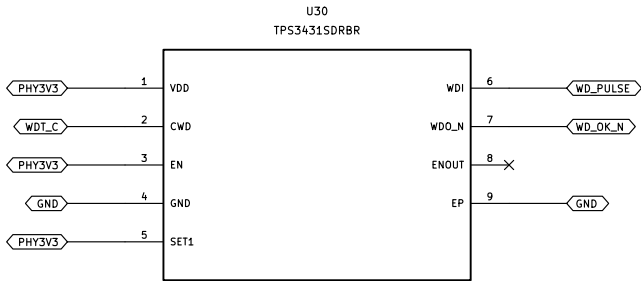

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /12_watchdog_latch/

File: 12_watchdog_latch.kicad_sch

Title: CANView / 12_watchdog_latch

Size: A3


Date: 2026-09-05


Rev: R1 REVIEW

KiCad E.D.A. 10.0.6

Id: 21/33

PHY-domain POR and physical disarm both CLEAR the latch, including USB-first automotive hot-plug. No stale Q reuse.

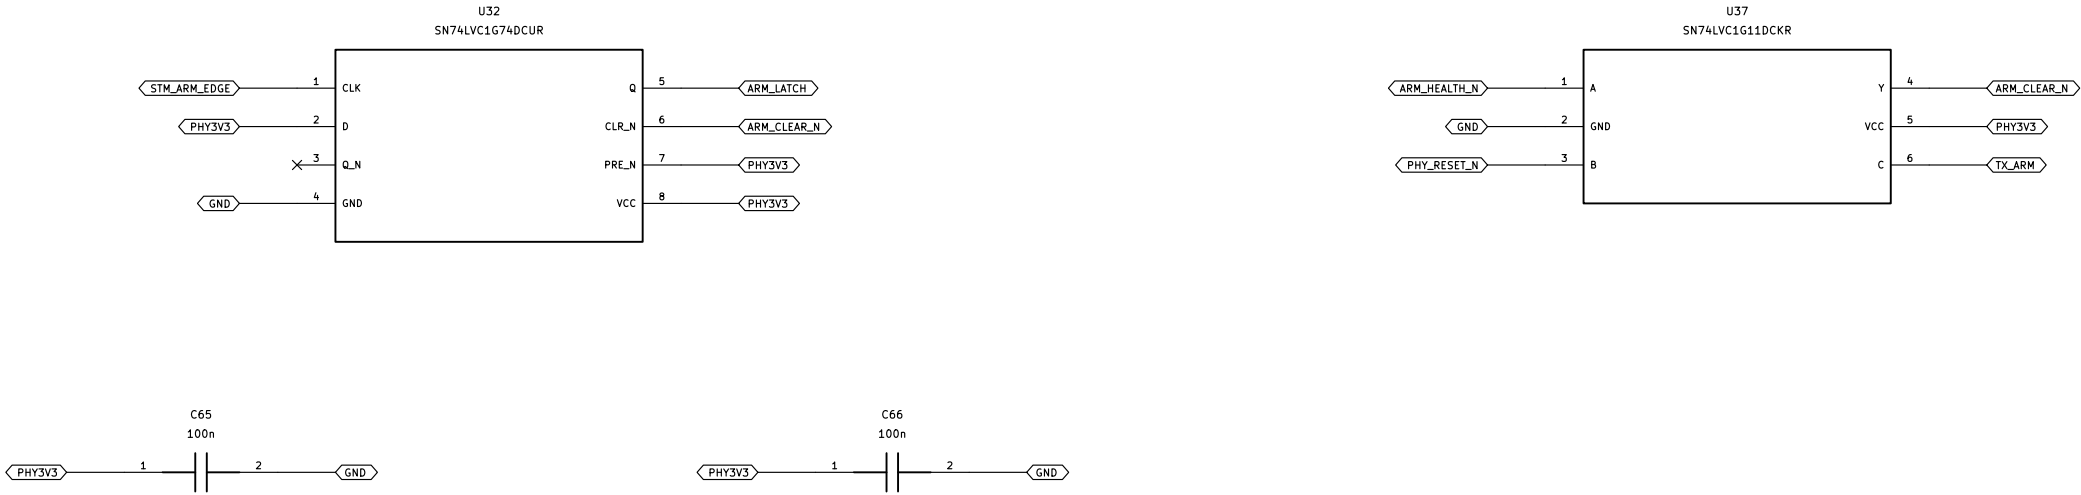

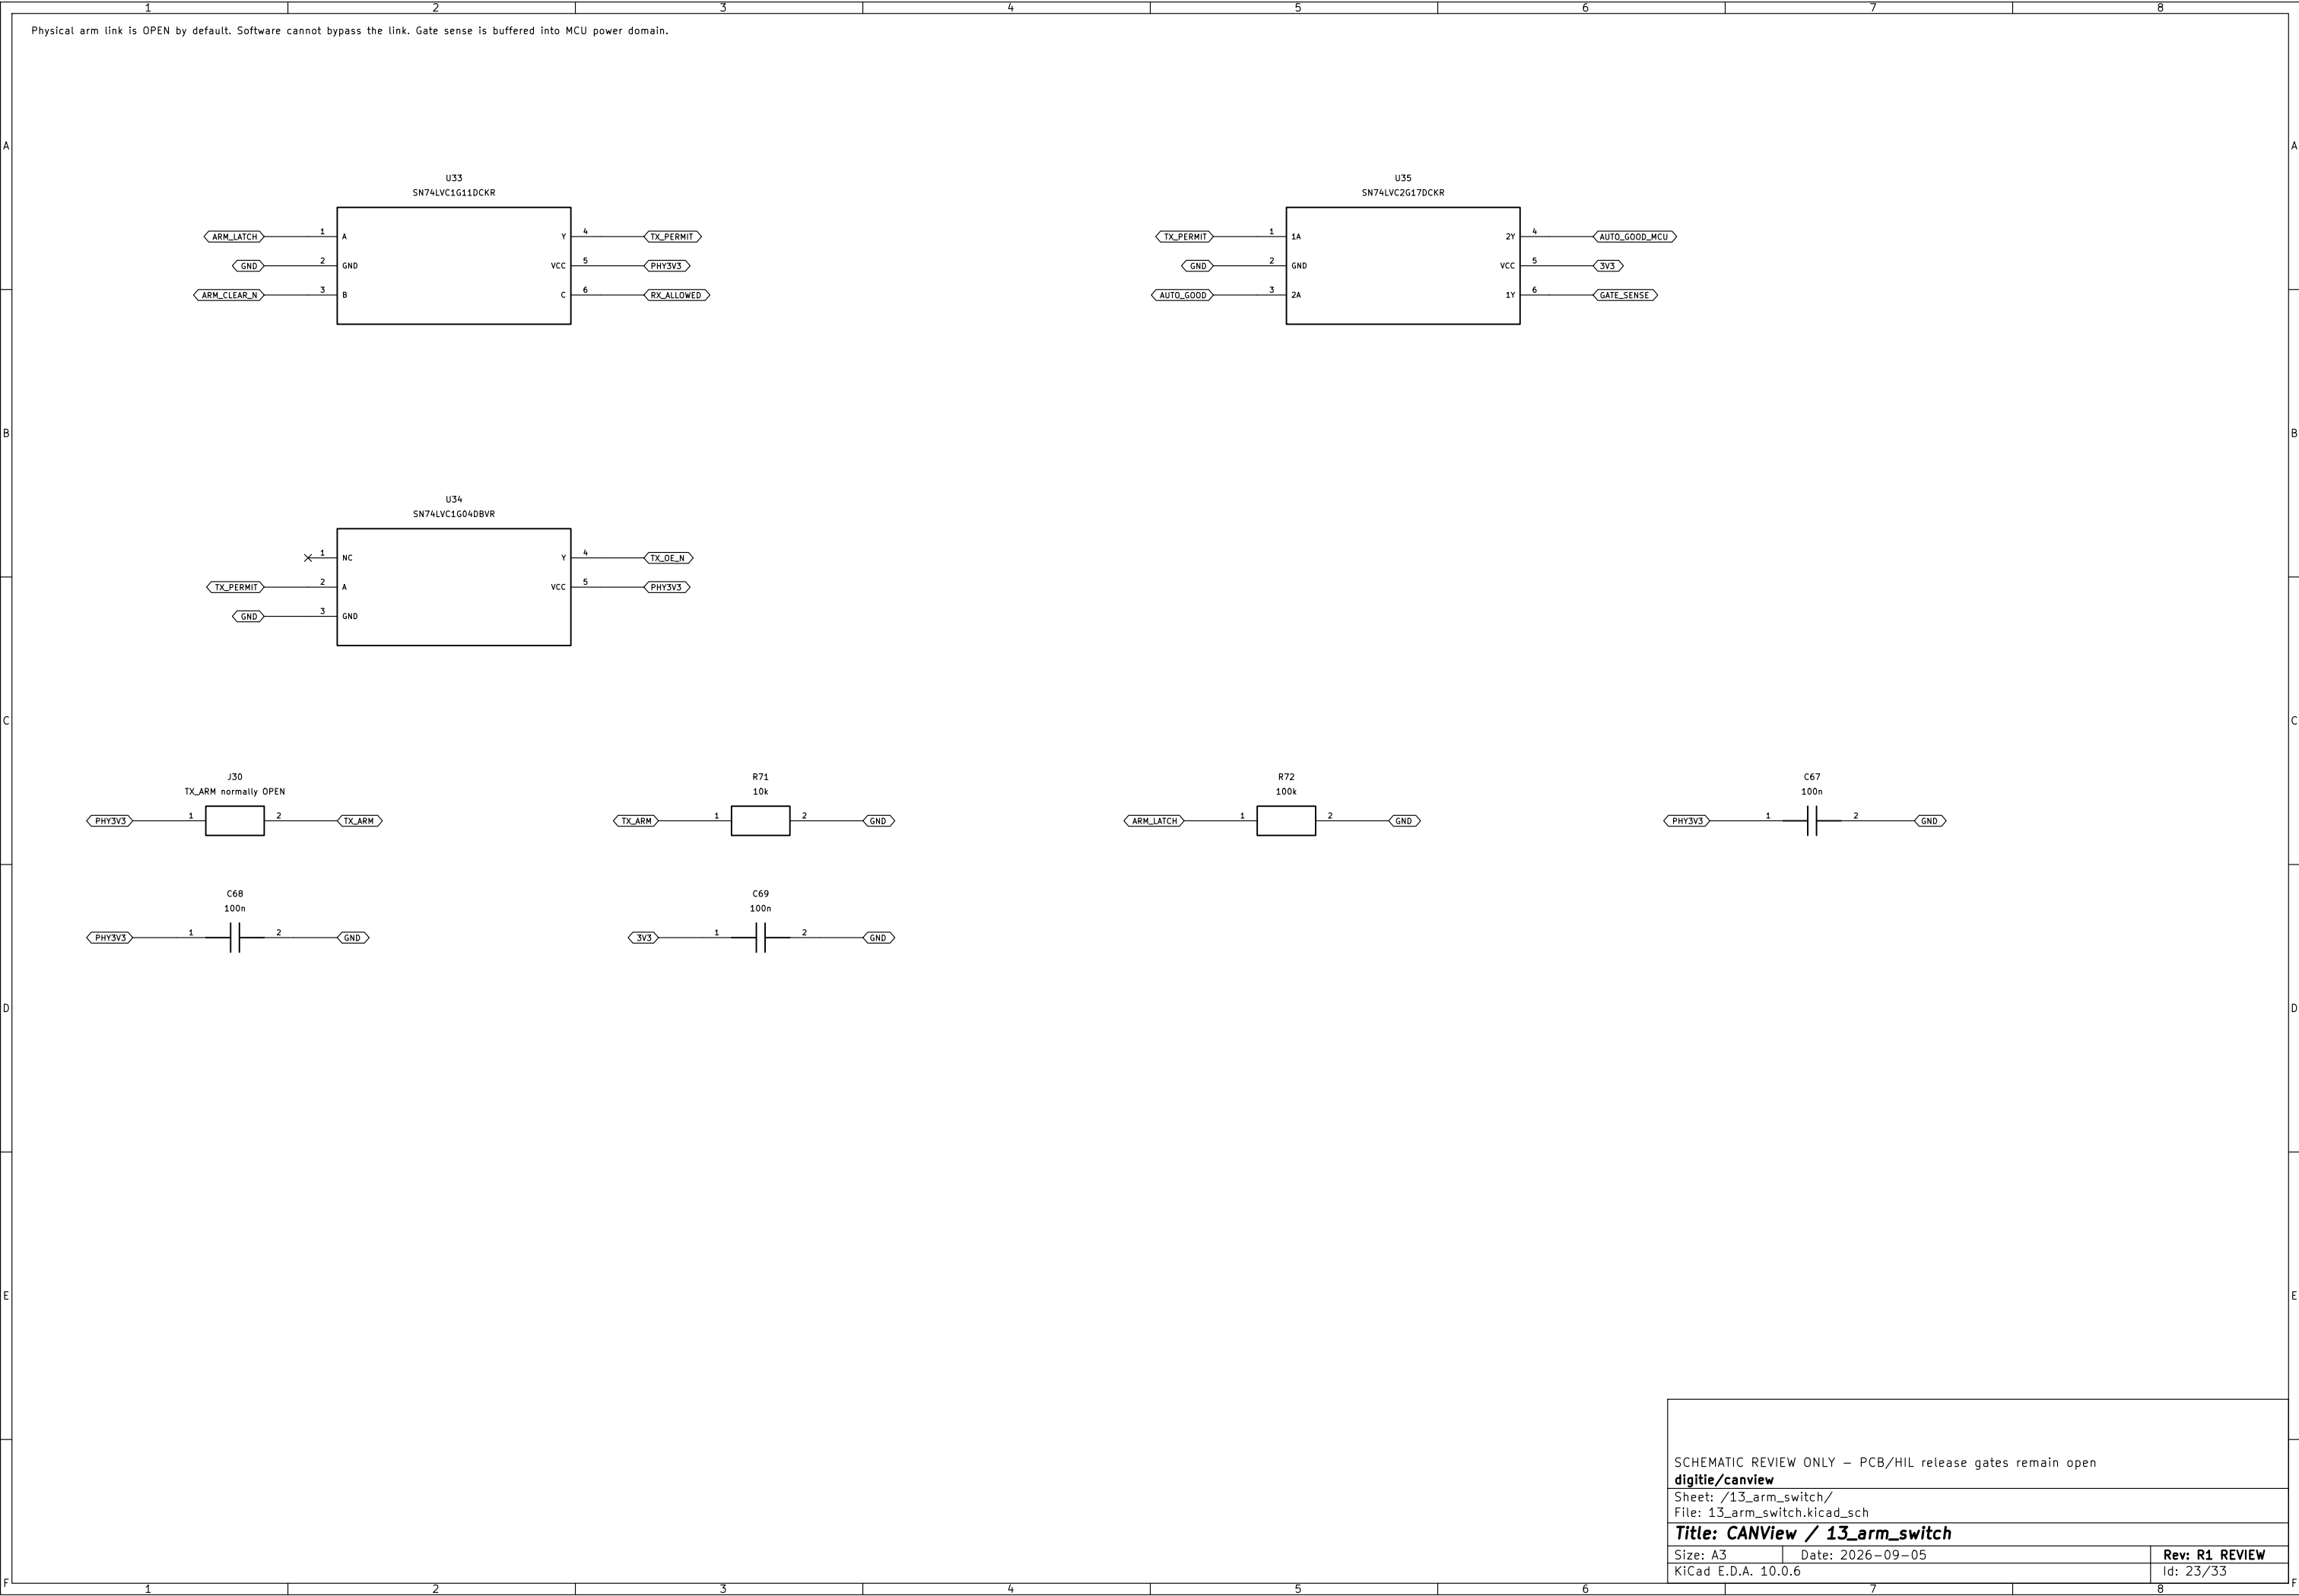

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /13_arm_switch/

File: 13_arm_switch.kicad_sch

Title: CANView / 13_arm_switch


Size: A3


Date: 2026-09-05


Rev: R1 REVIEW


KiCad E.D.A. 10.0.6


Id: 23/33

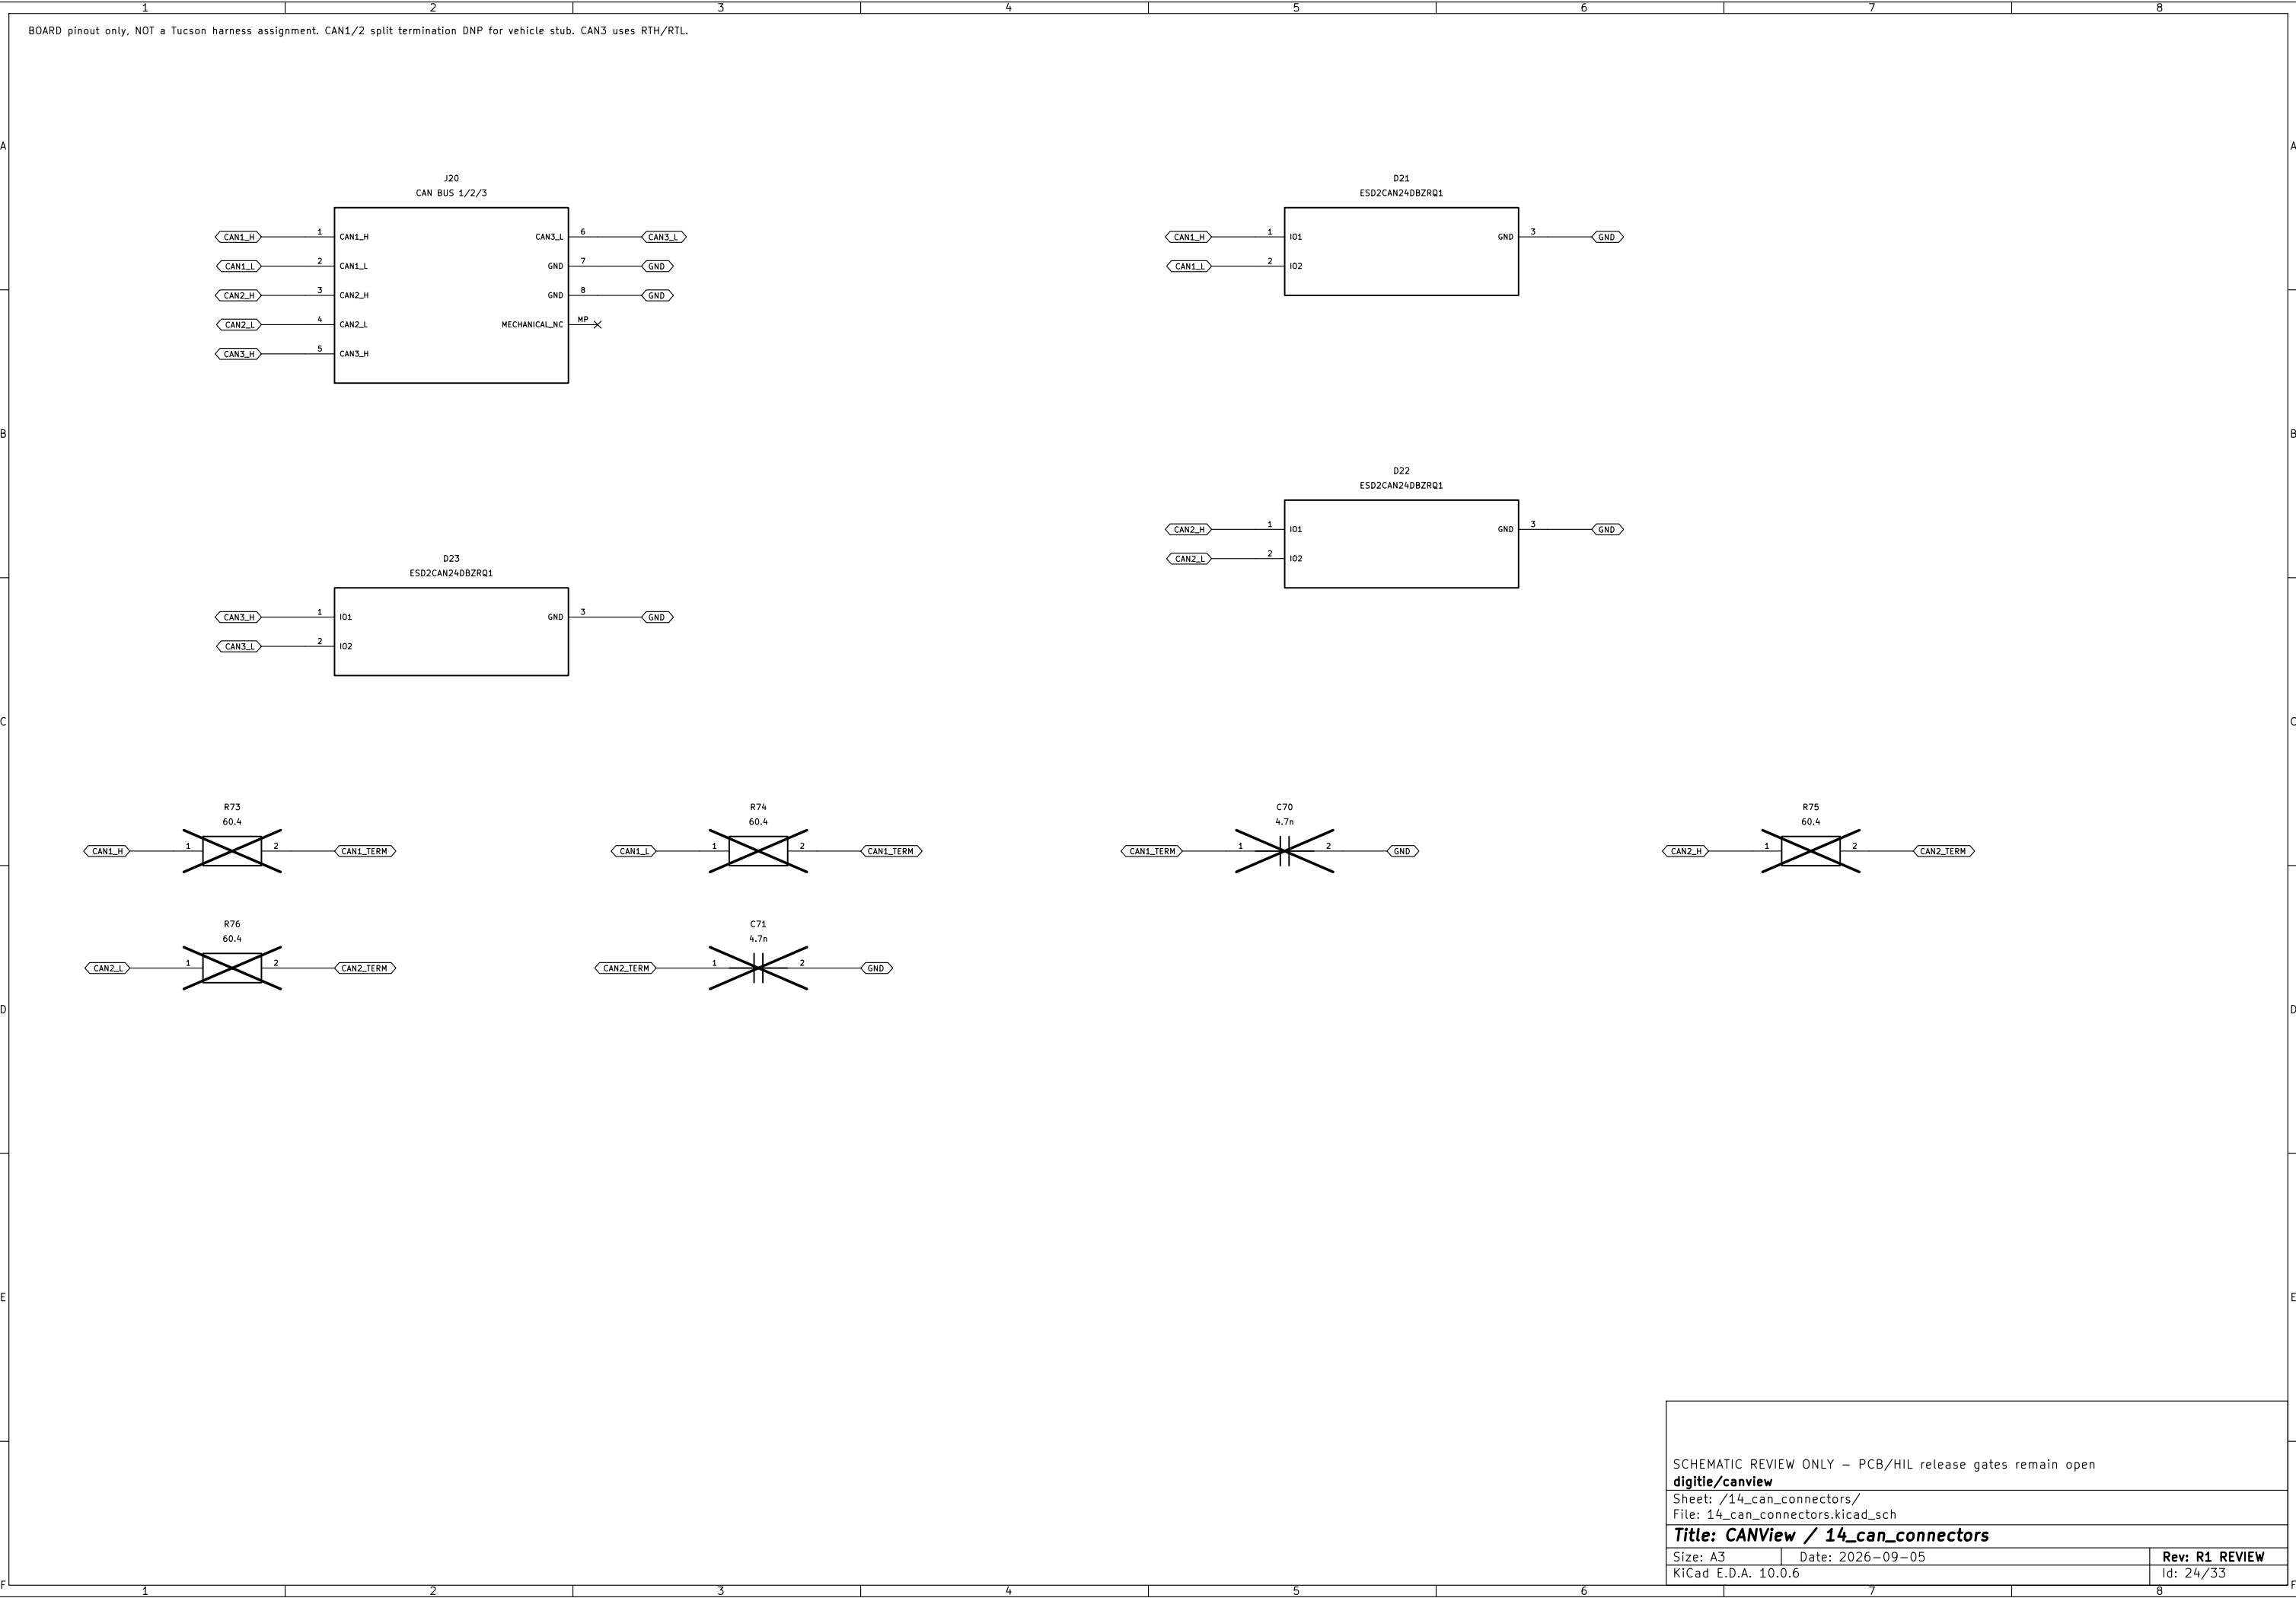


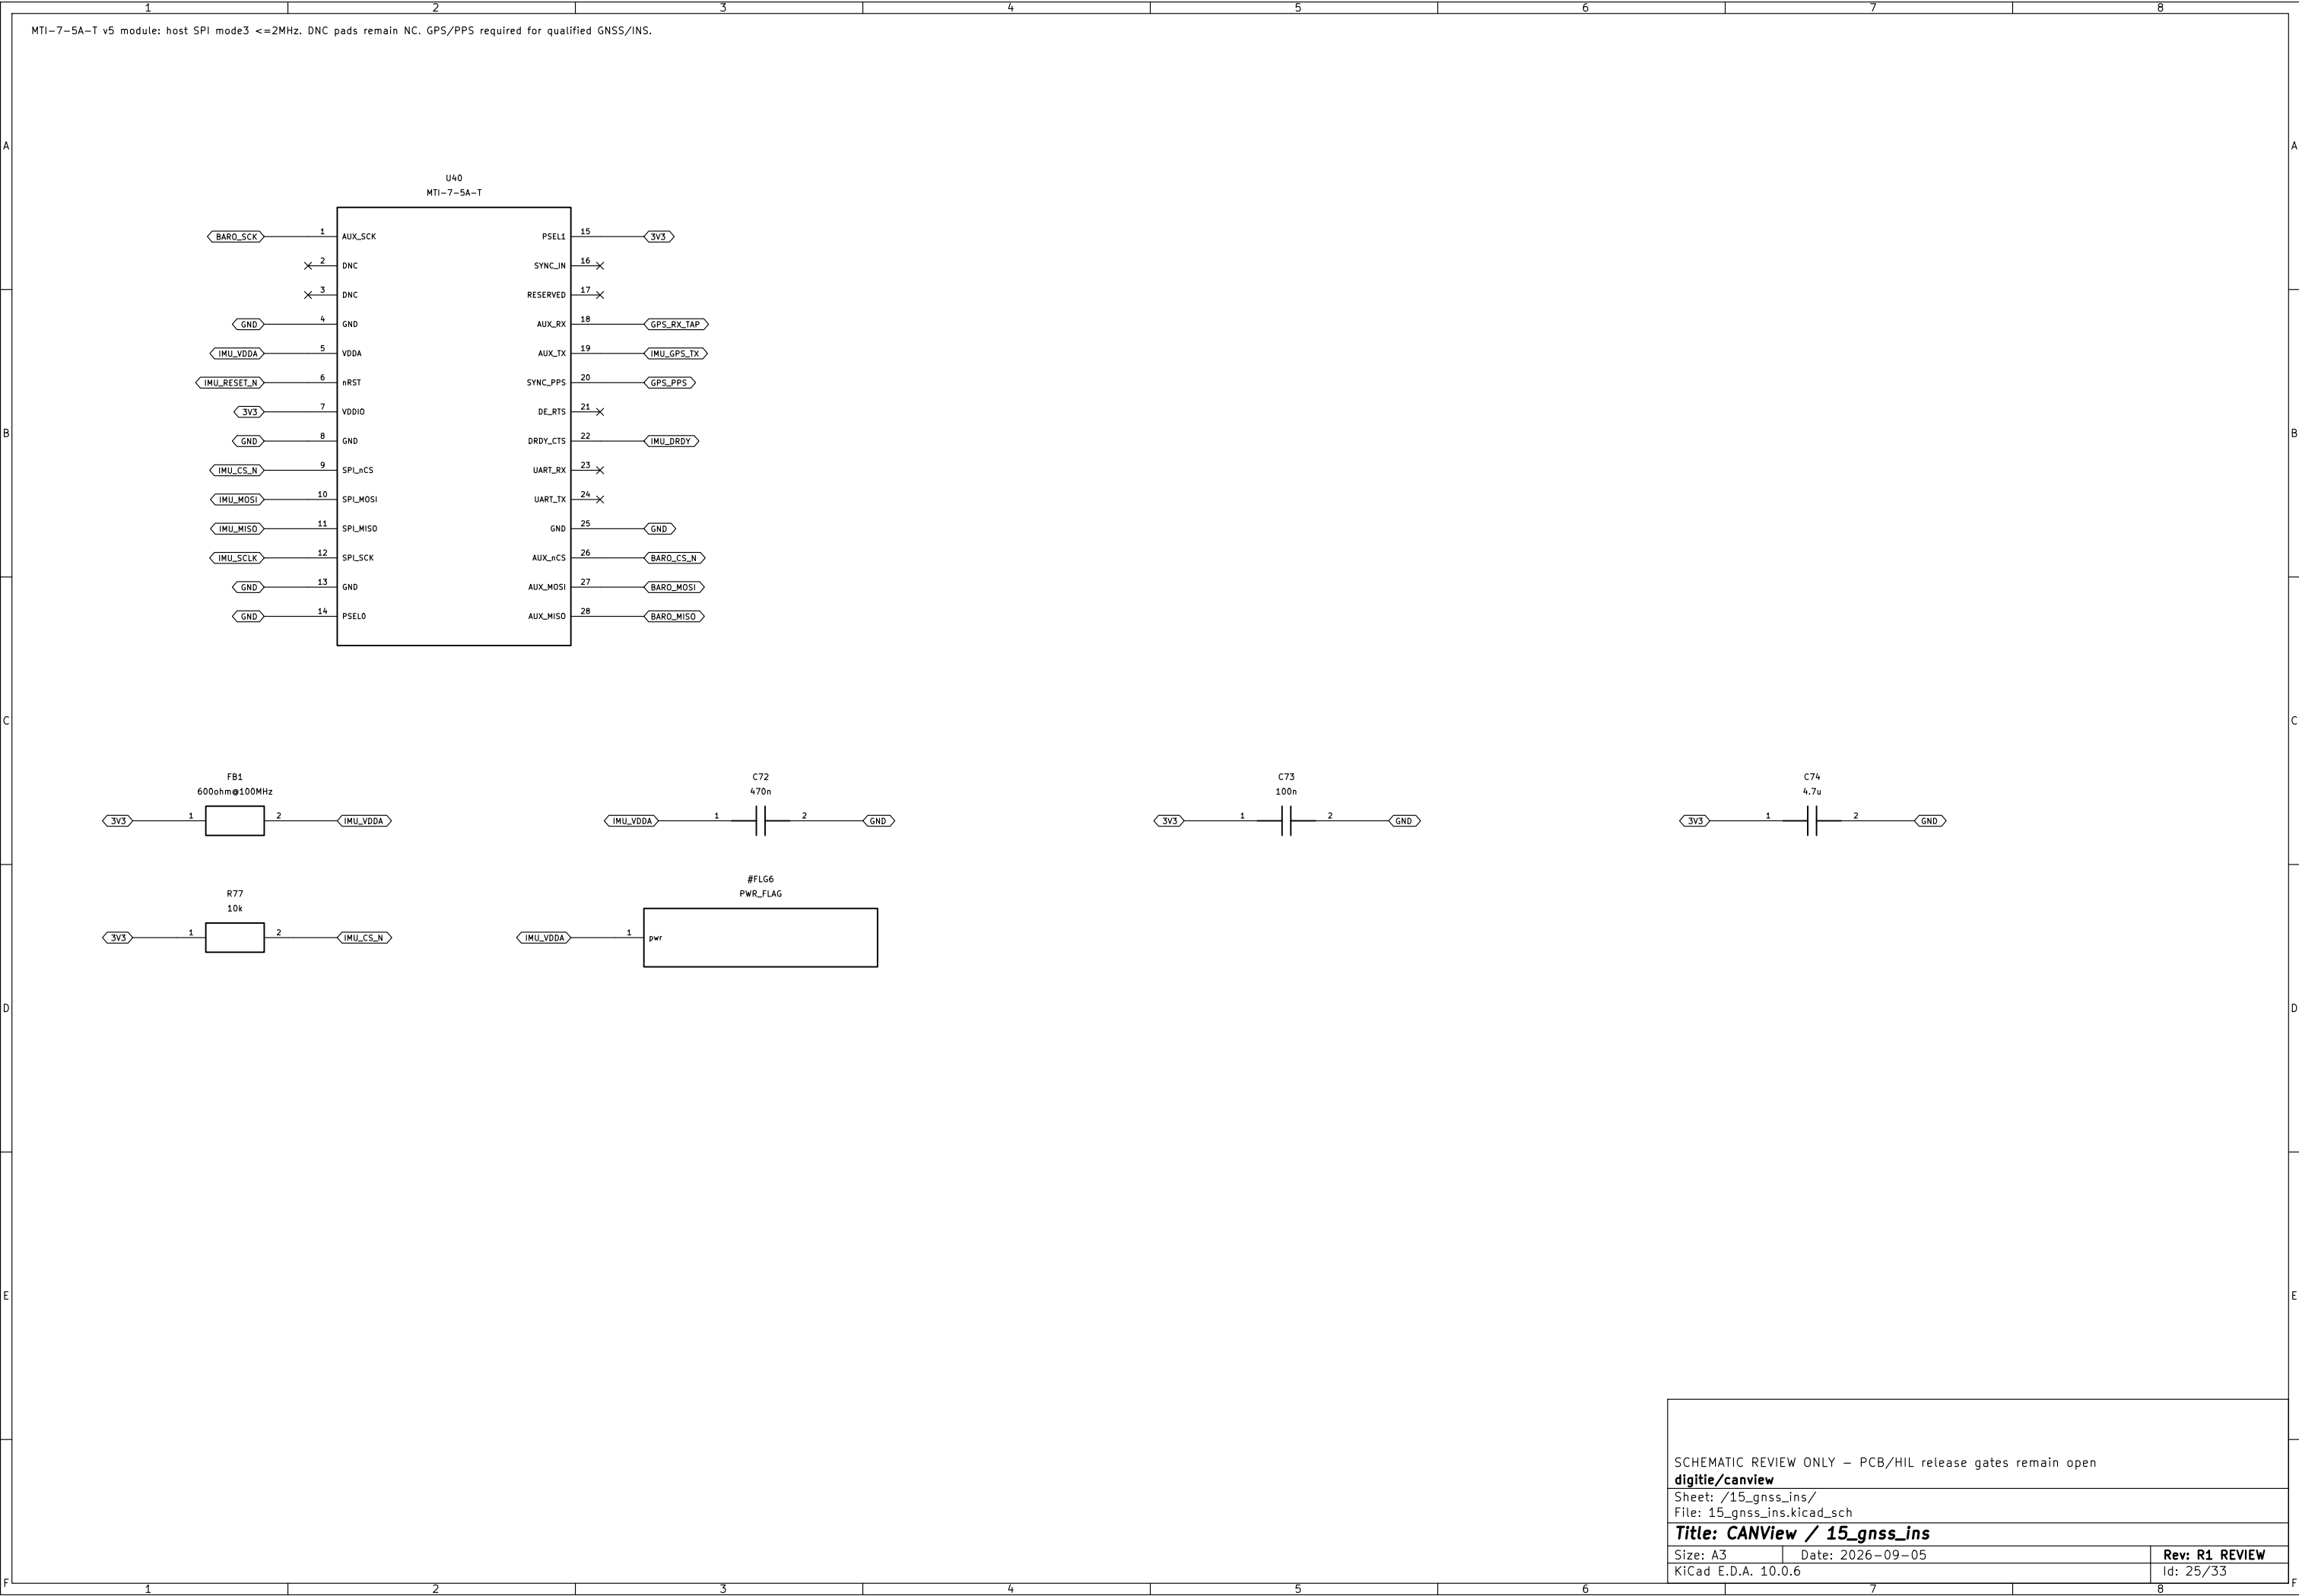

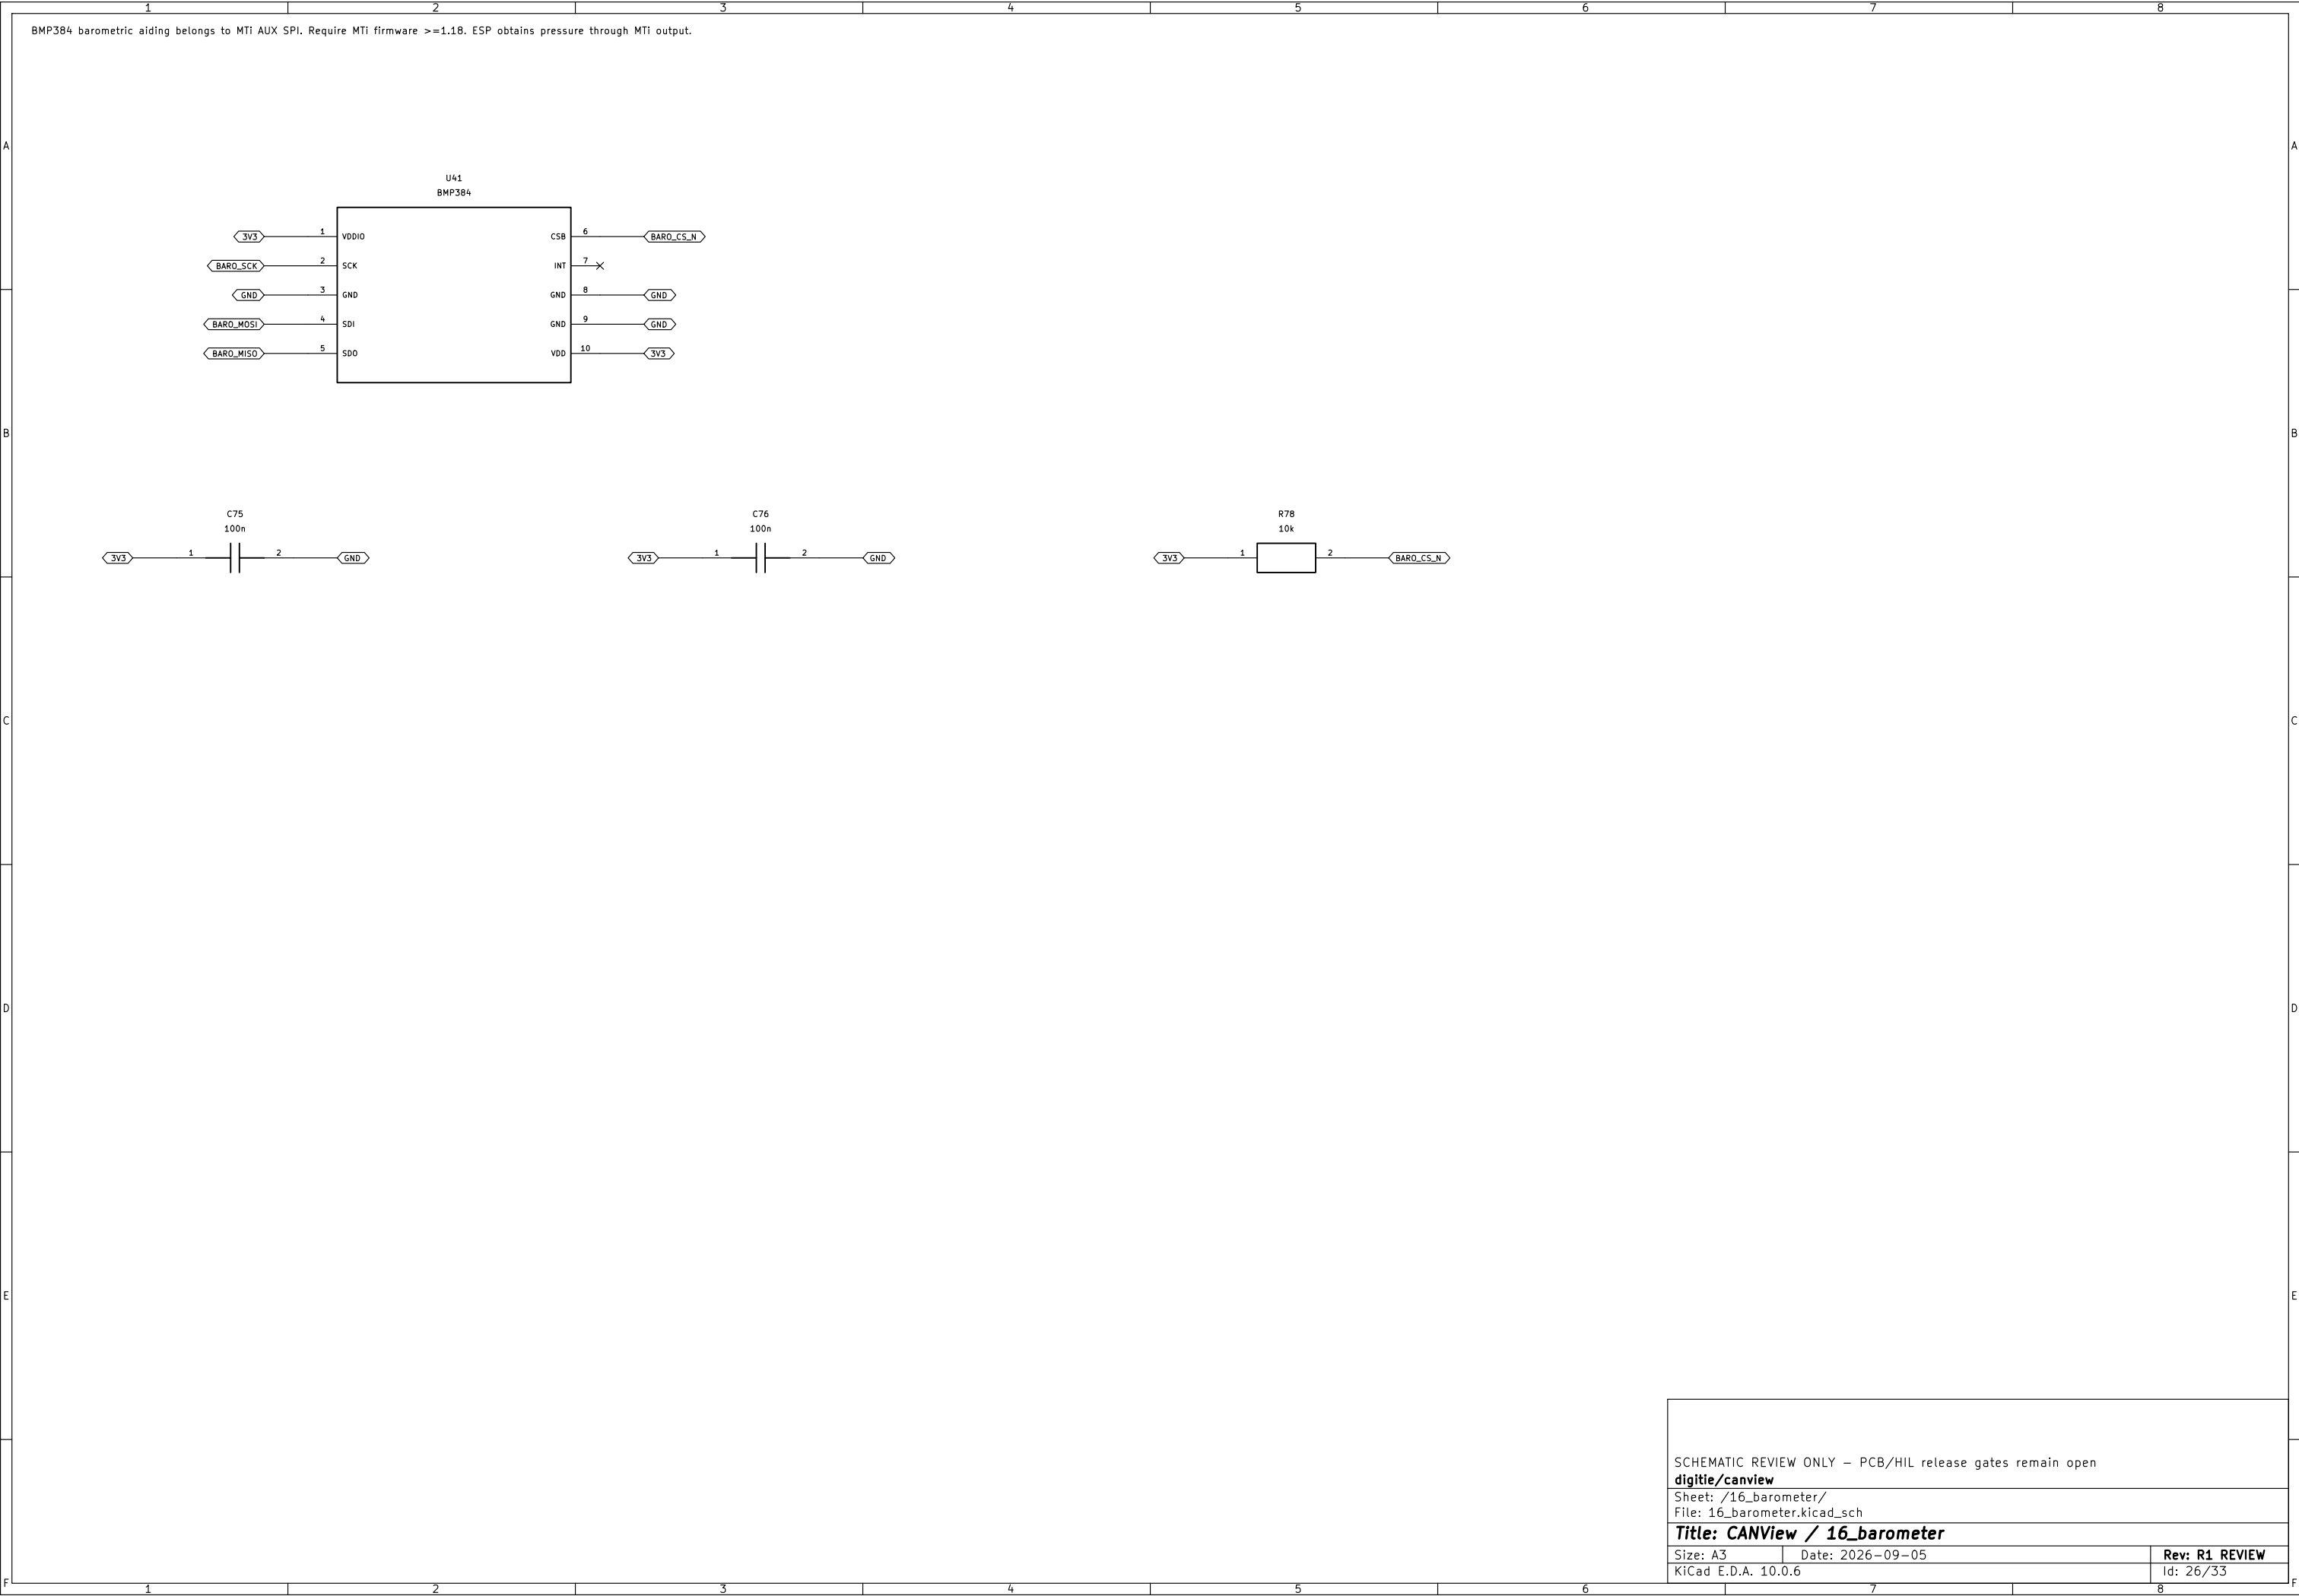

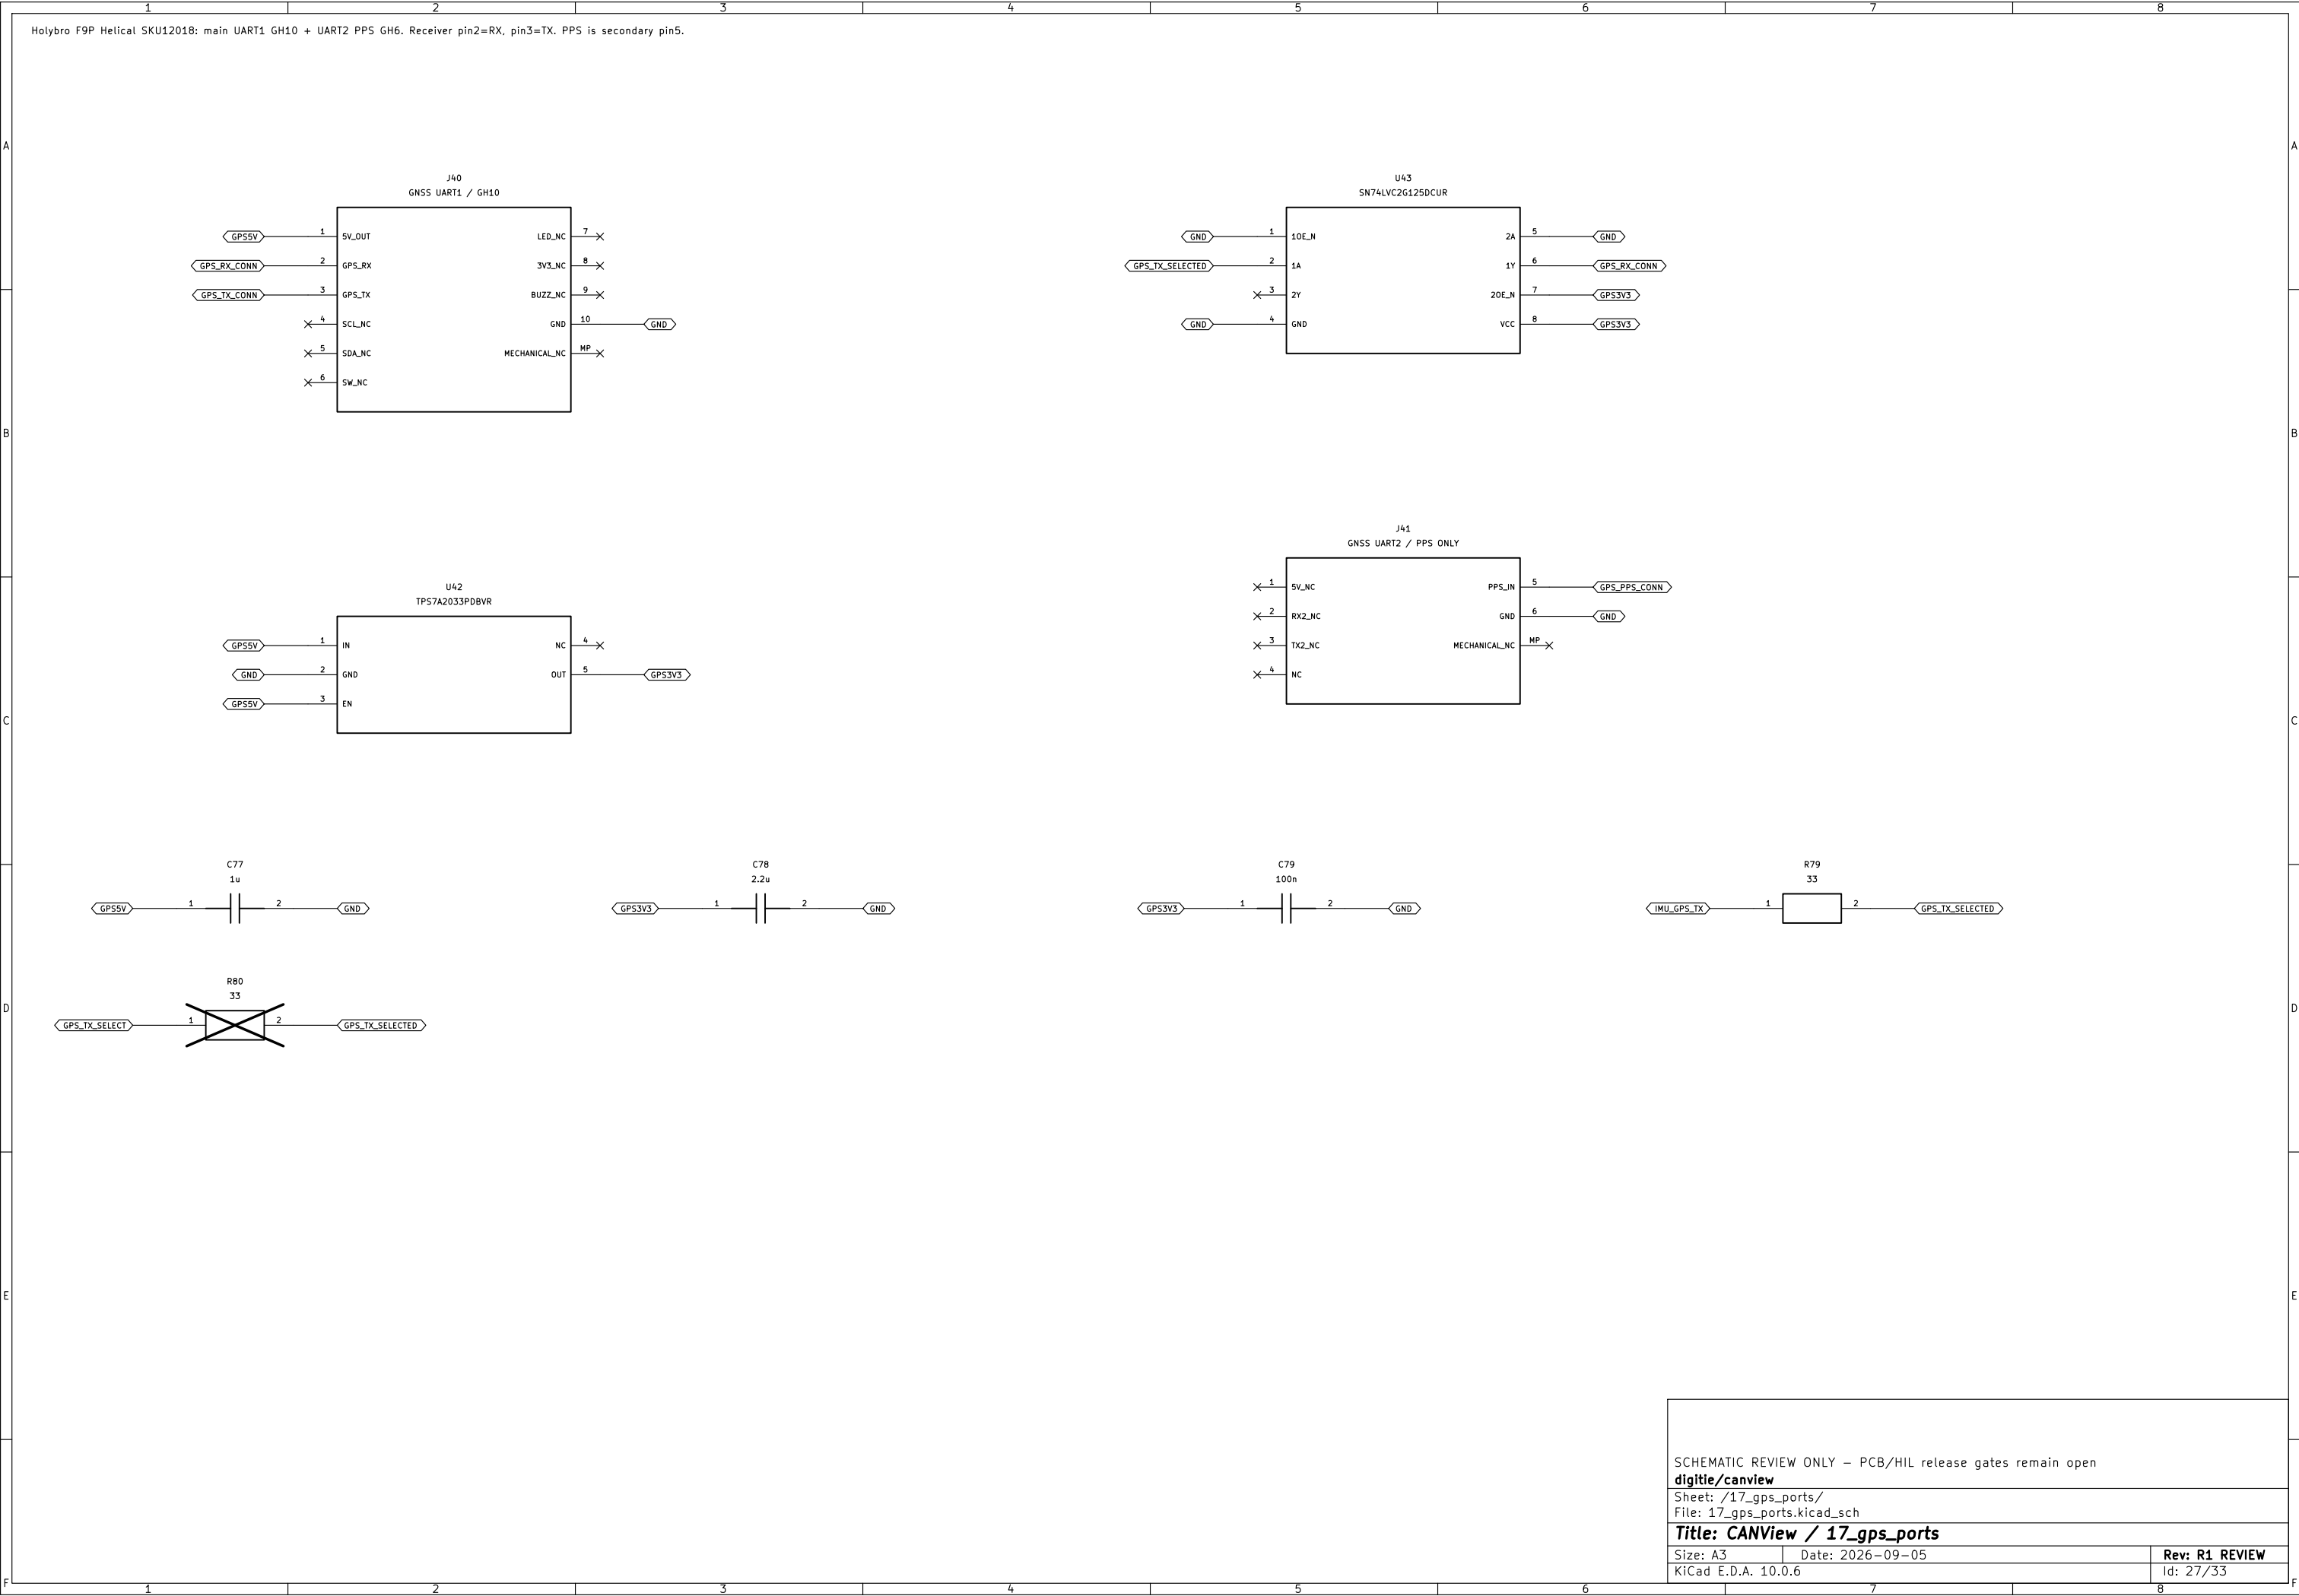

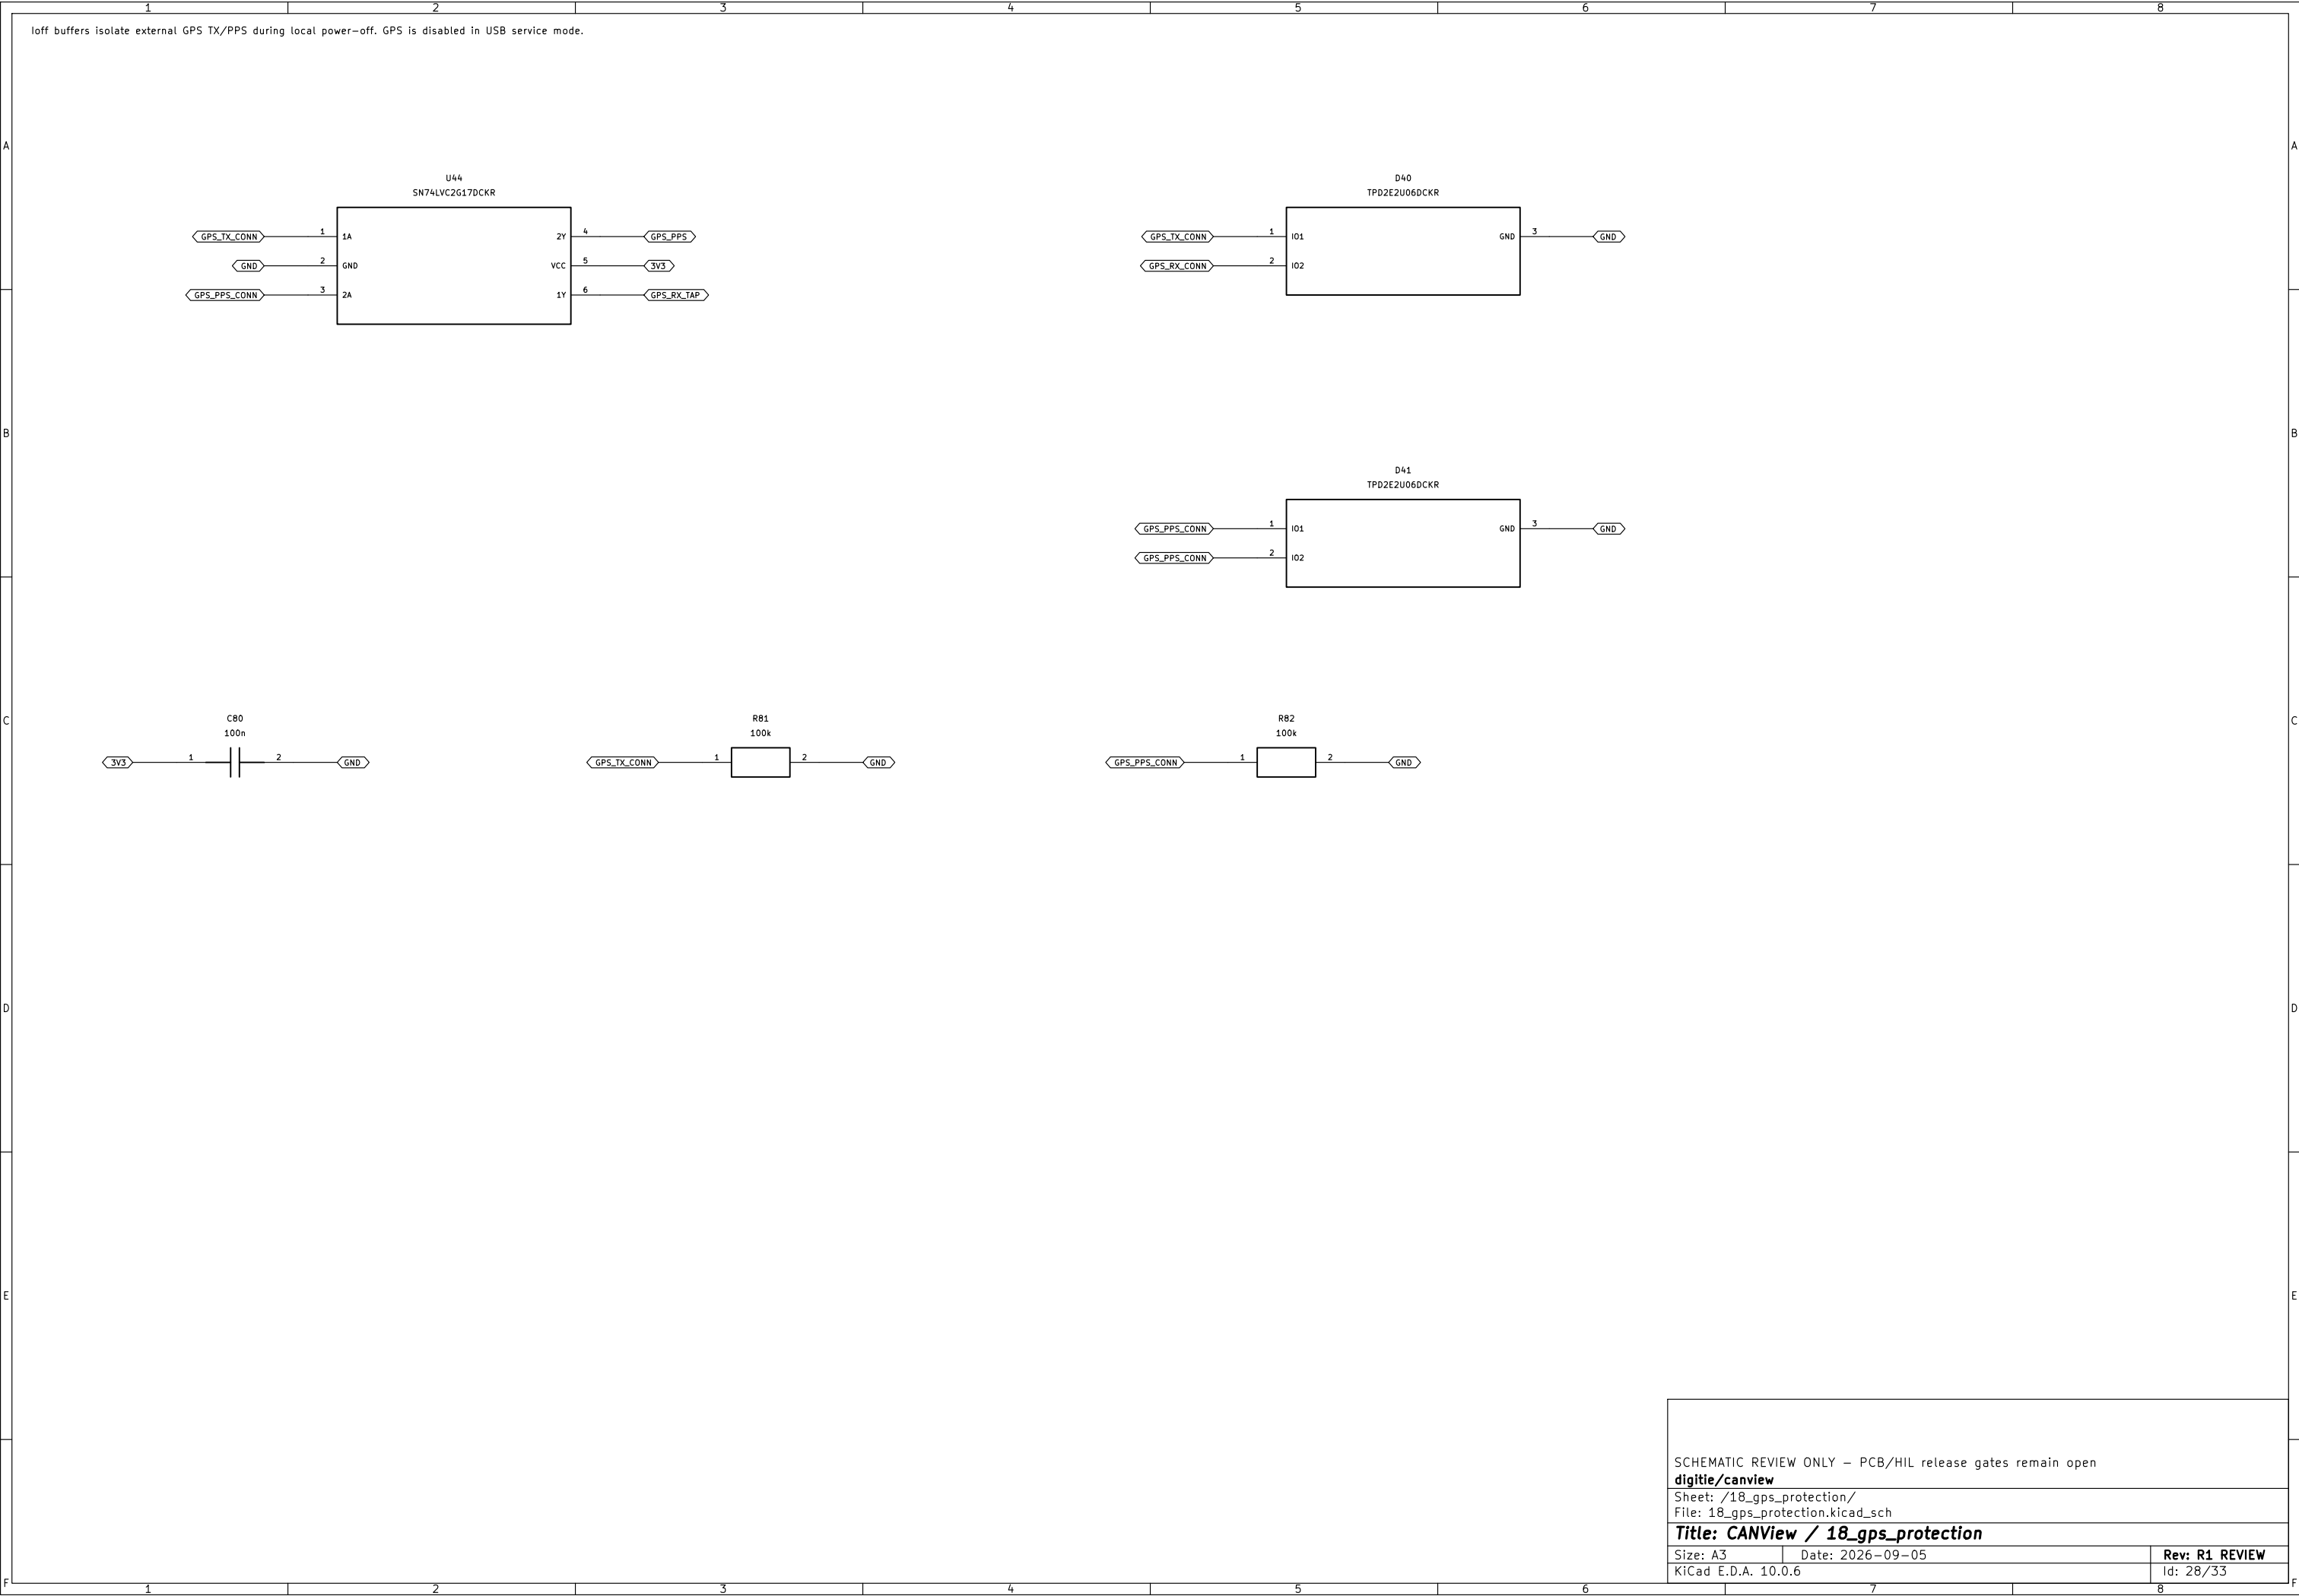

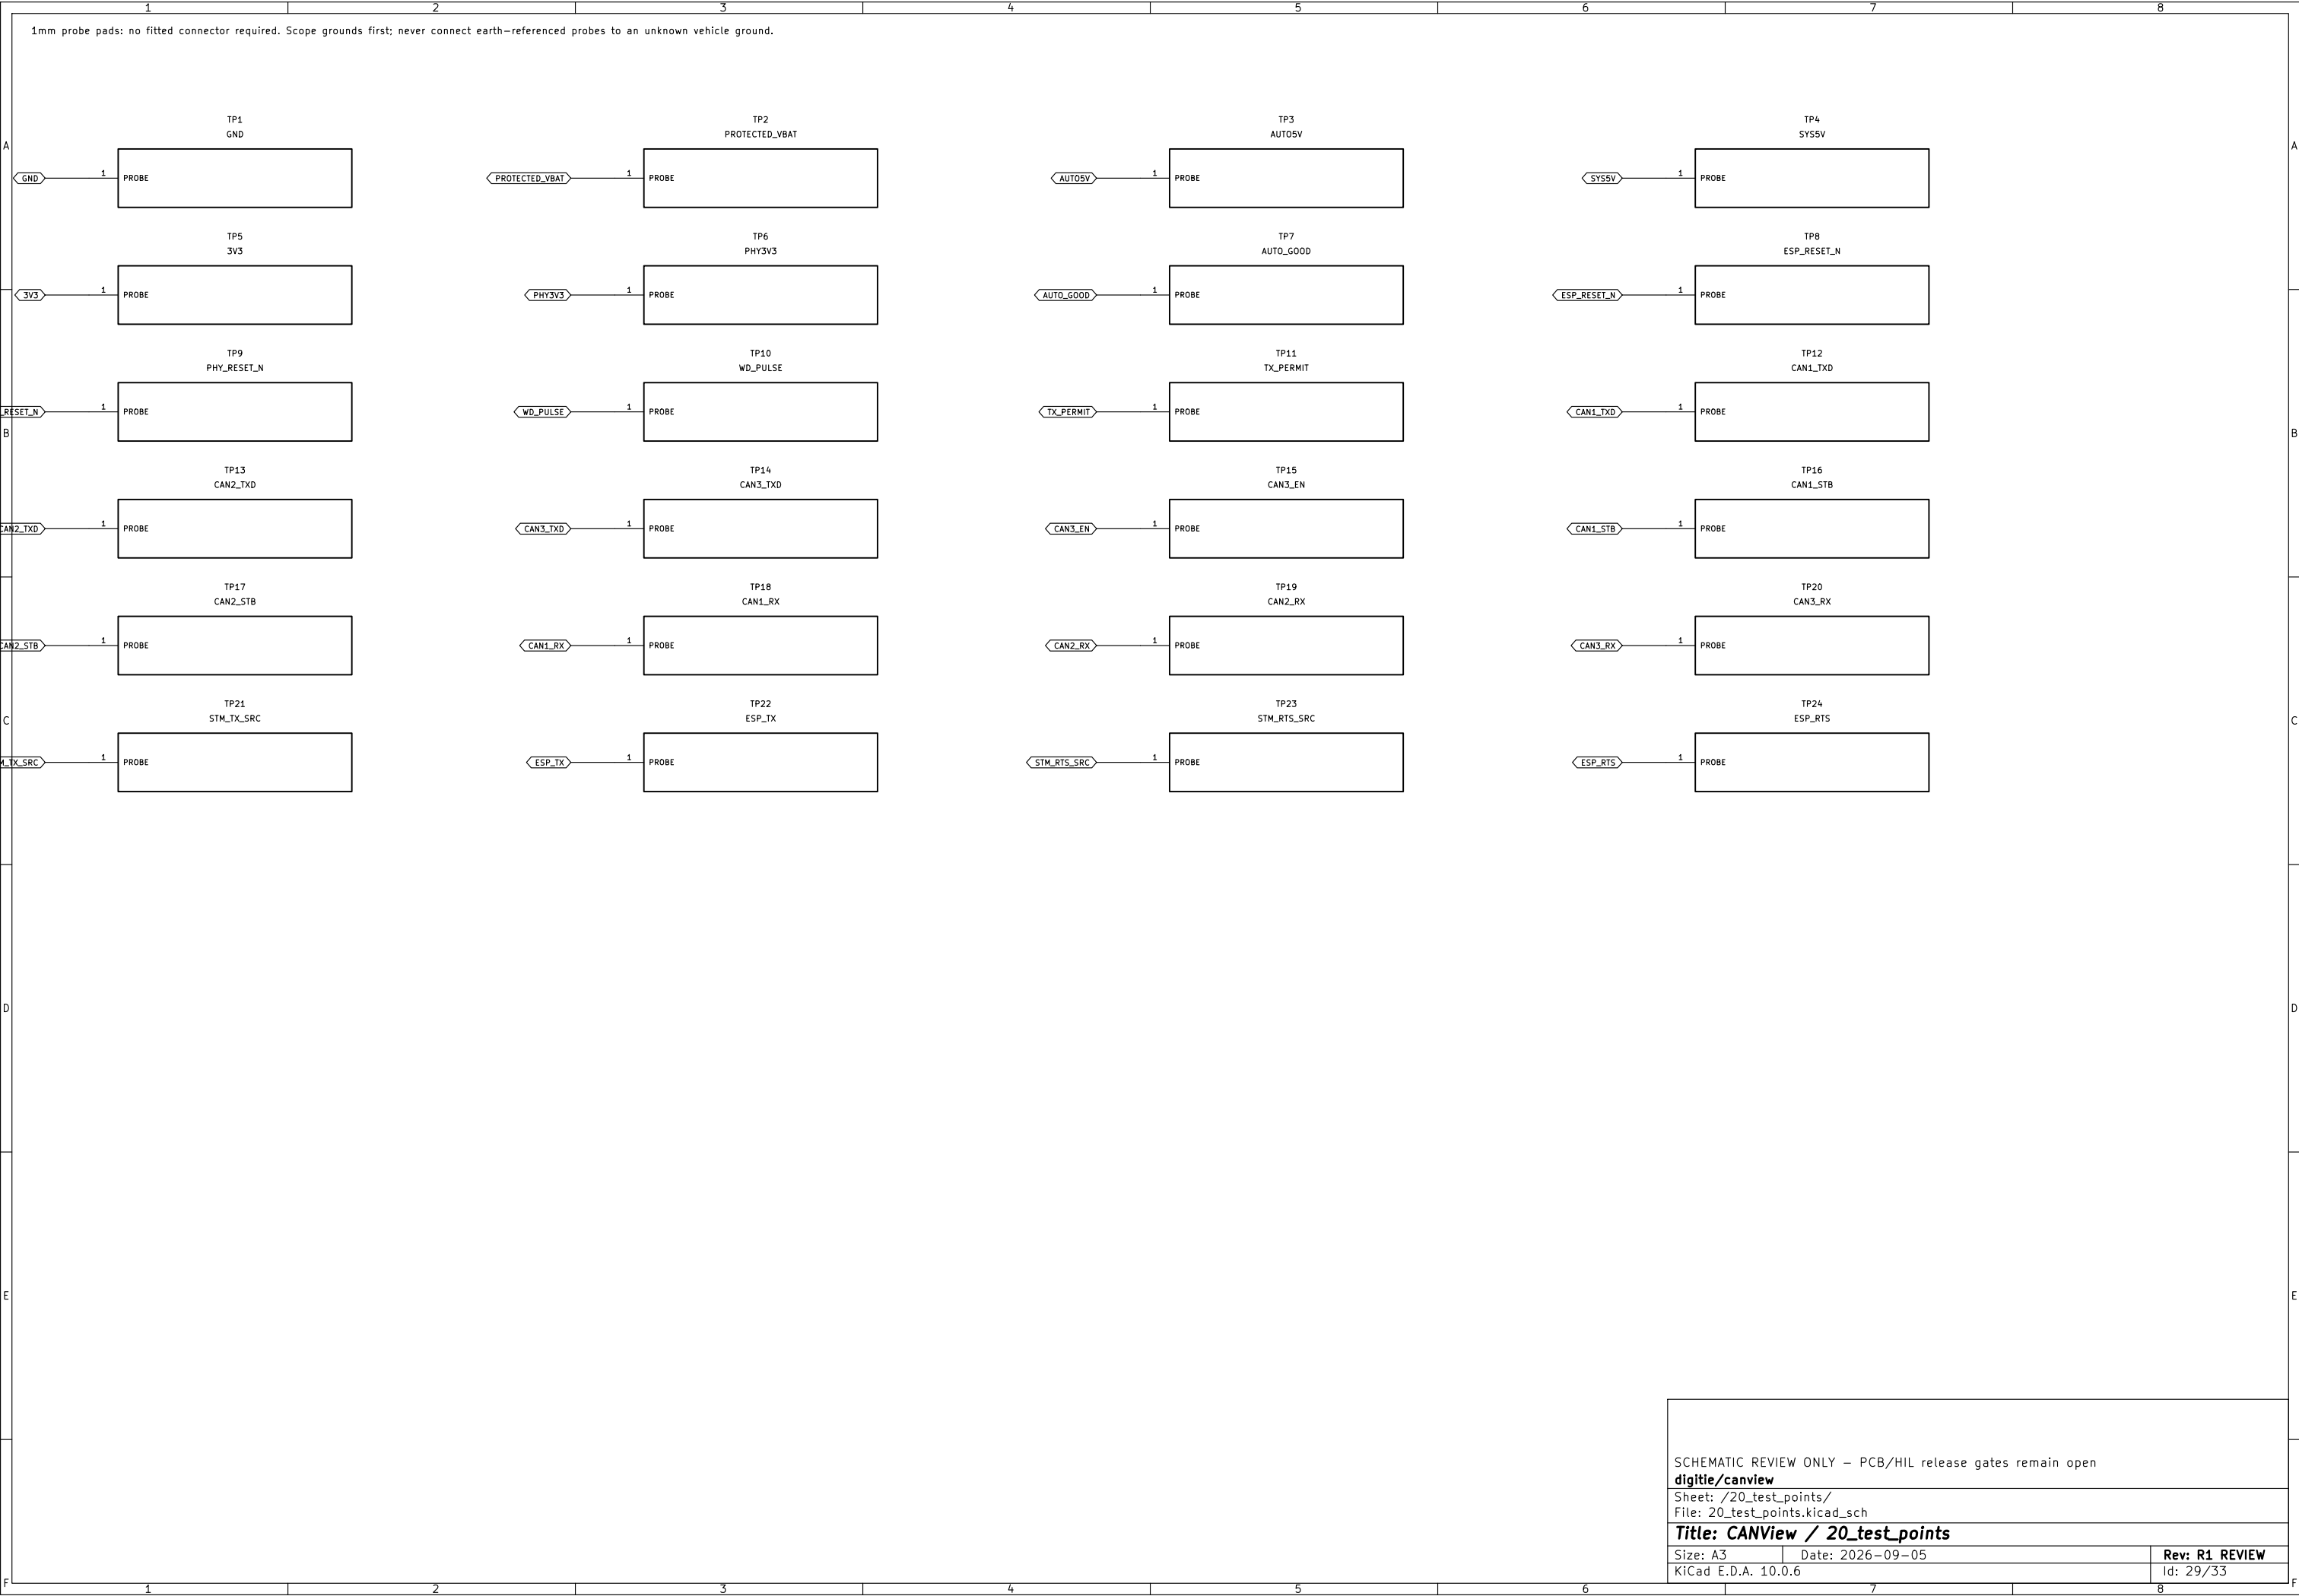

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open


digitie/canview


Sheet: /20_test_points/
File: 20_test_points.kicad_sch

Title: CANView / 20_test_points


Size: A3Date: 2026-09-05KiCad E.D.A. 10.0.6

Rev: R1 REVIEW
Id: 29/33

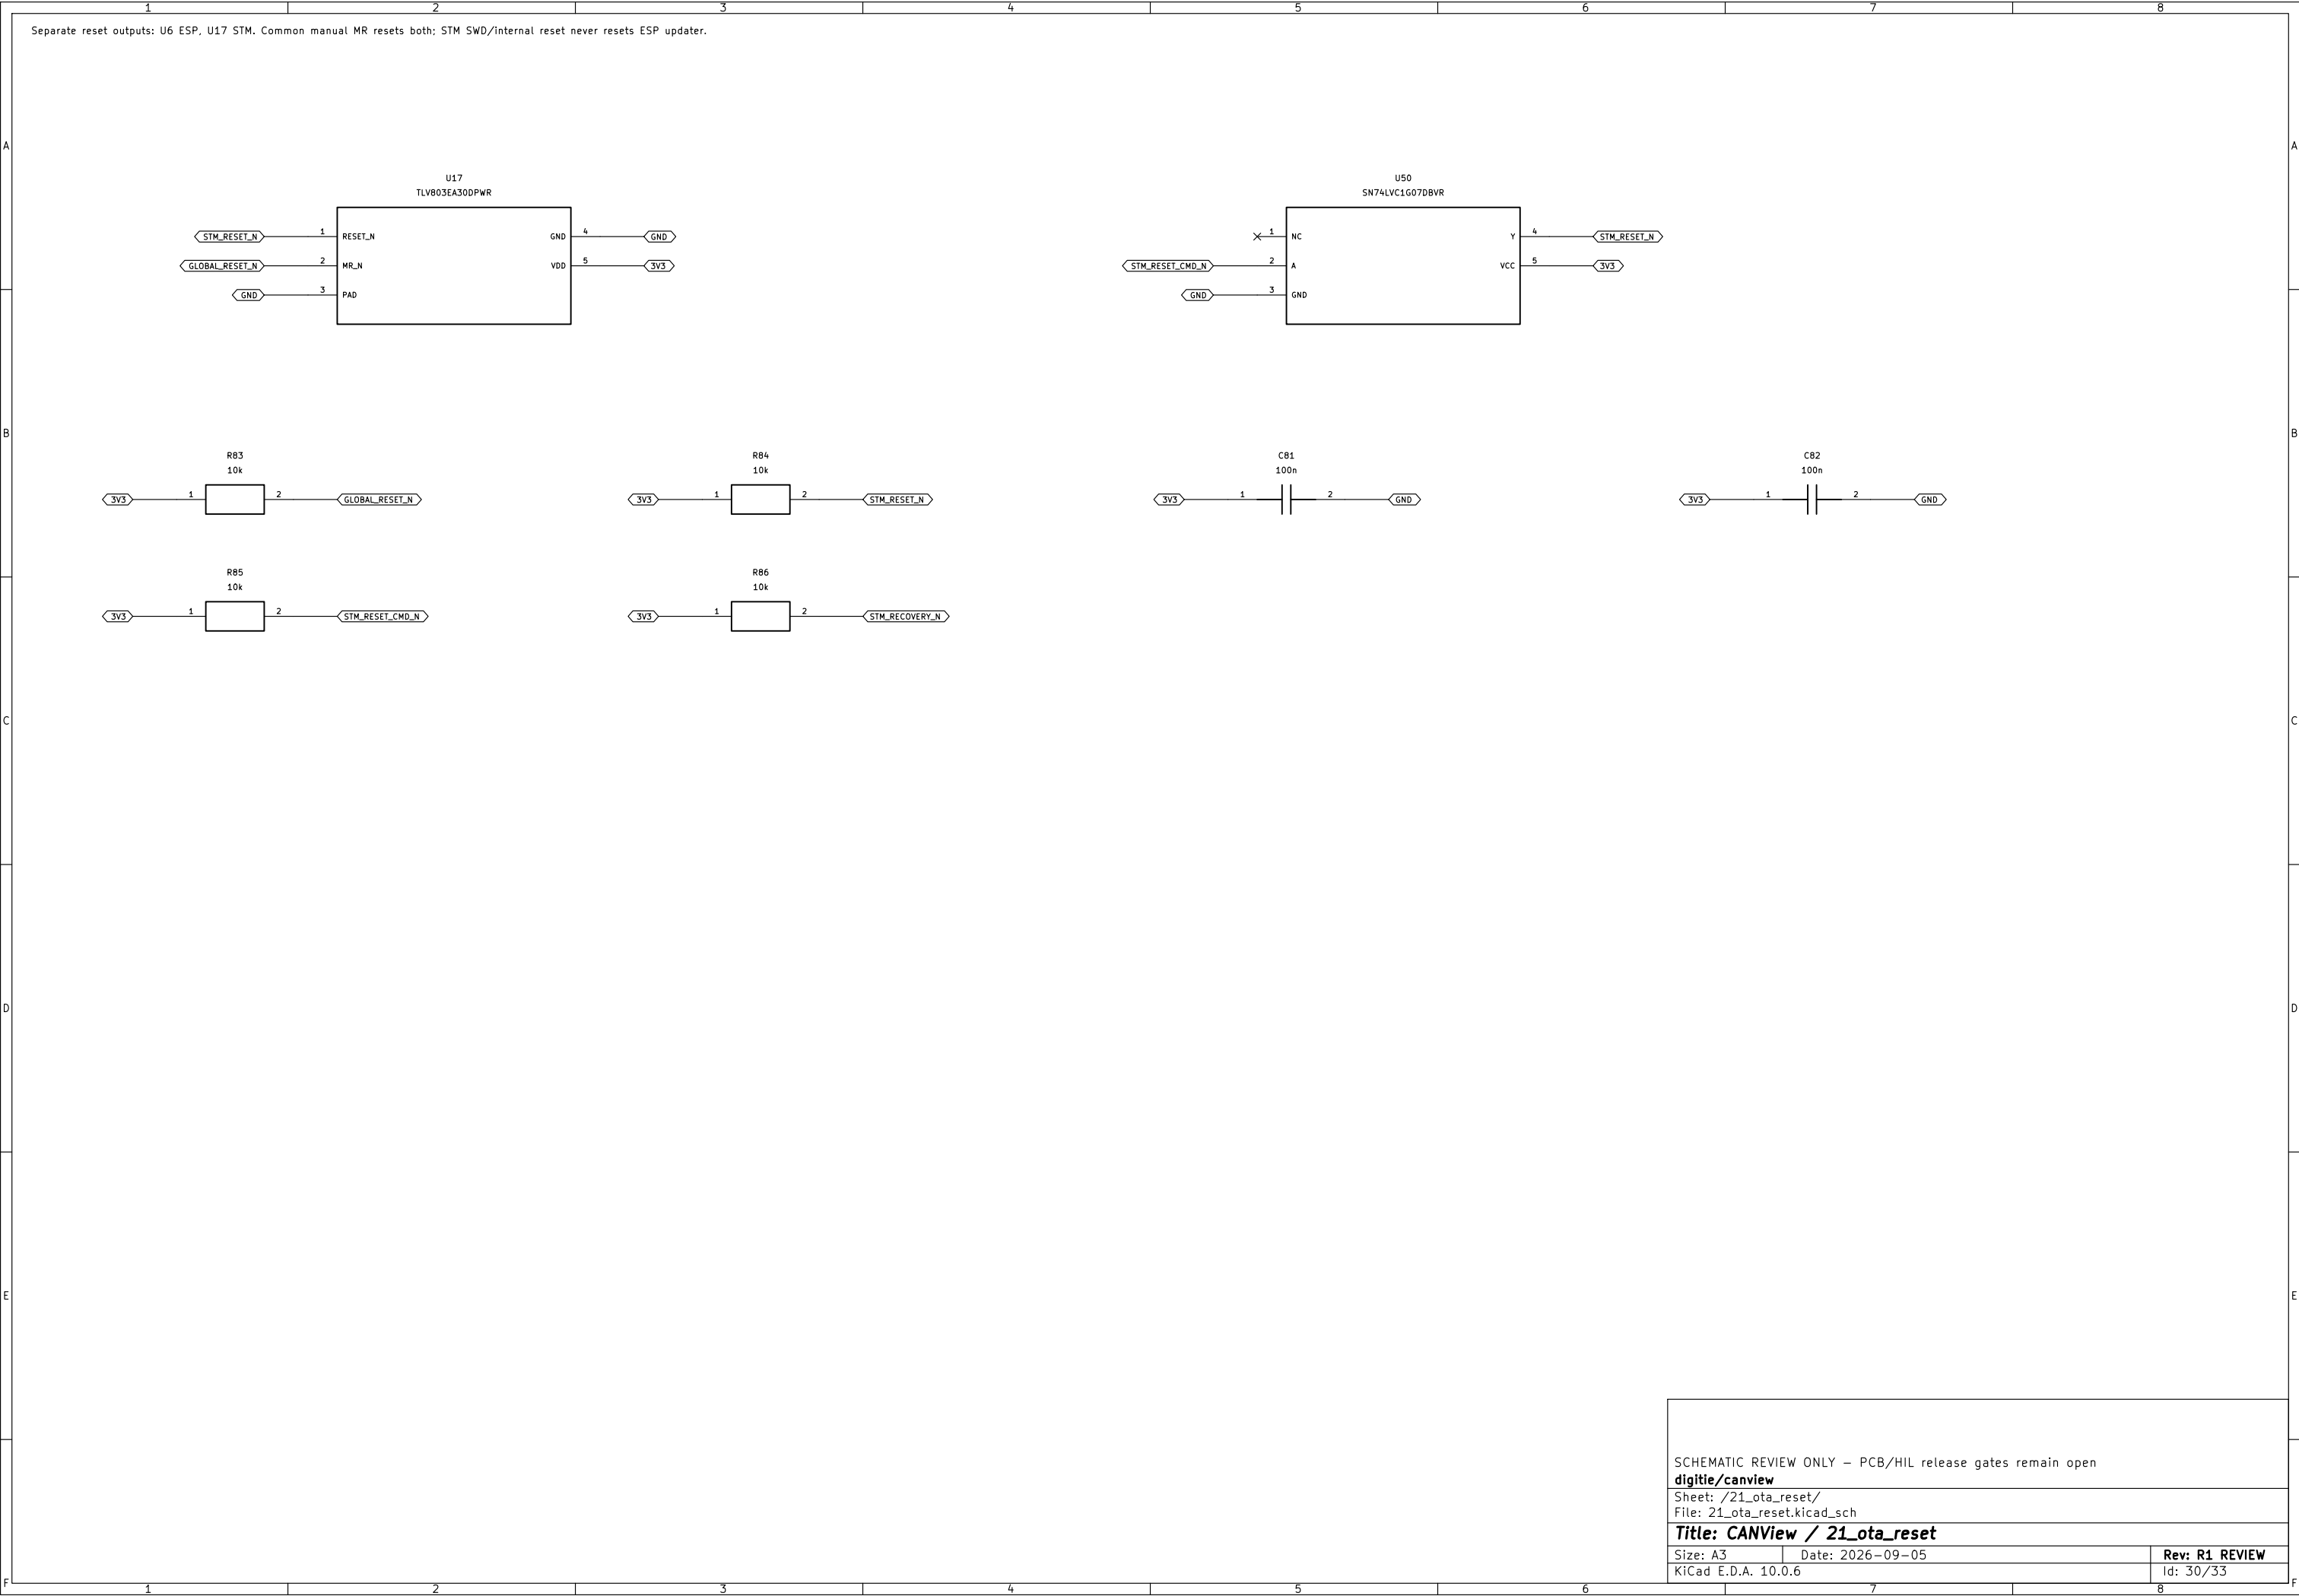

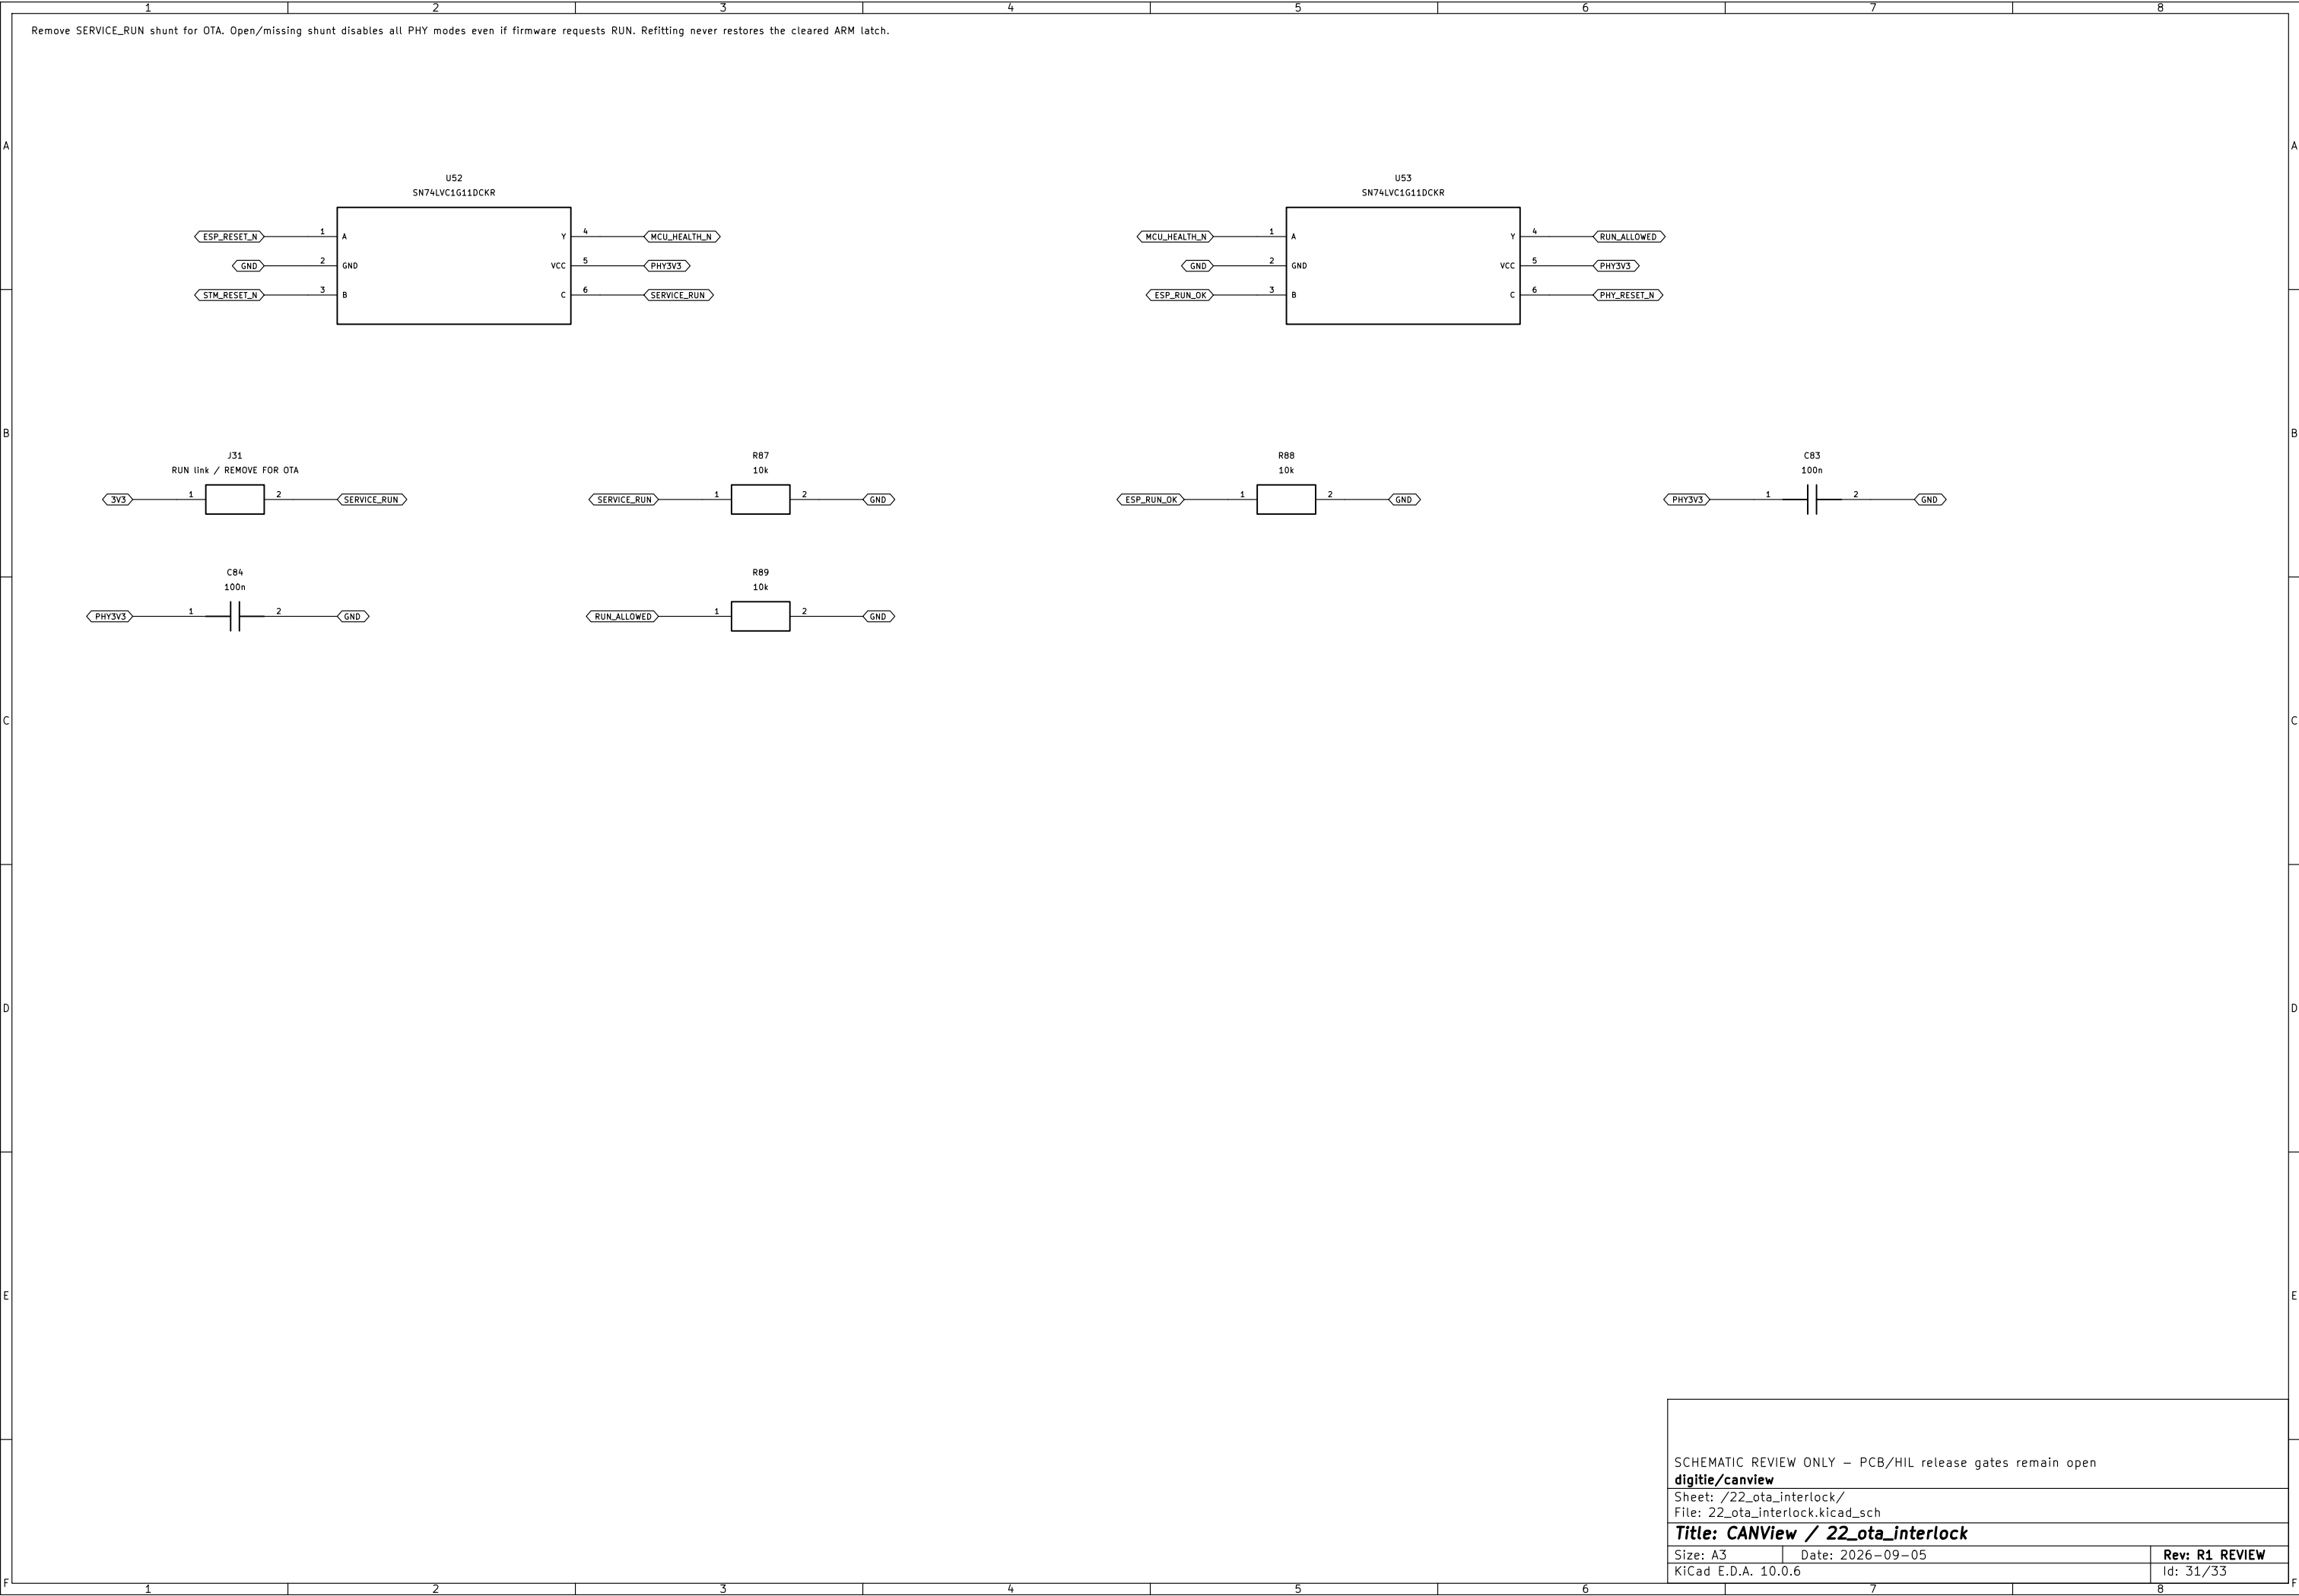

RECOVERY GPIO8 held at reset selects signed ESP test app. PB9 LOW requests authenticated STM bootloader with BOOT0 LOW. J32 normally OPEN restricts ROM to physical service.

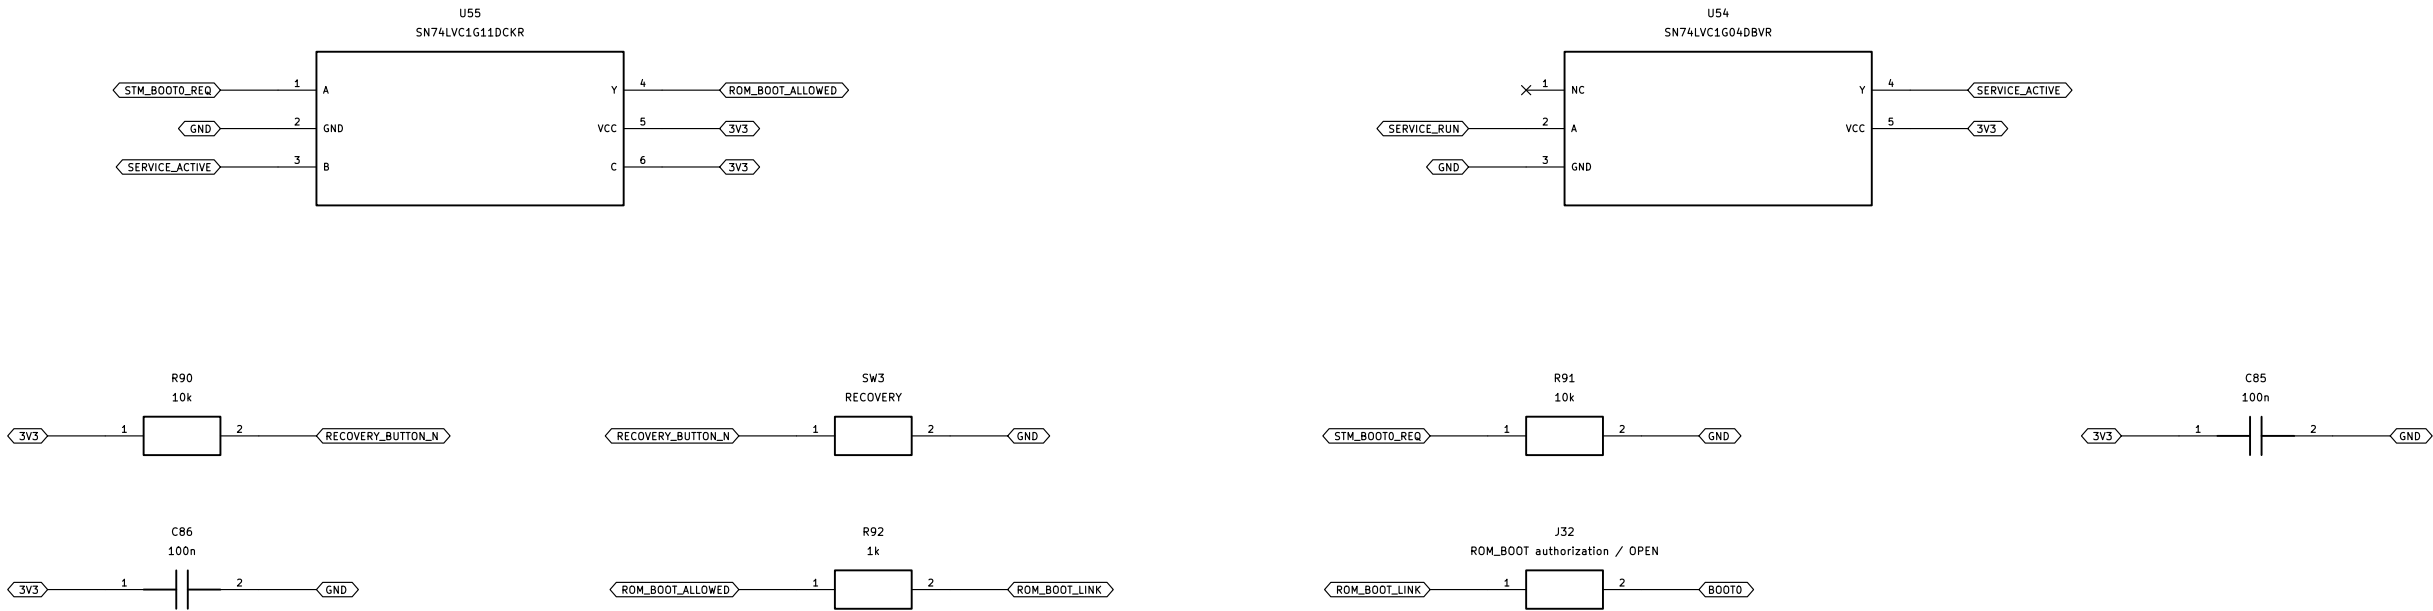

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open
digitie/canview

Sheet: /23_ota_recovery/
File: 23_ota_recovery.kicad_sch

Title: CANView / 23_ota_recovery

Size: A3
KiCad E.D.A. 10.0.6

Date: 2026-09-05

Rev: R1 REVIEW
Id: 32/33

