





	1	2	3	4	5	6	7	8	
A	00_vehicle_input : 00_vehicle_input.kicad_sch		04_stm32 : 04_stm32.kicad_sch		14_can_connectors : 14_can_connectors.kicad_sch				A
B	00b_reverse_ov : 00b_reverse_ov.kicad_sch		05_debug_clock_uart : 05_debug_clock_uart.kicad_sch		15_gnss_ins : 15_gnss_ins.kicad_sch				B
	00c_auto_5v : 00c_auto_5v.kicad_sch		06_esp32 : 06_esp32.kicad_sch		16_barometer : 16_barometer.kicad_sch				
	01_usb_c : 01_usb_c.kicad_sch		07_esp_service : 07_esp_service.kicad_sch		17_gps_ports : 17_gps_ports.kicad_sch				
C	01a_usb_cc_supply : 01a_usb_cc_supply.kicad_sch		08_can_fd : 08_can_fd.kicad_sch		18_gps_protection : 18_gps_protection.kicad_sch				C
	01b_usb_lmit : 01b_usb_limit.kicad_sch		09_can_ft : 09_can_ft.kicad_sch		20_test_points : 20_test_points.kicad_sch				
	02_system_power : 02_system_power.kicad_sch		10_tx_gate : 10_tx_gate.kicad_sch		21_ota_reset : 21_ota_reset.kicad_sch				
D	03_reset : 03_reset.kicad_sch		11_phy_modes : 11_phy_modes.kicad_sch		22_ota_interlock : 22_ota_interlock.kicad_sch				D
	03b_phy_power : 03b_phy_power.kicad_sch		12_watchdog_latch : 12_watchdog_latch.kicad_sch		23_ota_recovery : 23_ota_recovery.kicad_sch				
	03c_auto_qualification : 03c_auto_qualification.kicad_sch		12b_latch_clear : 12b_latch_clear.kicad_sch		24_ota_test_points : 24_ota_test_points.kicad_sch				
E	19_gps_power : 19_gps_power.kicad_sch		13_arm_switch : 13_arm_switch.kicad_sch		SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open digitie/canview Sheet: / File: communicator.kicad_sch Title: CANView / communicator Size: A3Date: 2026–09–06KiCad E.D.A. 10.0.6 Rev: R2 N16R8 REVIEWId: 1/33				E
F	1	2	3	4	5	6	7	8	F

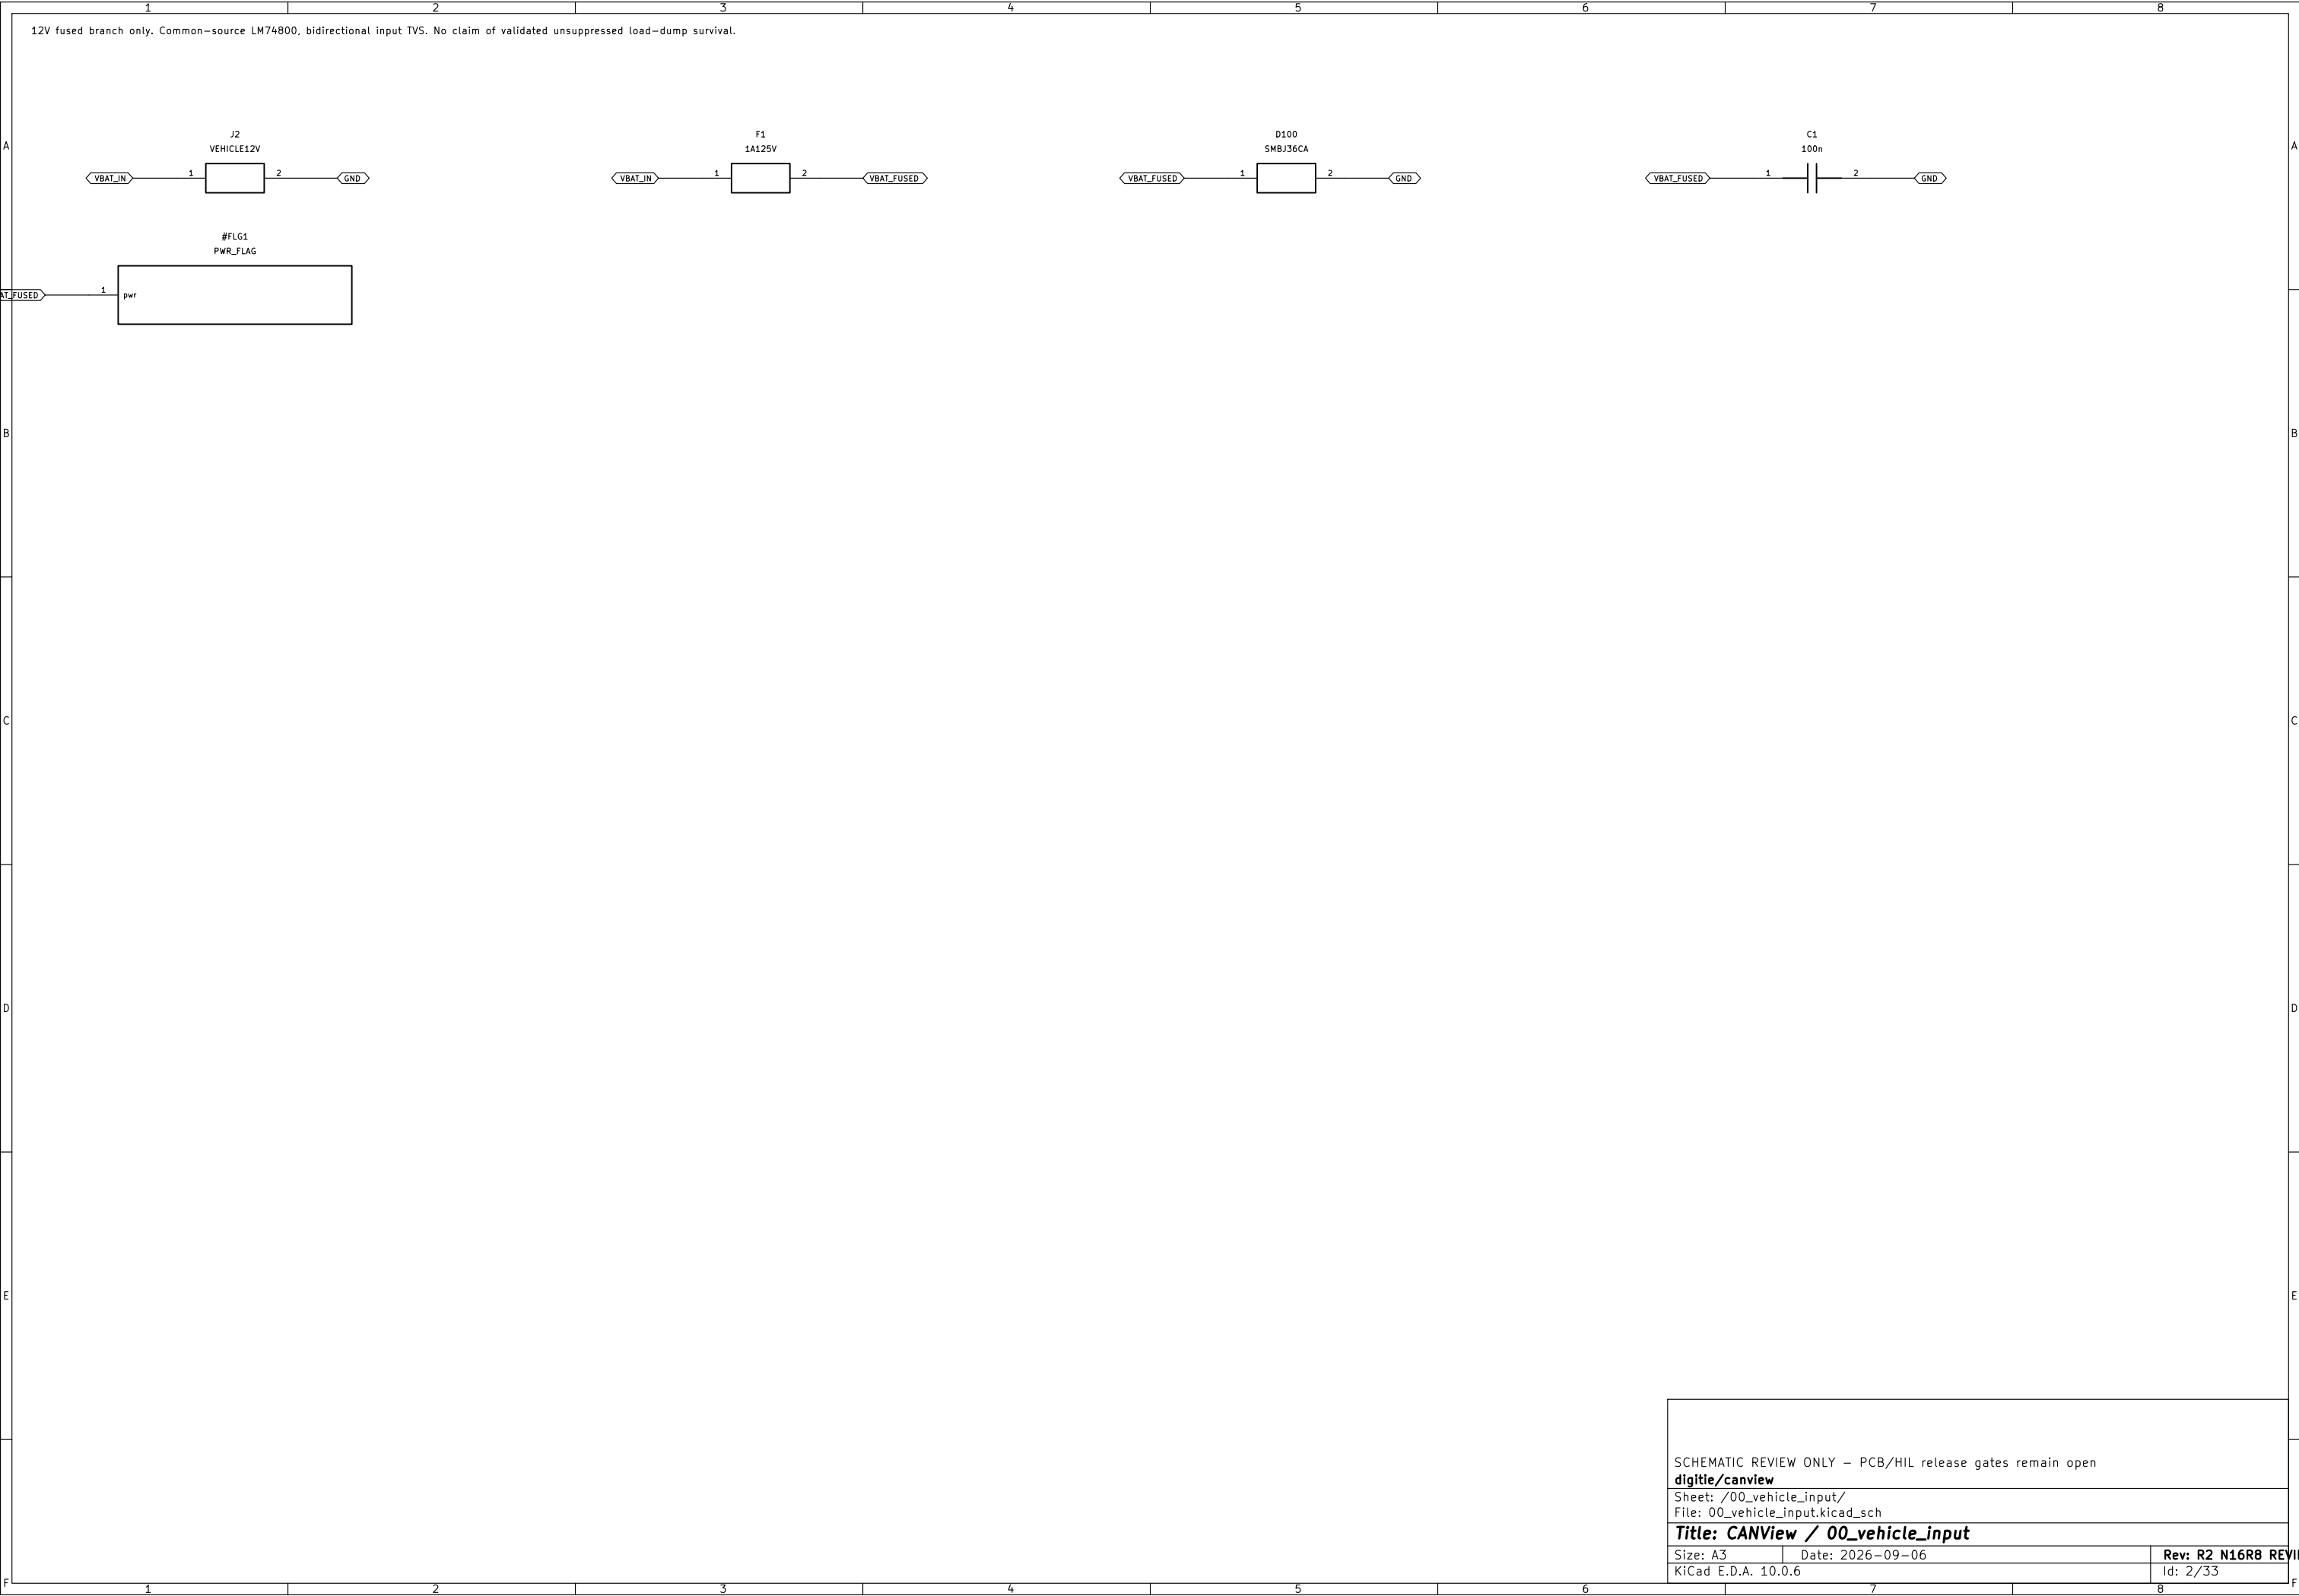


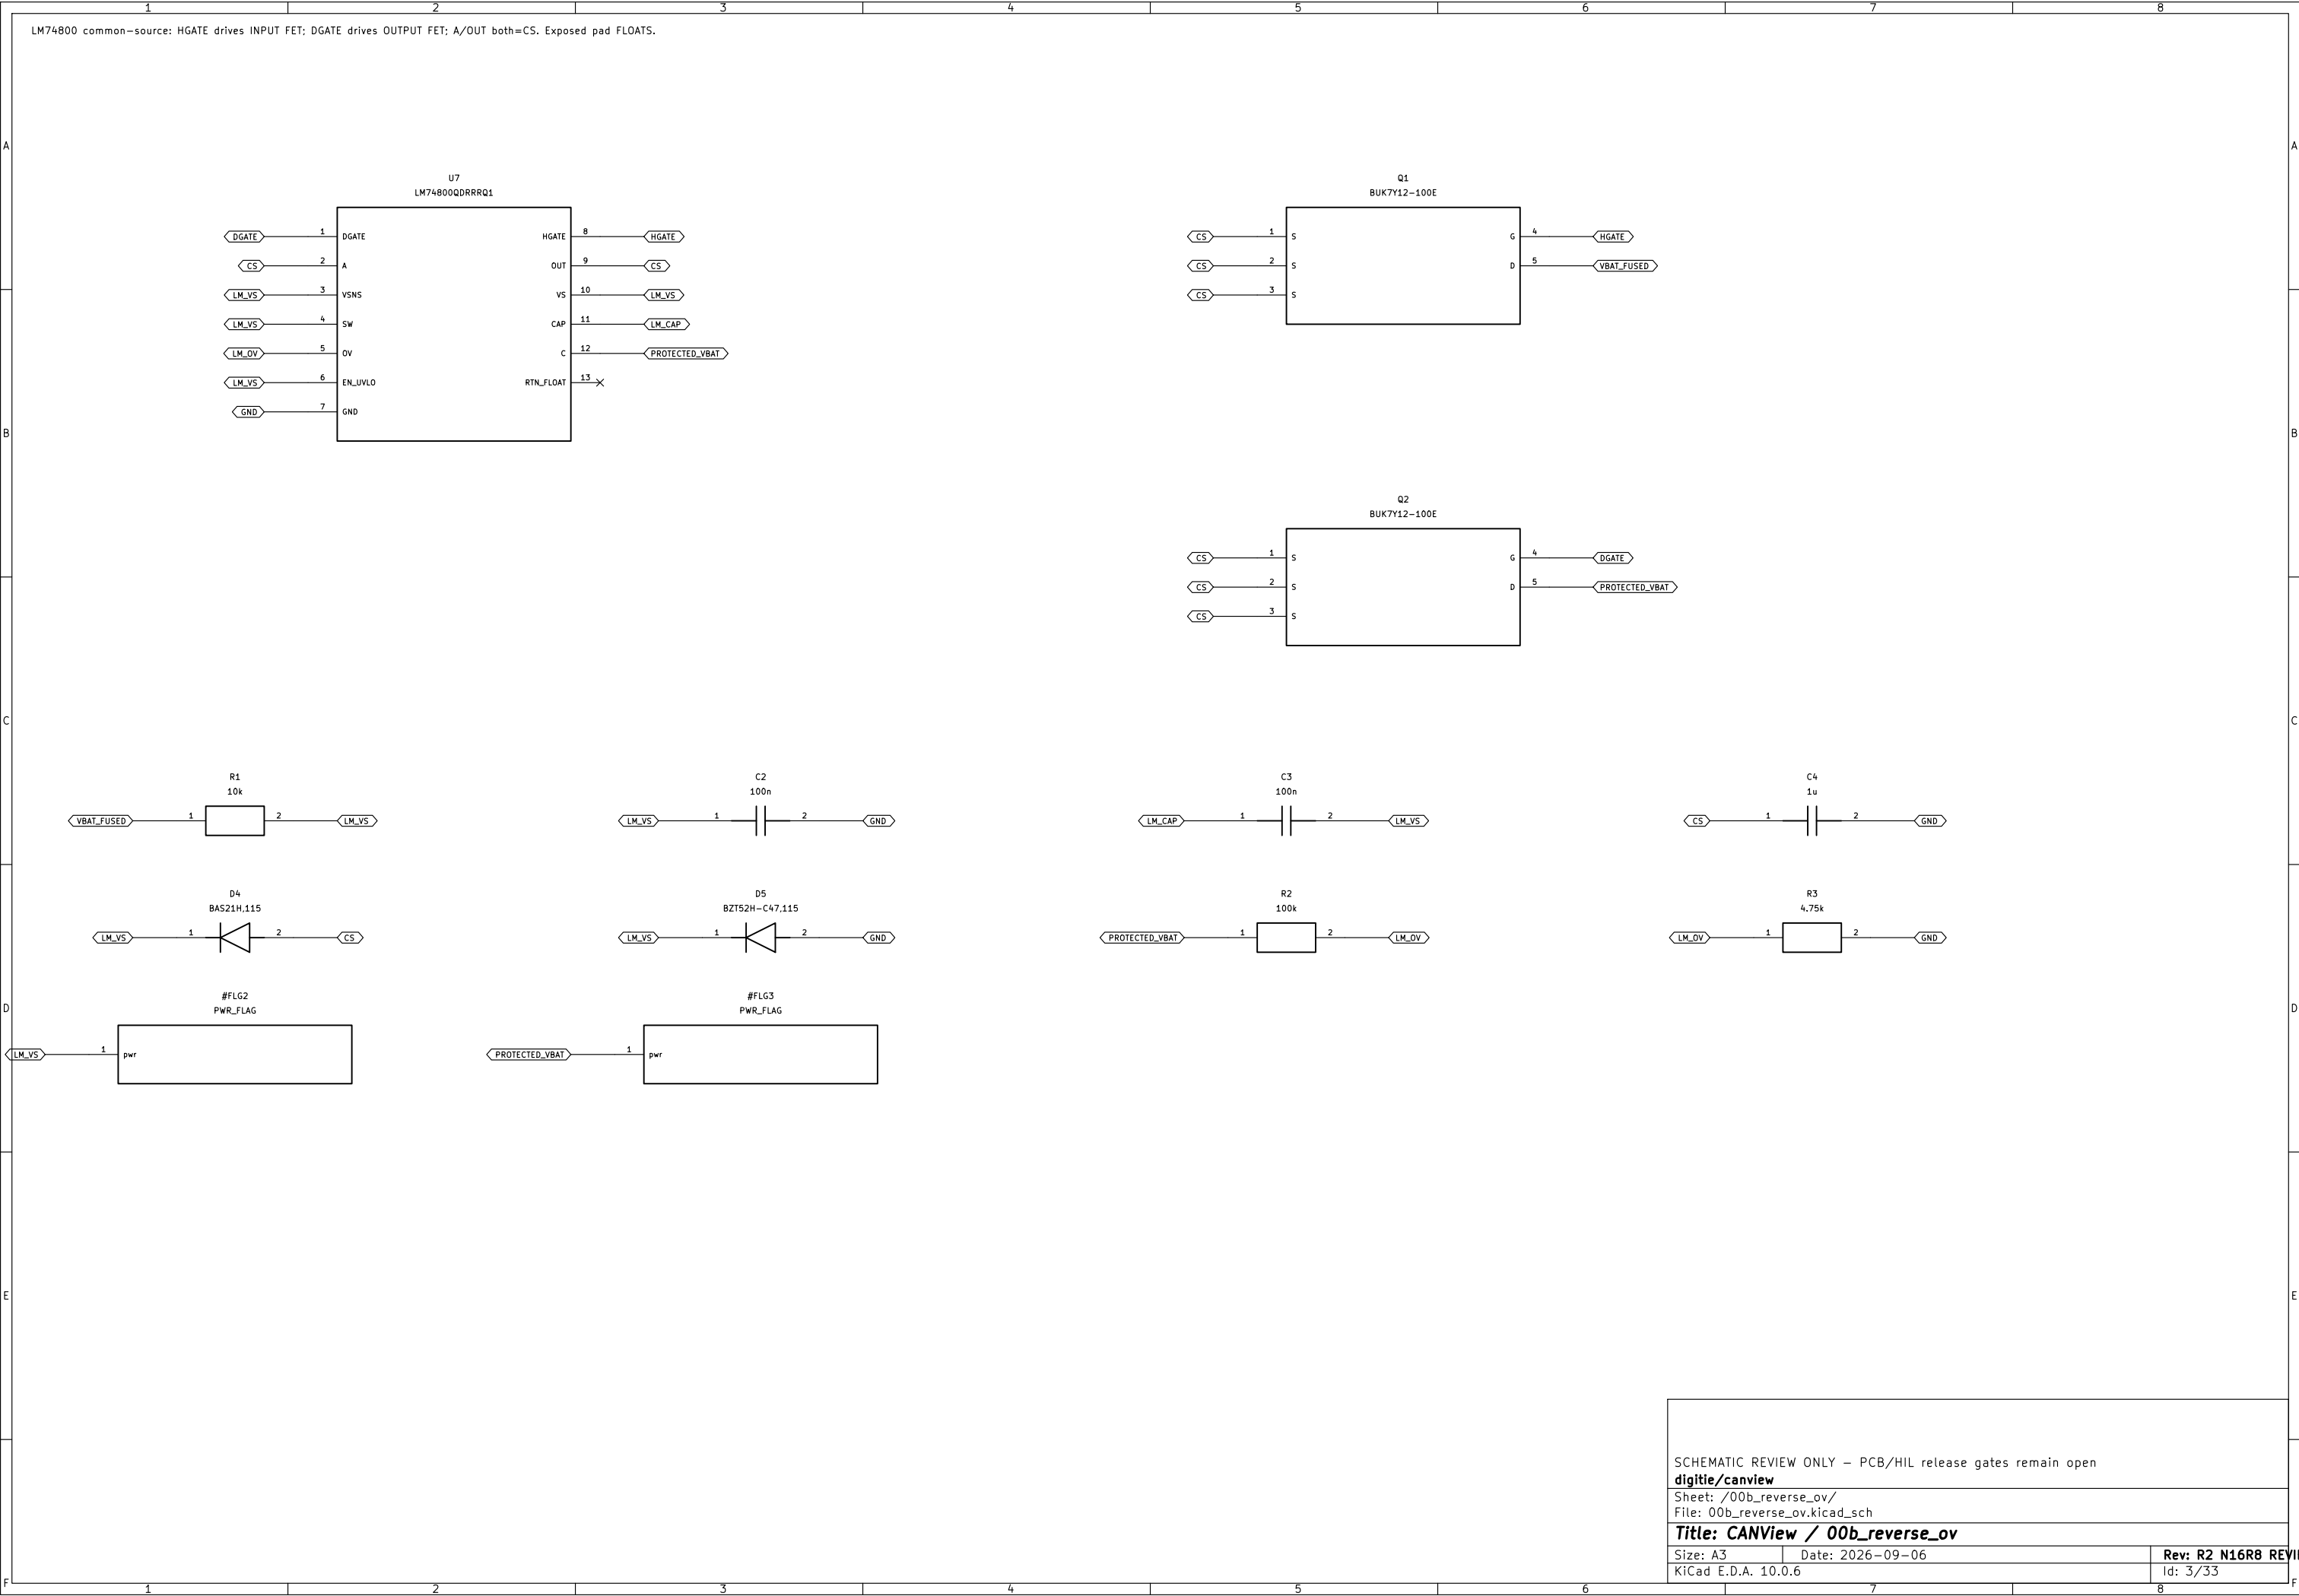


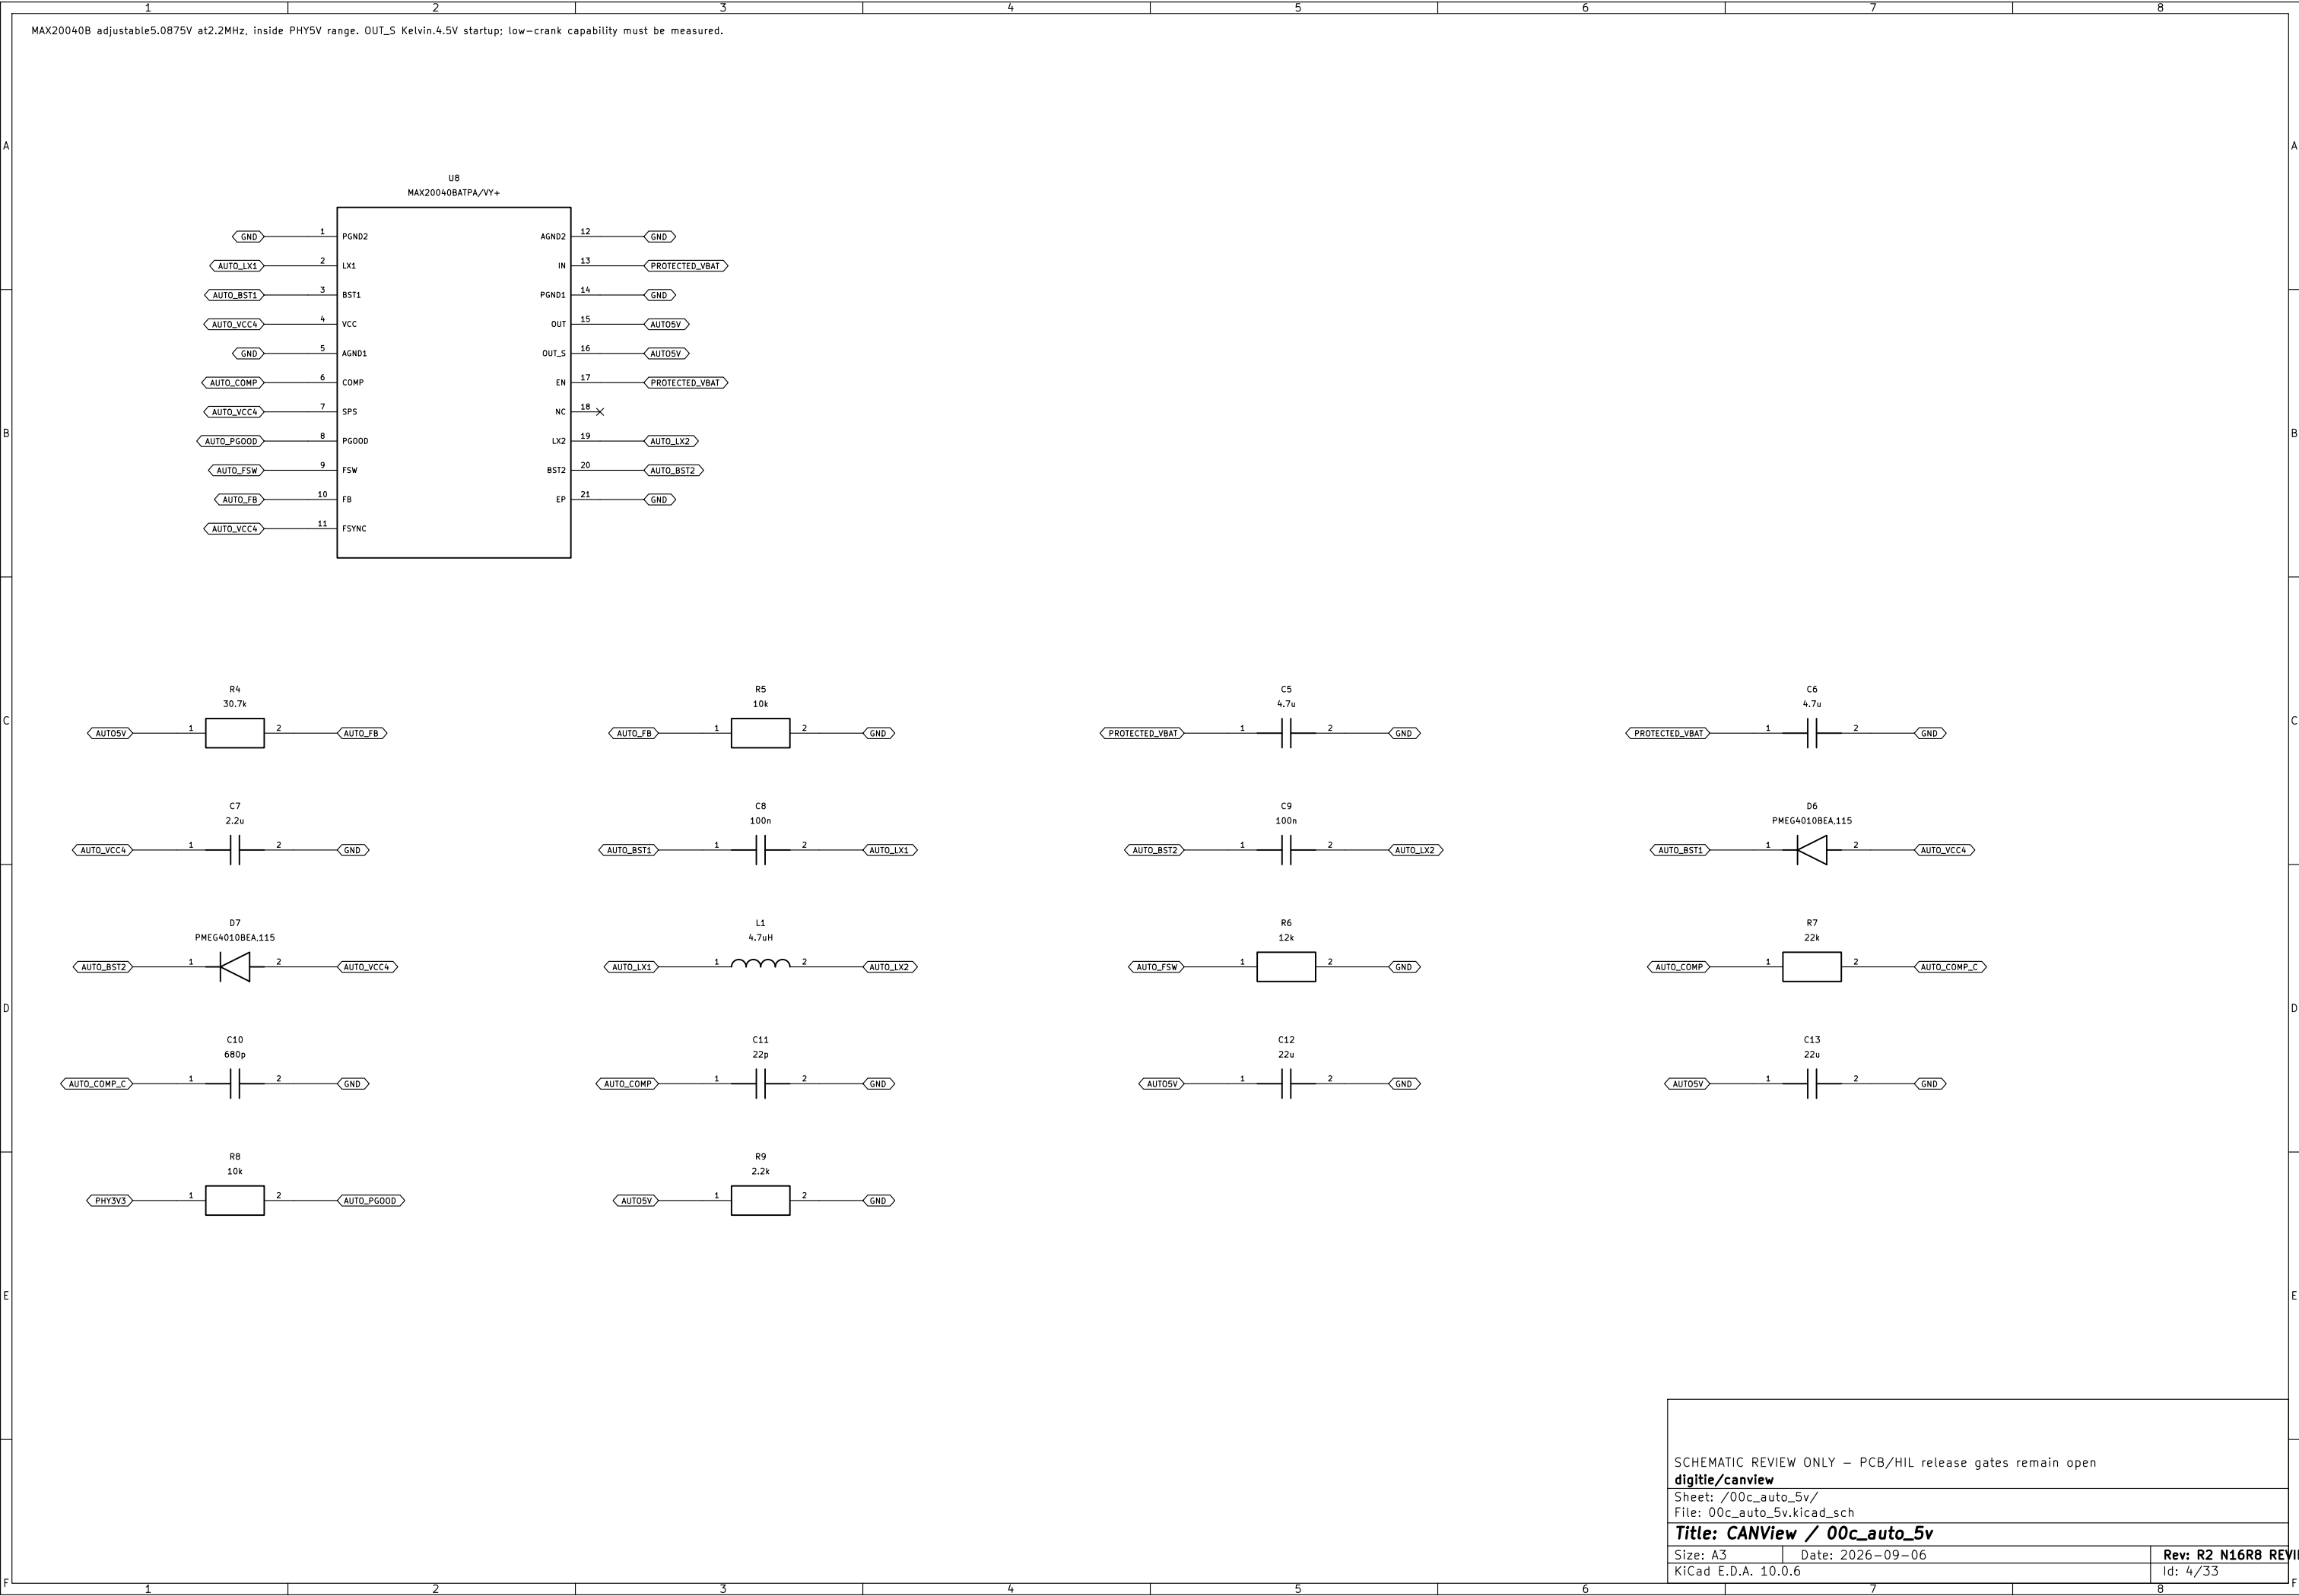




Id: 5/33

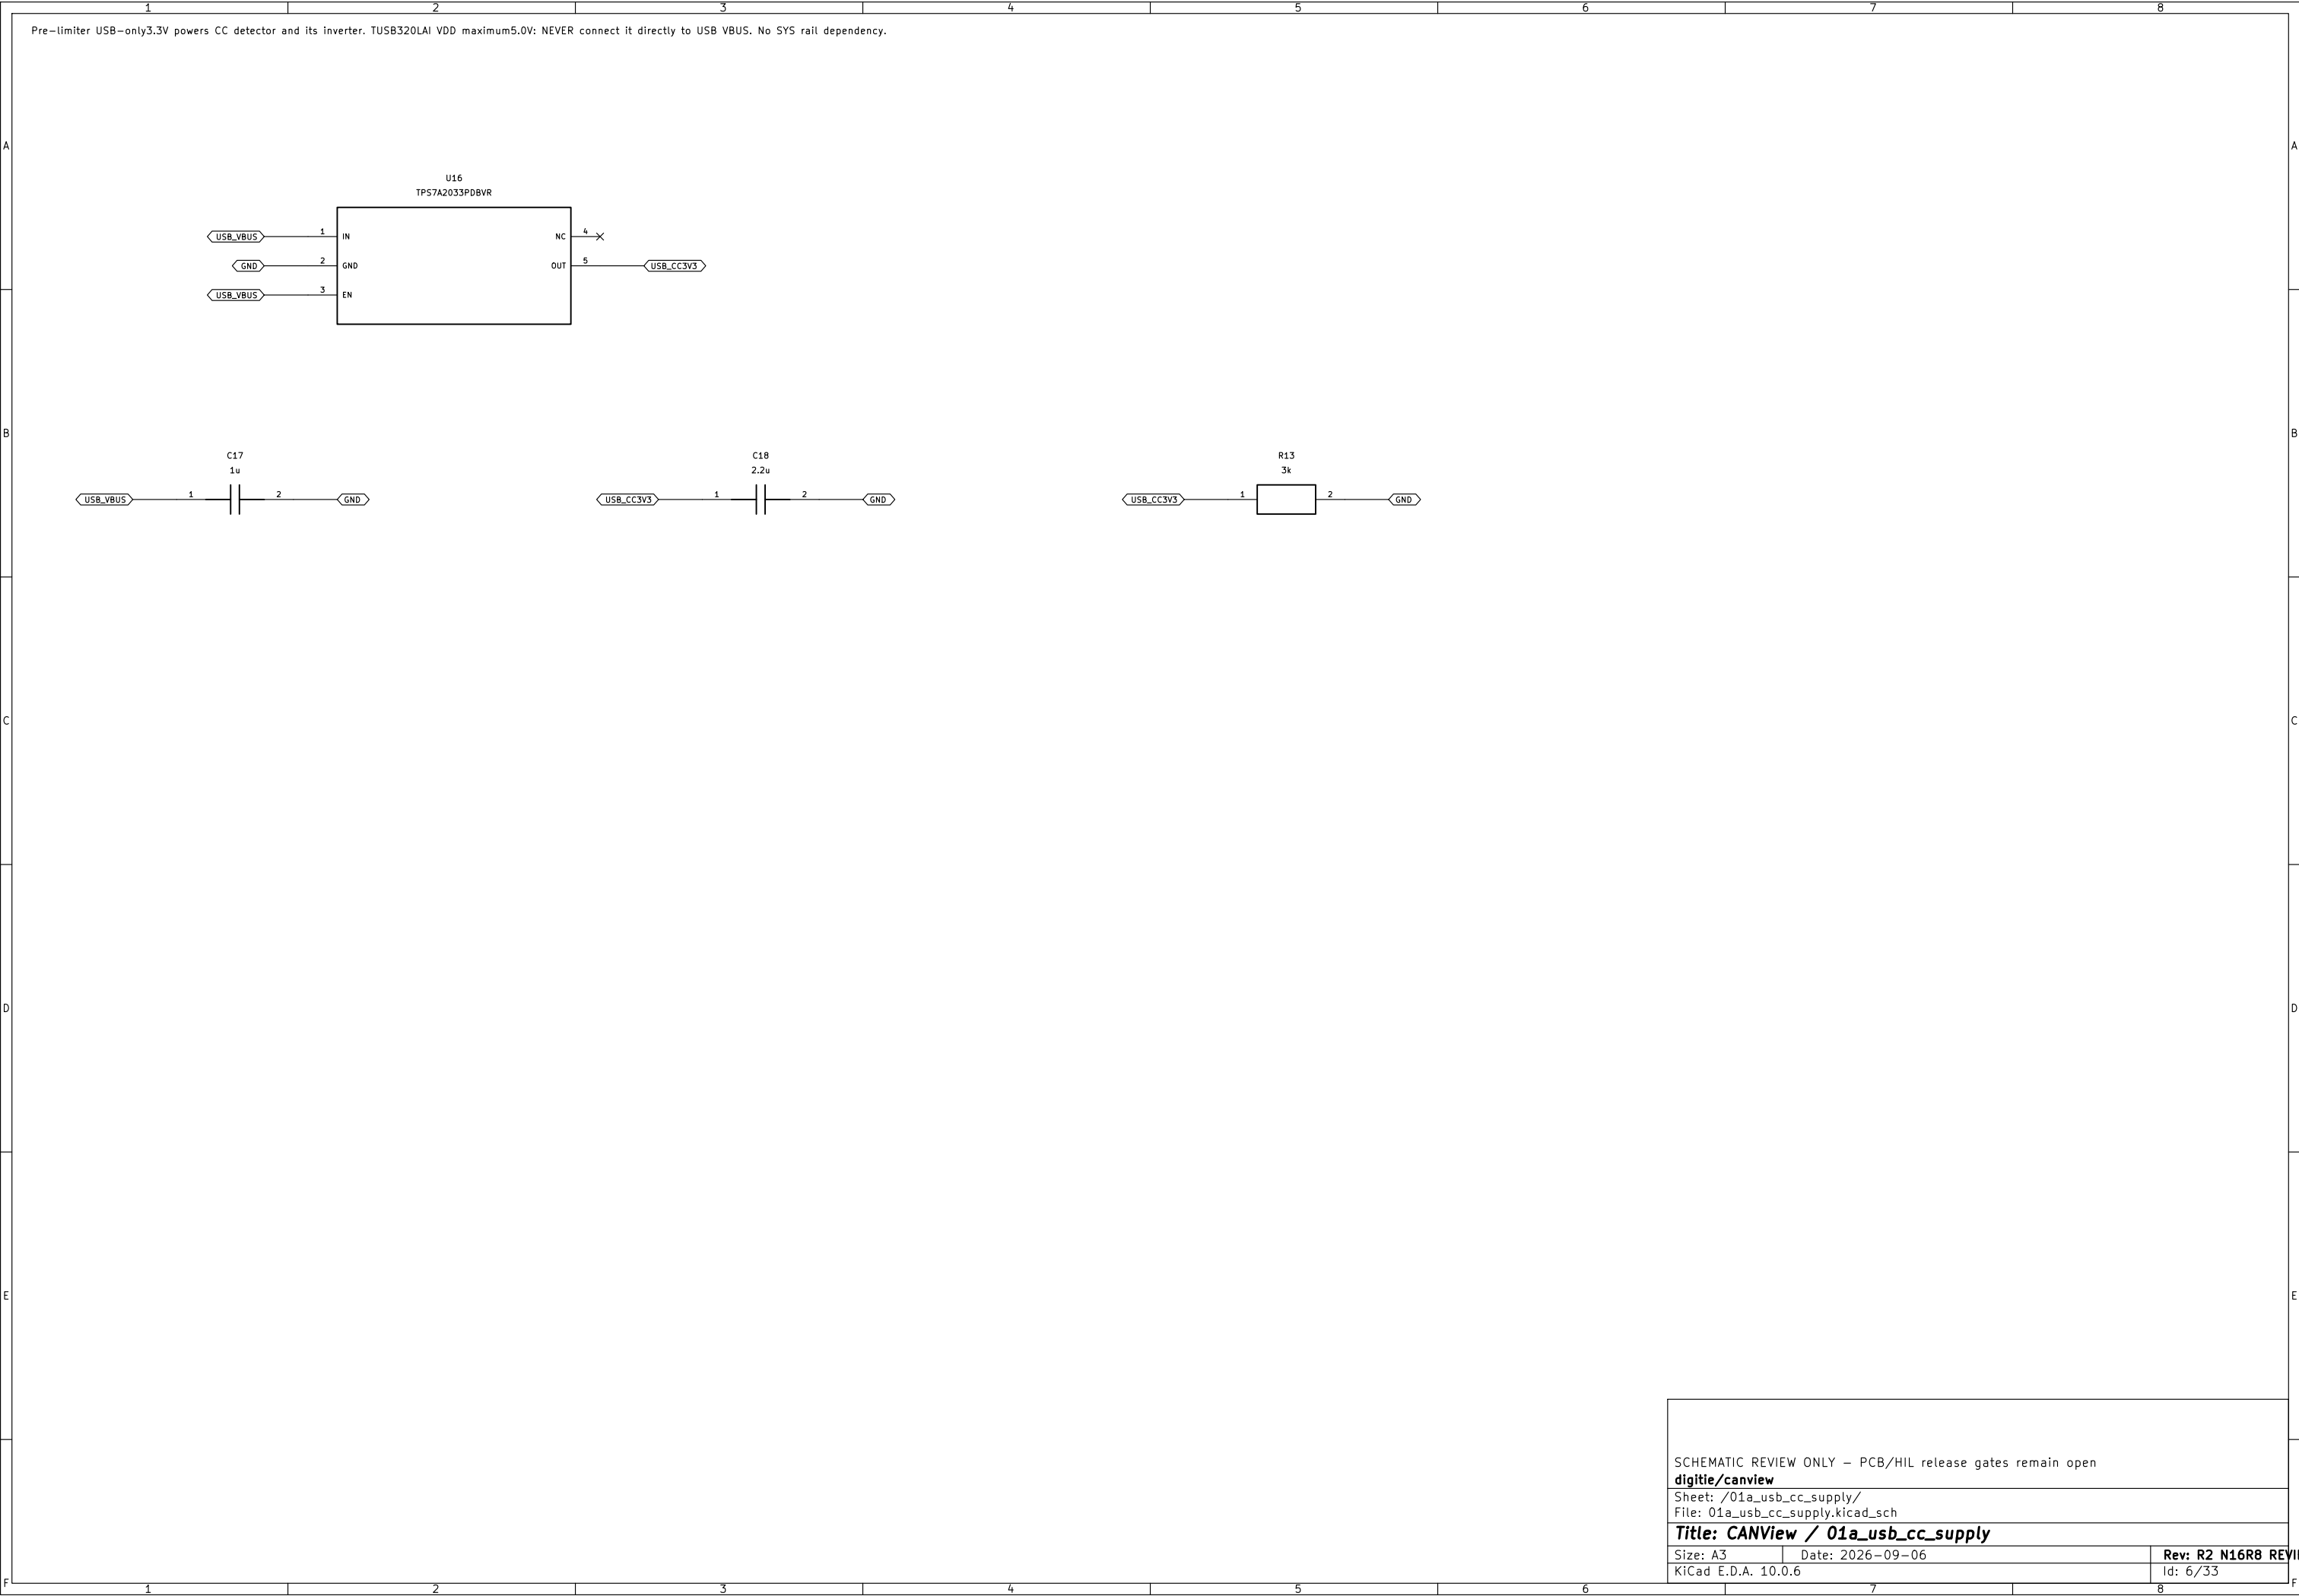

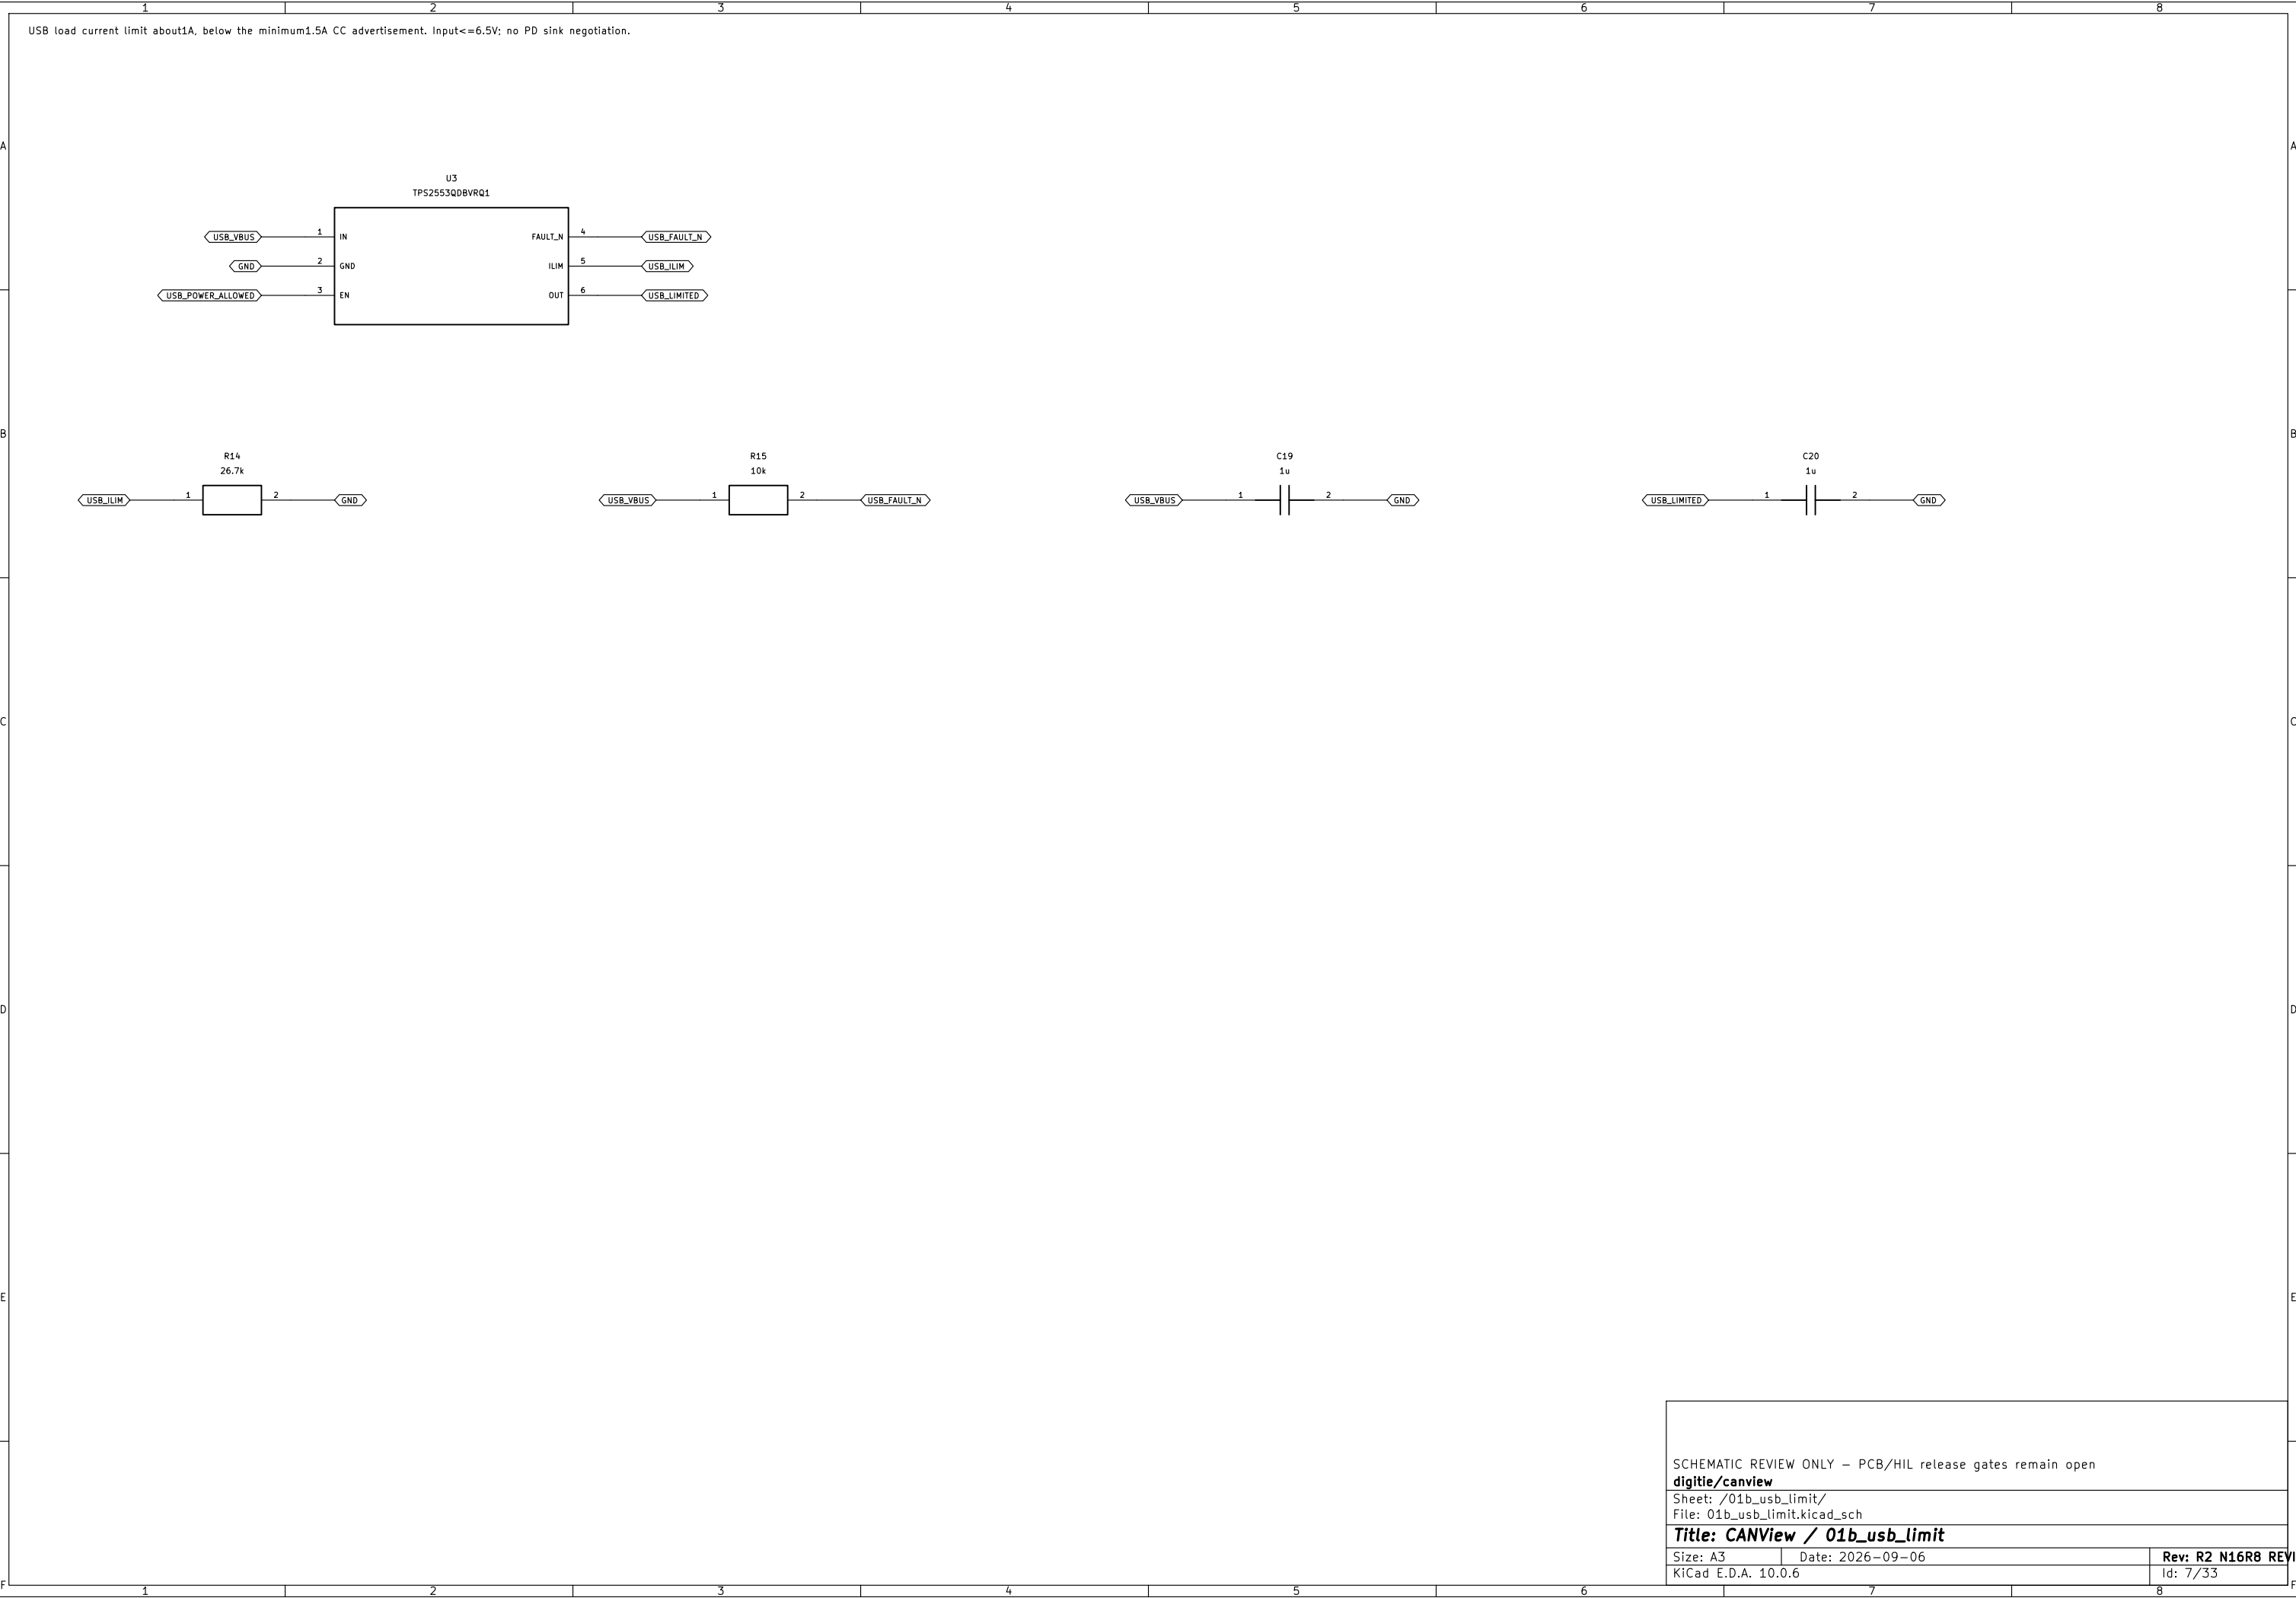

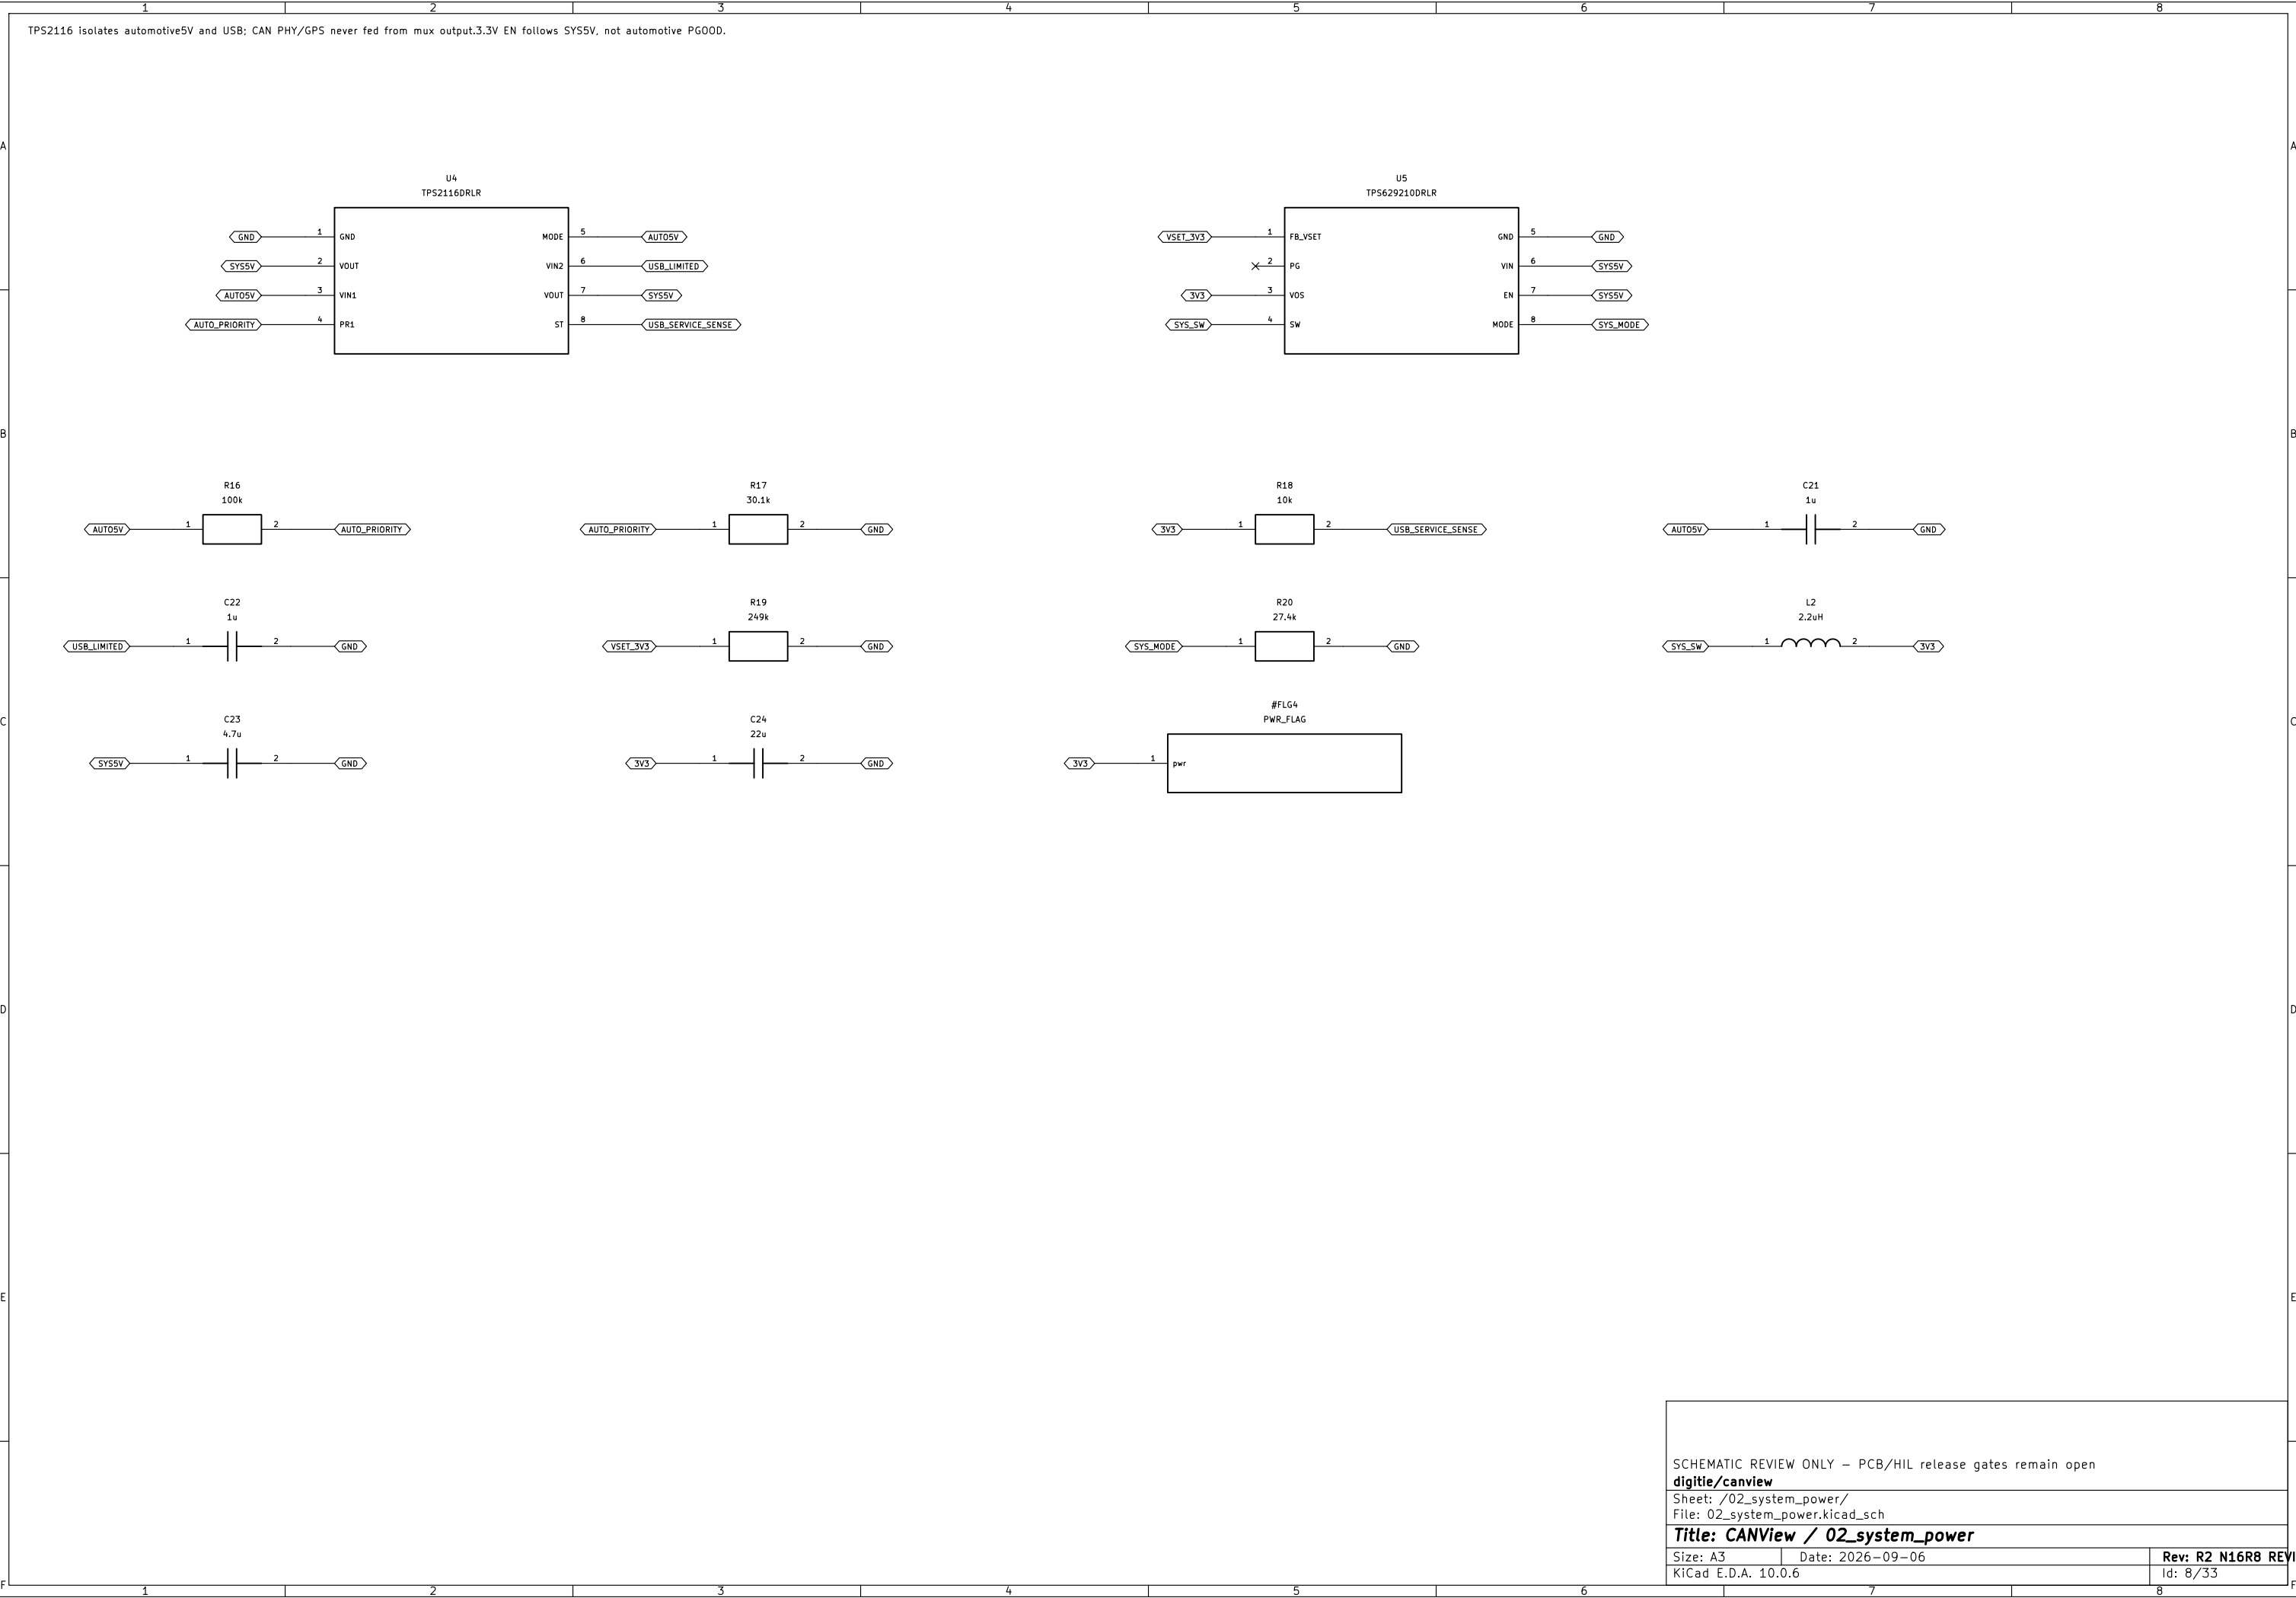

MCU supervisor3.08V with130..270ms release. Communicator also has an independent PHY-domain supervisor.

U6
TLV803EA30DPWR

ESP_RESET_N 1 RESET_N
GLOBAL_RESET_N 2 MR_N
GND 3 PAD
GND 4
3V3 5 VDD

R21
10k
3V3 1 2 ESP_RESET_N


C25
100n
3V3 1 2 GND

SW1
RESET
GLOBAL_RESET_N 1 2 GND














SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open
 digtite/canview
 Sheet: /03_reset/
 File: 03_reset.kicad_sch
Title: CANView / 03_reset
 Size: A3 Date: 2026-09-06 Rev: R2 N16R8 REV1
 KiCad E.D.A. 10.0.6 Id: 9/33

digit/canview		
Sheet: /03_reset/		
File: 03_reset.kicad_sch		
Title: CANVIEW / 03_reset		
Size: A3	Date: 2026-09-06	Rev: R2 N16R8 REV1
KiCad E.D.A. 10.0.6		Id: 9/33

Size: A3	Date: 2026-09-06	Rev: R2 N16R8 REV1
KiCad E.D.A. 10.0.6		Id: 9/33

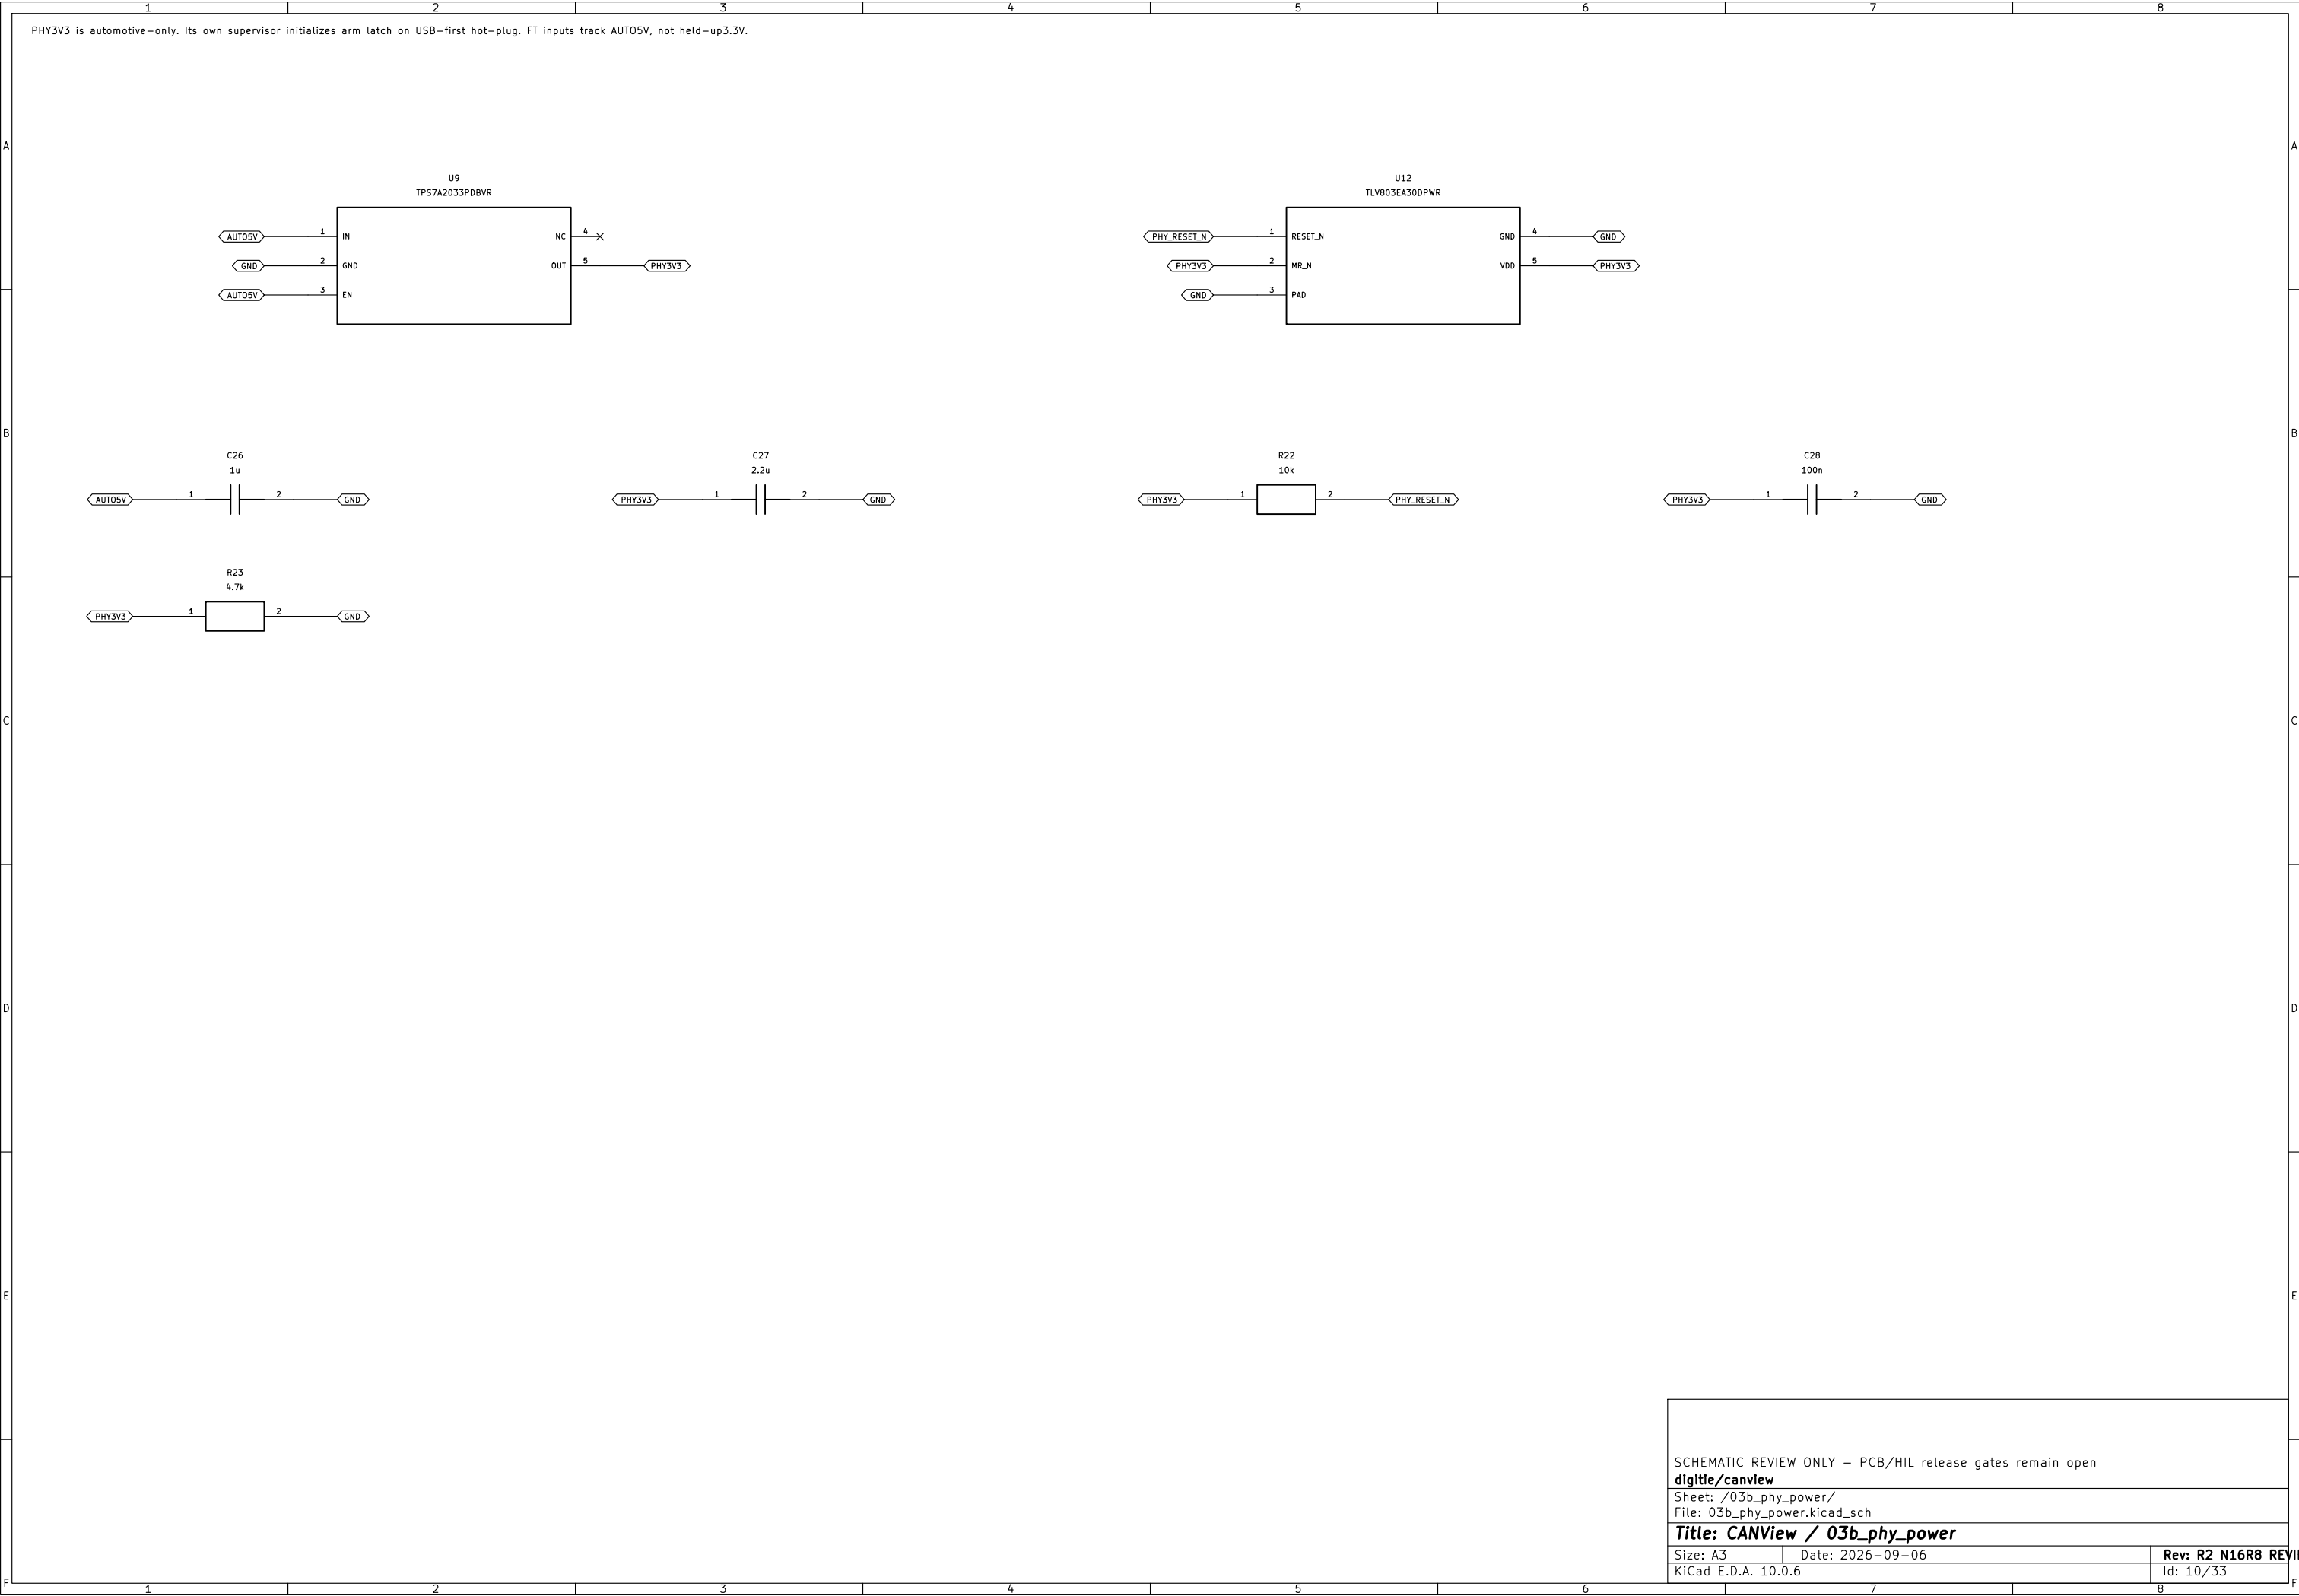

Independent battery threshold and real5V qualification. PGOOD alone is not sufficient for MAX3055. Threshold/latency worst cases remain test gates.

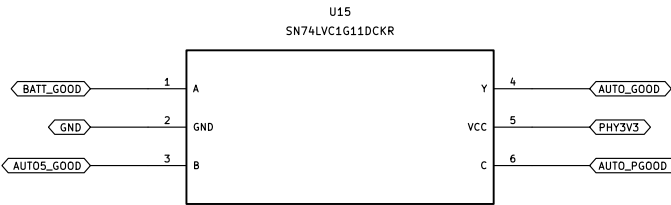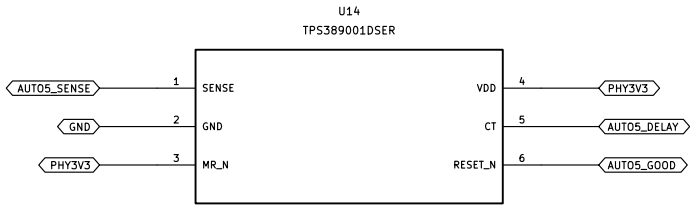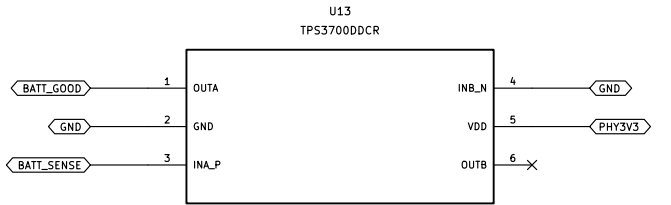

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /03c_auto_qualification/

File: 03c_auto_qualification.kicad_sch

Title: CANView / 03c_auto_qualification


Size: A3


Date: 2026-09-06


Rev: R2 N16R8 REVIEW


KiCad E.D.A. 10.0.6


Id: 11/33

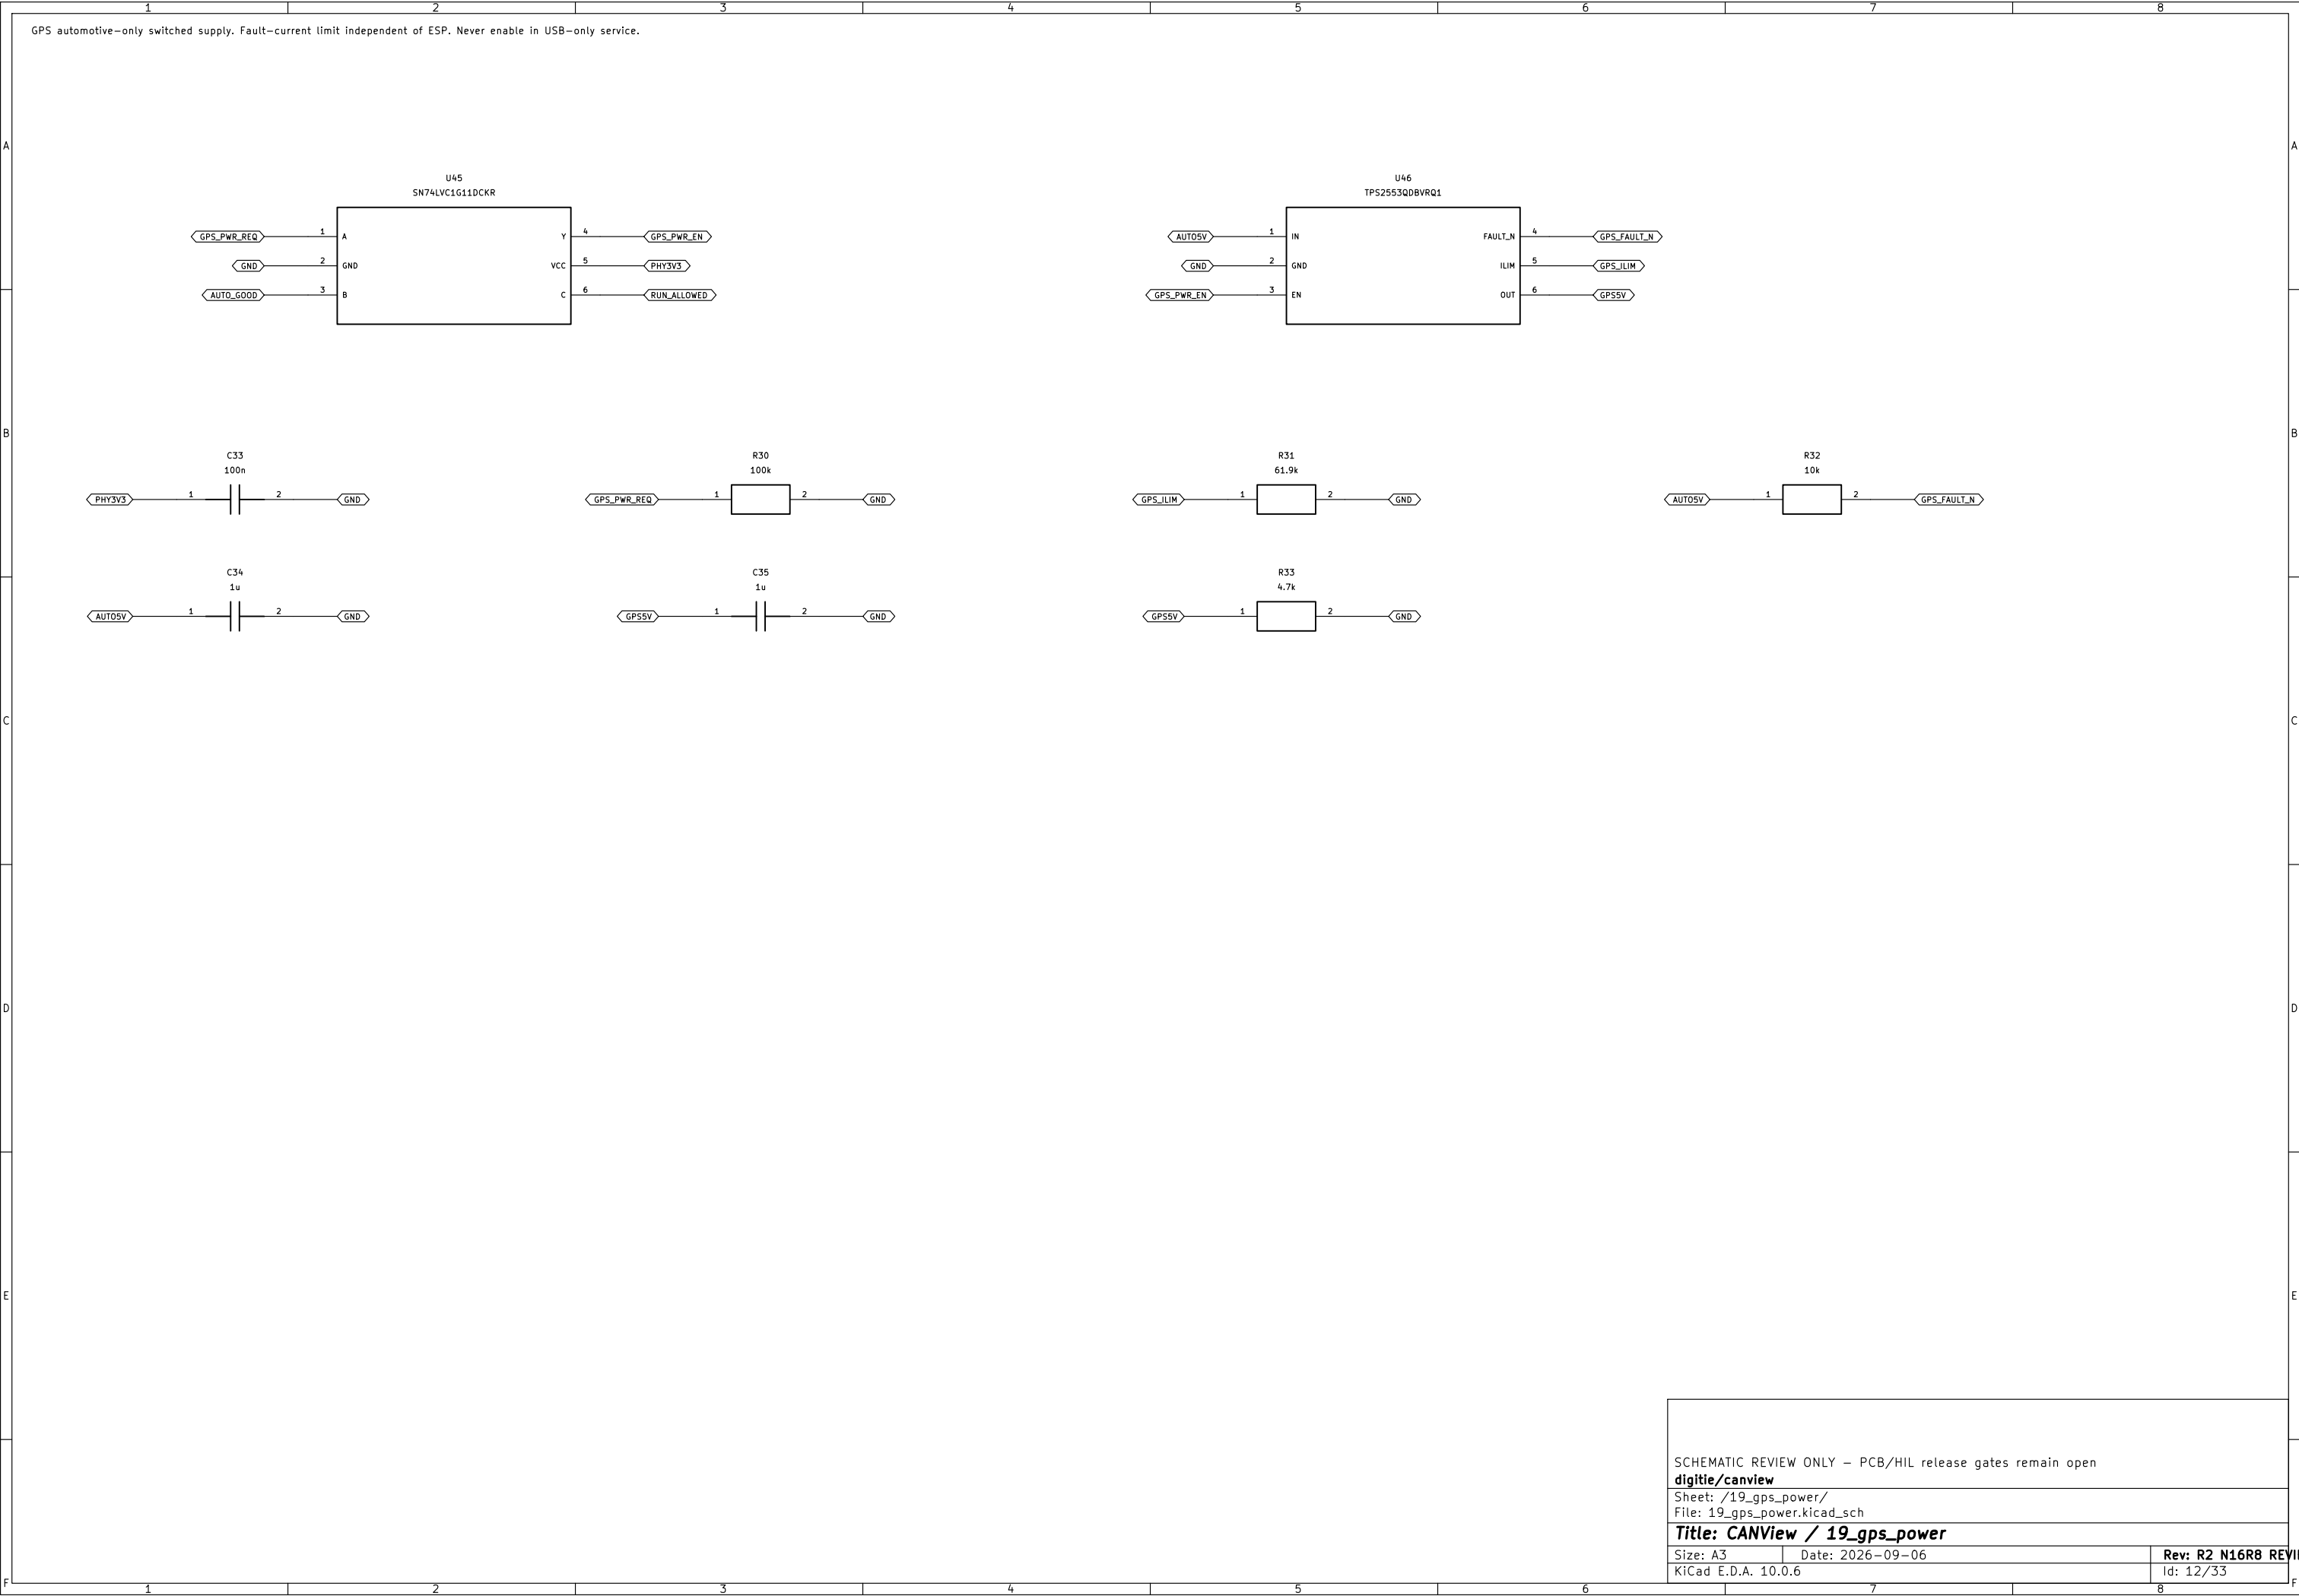


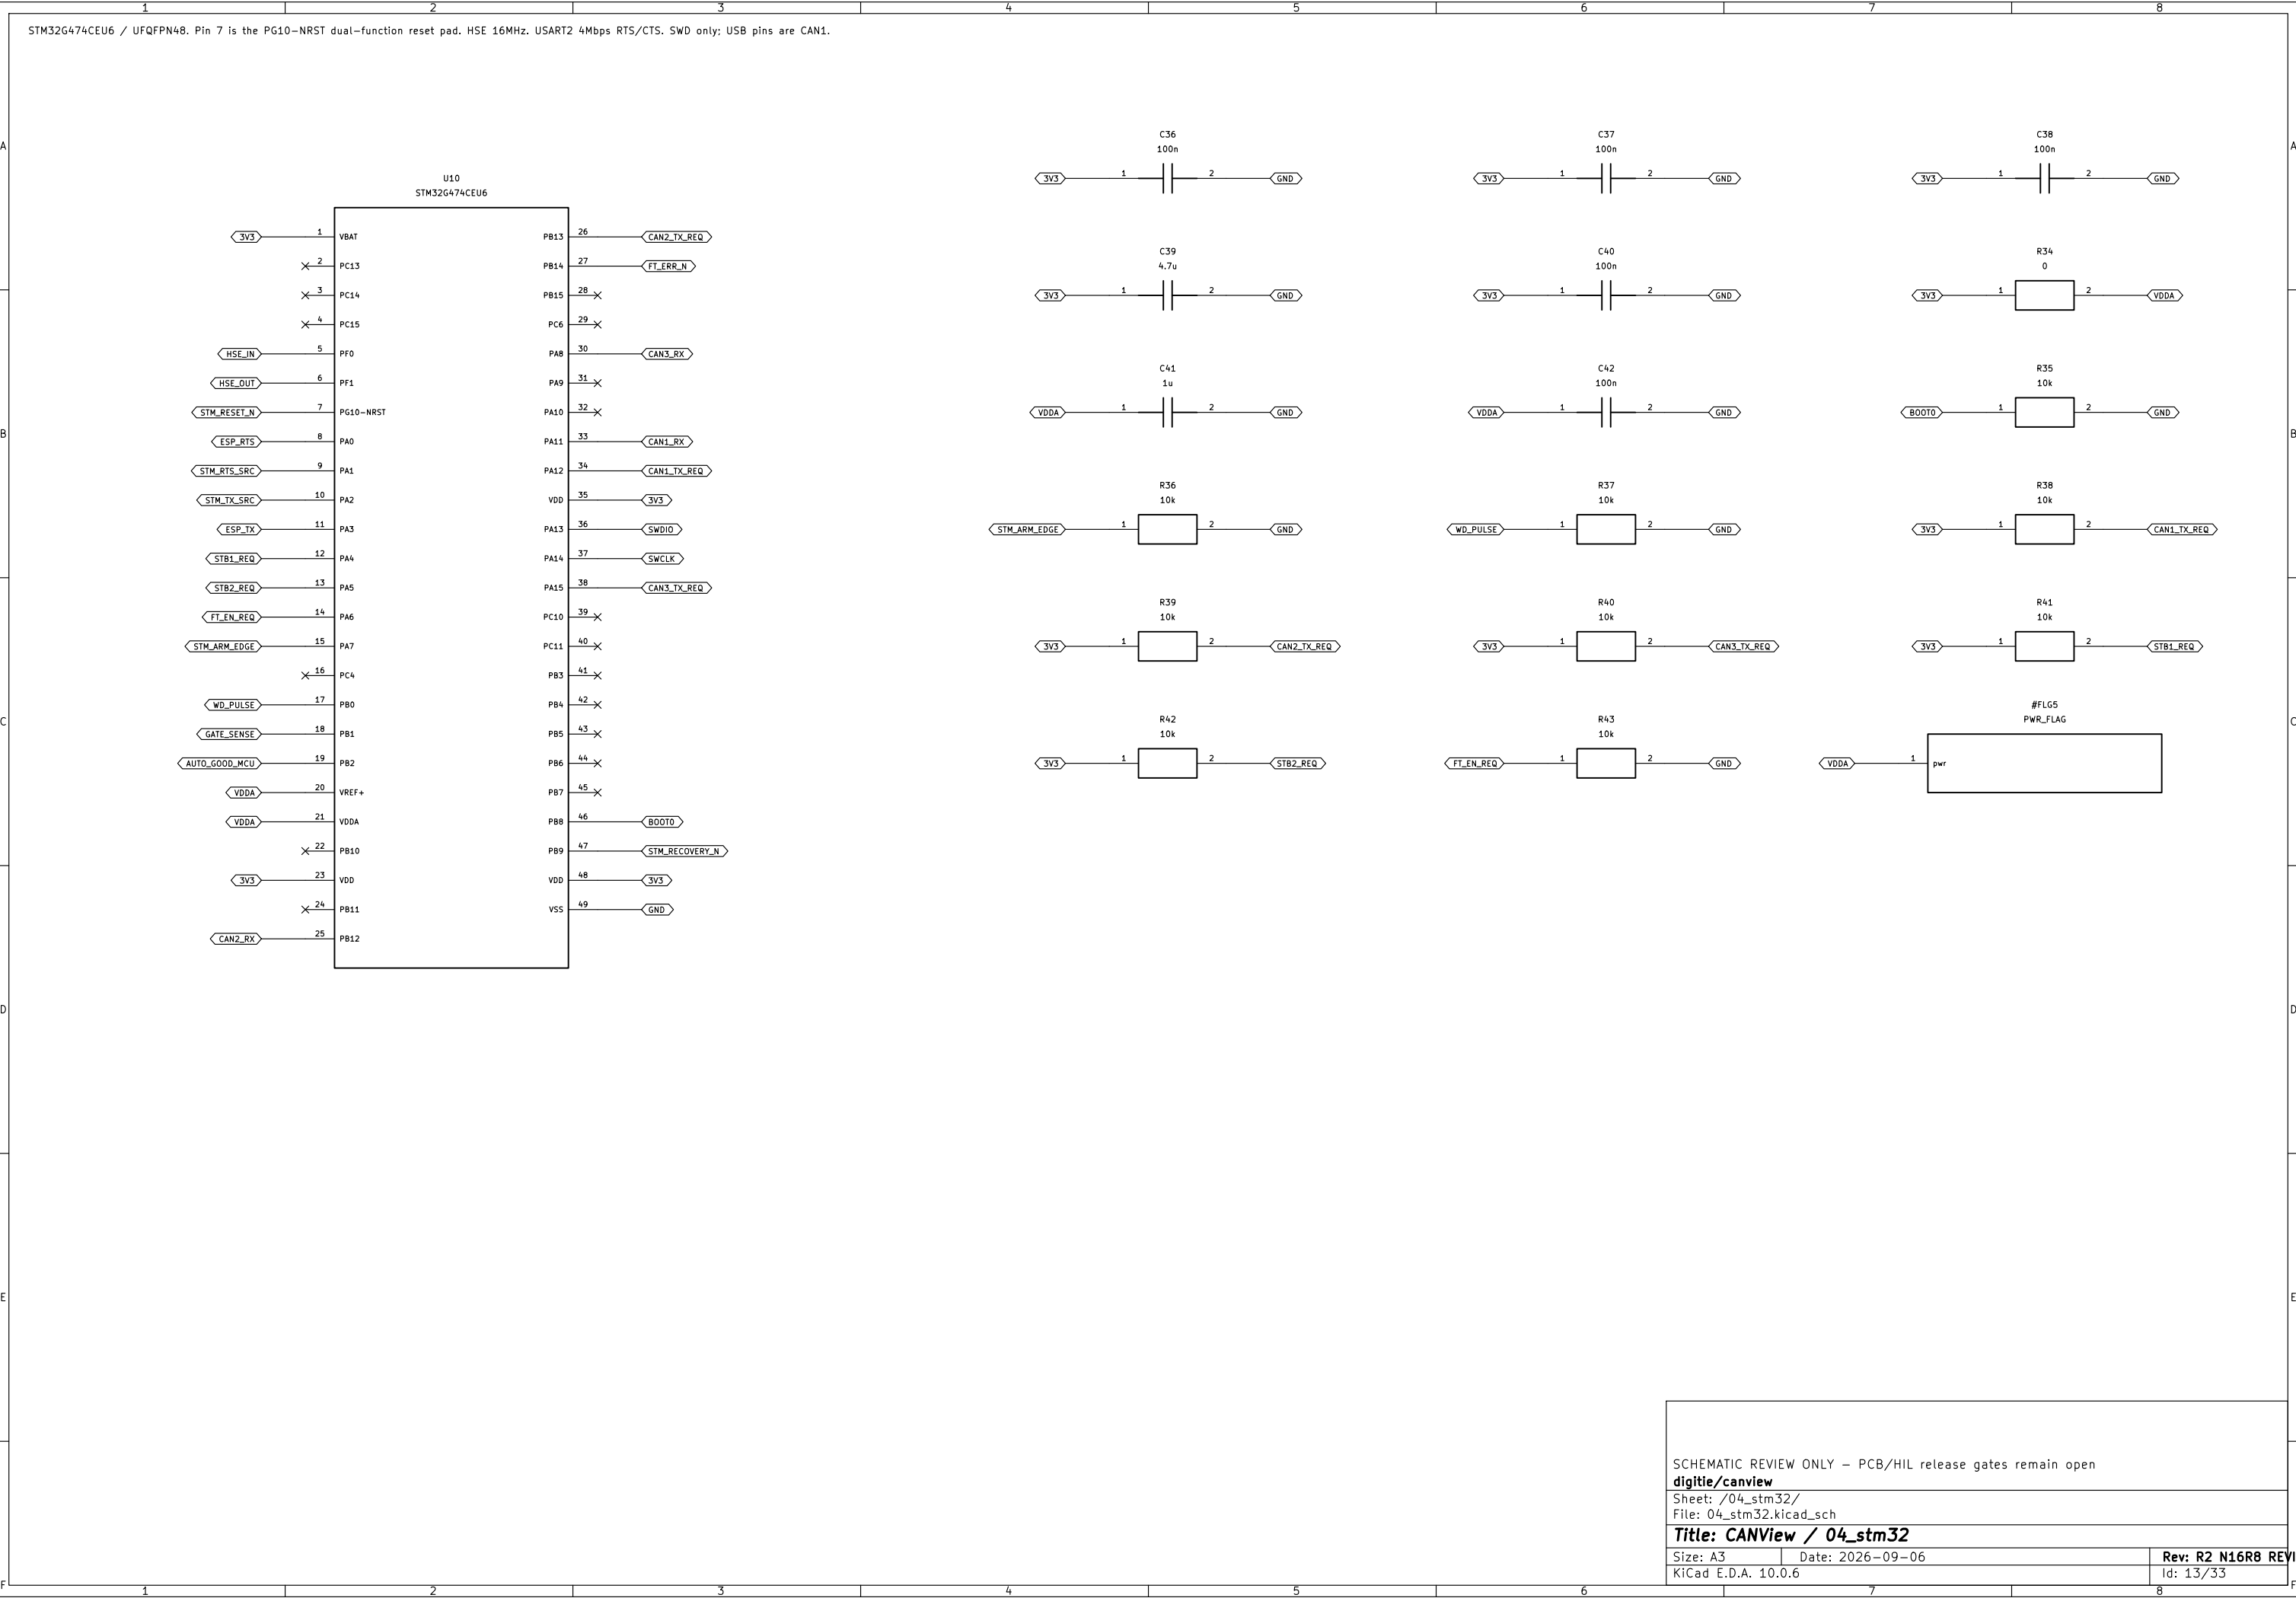


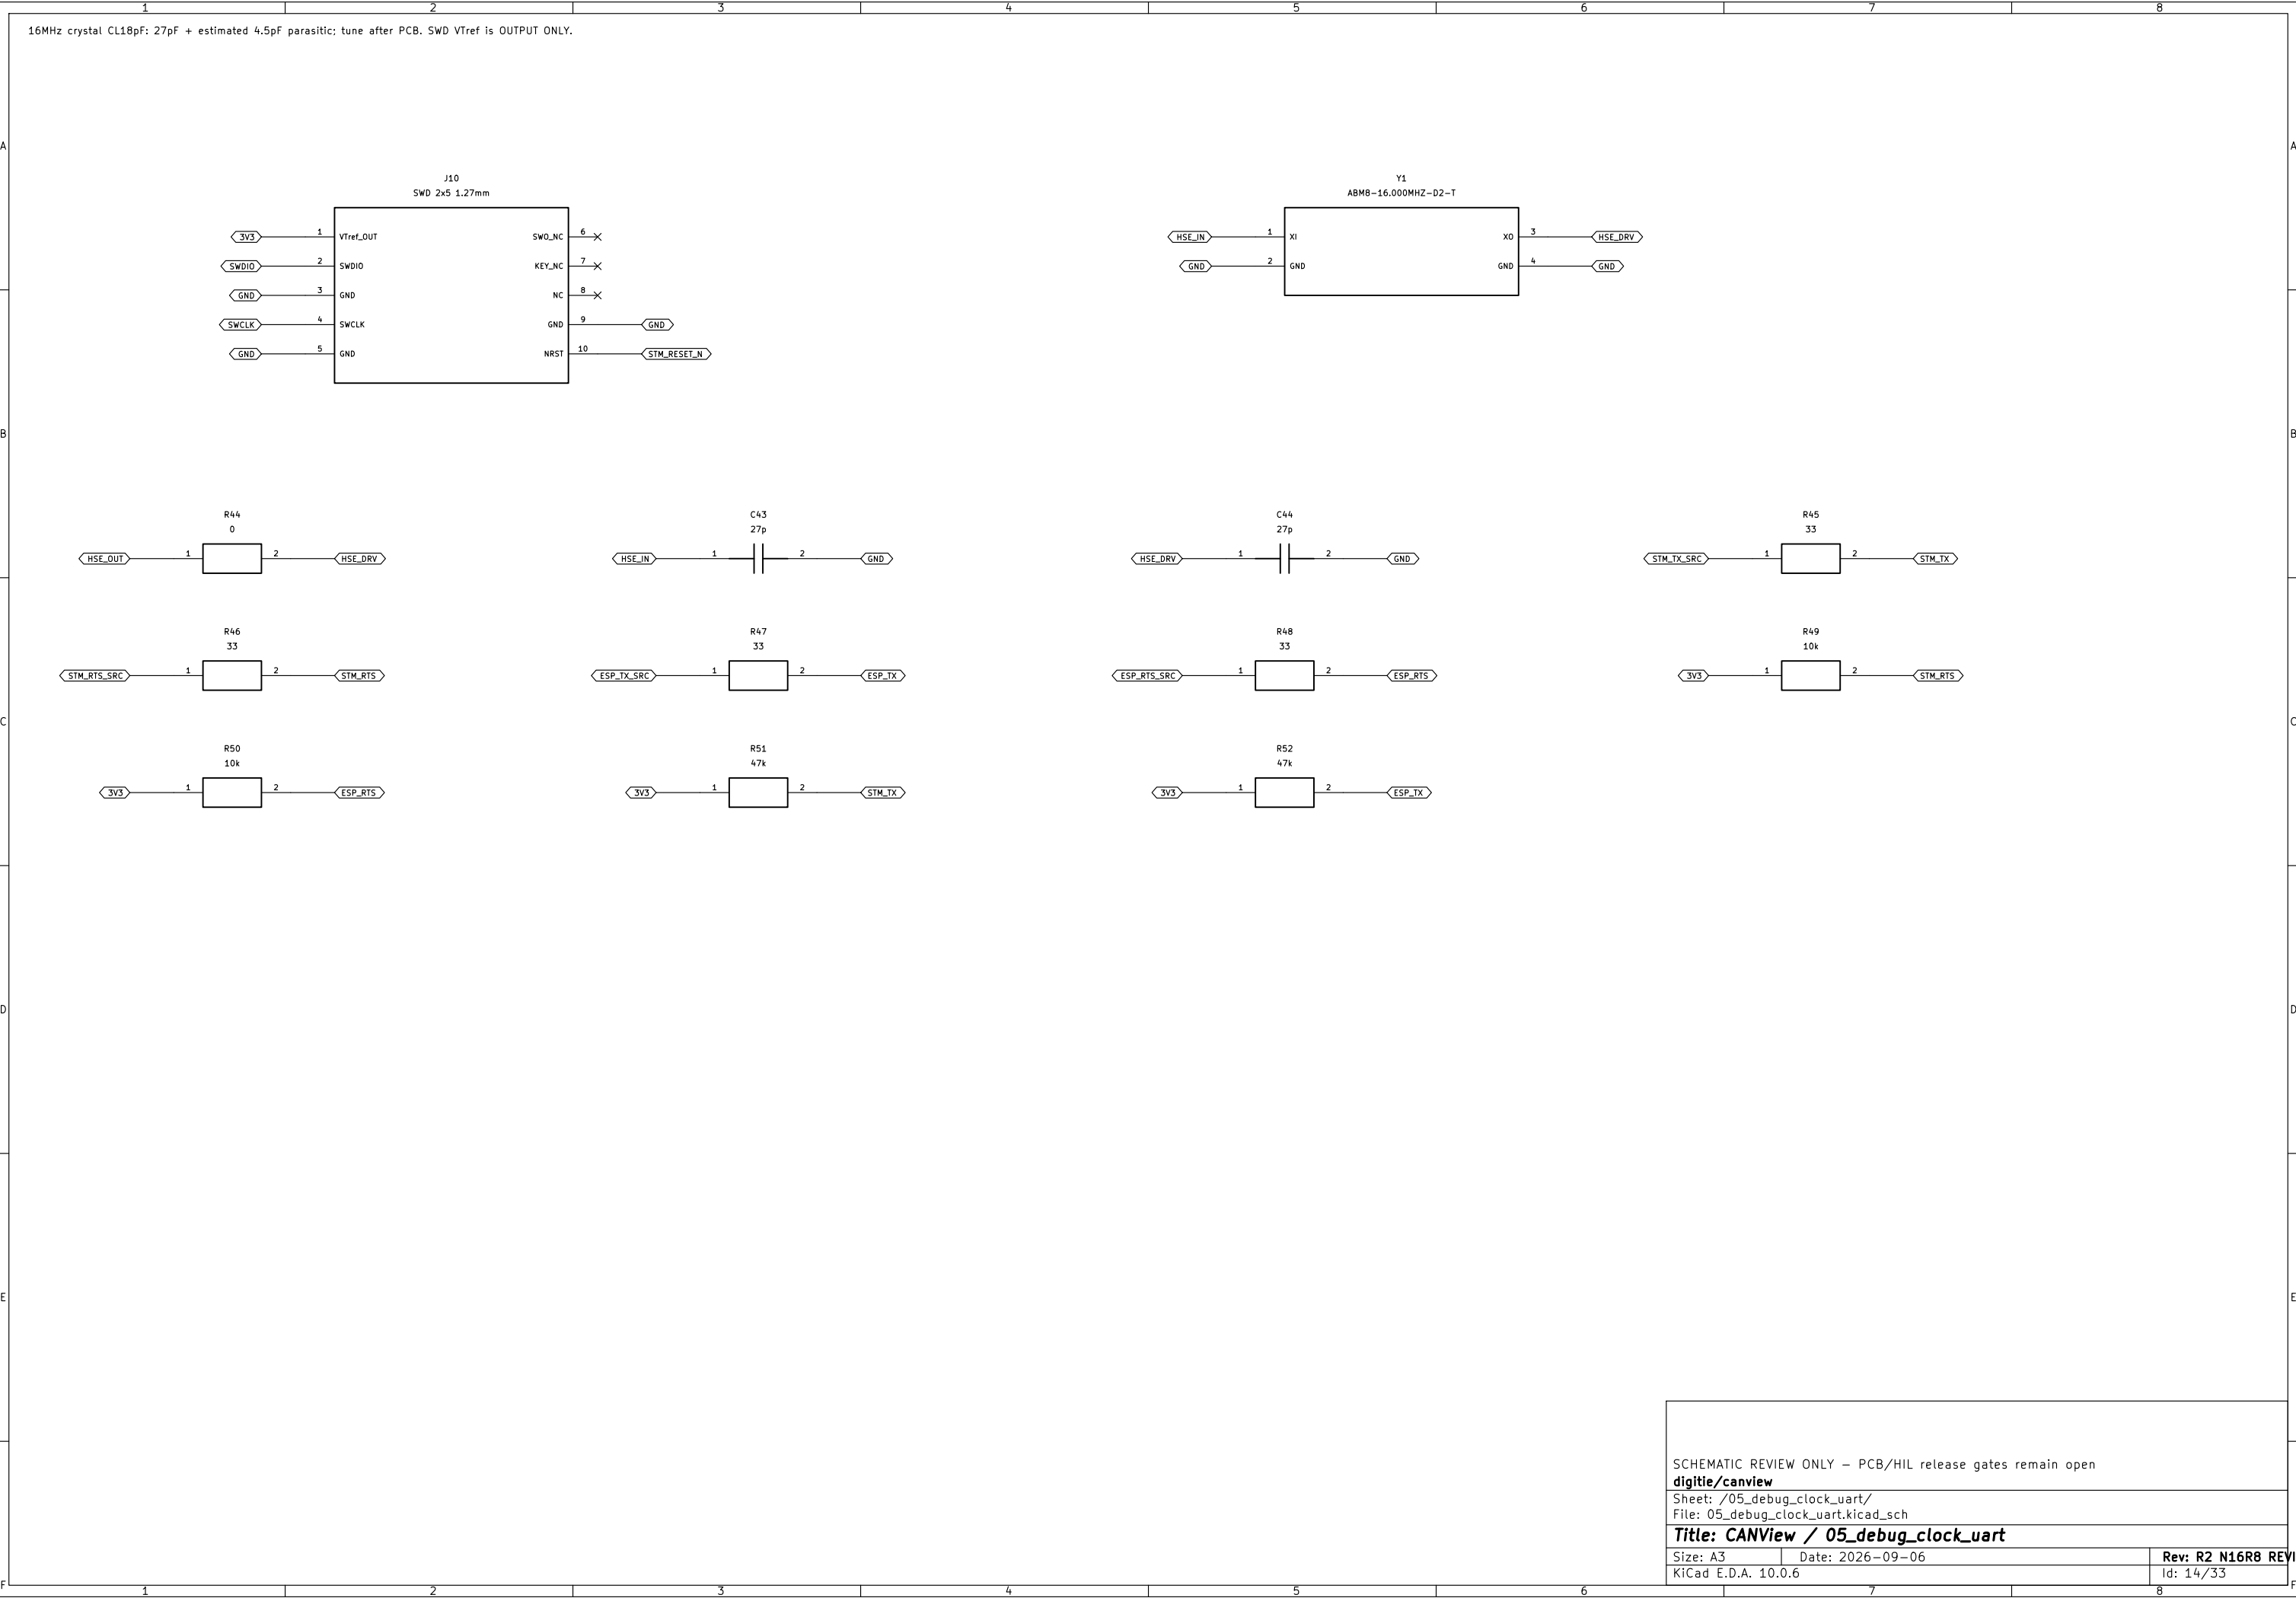


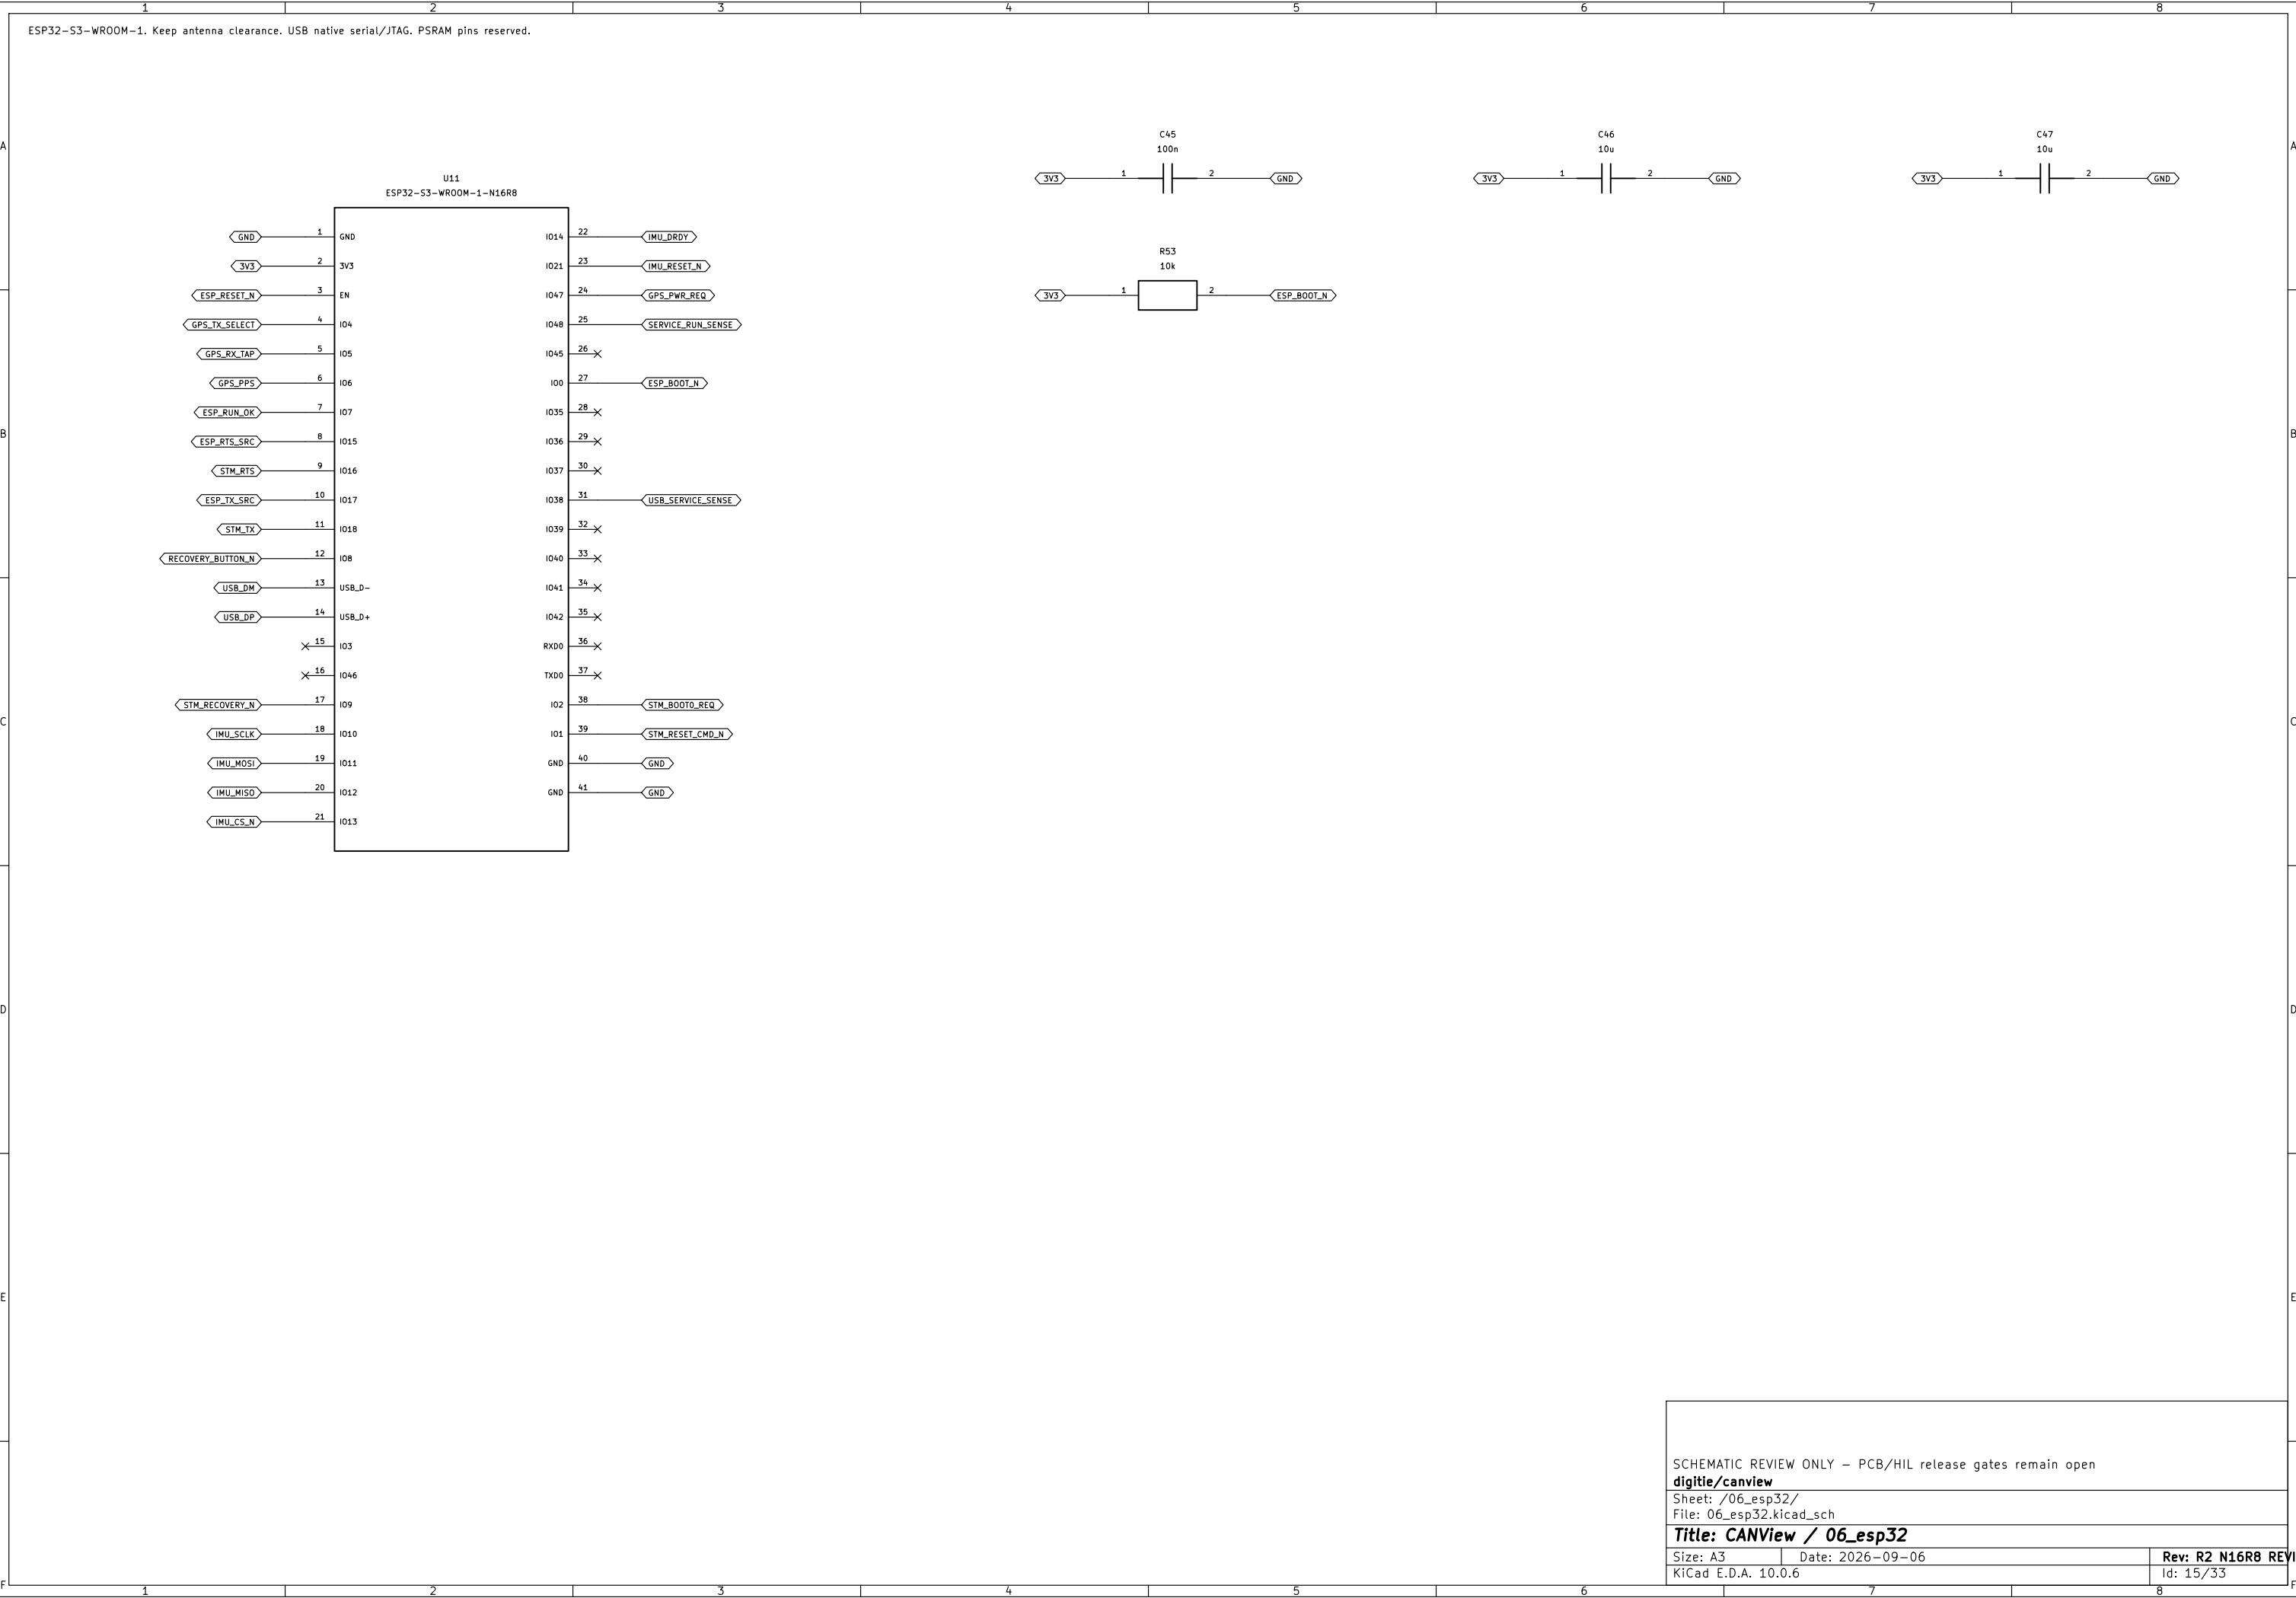






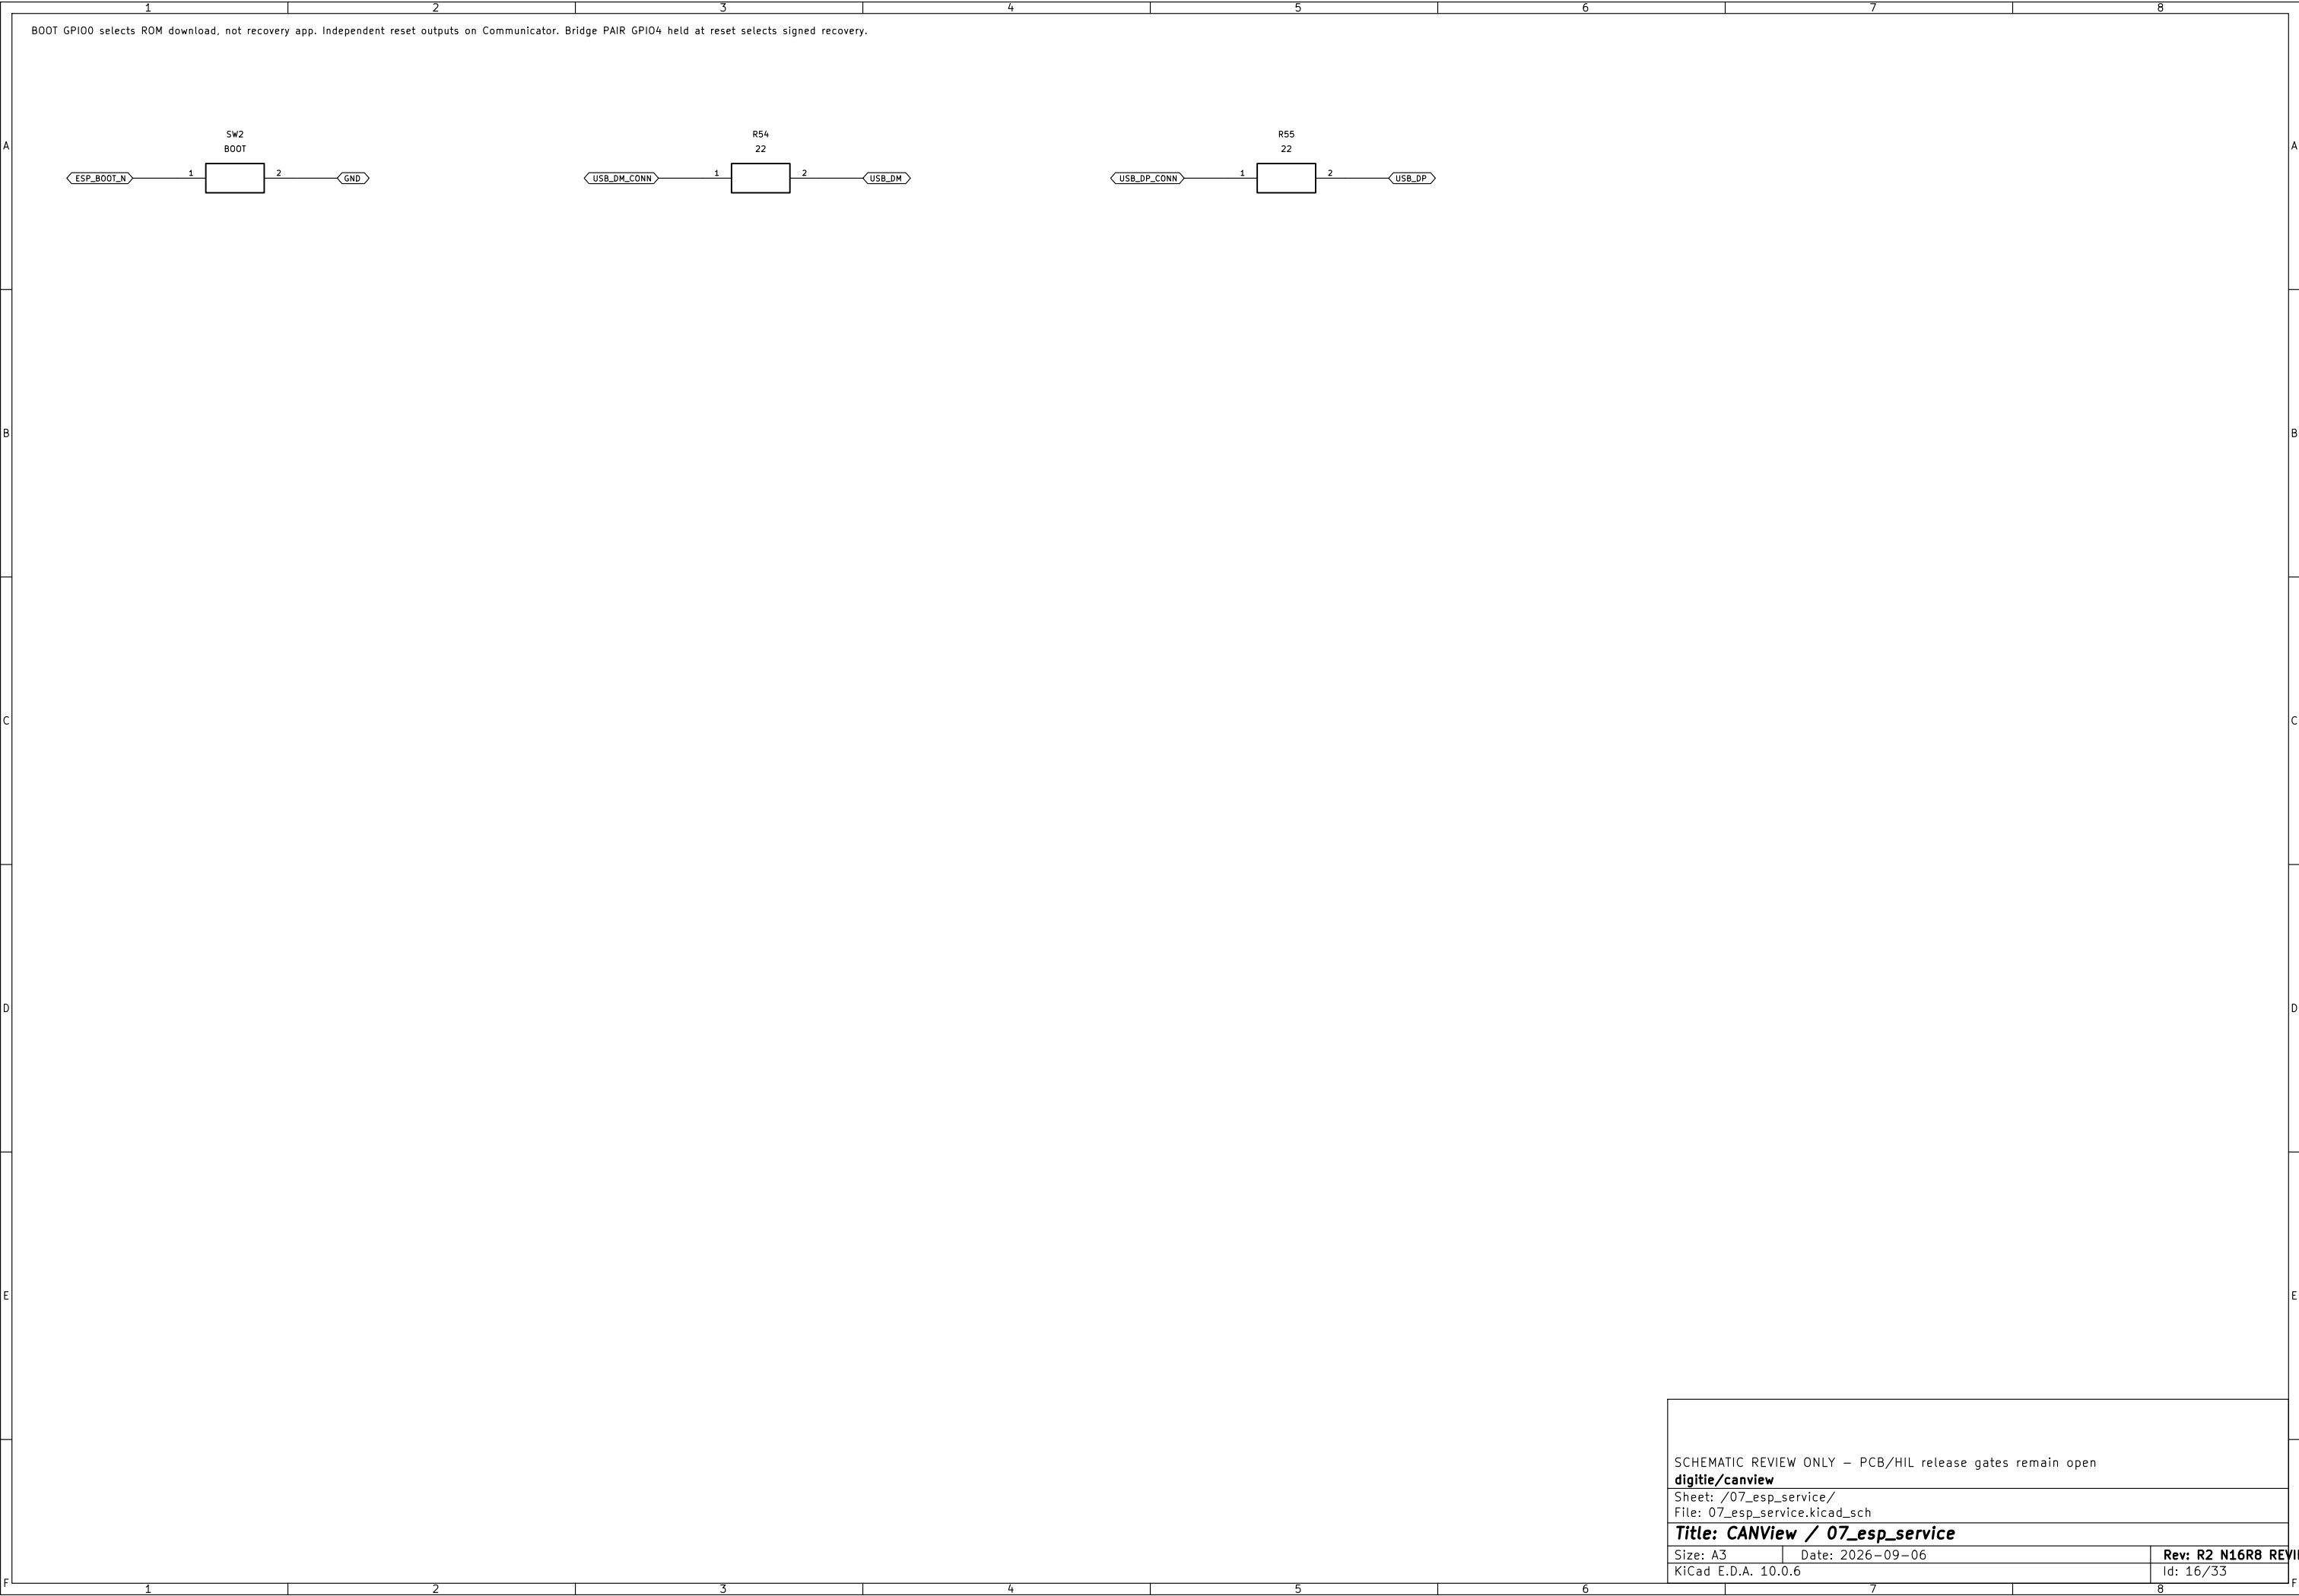


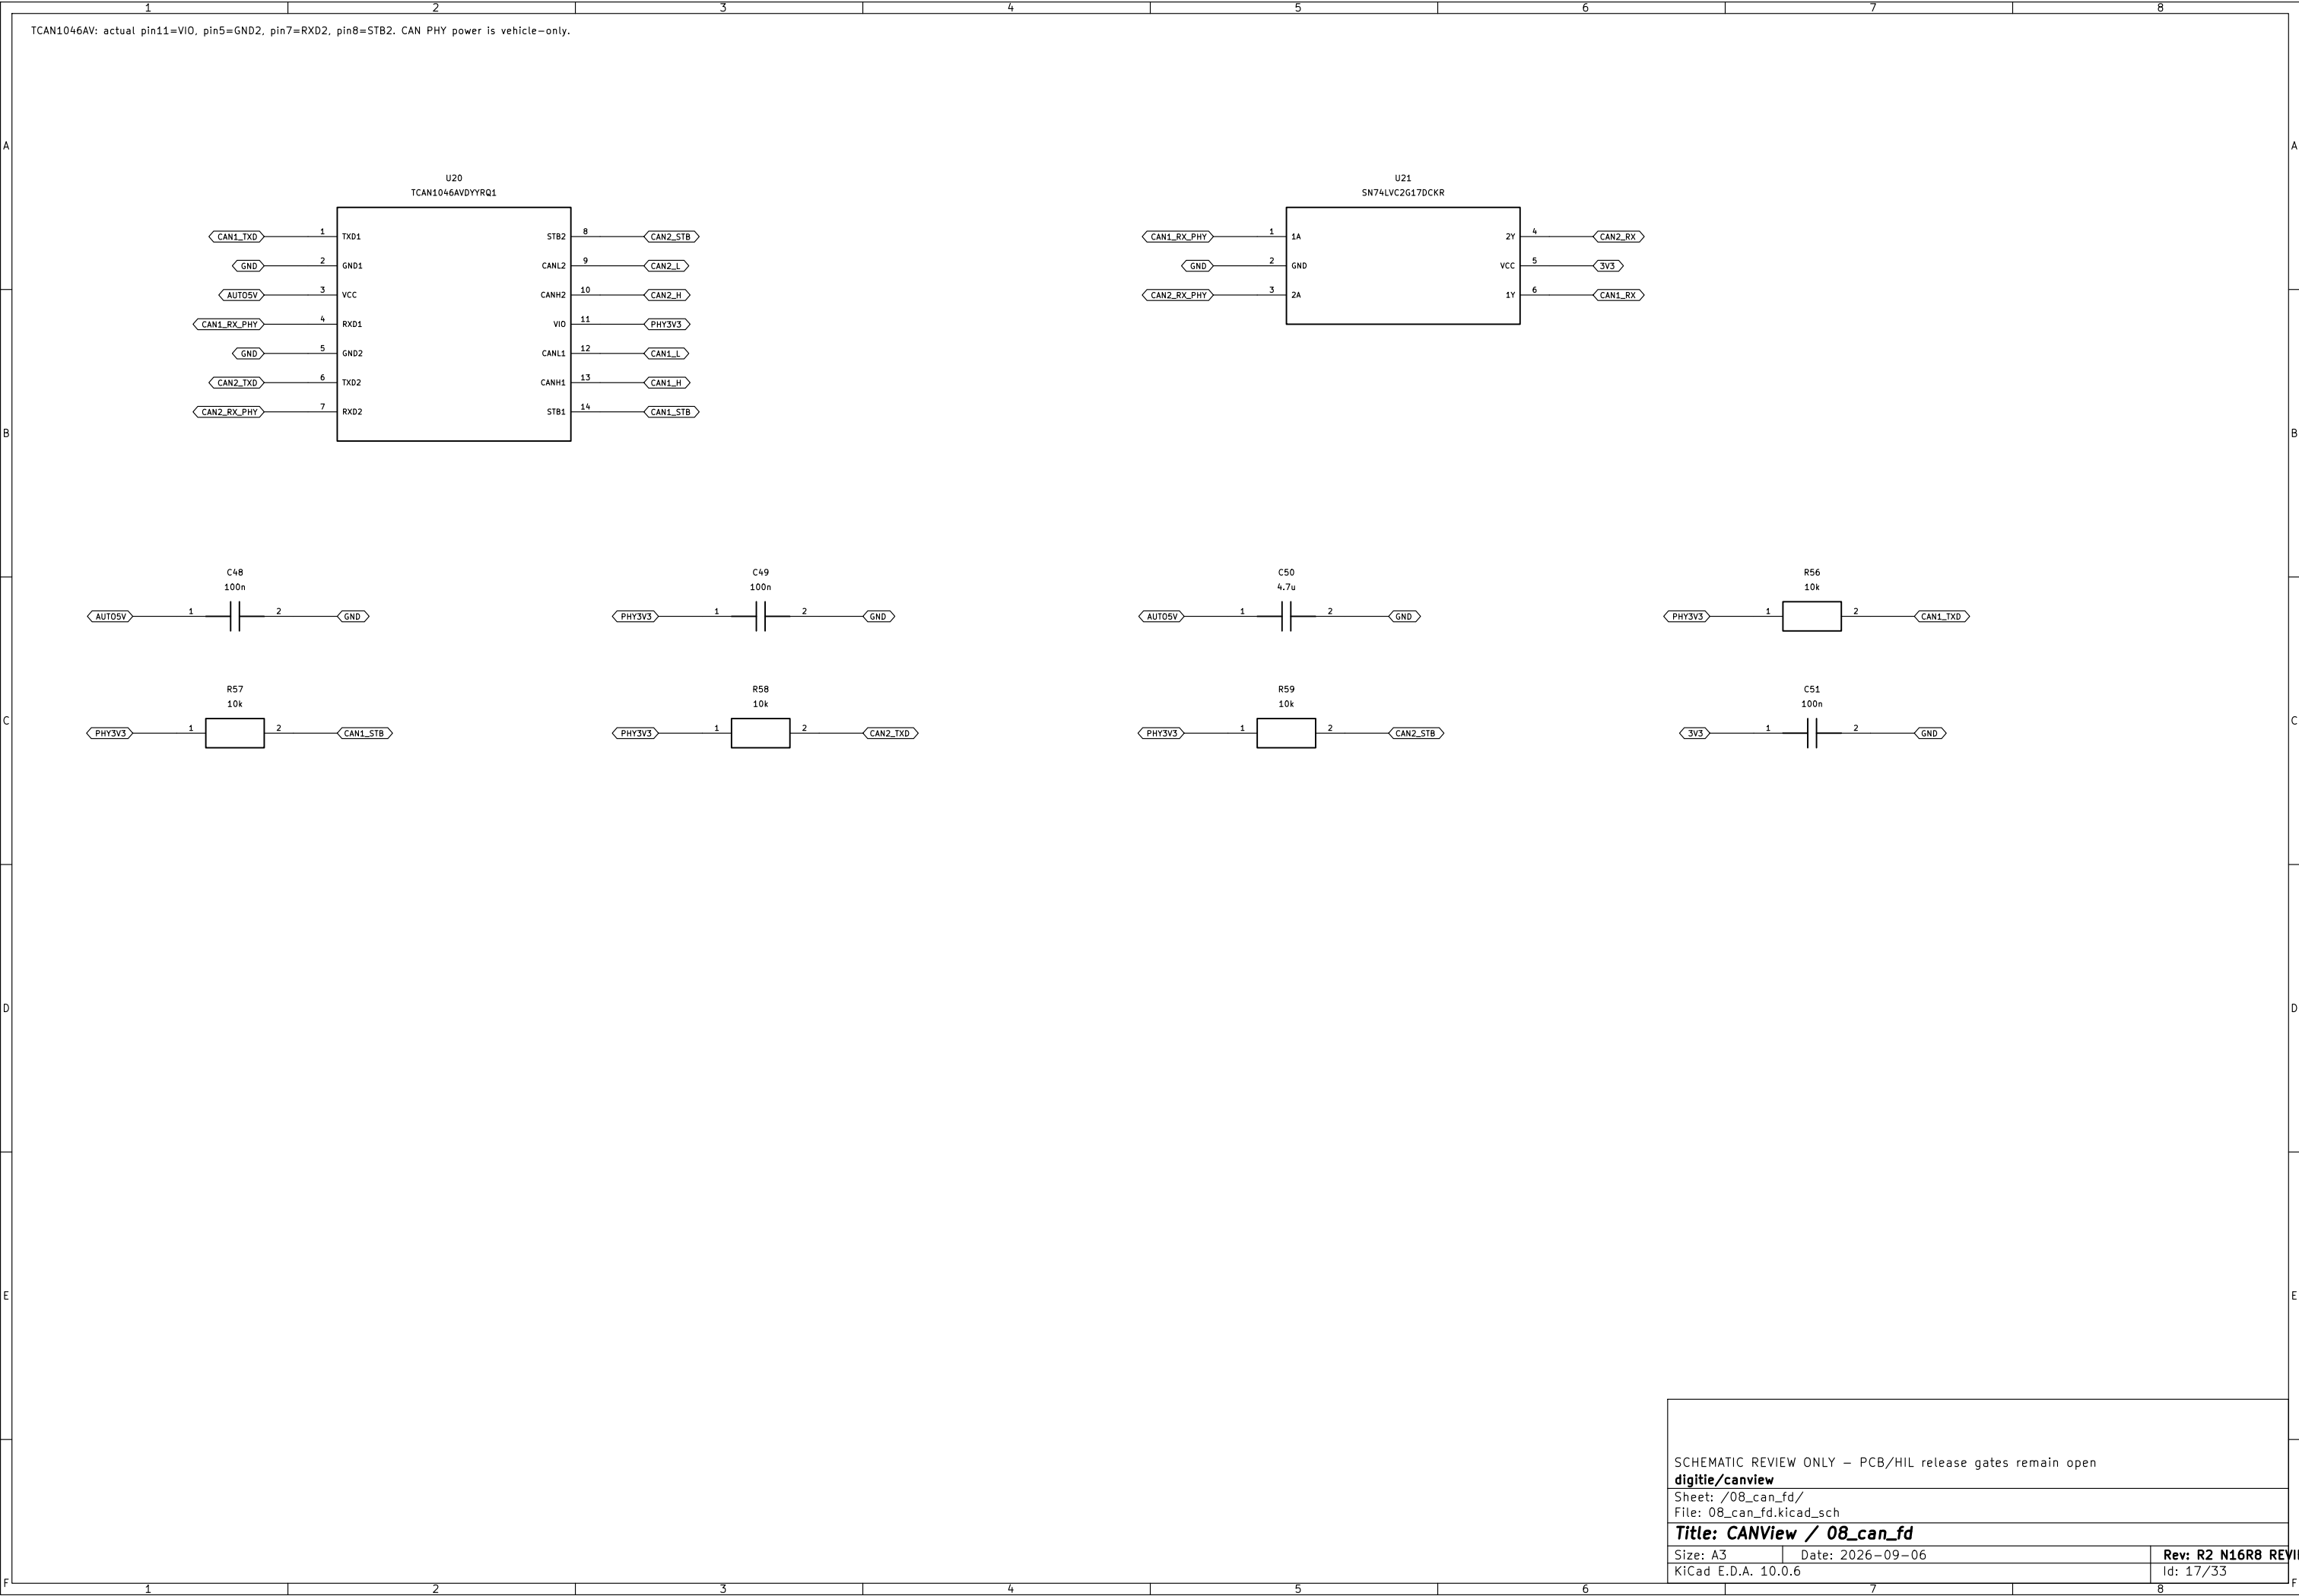

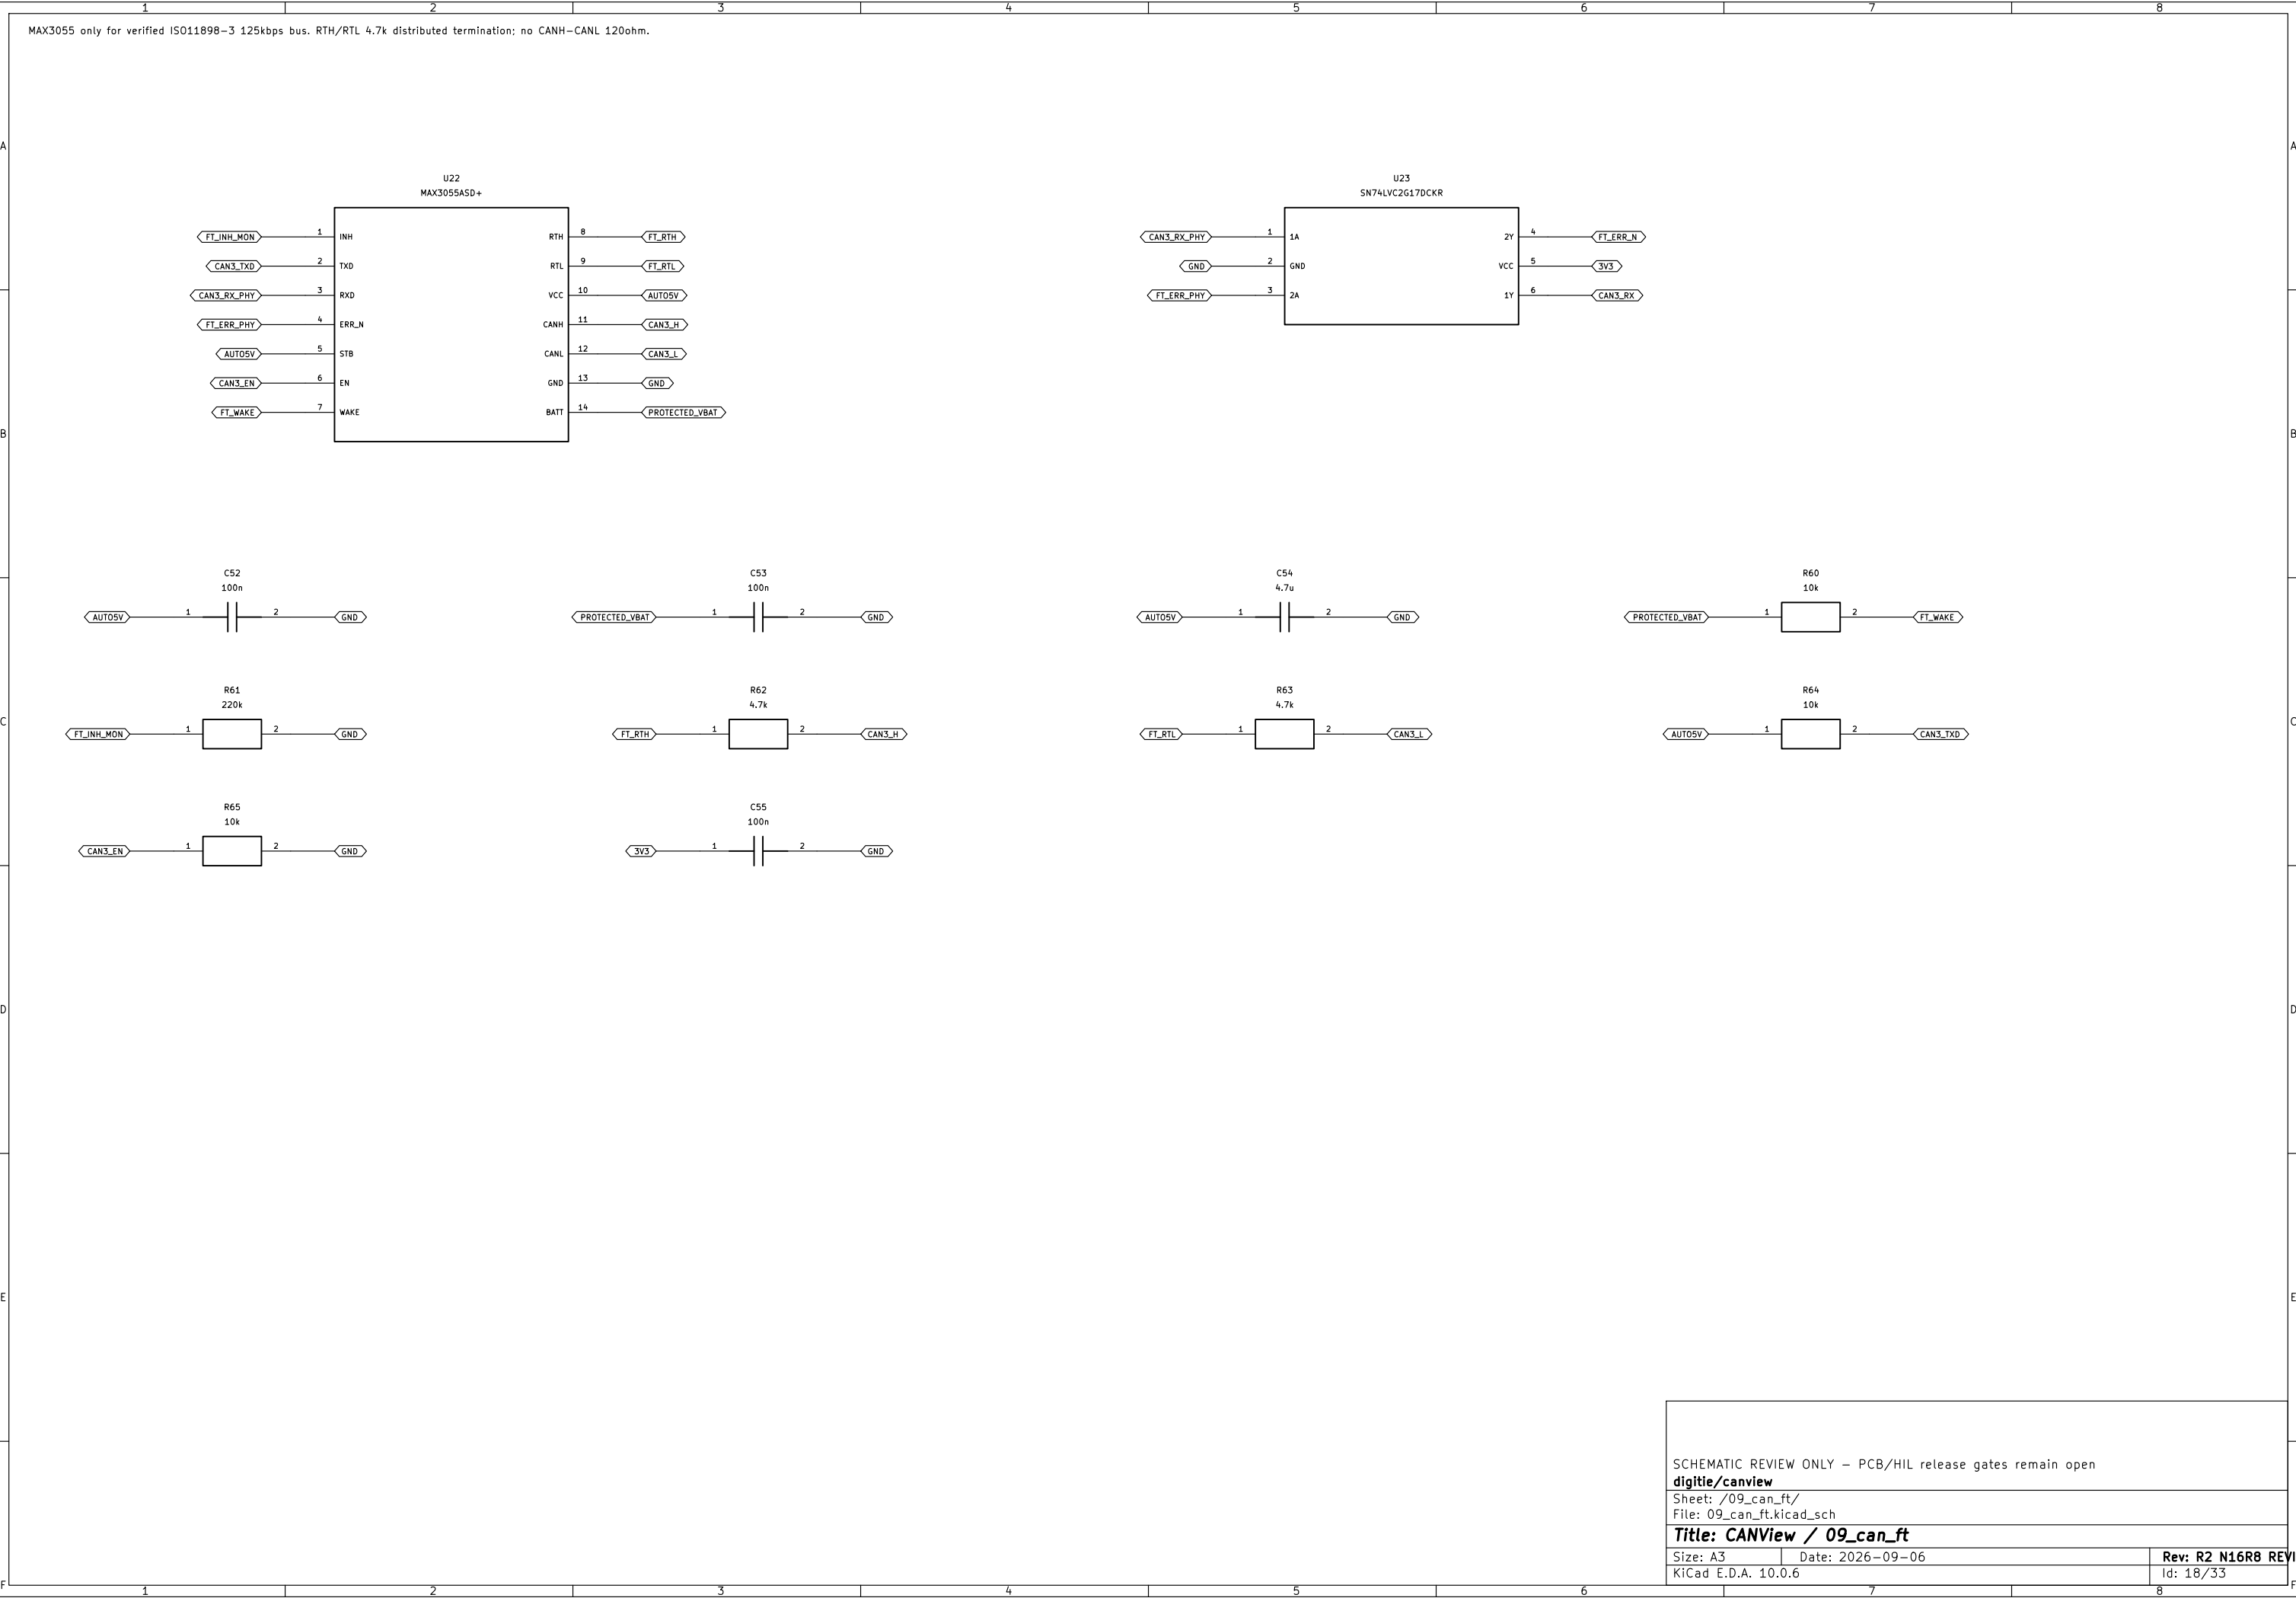

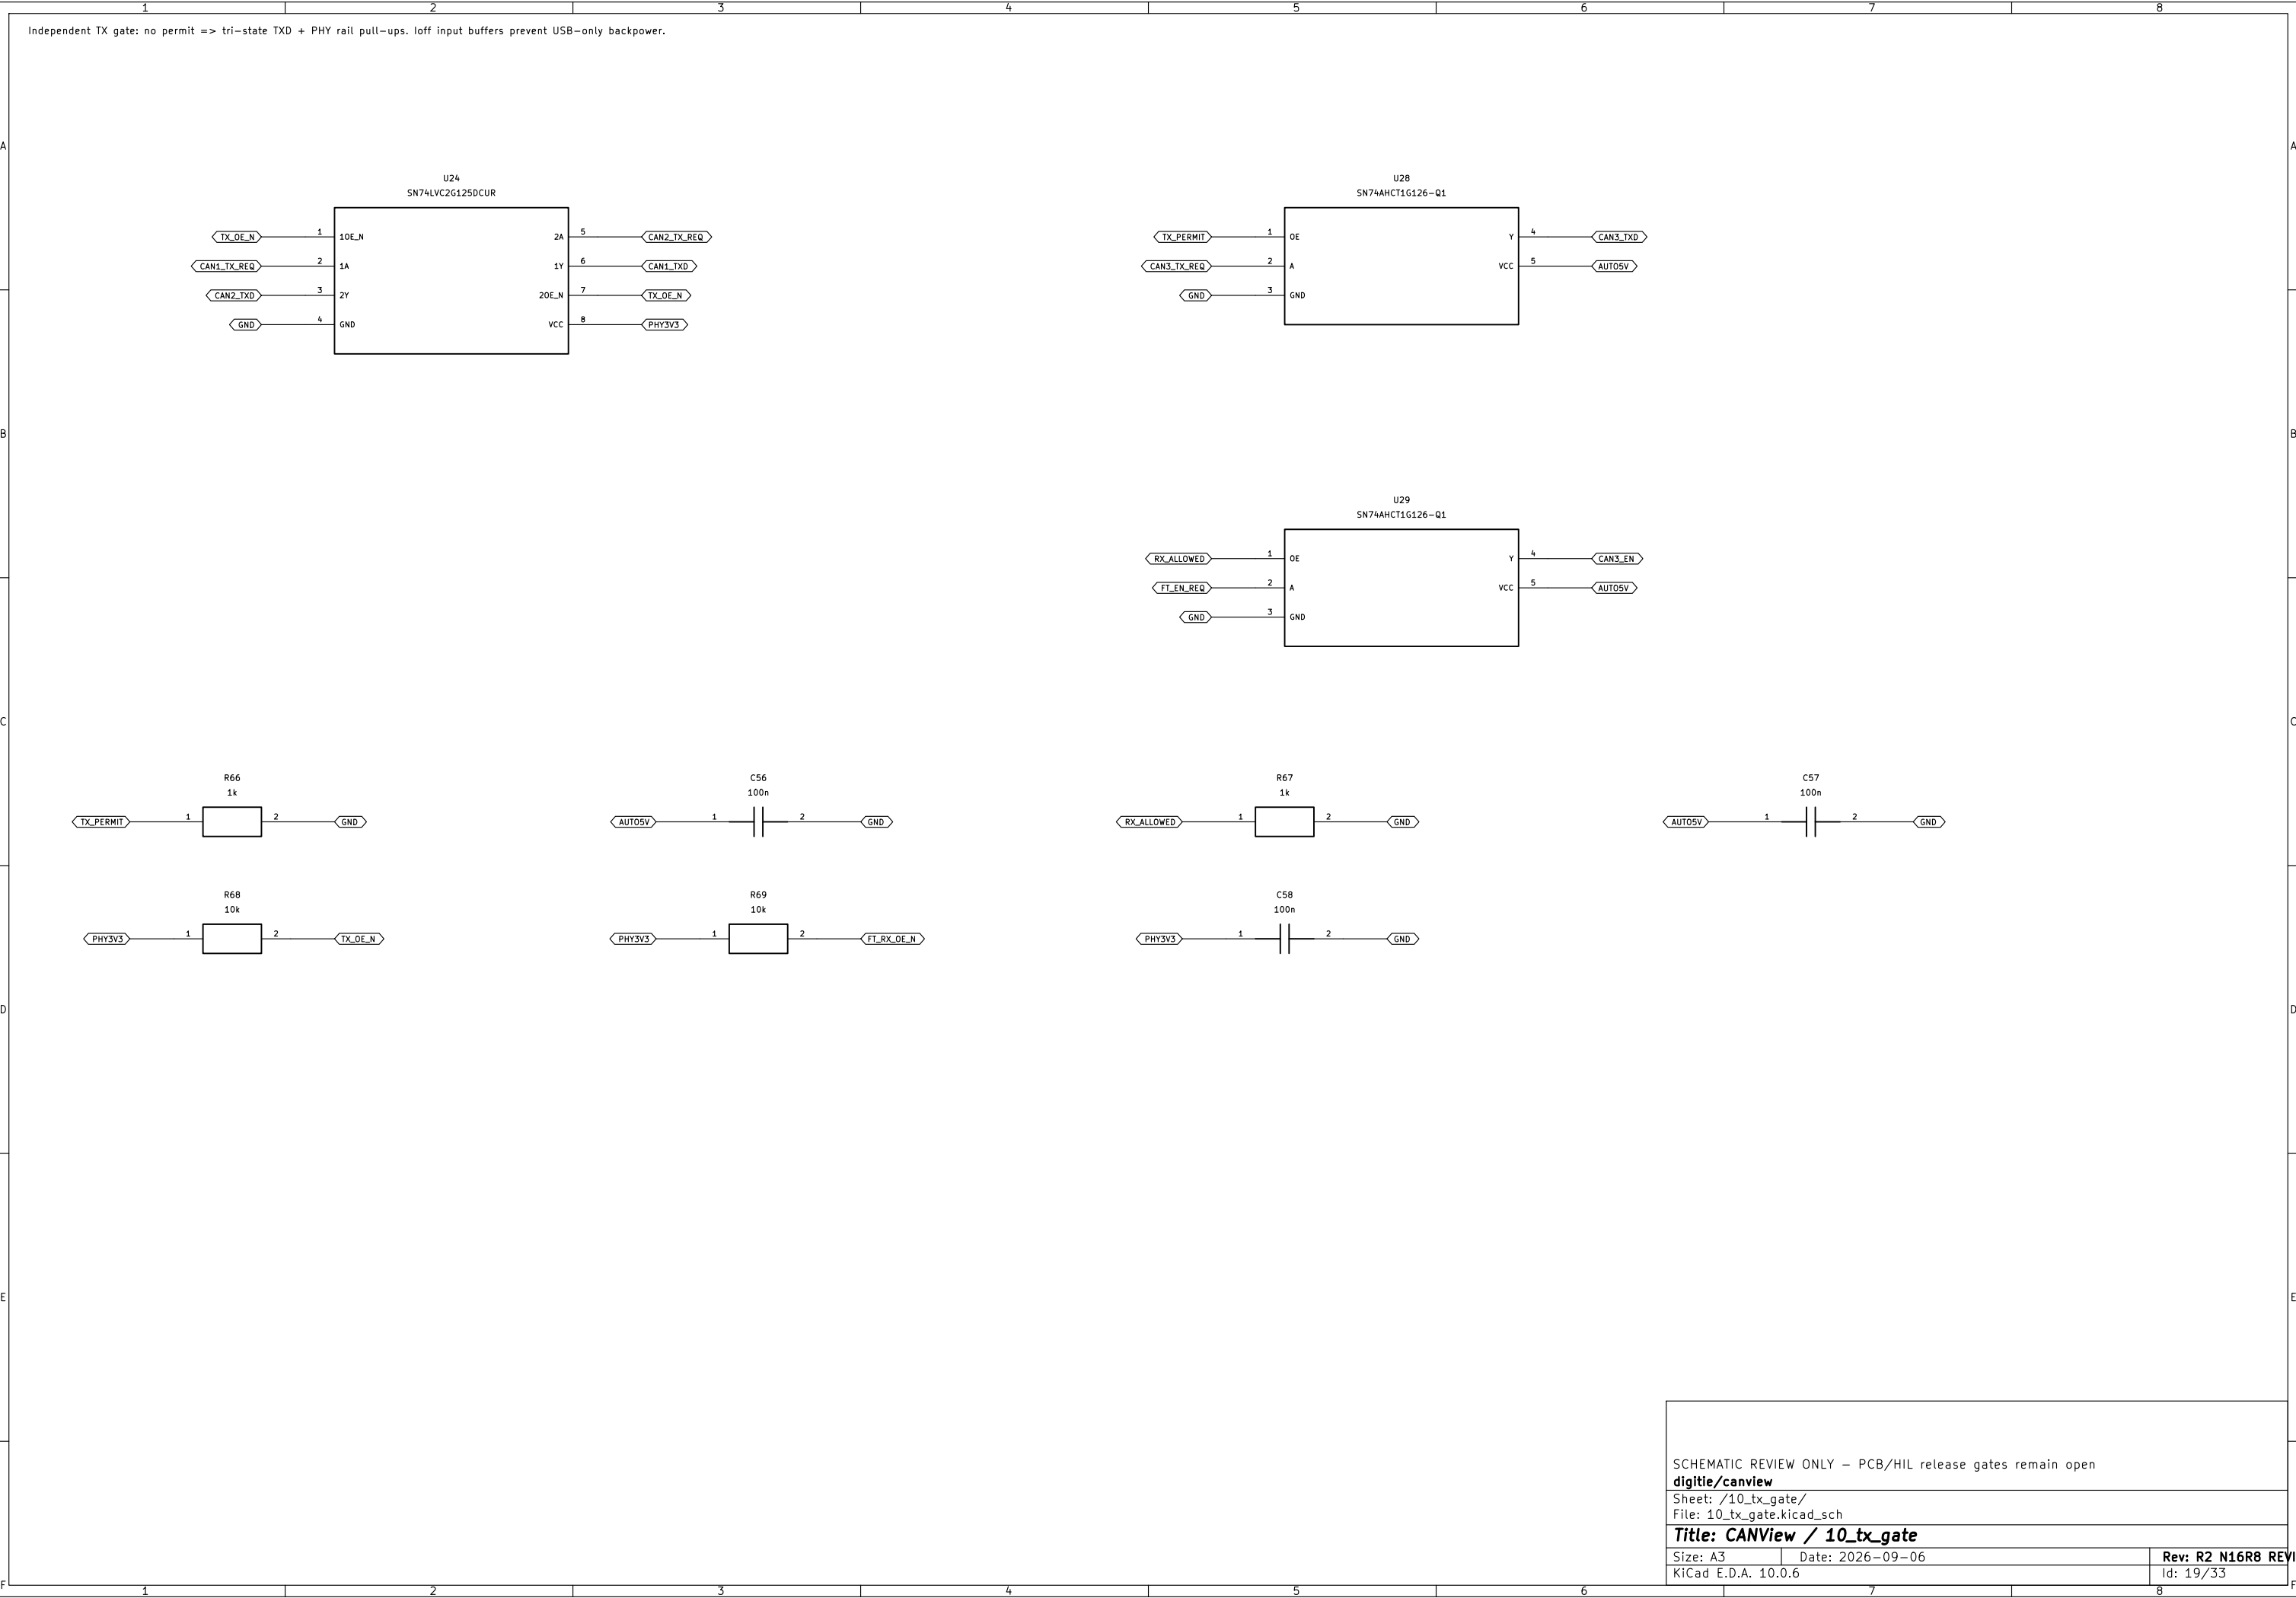

RX mode is independent of TX permit. On invalid automotive power all PHY enables return to hardware standby.

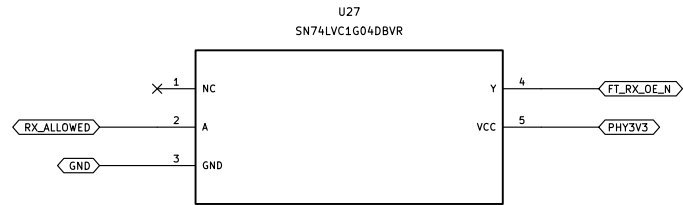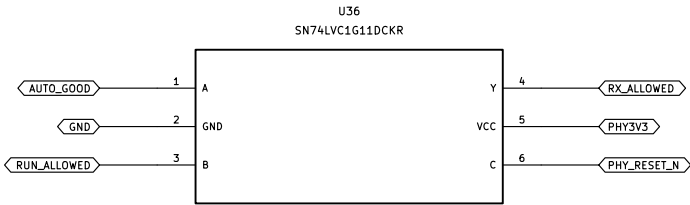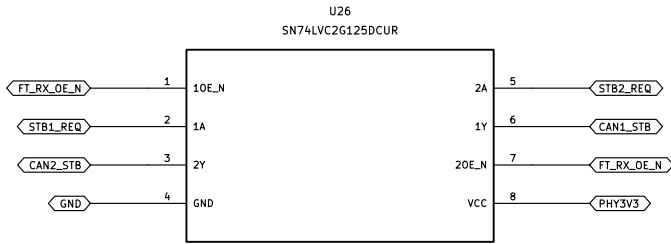

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /11_phy_modes/

File: 11_phy_modes.kicad_sch

Title: CANView / 11_phy_modes

Size: A3







Date: 2026-09-06

Rev: R2 N16R8 REVIEW

KiCad E.D.A. 10.0.6

Id: 20/33

120pF gives64.288ms nominal watchdog; budget<72ms with5% C and10pF stray. WDO recovery CANNOT re-arm TX; new ARM edge required.

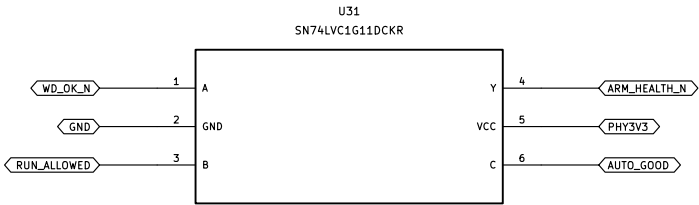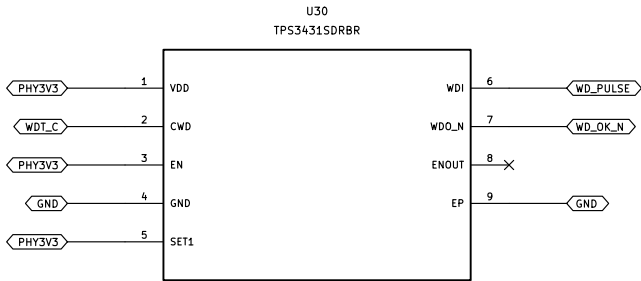

SCHEMATIC REVIEW ONLY – PCB/HIL release gates remain open

digitie/canview

Sheet: /12_watchdog_latch/

File: 12_watchdog_latch.kicad_sch

Title: CANView / 12_watchdog_latch


Size: A3


Date: 2026-09-06


Rev: R2 N16R8 REVIEW


KiCad E.D.A. 10.0.6


Id: 21/33

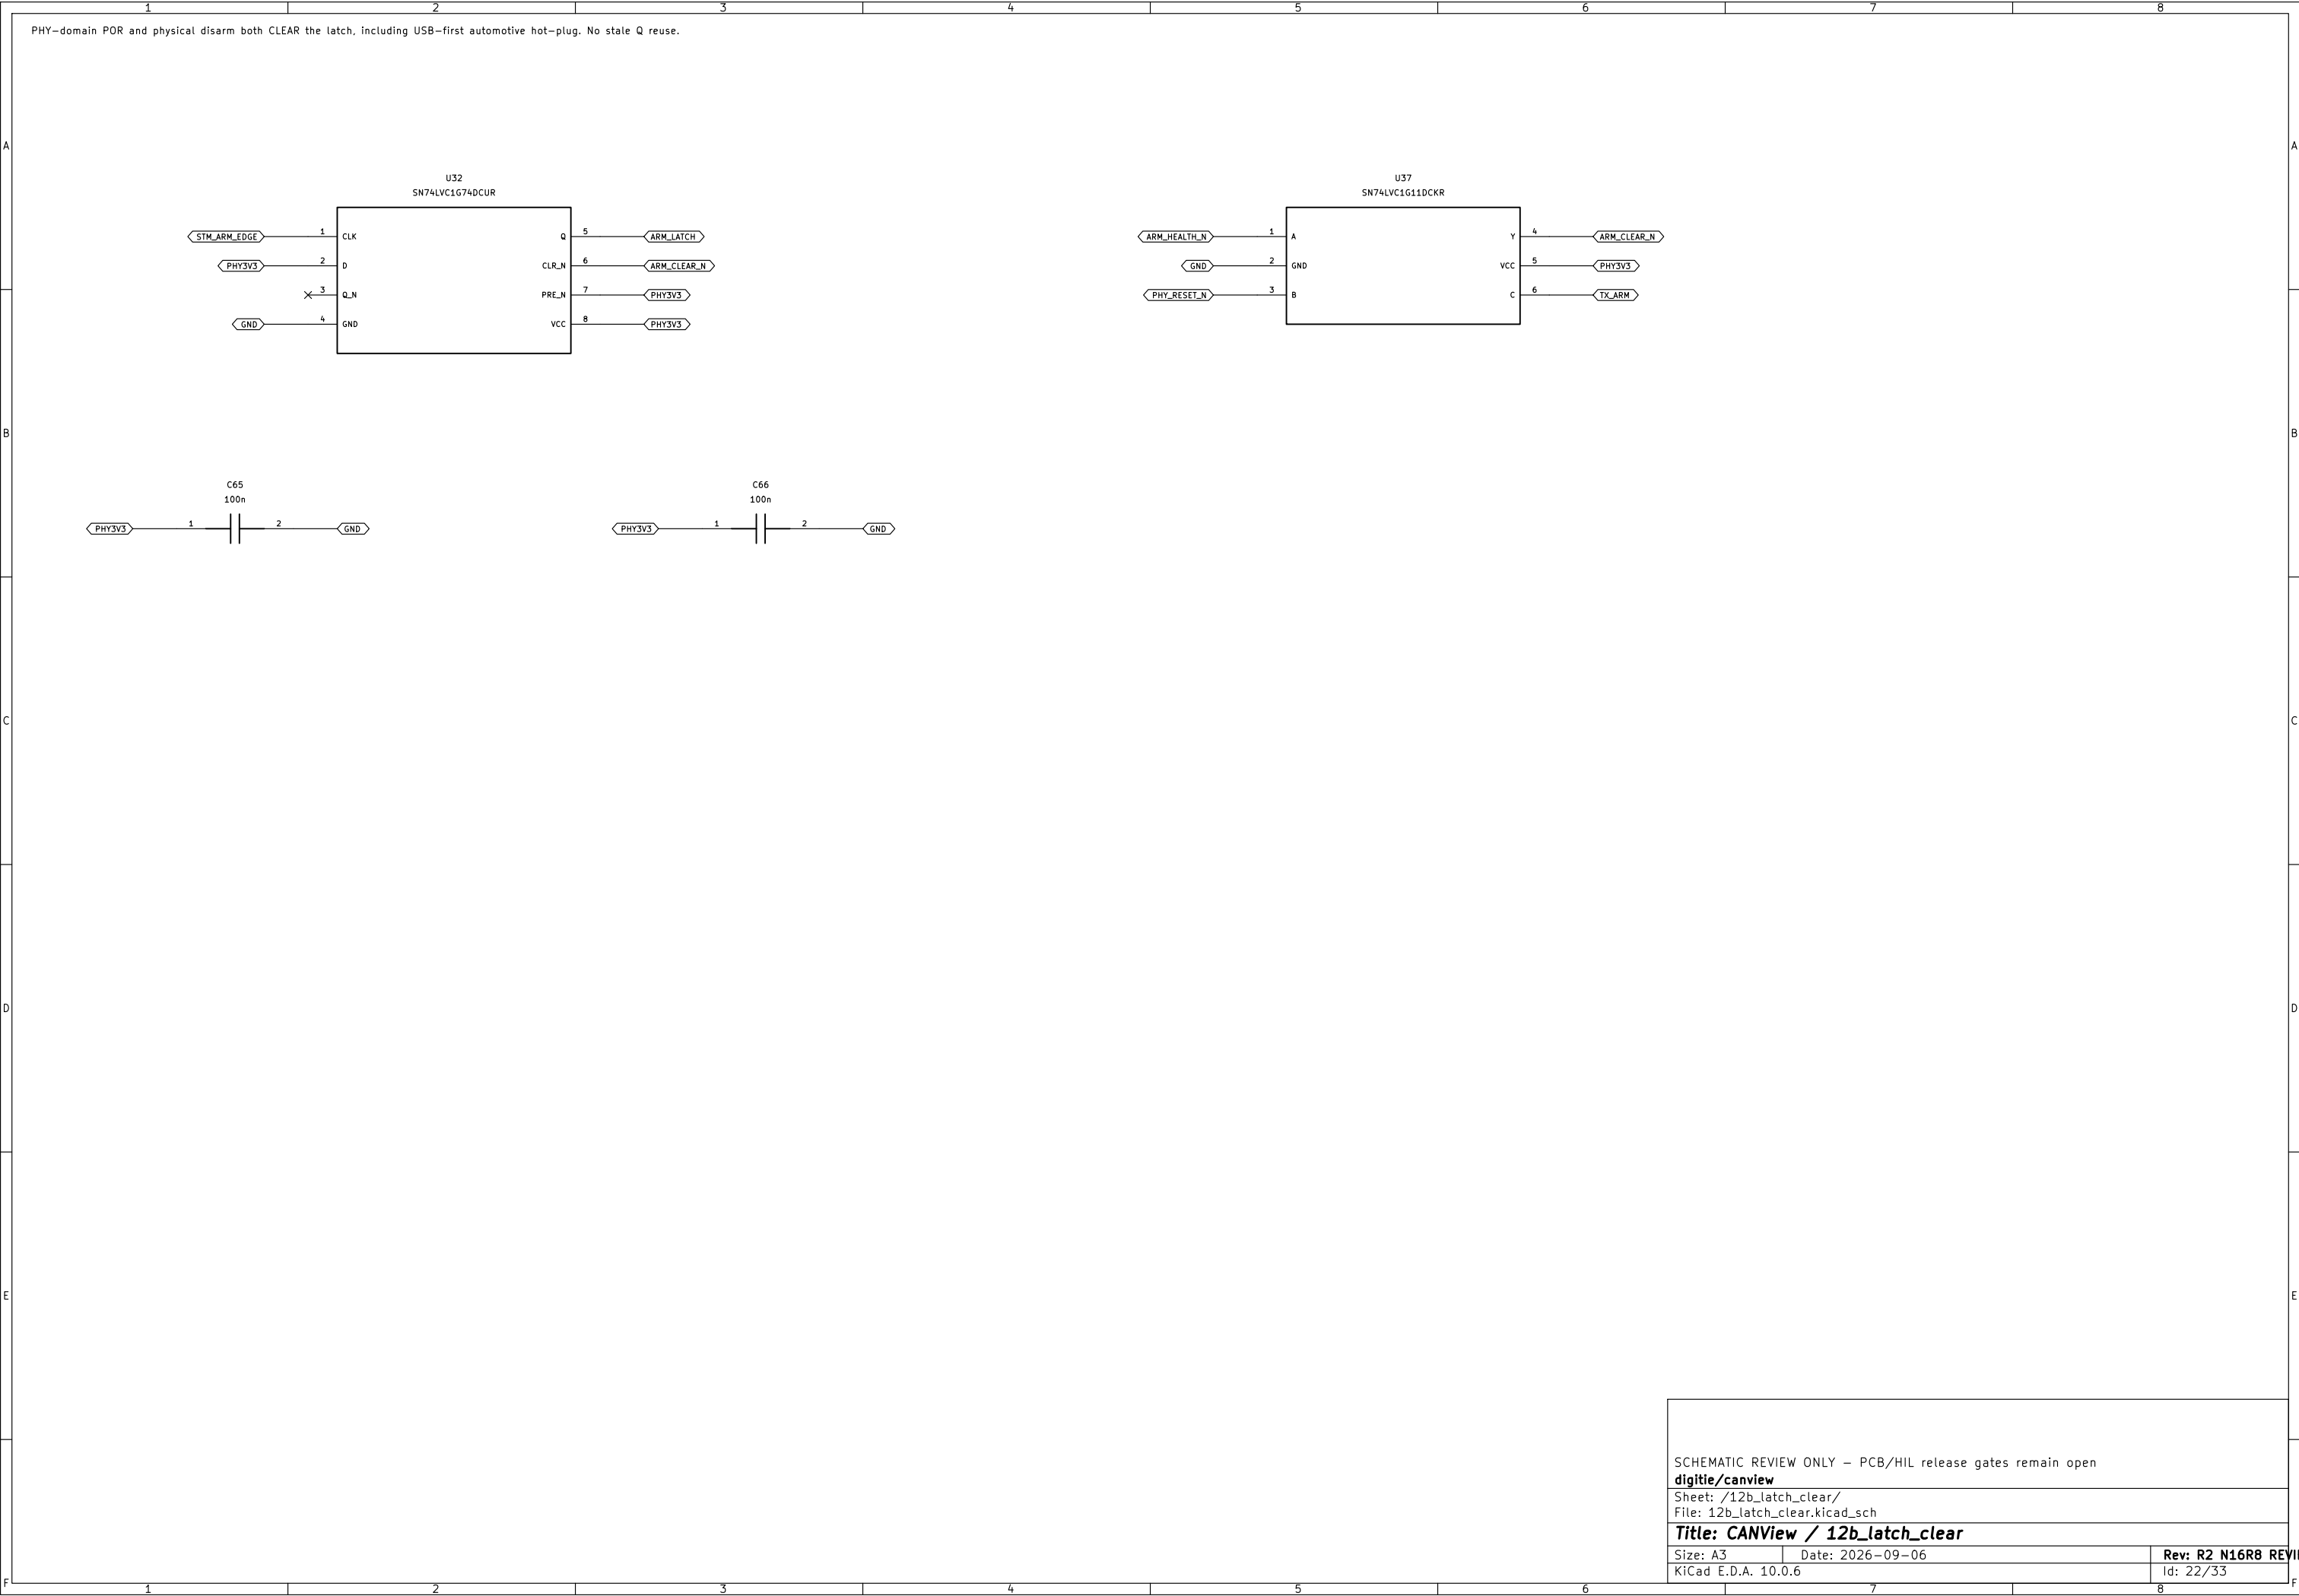


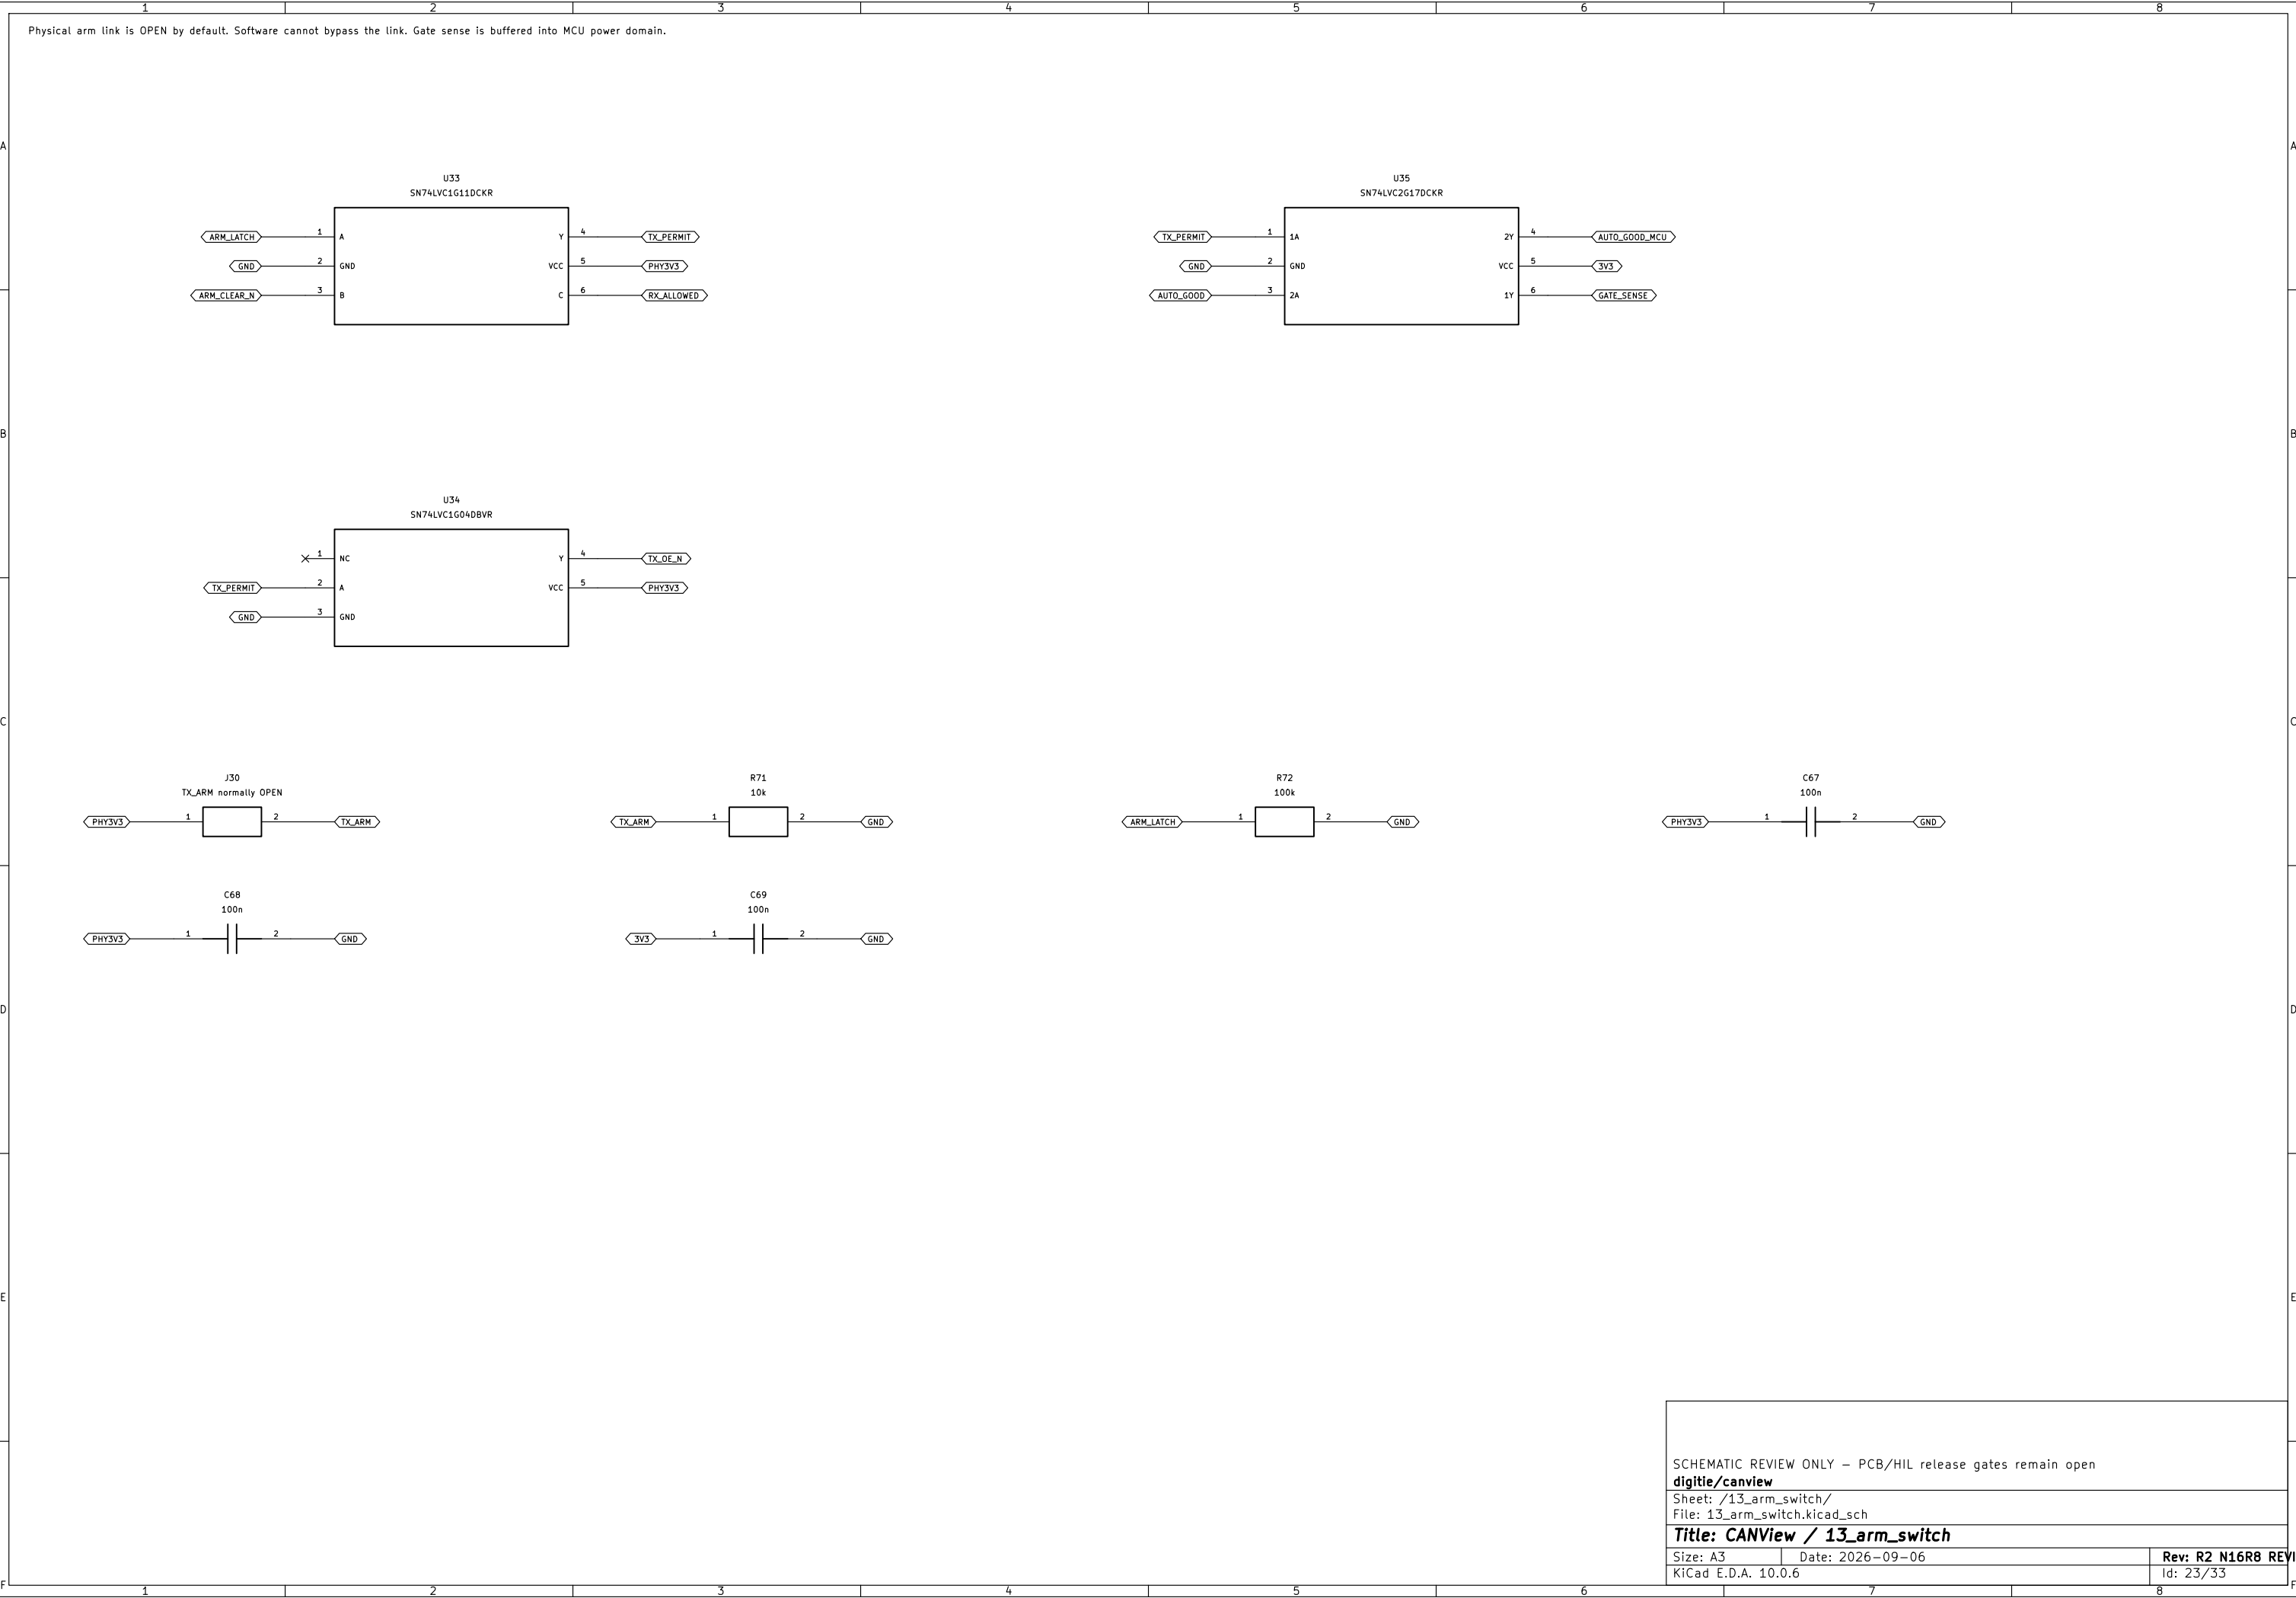


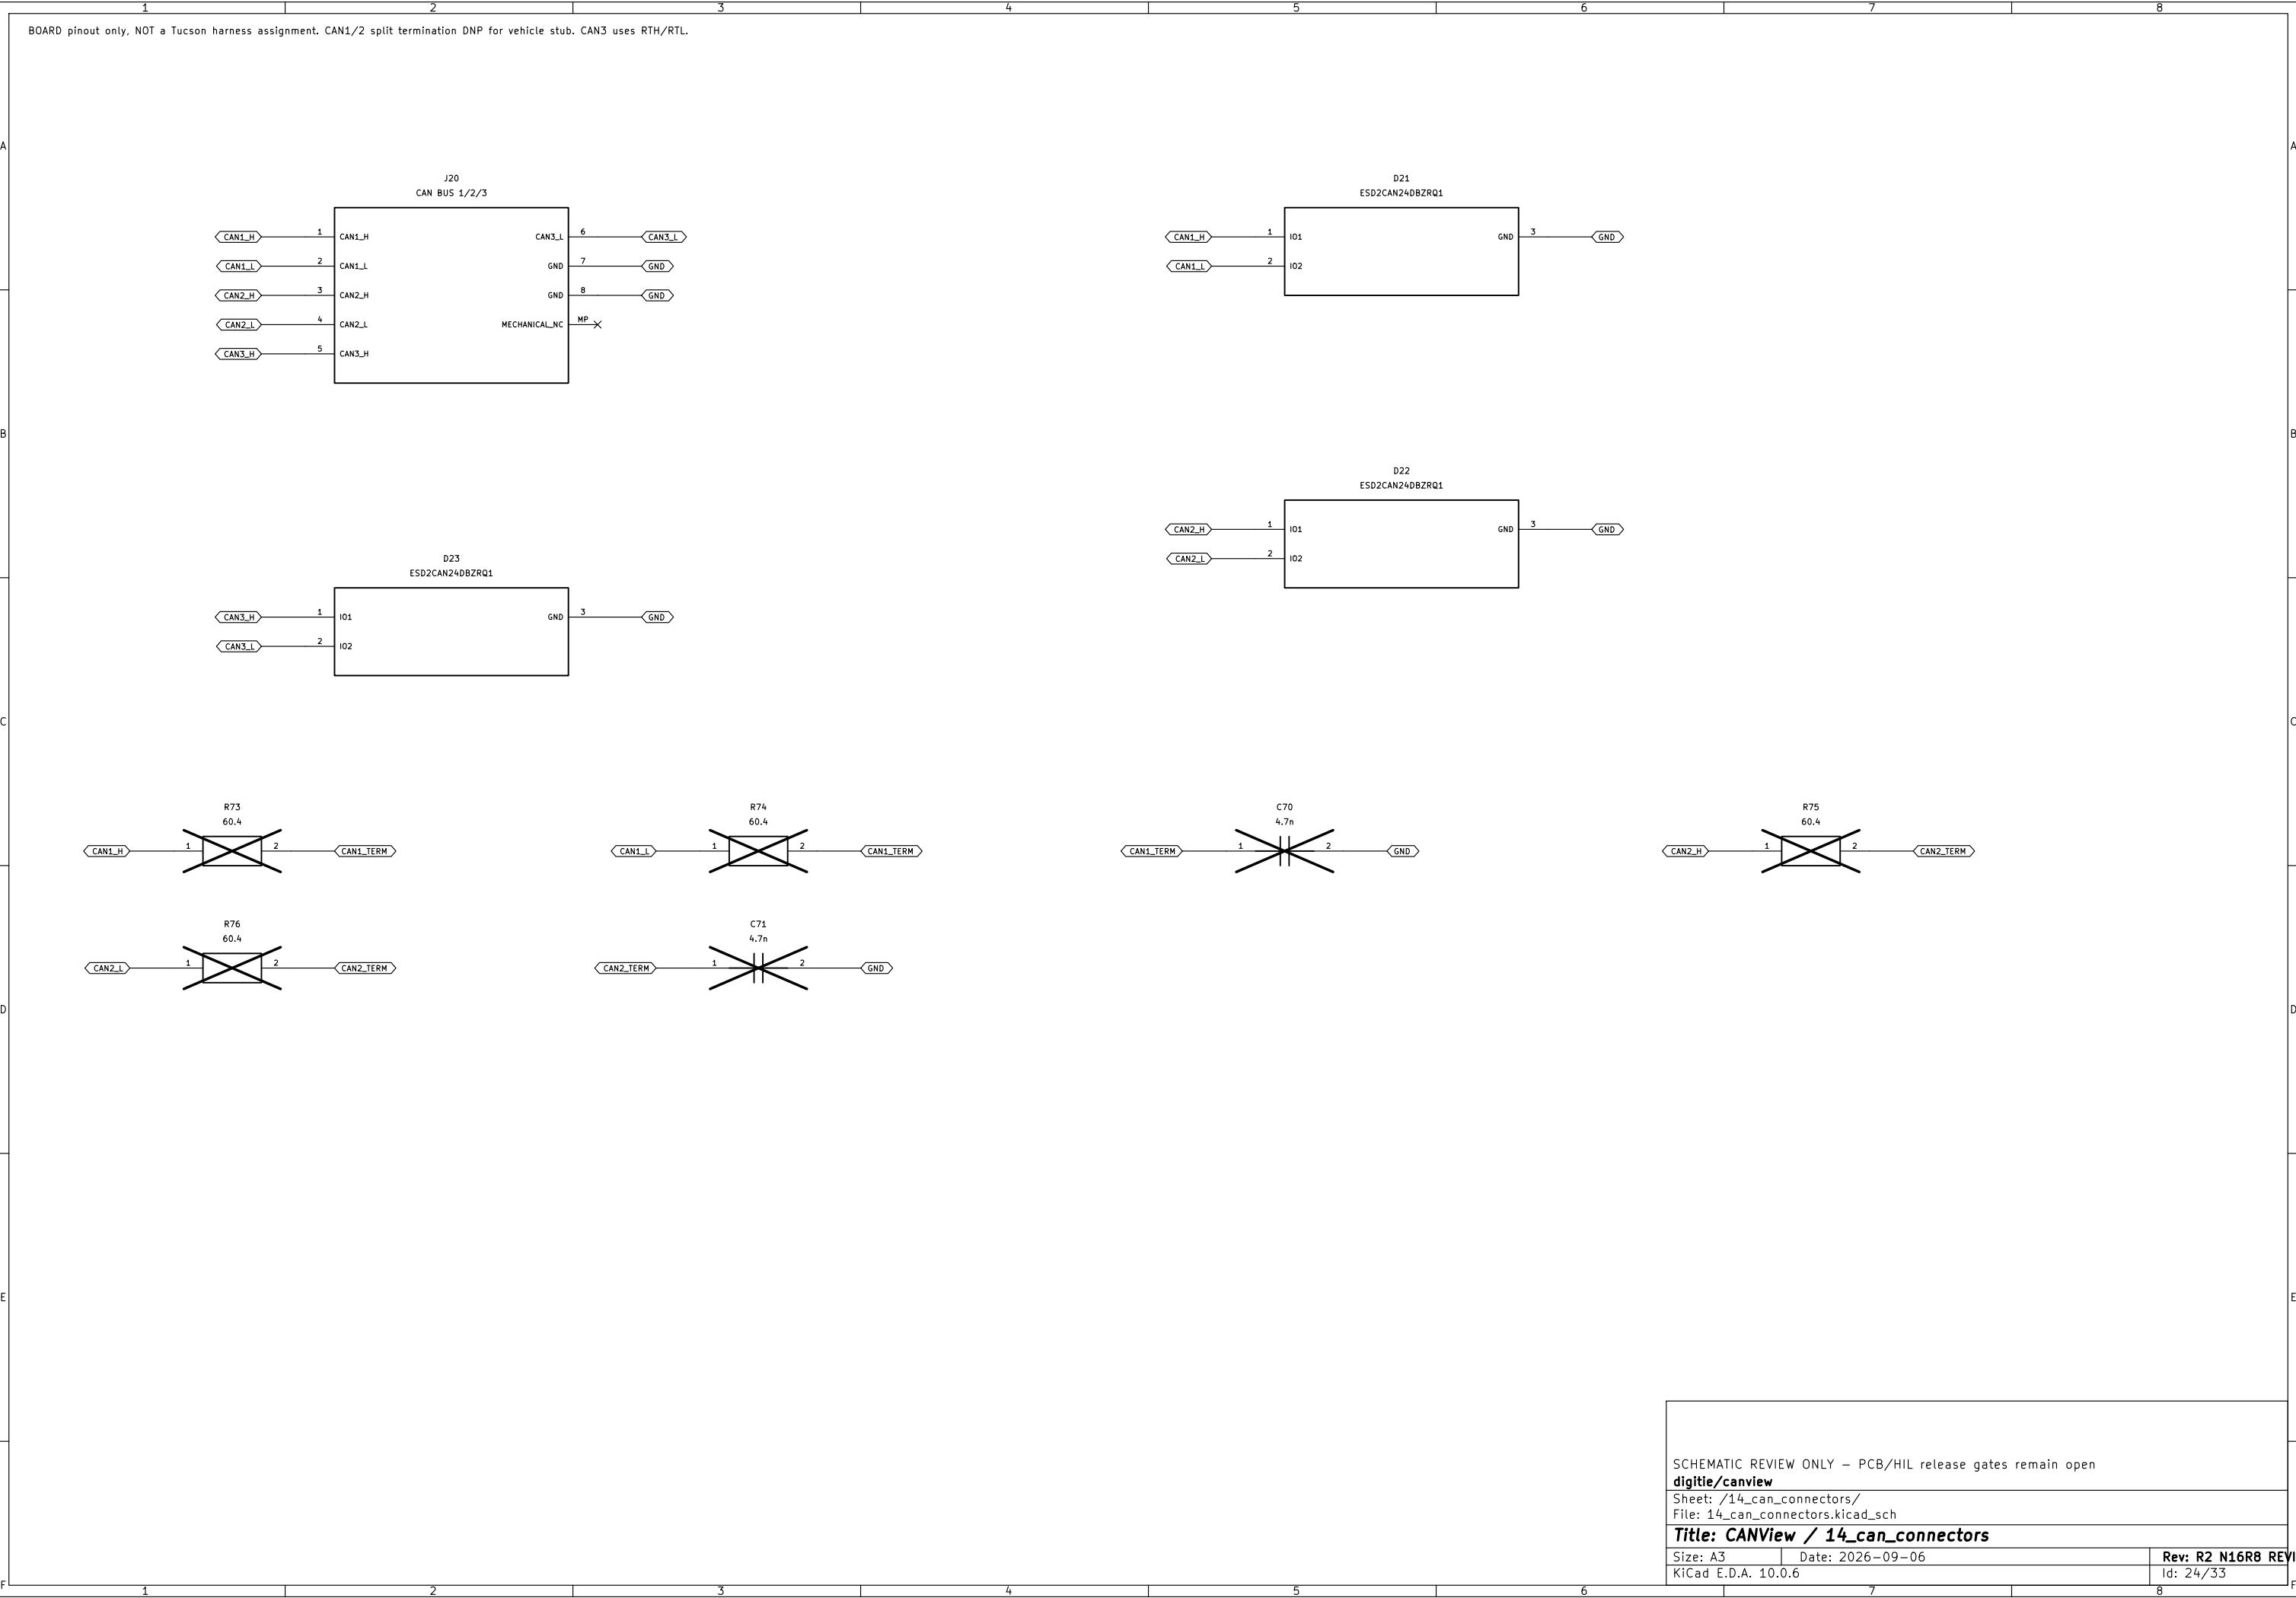


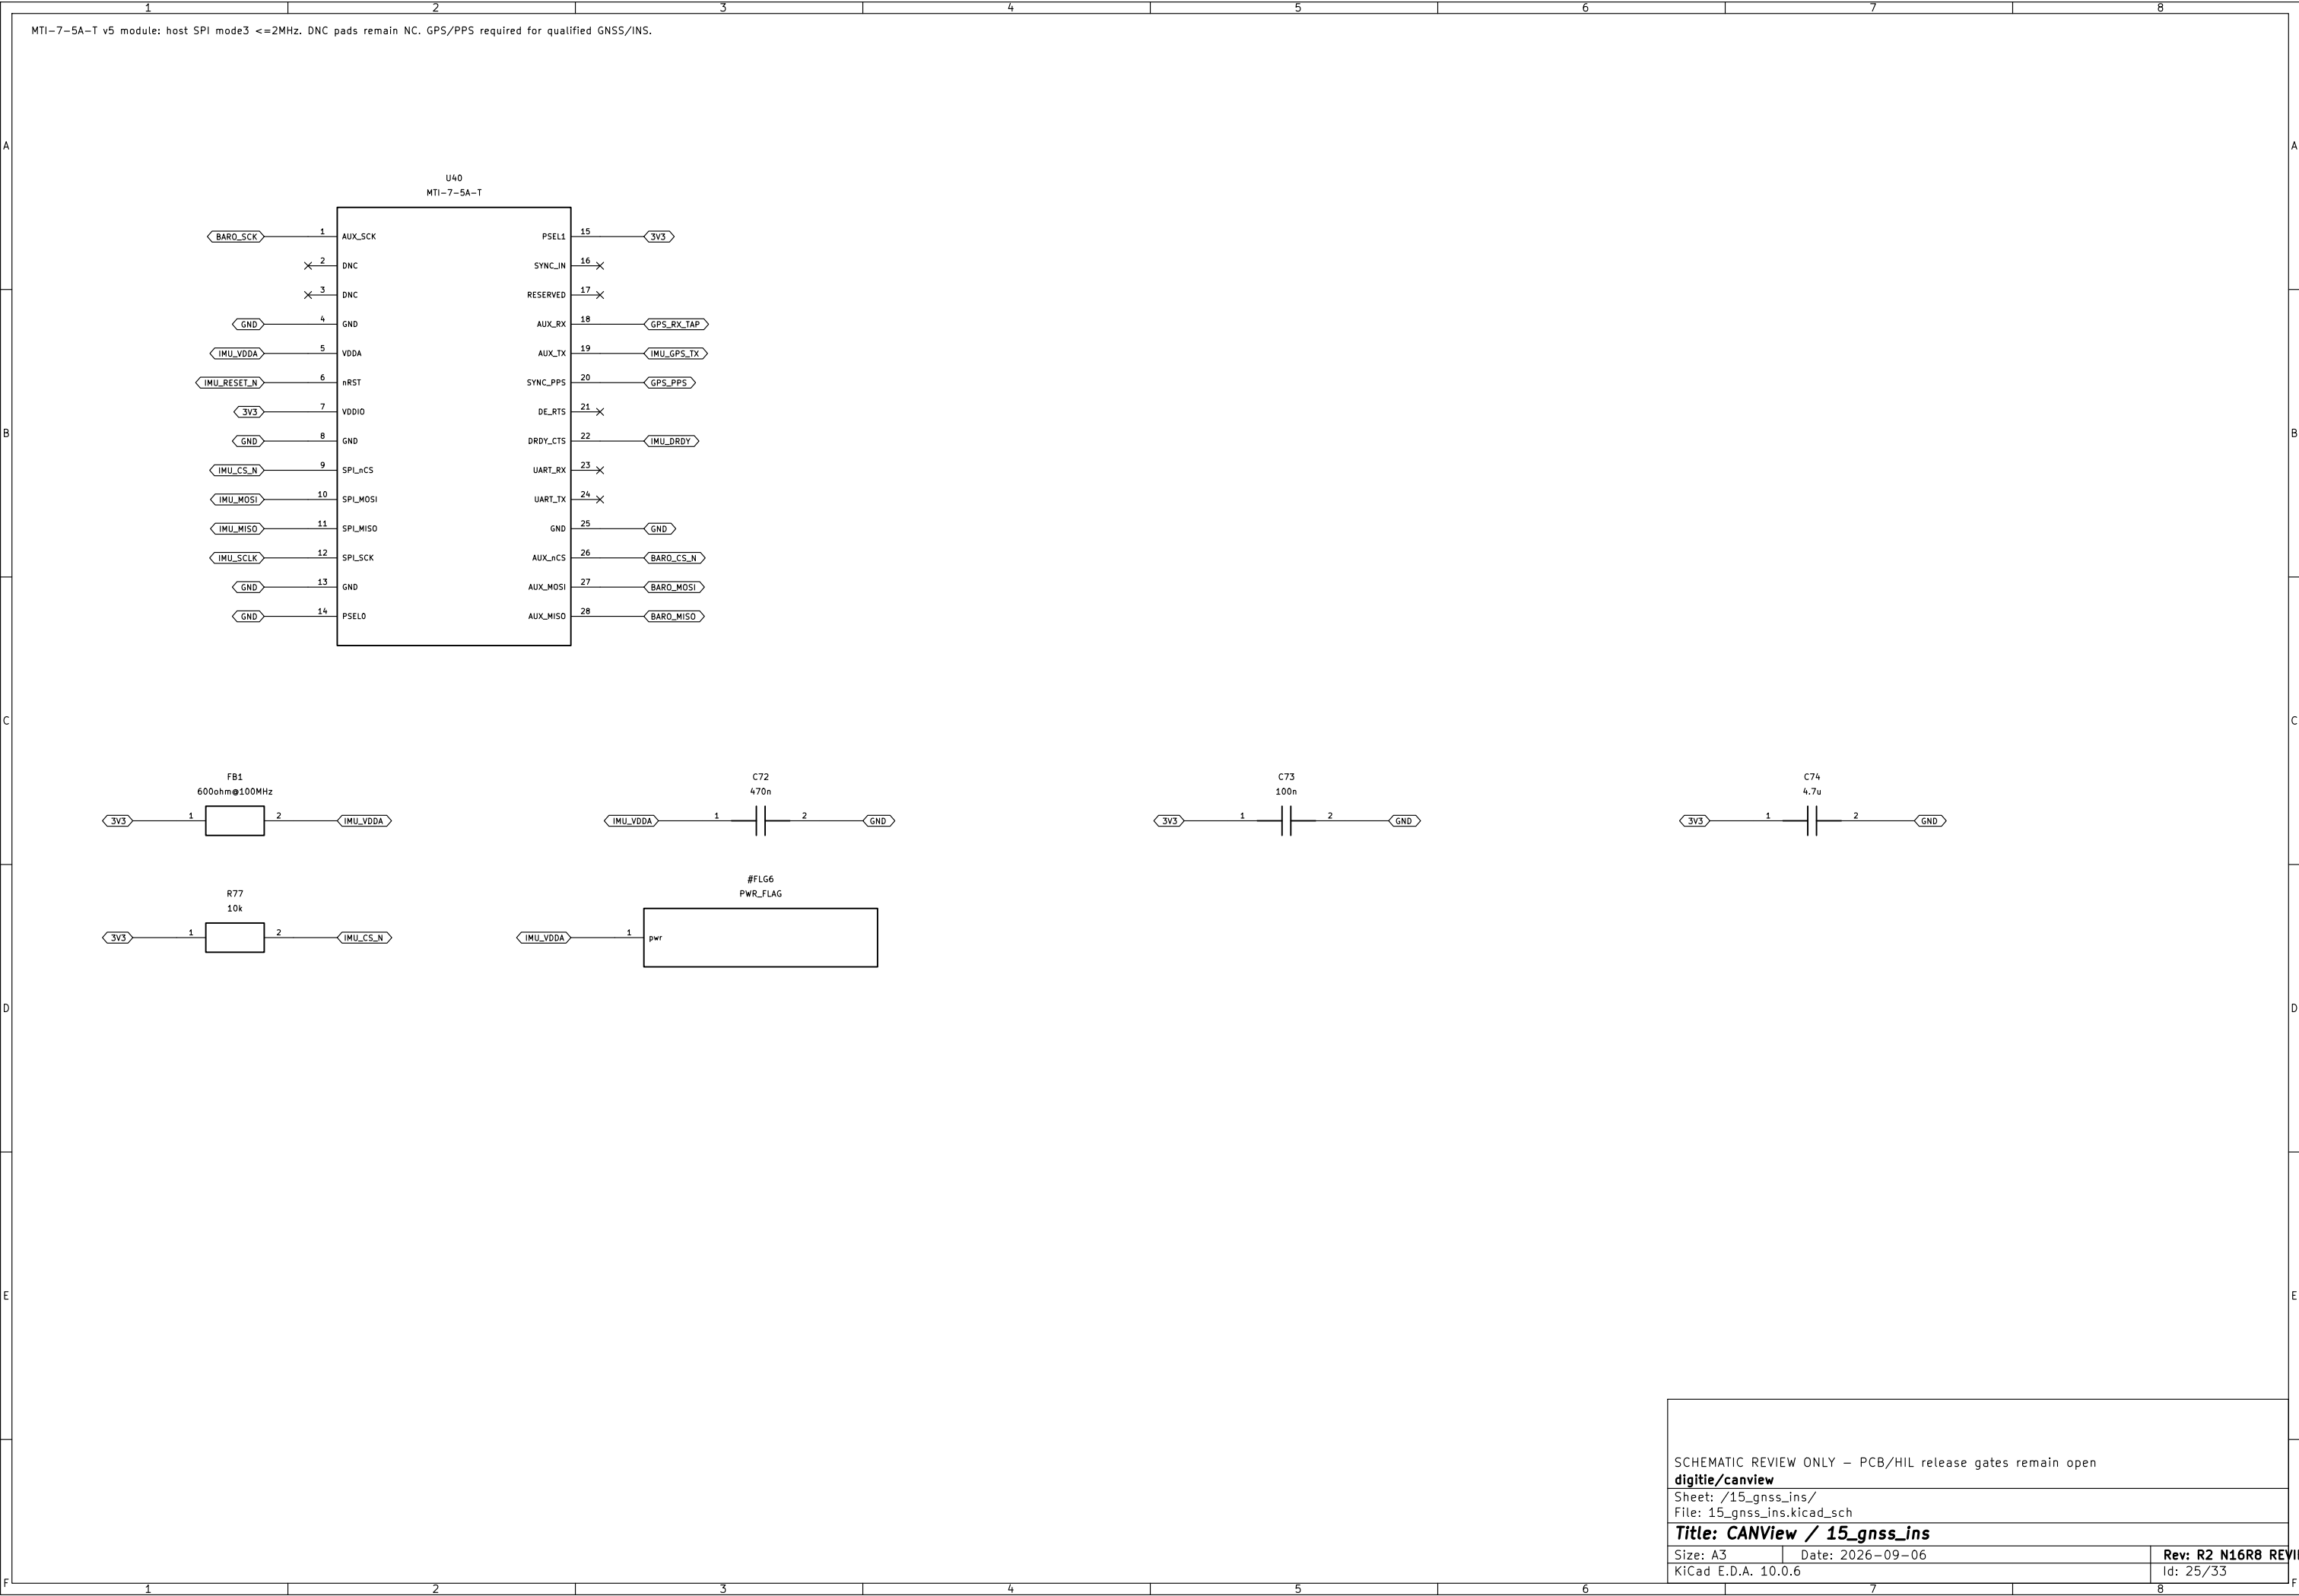


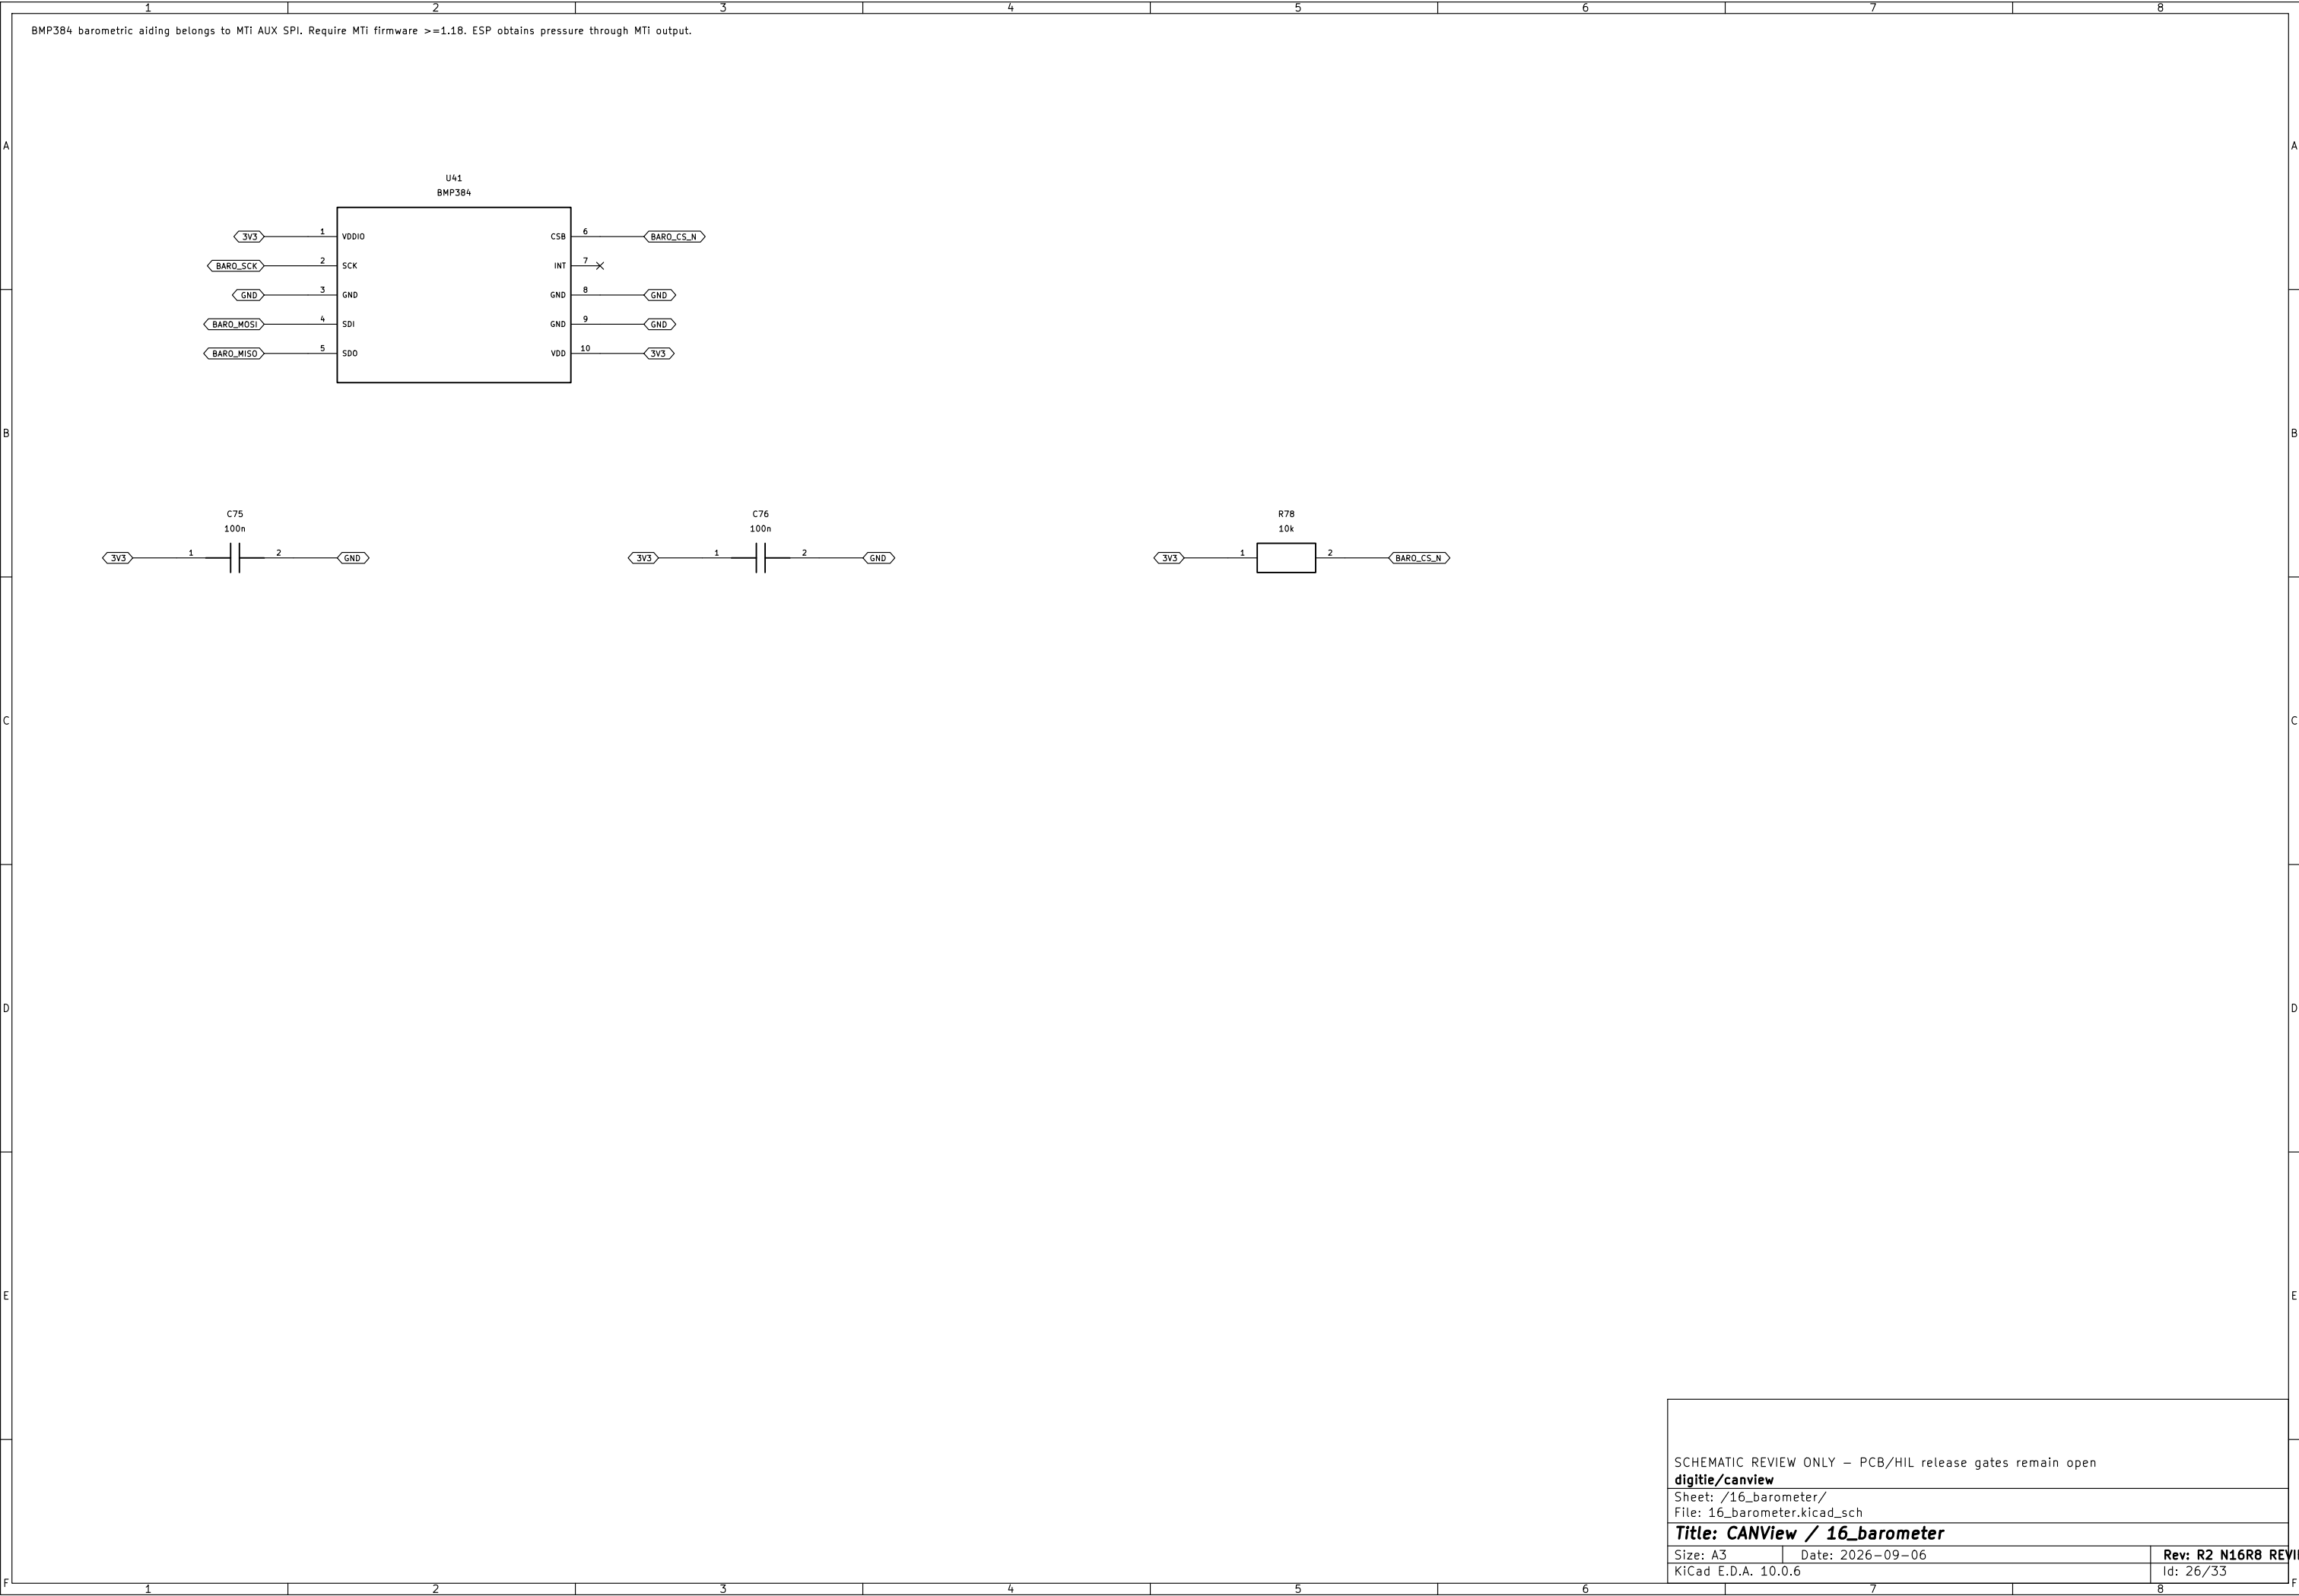


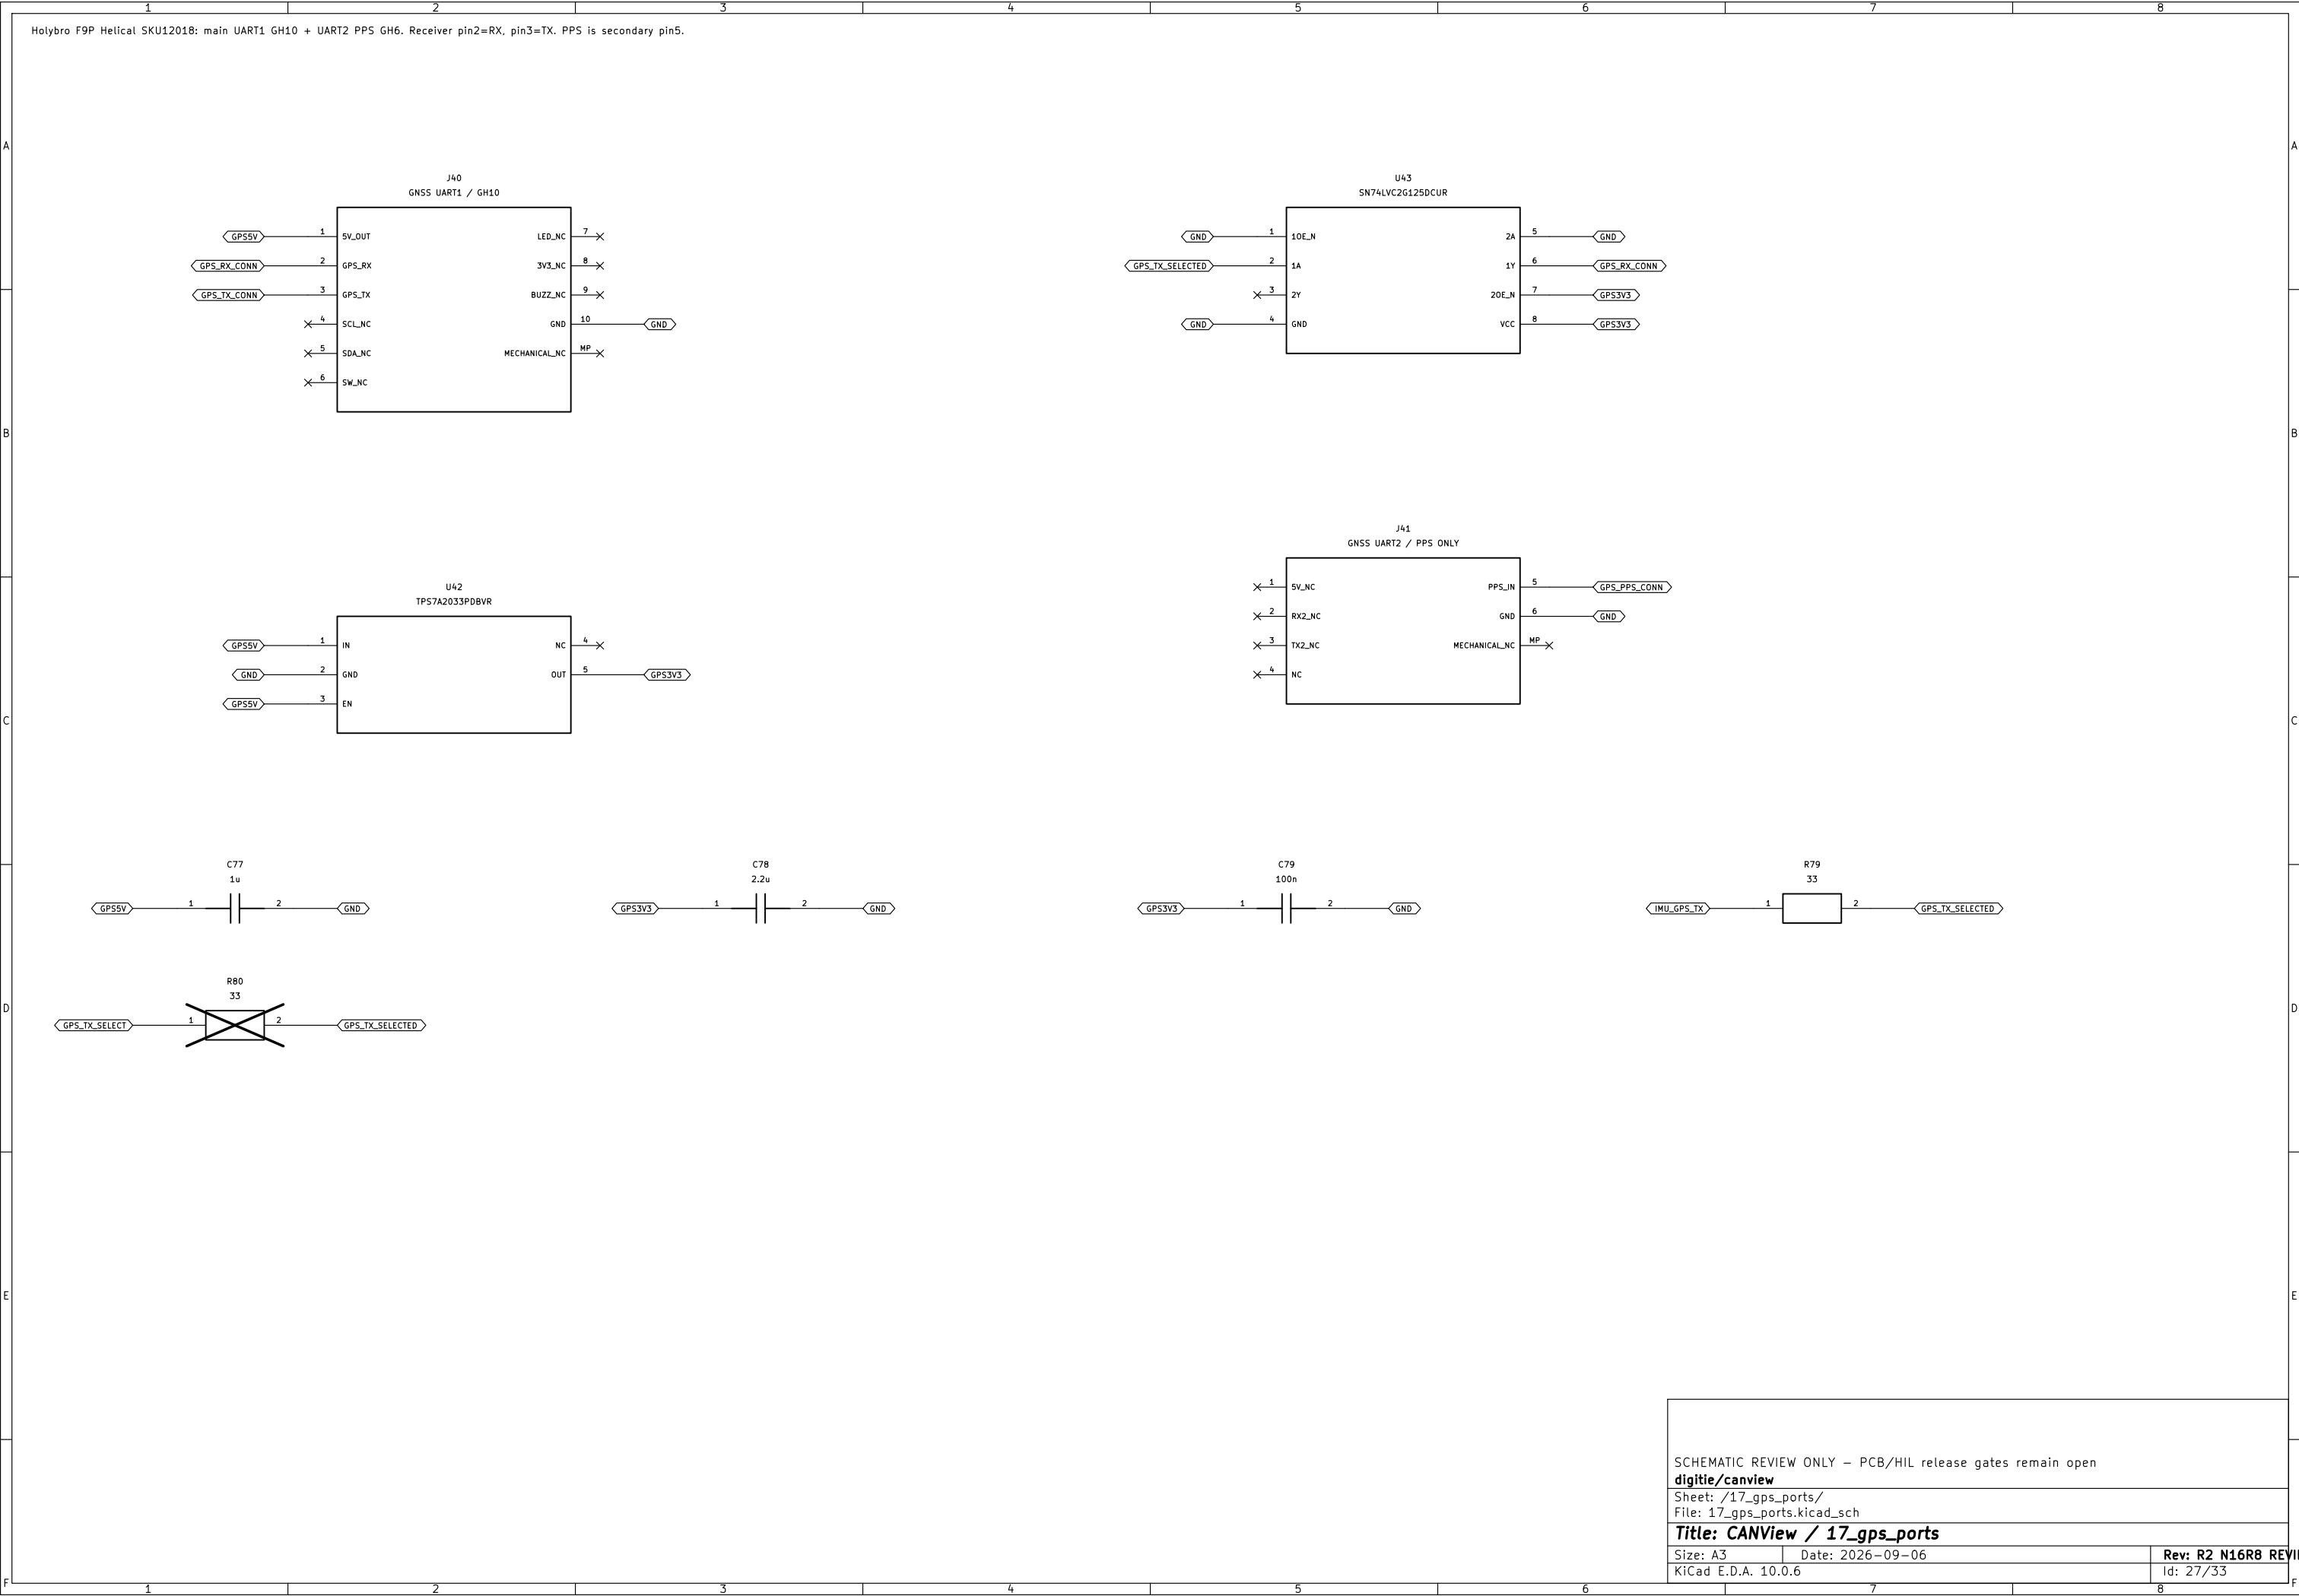

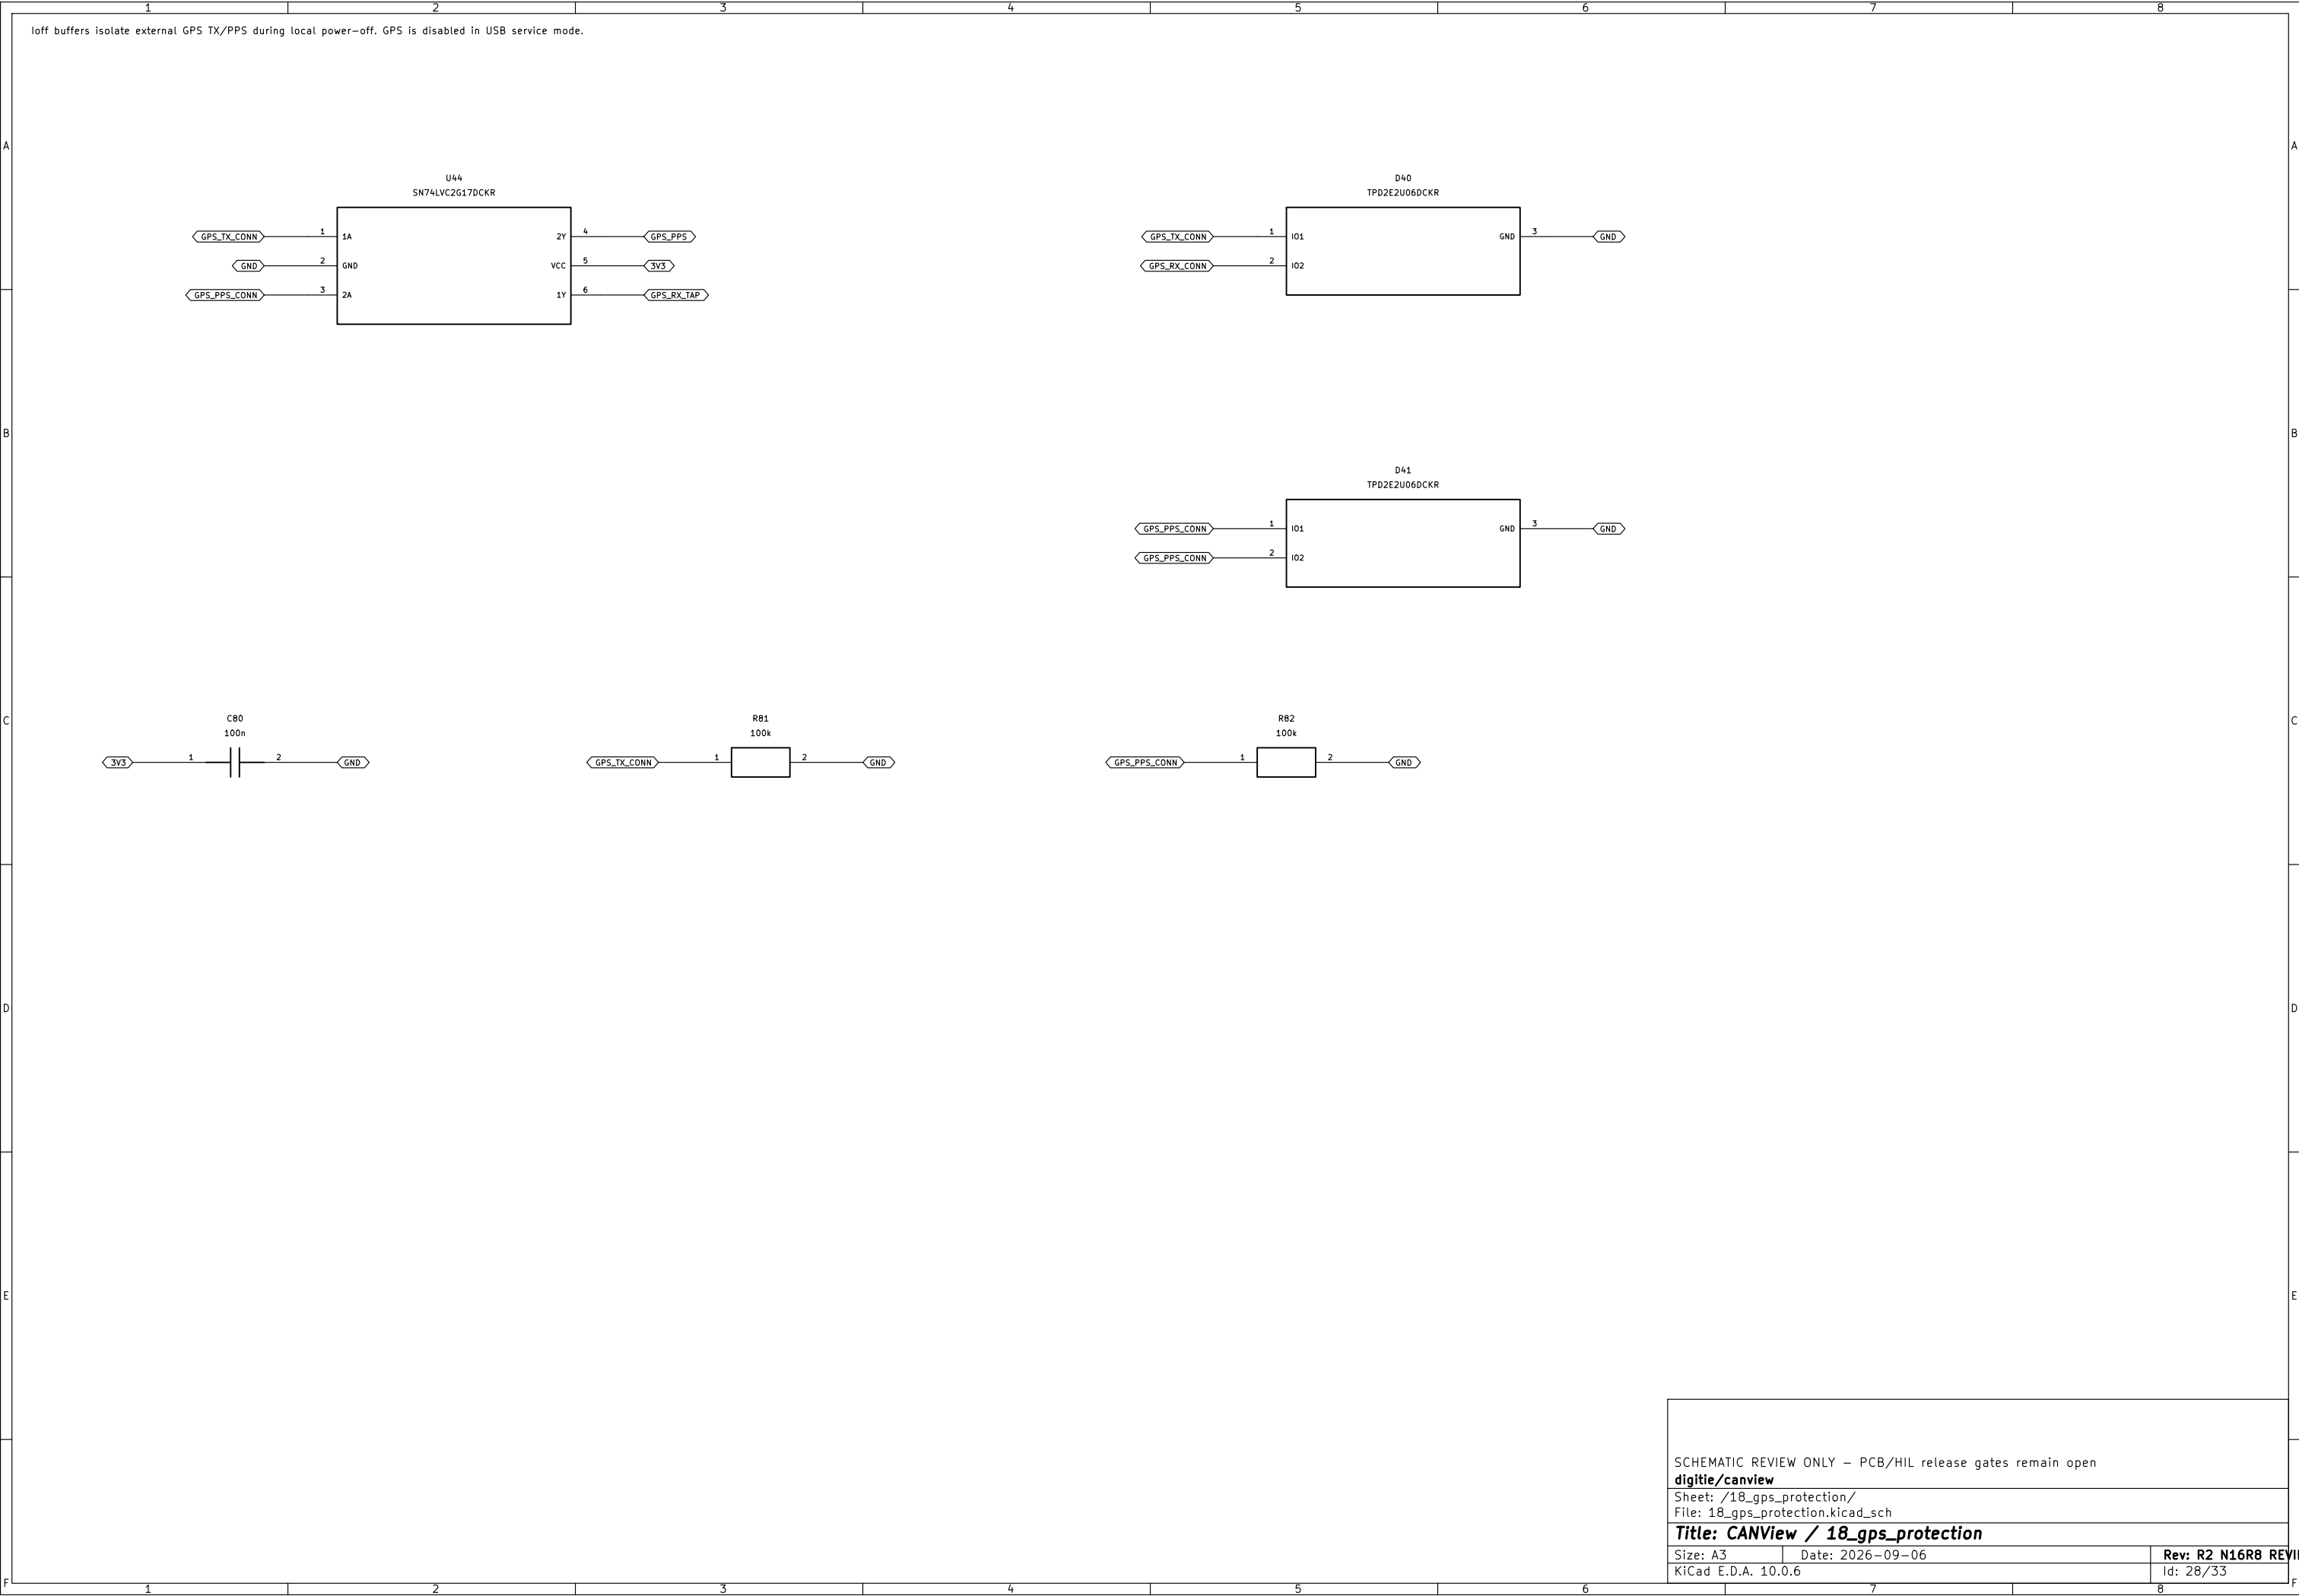

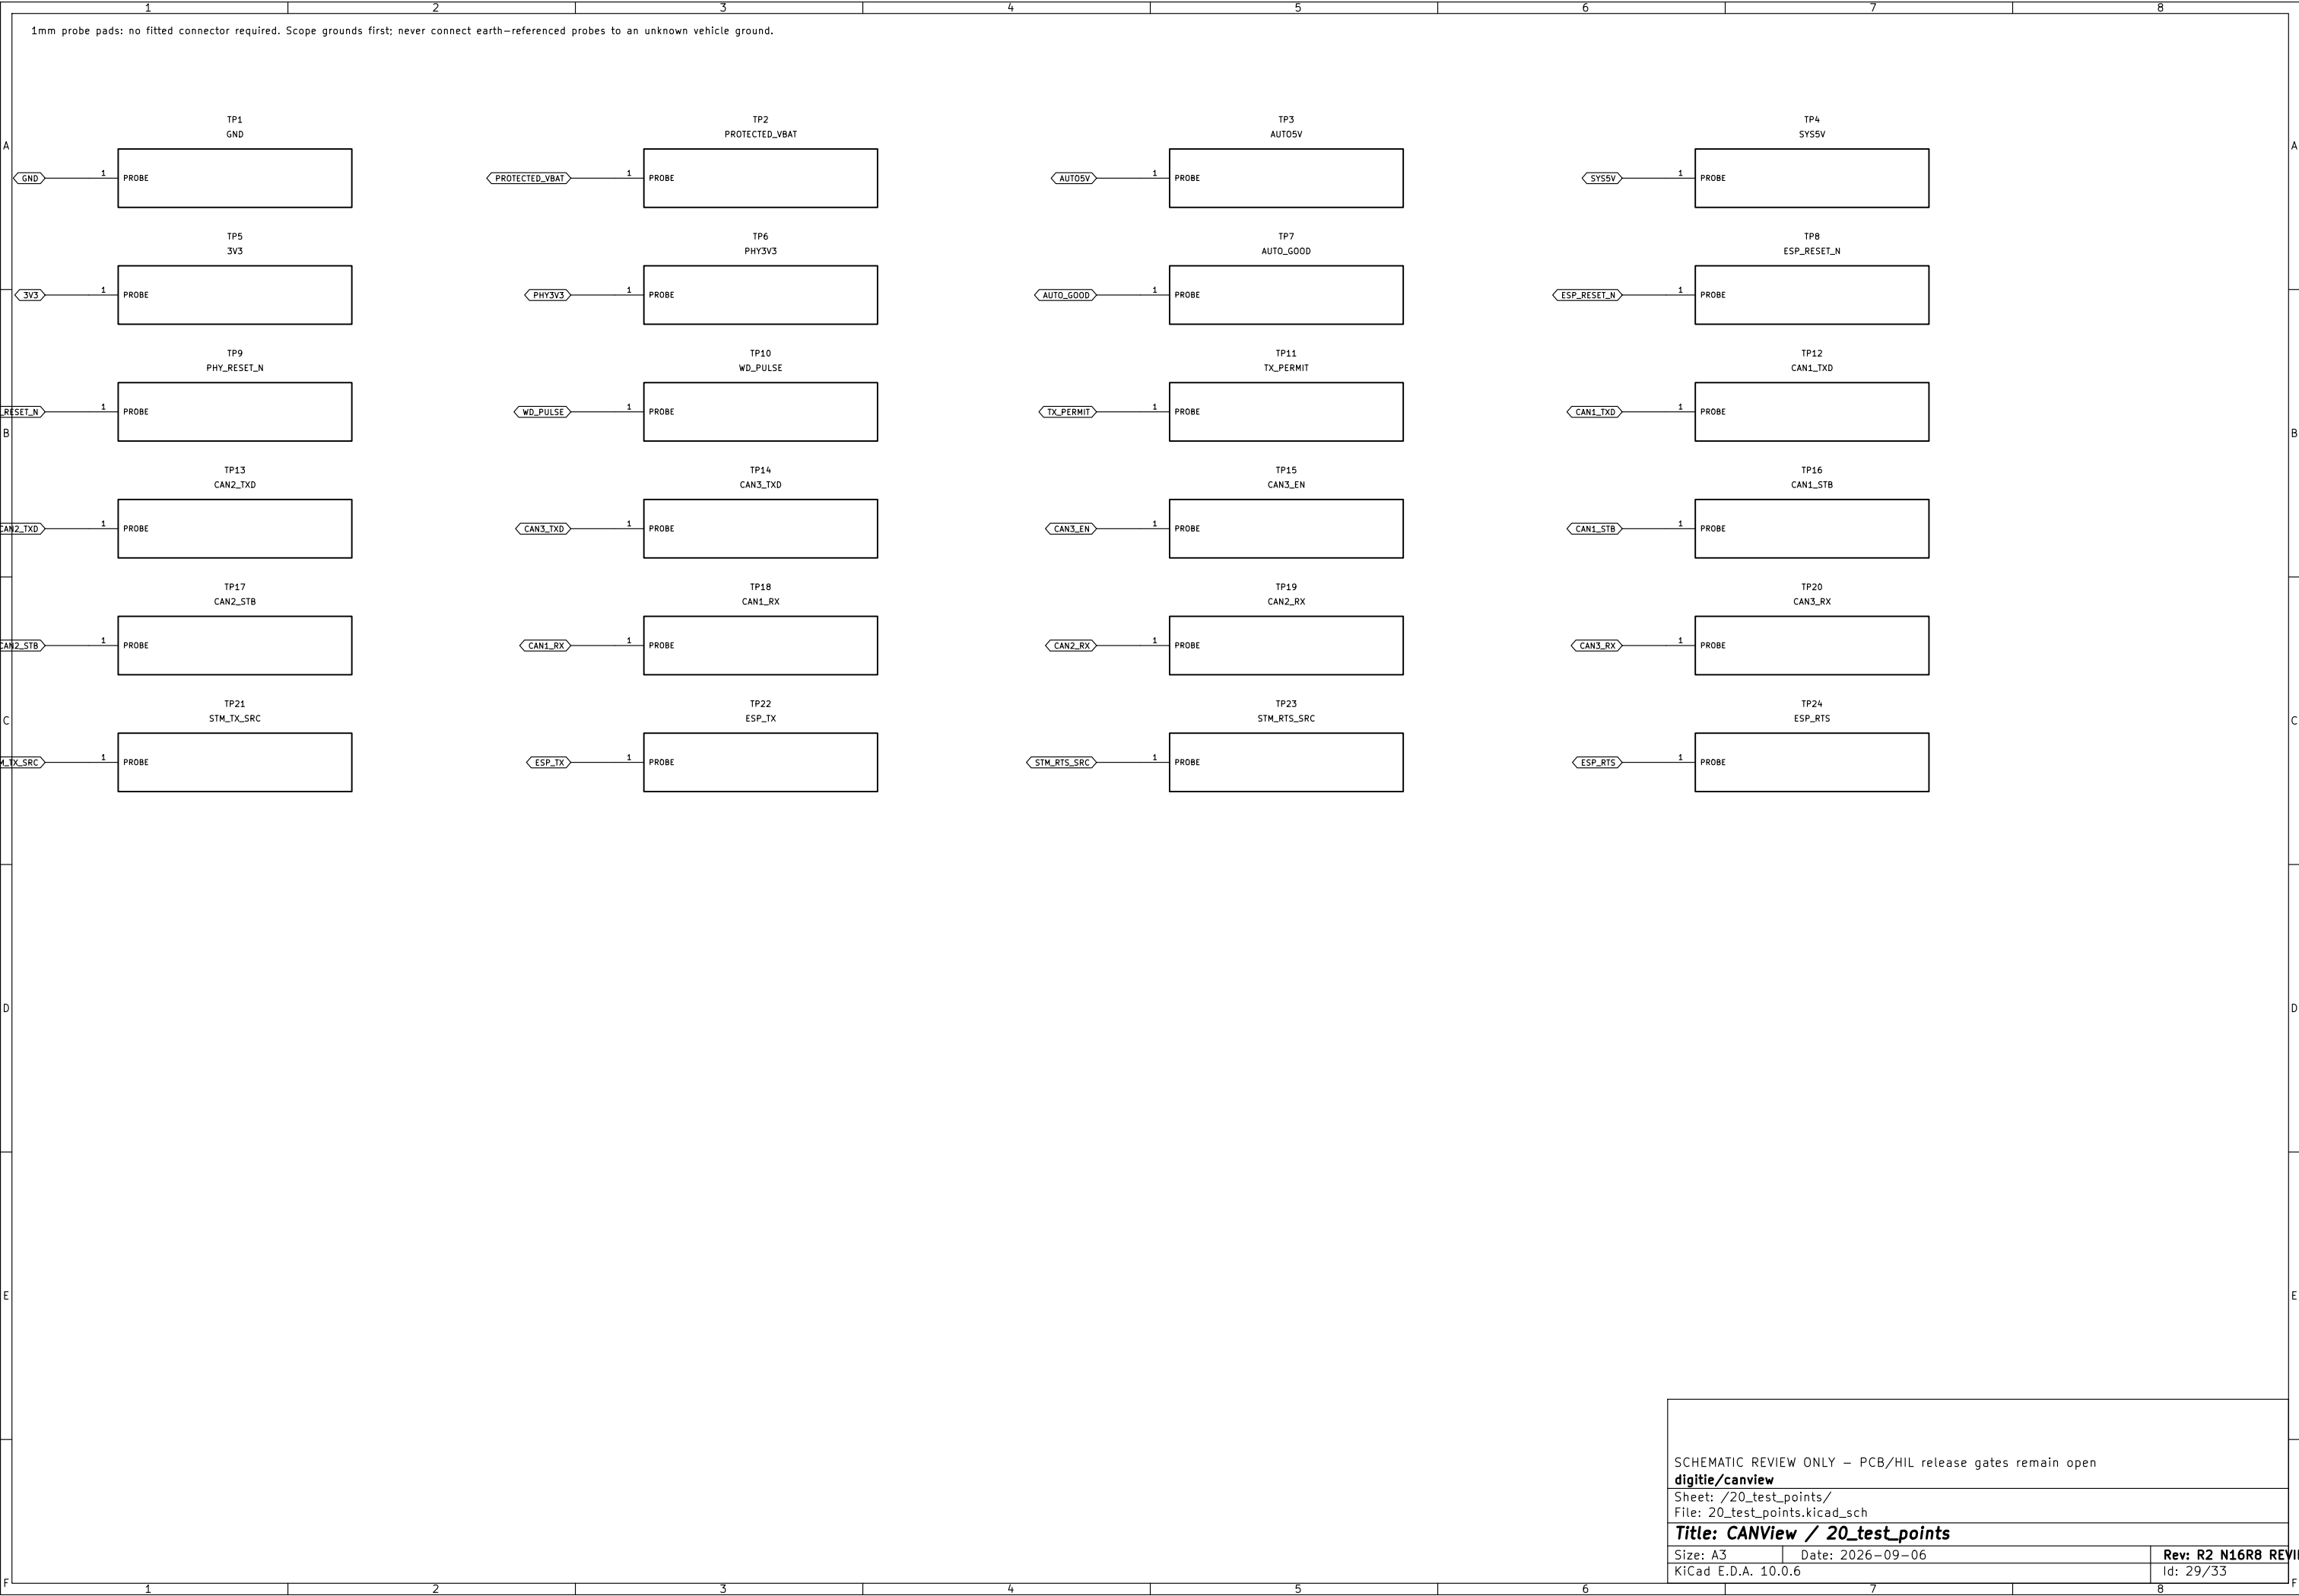

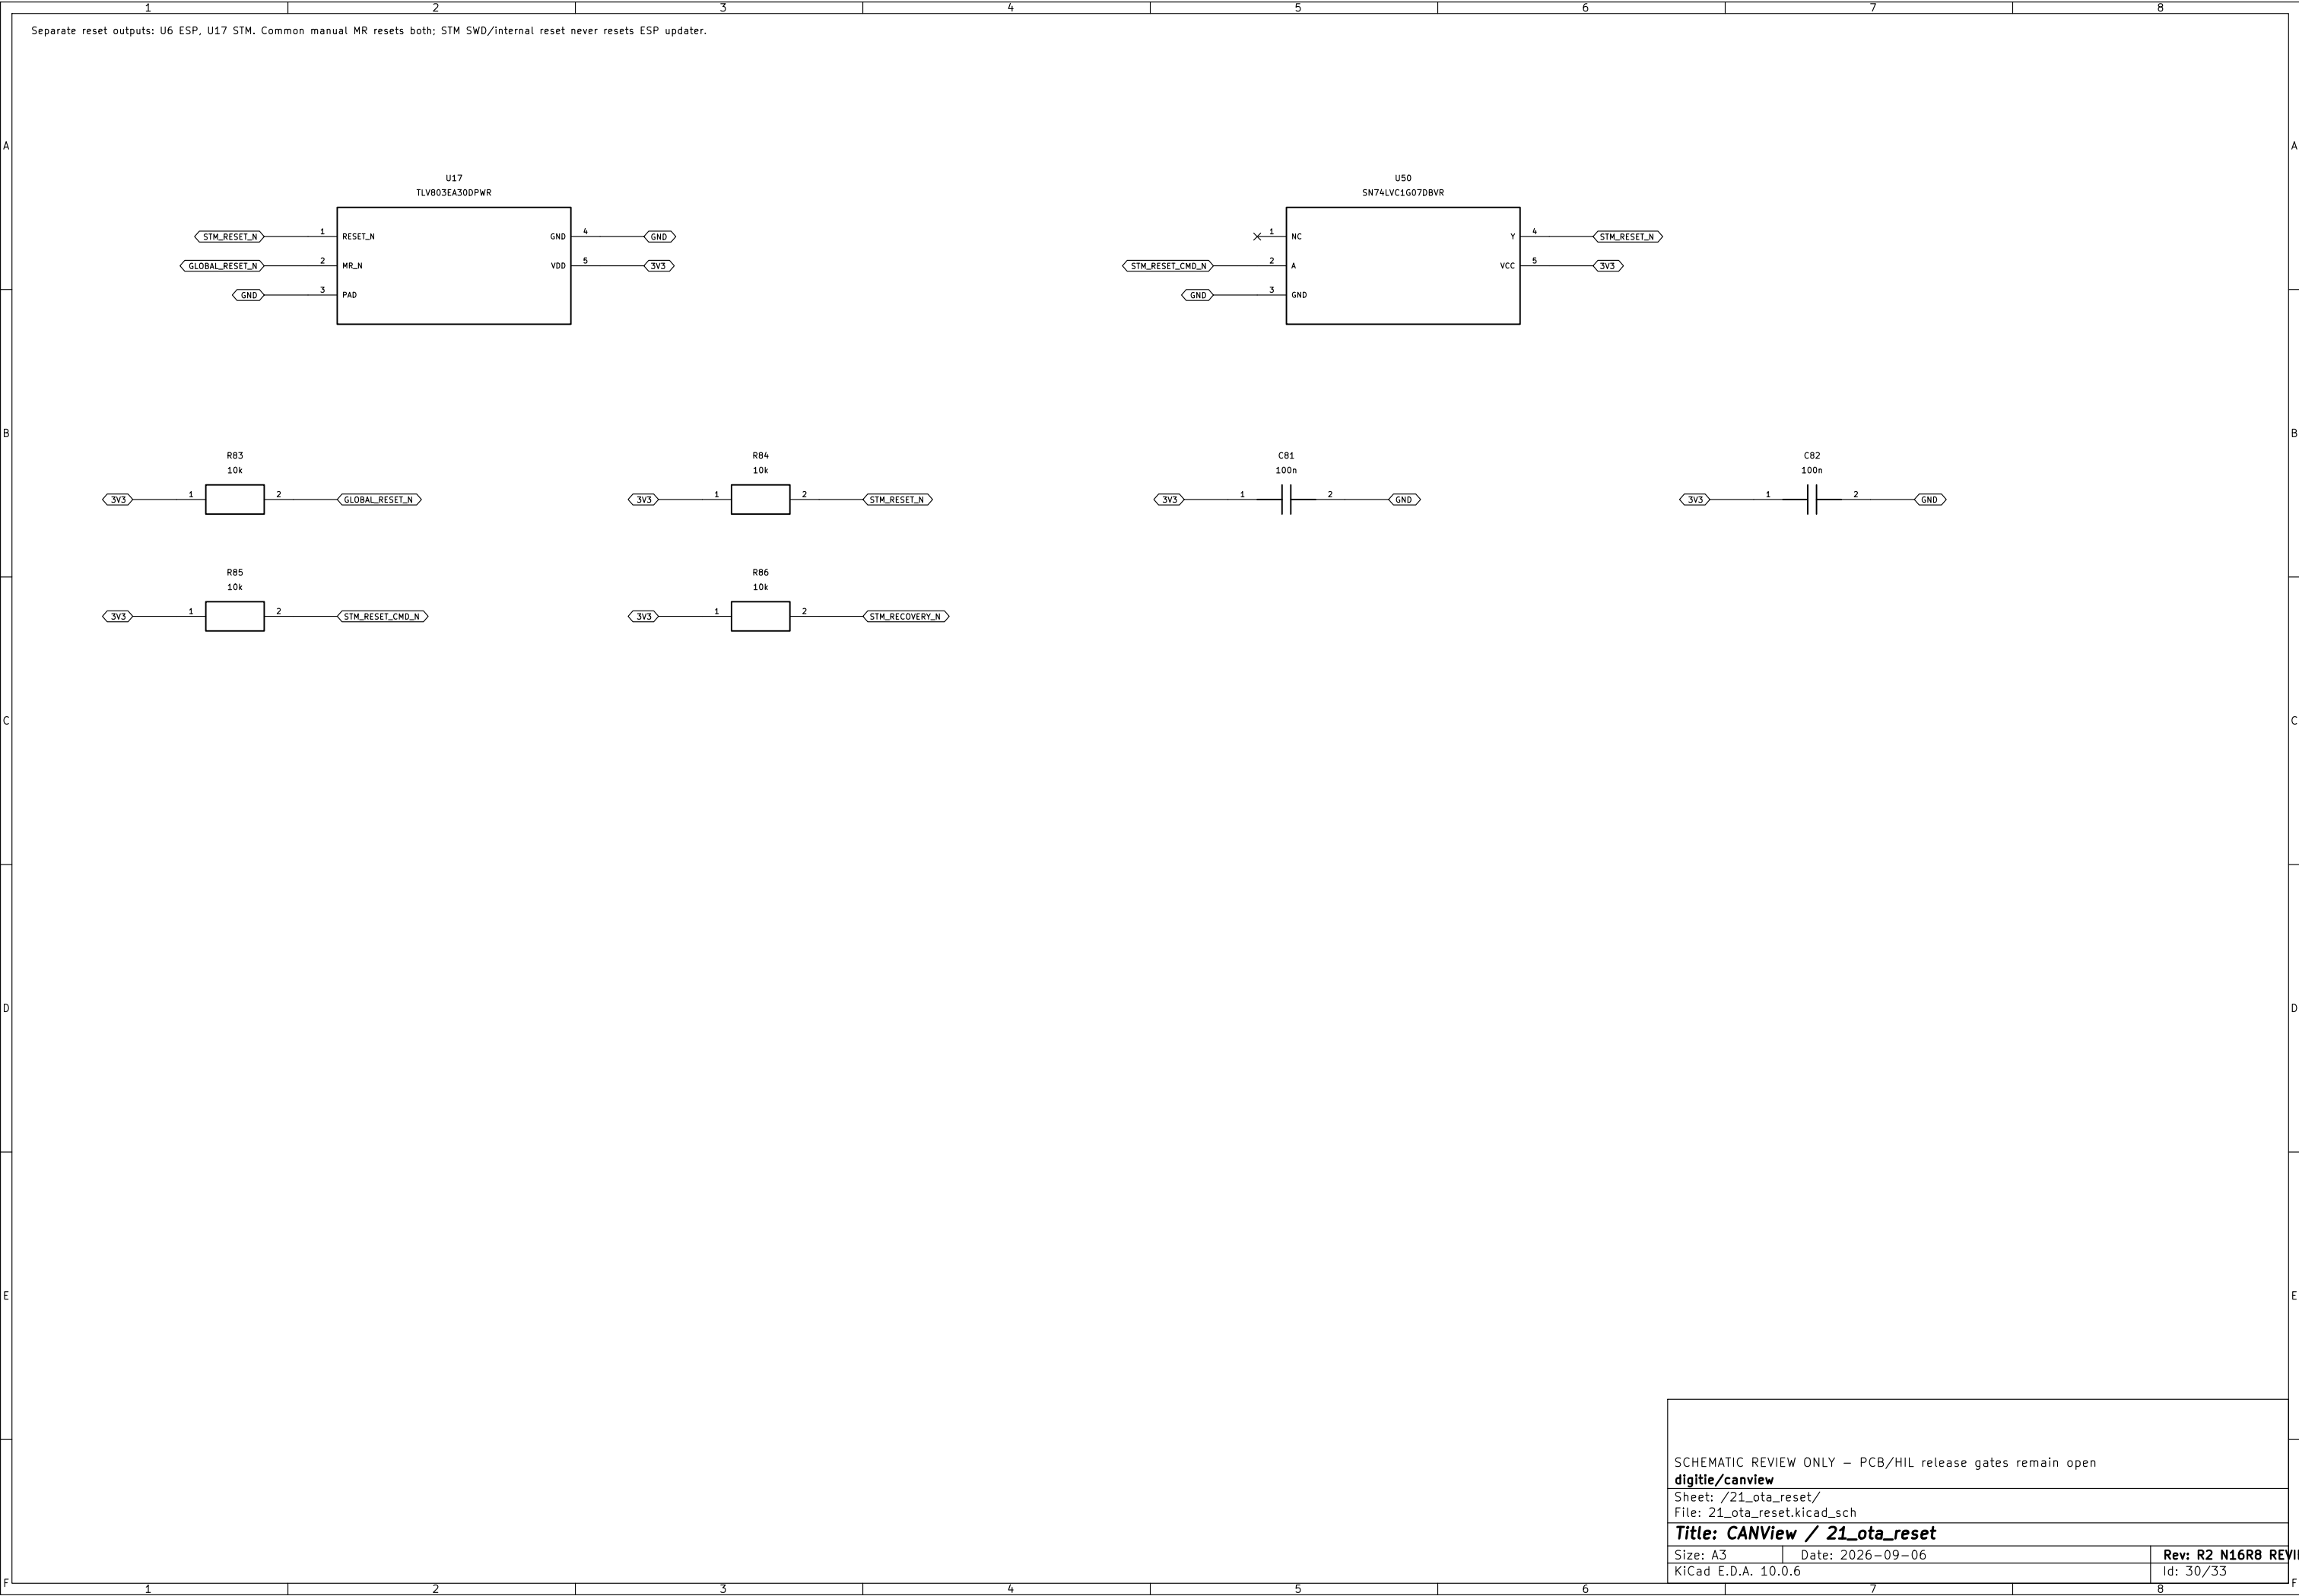

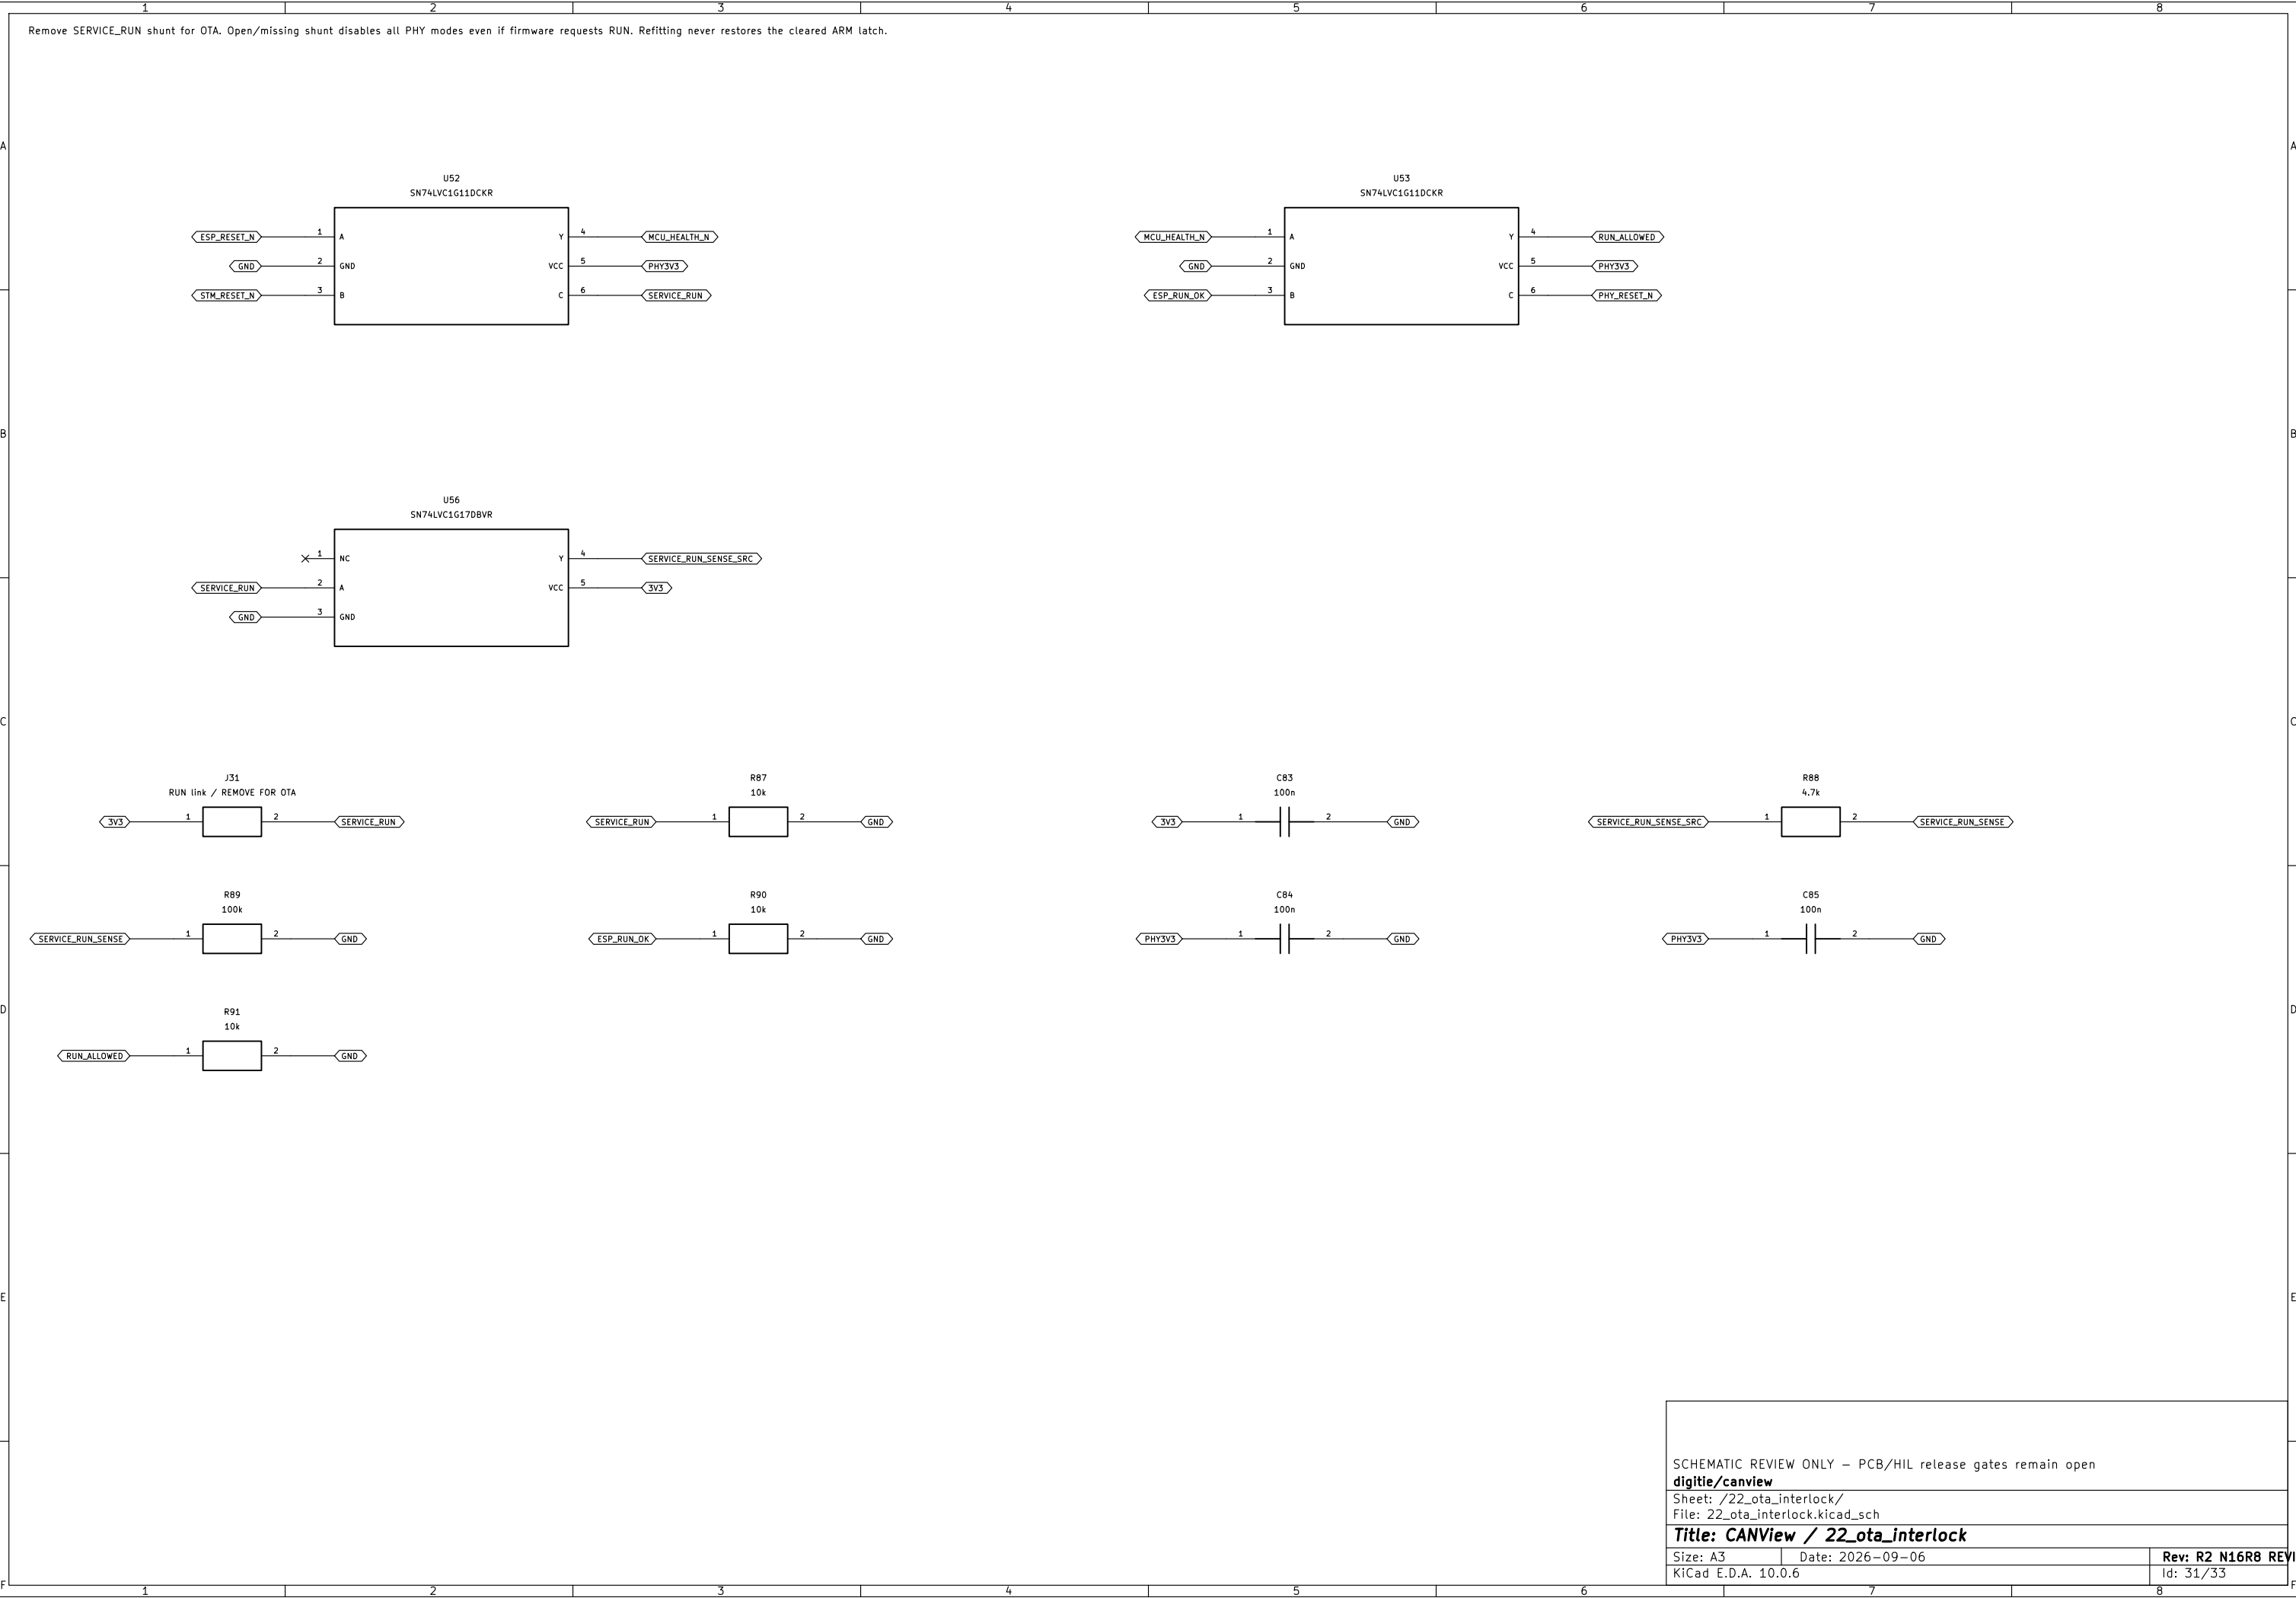

RECOVERY GPIO8 held at reset selects signed ESP test app. PB9 LOW requests authenticated STM bootloader with BOOT0 LOW. J32 normally OPEN restricts ROM to physical service.

