

FX SPATIAL

Delay, reverb, tail, and spatial environment


Create audible space, movement, and controlled tails on parallel spatial lanes.

Included products: NTRSTLLR, Cathedral, SacredVerb

Recommended route: Parallel spatial route: NTRSTLLR -> Cathedral -> SacredVerb.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

NTRSTLLR

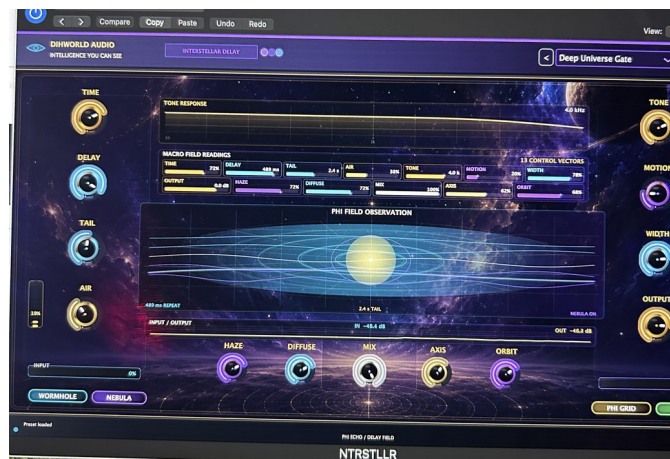

Audible interstellar delay and tail engine with travel, warp, orbit, portal, delay, air, haze, width, diffusion, axis, and Nebula/Wormhole modes.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Micro Peak
- Meso Density
- Macro Level
- Makeup Gain
- Travel
- Warp
- Orbit
- Portal
- Time/Delay

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT / OUTPUT	Weighted peak-plus-RMS level	Use for level matching around the spatial return.
TONE RESPONSE	Current low-to-high response shape	Shows tonal contour, not a mastering EQ recommendation.
WORMHOLE	Delay/warp-path energy	Shows active wormhole return strength.
NEBULA	Portal/diffusion-path energy	Shows active nebula tail strength.
SINGULARITY	Axis and pull concentration	Higher values indicate stronger inward focus.
PHI FIELD OBSERVATION	Combined macro-control activity	A spatial-state summary rather than loudness.
PHI ECHO / DELAY FIELD	Delay taps, orbit, and return motion	Use to understand tail movement and density.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Cathedral



Seven-river chamber environment with arch, convergence, 3-6-9 nodes, protected I/O, and parallel mix.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Arch
- Seven Rivers
- 3-6-9 Nodes
- Convergence
- Input
- Mix
- Output
- Gain Match

Meter and visualizer guide


These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
ENERGY	Current chamber RMS in dB	Shows how strongly the room is being excited.
DIFFUSION	3-6-9 node density	Higher values produce a denser, smoother tail.
WIDTH	Node density multiplied by wet mix	Shows audible spatial spread, not dry-source width.
RT60	Estimated mid-band decay time	Seconds required for the modeled room to decay by 60 dB.
ROOM RESONANCE	Modeled low/mid/high response	Use to identify room emphasis before printing.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SacredVerb

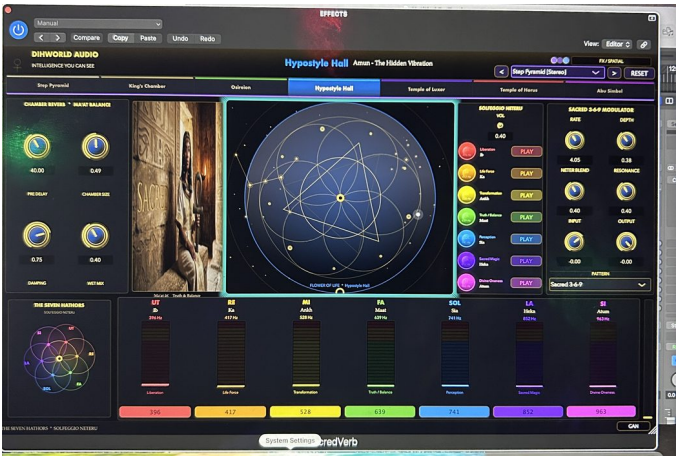

Sacred spatial reverb with pre-delay, chamber size, damping, rate, depth, Neter blend, resonance, chamber and pattern modes, and protected presets.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- PRE DELAY
- CHAMBER SIZE
- DAMPING
- WET MIX
- RATE
- DEPTH
- NETER BLEND
- RESONANCE
- INPUT

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
Seven Hathor meters	Energy at enabled Solfeggio nodes	Each column shows its resonant band activity and peak hold.
Output meter	Current reverb-output peak	Use to keep the return controlled and level matched.
3-6-9 modulator	Active modulation/pattern state	Shows motion settings; it is not a loudness meter.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.