

UTILITY OBSERVATION

Observation, metering, and print confirmation


Observe final behavior without becoming a tone-changing stage.

Included products: SESHAT

Recommended route: Place Seshat at the end of the analysis and print lane.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

SESHAT

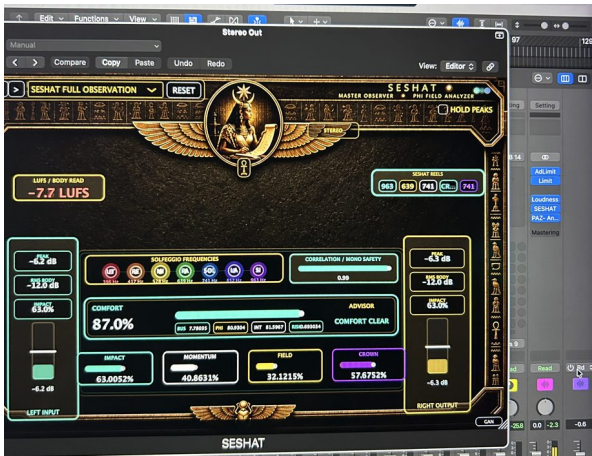

Final observation and analysis lane with restored spacious panel layout and optional peak hold; Full Observation shows the complete meter set, while each named preset shows only the meter or panel relevant to that view. It is not a tone-shaping processor.

Preferred placement: Observation. Place last in the analysis and print lane for final observation and confirmation.

Core controls

- Hold Peaks
- Gain Match

Full Observation displays every analysis panel. Each named observation preset displays only the meter or panel required by that preset, restoring the focused older workflow and keeping unused meters off screen.

SESHAT PRINT SCAN is a read-only print-confirmation view: it does not process or change the audio. Read the five SESHAT REELS from left to right as Impact, Field, Momentum, Alignment, and Moon. Each reel advances through the symbolic 396, 417, 528, 639, 741, 852, 963, PHI, CROWN, and MOON scale as that observation rises; those reel numbers are ranks, not frequency readings.

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
LUFS / BODY READ	Short-window perceptual loudness	Use for loudness context, not as the only delivery decision.
LEFT INPUT / RIGHT OUTPUT	Peak, RMS body, impact, and held peak	Shows entry and exit behavior; Hold Peaks retains the highest marker.
CORRELATION / MONO SAFETY	Left/right phase relationship	+1 is coherent, 0 is wide/uncorrelated, negative values risk cancellation.
SOLFEGGIO FREQUENCIES	Energy near the seven displayed resonant bands	Shows tonal concentration around 396 through 963 Hz.
IMPACT	Fast peak relative to the canon ceiling	Higher means stronger transient force.
FIELD	Body RMS plus stereo-side pressure	Higher means denser sustained spatial load.
MOMENTUM	Change in impact plus transient shape	Higher means faster, more active movement.
PHI ALIGNMENT	Proximity to DIH golden-ratio checkpoints	Higher means field pressure sits nearer a PHI reference point.

Display	What it measures	How to read it
INTEGRITY	Similarity between impact and field pressure	Higher means transients and body remain proportionate.
CROWN	Weighted combined observation score	Summarizes impact, field, momentum, alignment, and integrity.
MOON	Transient shape plus momentum	Higher means stronger forward or launching behavior.
HF RISK	High-frequency energy imbalance	Higher values warn of potential harshness.
PHASE RISK	Correlation and side-energy danger	Higher values warn of mono cancellation.
LEVEL RISK	Peak/ceiling and transient danger	Higher values warn of insufficient headroom.
COMFORT	Alignment, integrity, and low-risk balance	Higher values indicate a more stable field.
ADVISOR	Combined risk recommendation	A diagnostic suggestion; it does not change audio.
REEL 1 - Impact	Transient-force rank	First reel; 396 is low and MOON is highest.
REEL 2 - Field	Sustained spatial-pressure rank	Second reel; numbers are symbolic stages, not Hz.
REEL 3 - Momentum	Motion/transient-change rank	Third reel; higher stages mean more movement.
REEL 4 - Alignment	PHI-alignment rank	Fourth reel; higher stages mean closer alignment.
REEL 5 - Moon	Forward-propulsion rank	Fifth reel; higher stages mean stronger launch.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.