

DIHWorld Audio

Complete Audio Manual

42 plugins · 13 families · visual guides and current technical reference

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 42 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

VOCAL MIC SOURCE

Vocal, microphone, and source-tone shaping

Build or protect the source before downstream color, dynamics, and spatial processing.

Included products: GOLD, SILVER, WPR, Aegis Nova, TRIPLER, EchoLocate

Recommended route: Lead vocal: GOLD -> AEGIS NOVA -> SILVER. Background vocal: GOLD -> TRIPLER -> EchoLocate.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

GOLD



Master-series microphone voicing that combines source-array blend with silver air, copper body, iron weight, gold presence, platinum authority, and nickel focus.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Gain Match
- Source / Mic Array
- Ag Air
- Cu Body
- Fe Weight
- Au Presence
- Pt Authority
- Ni Focus

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SILVER



Precision microphone voicing for truth, focus, grounding, air, and transient definition with protected input, mix, and output control.


Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Gain Match
- Truth Field
- Precision
- Ground
- Air
- Transient
- Output
- Input
- Mix

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

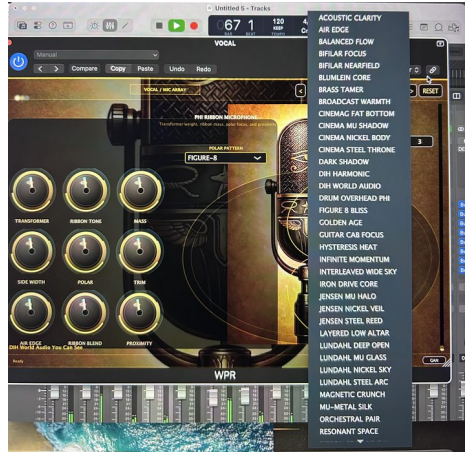

Phi ribbon microphone channel with transformer family, core material, winding, lamination, polar pattern, ribbon mass, proximity, and magnetic behavior.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls


- Transformer
- Ribbon Tone
- Ribbon Mass
- Side Width
- Polar Focus
- Output Trim
- Air Edge
- Ribbon Blend
- Proximity

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Aegis Nova

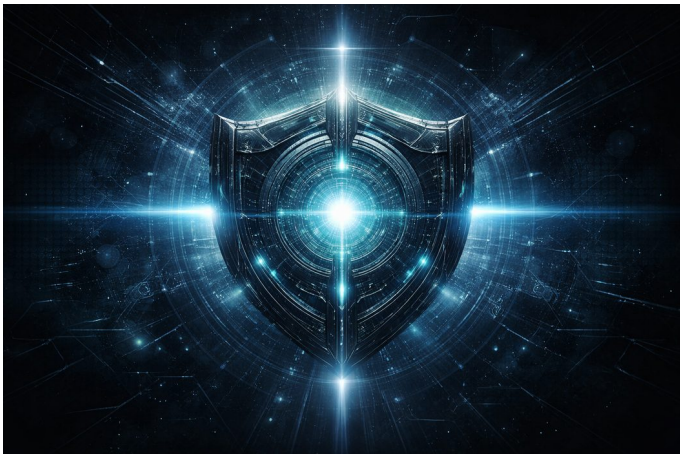

Vocal shield for plosive and sibilance control with a restrained drive stage and parallel mix.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Gain Match
- Power
- Plosive
- Sibilance
- Drive
- Mix

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT	Incoming peak activity	Confirms source level reaching the shield.
NOVA	Detected plosive/sibilant activity	More light means stronger shield intervention.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

TRIPLER



Three-voice vocal harmonizer with key, scale, chord, pitch correction, voice gain, pan, fine tune, and Phi field control. The current left/right voices use the repaired high-quality overlap-add pitch path for clean stereo harmonies.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- DIATONIC
- CHORD
- KEY
- SCALE
- L_GAIN
- R_GAIN
- C_GAIN
- L_PAN
- R_PAN

The repaired left and right harmony voices use higher-quality overlap-add processing and fractional-bin interpolation. They should remain clean at their default voice levels; reduce voice gain only for blend, not as a distortion workaround.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

EchoLocate



Three-position source-placement processor for spread, drift, microphone gain, proximity, pan, and reflected-space mix.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- MODE
- SPREAD
- DRIFT
- MIX
- MIC1_GAIN
- MIC2_GAIN
- MIC3_GAIN
- MIC2_PROX
- MIC3_PAN

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Vocal / Mic / Source Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 6 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

GOLD

RELEASE	FAMILY	PLACEMENT
v1.0.1	Vocal / Mic / Source	Insert Safe

Master-series microphone voicing that combines source-array blend with silver air, copper body, iron weight, gold presence, platinum authority, and nickel focus.

Recommended use: source/vocal color; secondary silver mastering-support dot

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool
sourcearray	Source / Mic Array	Factory
AG_AIR	Ag Air	Factory
CU_BODY	Cu Body	Factory
FE_GLUE	Fe Weight	Factory
AU_DRIVE	Au Presence	Factory
PT_AUTHORITY	Pt Authority	Factory
NI_FOCUS	Ni Focus	Factory

Factory starting points

Canon Open • Source True • Root Anchor • Earth Hold • Body Open • Spirit Lift • Sacred Push • Full Field

SILVER

RELEASE	FAMILY	PLACEMENT
v1.0.1	Vocal / Mic / Source	Insert Safe

Precision microphone voicing for truth, focus, grounding, air, and transient definition with protected input, mix, and output control.

Recommended use: source/vocal color; secondary silver mastering-support dot

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool
AG_TRUTH	Truth Field	Factory
NI_FOCUS	Precision	Factory
CU_GROUND	Ground	Factory
AIR	Air	Factory
TRANSIENT	Transient	Factory
OUTPUT	Output	Factory
INPUT_GAIN	Input	Factory
MIX_BLEND	Mix	Factory

Factory starting points

Silver Prep [Stereo] • Reference Truth [Stereo] • Air Open [Stereo] • Transient Detail [Stereo] • Vocal Reveal [Stereo] • String Clarity [Stereo] • Piano Glass [Stereo] • Room Truth [Stereo] • Source True [Stereo] • Phi Balance [Stereo] • Breath Silver [Stereo] • Precision Field [Stereo] • Expansion Air [Stereo] • Neutral Transfer [Stereo] • Silver Prep [Mono] • Reference Truth [Mono] • Air Open [Mono] • Transient Detail [Mono] • Vocal Reveal [Mono] • String Clarity [Mono] • Piano Glass [Mono] • Room Truth [Mono] • Source True [Mono] • Phi Balance [Mono] • Breath Silver [Mono] • Precision Field [Mono] • Expansion Air [Mono] • Neutral Transfer [Mono] • Silver Prep [Dual Mono] • Reference Truth [Dual Mono] • Air Open [Dual Mono] • Transient Detail [Dual Mono] • Vocal Reveal [Dual Mono] • String Clarity [Dual Mono] • Piano Glass [Dual Mono] • Room Truth [Dual Mono] • Source True [Dual Mono] • Phi Balance [Dual Mono] • Breath Silver [Dual Mono] • Precision Field [Dual Mono] • Expansion Air [Dual Mono] • Neutral Transfer [Dual Mono]

WPR

RELEASE	FAMILY	PLACEMENT
v1.0.0	Vocal / Mic / Source	Insert Safe

Phi ribbon microphone channel with transformer family, core material, winding, lamination, polar pattern, ribbon mass, proximity, and magnetic behavior.

Recommended use: ribbon mic source shaping

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
DRIVE	Transformer	Float
ARCHITECTURE	Ribbon Tone	Float
DEPTH	Ribbon Mass	Float
WIDTH	Side Width	Float
FOCUS	Polar Focus	Float
ENERGY	Output Trim	Float
CLARITY	Air Edge	Float
MIX	Ribbon Blend	Float
CONVERGENCE	Proximity	Float
IRON_DRIVE	Iron Drive	Float
FLUX	Magnetic Flux	Float
HEADROOM	Core Headroom	Float
PRI_BIAS	Primary Bias	Float
SEC_COLOR	Sec Coloring	Float
LOAD	Winding Load	Float
PERMEABILITY	Permeability	Float
HYSTERESIS	Hysteresis	Float
GEOMETRY	Iron Geometry	Float
gainmatch	Gain Match	Bool
LAMINATION	Lamination Type	Choice
TRANSFORMER_FAMILY	Transformer Family	Choice
CORE_MATERIAL	Core Material	Choice
WINDING_TOPOLOGY	Winding Topology	Choice
CORE_AGE	Core Age	Choice
POLAR_MODE	Polar Pattern	Choice
OUTPUT	Output	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

WP-R MKVI CANON [Stereo] • VINTAGE VELVET [Stereo] • ROOM AMBIENCE [Stereo] • AIR EDGE [Stereo] • ORCHESTRAL PAIR [Stereo] • BRASS TAMER [Stereo] • VOCAL INTIMACY [Stereo] • BROADCAST WARMTH [Stereo] • DARK SHADOW [Stereo] • IRON DRIVE CORE [Stereo] • SILVER FOIL JENSEN [Stereo] • MAGNETIC CRUNCH [Stereo] • LUNDAHL DEEP OPEN [Stereo] • CINEMAG FAT BOTTOM [Stereo] • MU-METAL SILK [Stereo]

• HYSTERESIS HEAT [Stereo] • BIFILAR FOCUS [Stereo] • VINTAGE CORE AGE [Stereo] • FIGURE 8 BLISS [Stereo] • BLUMLEIN CORE [Stereo] • GUITAR CAB FOCUS [Stereo] • DRUM OVERHEAD PHI [Stereo] • ACOUSTIC CLARITY [Stereo] • INFINITE MOMENTUM [Stereo] • RESONANT SPACE [Stereo] • DIH WORLD AUDIO [Stereo] • ULTRA CEILING 369 [Stereo] • WP-R MKVI CANON [Mono] • VINTAGE VELVET [Mono] • ROOM AMBIENCE [Mono] • AIR EDGE [Mono] • ORCHESTRAL PAIR [Mono] • BRASS TAMER [Mono] • VOCAL INTIMACY [Mono] • BROADCAST WARMTH [Mono] • DARK SHADOW [Mono] • IRON DRIVE CORE [Mono] • SILVER FOIL JENSEN [Mono] • MAGNETIC CRUNCH [Mono] • LUNDAHL DEEP OPEN [Mono] • CINEMAG FAT BOTTOM [Mono] • MU-METAL SILK [Mono] • HYSTERESIS HEAT [Mono] • BIFILAR FOCUS [Mono] • VINTAGE CORE AGE [Mono] • FIGURE 8 BLISS [Mono] • BLUMLEIN CORE [Mono] • GUITAR CAB FOCUS [Mono] • DRUM OVERHEAD PHI [Mono] • ACOUSTIC CLARITY [Mono] • INFINITE MOMENTUM [Mono] • RESONANT SPACE [Mono] • DIH WORLD AUDIO [Mono] • ULTRA CEILING 369 [Mono] • WP-R MKVI CANON [Dual Mono] • VINTAGE VELVET [Dual Mono] • ROOM AMBIENCE [Dual Mono] • AIR EDGE [Dual Mono] • ORCHESTRAL PAIR [Dual Mono] • BRASS TAMER [Dual Mono] • VOCAL INTIMACY [Dual Mono] • BROADCAST WARMTH [Dual Mono] • DARK SHADOW [Dual Mono] • IRON DRIVE CORE [Dual Mono] • SILVER FOIL JENSEN [Dual Mono] • MAGNETIC CRUNCH [Dual Mono] • LUNDAHL DEEP OPEN [Dual Mono] • CINEMAG FAT BOTTOM [Dual Mono] • MU-METAL SILK [Dual Mono] • HYSTERESIS HEAT [Dual Mono] • BIFILAR FOCUS [Dual Mono] • VINTAGE CORE AGE [Dual Mono] • FIGURE 8 BLISS [Dual Mono] • BLUMLEIN CORE [Dual Mono] • GUITAR CAB FOCUS [Dual Mono] • DRUM OVERHEAD PHI [Dual Mono] • ACOUSTIC CLARITY [Dual Mono] • INFINITE MOMENTUM [Dual Mono] • RESONANT SPACE [Dual Mono] • DIH WORLD AUDIO [Dual Mono] • ULTRA CEILING 369 [Dual Mono]

AEGIS_NOVA

RELEASE	FAMILY	PLACEMENT
v2.0.0	Vocal / Mic / Source	Insert Safe

Vocal shield for plosive and sibilance control with a restrained drive stage and parallel mix.

Recommended use: vocal/source protection and tone

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
gainmatch	Gain Match	Bool
power	Power	Bool
plosive	Plosive	Float
sibilance	Sibilance	Float
drive	Drive	Float
mix	Mix	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

Vocal Shield [Stereo] • Plosive Deflector [Stereo] • Broadcast Guard [Stereo] • Repair Field [Stereo] • Nova Transparent [Stereo] • Air Lock [Stereo] • Rap Shield [Stereo] • Podcast Field [Stereo] • Full Guard [Stereo] • Bass Vocal Lock [Stereo] • Female Vocal [Stereo] • Singer Songwriter [Stereo] • Breath Detail [Stereo] • Stage Vocal Lock [Stereo] • Vocal Shield [Mono] • Plosive Deflector [Mono] • Broadcast Guard [Mono] • Repair Field [Mono] • Nova Transparent [Mono] • Air Lock [Mono] • Rap Shield [Mono] • Podcast Field [Mono] • Full Guard [Mono] • Bass Vocal Lock [Mono] • Female Vocal [Mono] • Singer Songwriter [Mono] • Breath Detail [Mono] • Stage Vocal Lock [Mono] • Vocal Shield [Dual Mono] • Plosive Deflector [Dual Mono] • Broadcast Guard [Dual Mono] • Repair Field [Dual Mono] • Nova Transparent [Dual Mono] • Air Lock [Dual Mono] • Rap Shield [Dual Mono] • Podcast Field [Dual Mono] • Full Guard [Dual Mono] • Bass Vocal Lock [Dual Mono] • Female Vocal [Dual Mono] • Singer Songwriter [Dual Mono] • Breath Detail [Dual Mono] • Stage Vocal Lock [Dual Mono]

Meters and visualizers

INPUT: Incoming peak activity. Confirms source level reaching the shield.

NOVA: Detected plosive/sibilant activity. More light means stronger shield intervention.

TRIPLER

RELEASE	FAMILY	PLACEMENT
v3.5.7	Vocal / Mic / Source	Insert Safe

Three-voice vocal harmonizer with key, scale, chord, pitch correction, voice gain, pan, fine tune, and Phi field control. The current left/right voices use the repaired high-quality overlap-add pitch path for clean stereo harmonies.

Recommended use: vocal/mic array enhancement

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
DIATONIC	DIATONIC	Referenced
CHORD	CHORD	Referenced
KEY	KEY	Referenced
SCALE	SCALE	Referenced
L_GAIN	L_GAIN	Referenced
R_GAIN	R_GAIN	Referenced
C_GAIN	C_GAIN	Referenced
L_PAN	L_PAN	Referenced
R_PAN	R_PAN	Referenced
BYPASS	BYPASS	Referenced
PITCH_CORRECT	PITCH_CORRECT	Referenced
PC_AMOUNT	PC_AMOUNT	Referenced
FINE_TUNE	FINE_TUNE	Referenced
PHI_FIELD	PHI_FIELD	Referenced
L_ON	L_ON	Referenced
R_ON	R_ON	Referenced
OUT_GAIN	OUT_GAIN	Referenced
GAINMATCH	GAINMATCH	Referenced

Factory starting points

Default [Stereo] • Wide Open [Stereo] • Gospel 3rds [Major] [Stereo] • R&B Minor Bed [Stereo] • Soul Dom 7 [Stereo] • Trap Major 7 [Stereo] • Trap Minor 7 [Stereo] • Lo Seventh Bed [Stereo] • Pop Fifth Stack [Stereo] • Streaming Ready [Stereo] • Vinyl Warm [Stereo] • 357 Canon [Full] [Stereo] • 357 Diatonic Major [Stereo] • 357 Diatonic Minor [Stereo] • Default [Mono] • Wide Open [Mono] • Gospel 3rds [Major] [Mono] • R&B Minor Bed [Mono] • Soul Dom 7 [Mono] • Trap Major 7 [Mono] • Trap Minor 7 [Mono] • Lo Seventh Bed [Mono] • Pop Fifth Stack [Mono] • Streaming Ready [Mono] • Vinyl Warm [Mono] • 357 Canon [Full] [Mono] • 357 Diatonic Major [Mono] • 357 Diatonic Minor [Mono] • Default [Dual Mono] • Wide Open [Dual Mono] • Gospel 3rds [Major] [Dual Mono] • R&B Minor Bed [Dual Mono] • Soul Dom 7 [Dual Mono] • Trap Major 7 [Dual Mono] • Trap Minor 7 [Dual Mono] • Lo Seventh Bed [Dual Mono] • Pop Fifth Stack [Dual Mono] • Streaming Ready [Dual Mono] • Vinyl Warm [Dual Mono] • 357 Canon [Full] [Dual Mono] • 357 Diatonic Major [Dual Mono] • 357 Diatonic Minor [Dual Mono]

EchoLocate

RELEASE	FAMILY	PLACEMENT
v2.0.1	Vocal / Mic / Source	Insert Safe

Three-position source-placement processor for spread, drift, microphone gain, proximity, pan, and reflected-space mix.

Recommended use: source localization

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
MODE	MODE	Referenced
SPREAD	SPREAD	Referenced
DRIFT	DRIFT	Referenced
MIX	MIX	Referenced
MIC1_GAIN	MIC1_GAIN	Referenced
MIC2_GAIN	MIC2_GAIN	Referenced
MIC3_GAIN	MIC3_GAIN	Referenced
MIC2_PROX	MIC2_PROX	Referenced
MIC3_PAN	MIC3_PAN	Referenced
OUT_GAIN	OUT_GAIN	Referenced
channelmode	channelmode	Referenced
dualmonolink	dualmonolink	Referenced

Factory starting points

ECHOLOCATE CANON [Stereo] • CLOSE CENTER [Stereo] • WIDE CALL [Stereo] • TRIPLE ROOM [Stereo] • CHEST LOCK [Stereo] • HEAD AIR [Stereo] • WALL RETURN [Stereo] • FOCUS FINDER [Stereo] • PHI PREPARATION [Stereo] • PHI HOME [Stereo] • PHI OPEN [Stereo] • PHI ACTIVE [Stereo] • PHI PUSH [Stereo] • PHI EXPANSION [Stereo] • ECHOLOCATE CANON [Mono] • CLOSE CENTER [Mono] • WIDE CALL [Mono] • TRIPLE ROOM [Mono] • CHEST LOCK [Mono] • HEAD AIR [Mono] • WALL RETURN [Mono] • FOCUS FINDER [Mono] • PHI PREPARATION [Mono] • PHI HOME [Mono] • PHI OPEN [Mono] • PHI ACTIVE [Mono] • PHI PUSH [Mono] • PHI EXPANSION [Mono] • ECHOLOCATE CANON [Dual Mono] • CLOSE CENTER [Dual Mono] • WIDE CALL [Dual Mono] • TRIPLE ROOM [Dual Mono] • CHEST LOCK [Dual Mono] • HEAD AIR [Dual Mono] • WALL RETURN [Dual Mono] • FOCUS FINDER [Dual Mono] • PHI PREPARATION [Dual Mono] • PHI HOME [Dual Mono] • PHI OPEN [Dual Mono] • PHI ACTIVE [Dual Mono] • PHI PUSH [Dual Mono] • PHI EXPANSION [Dual Mono]

DYNAMICS GUARD

Envelope, transient, pressure, and containment control


Control entry, impact, sustain, and pressure without hiding the source.

Included products: ANUBIS, OTIS, DEBO, LOOKOUT

Recommended route: Use on individual tracks or buses according to Smart Position. DEBO may be used for parallel impact.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

ANUBIS

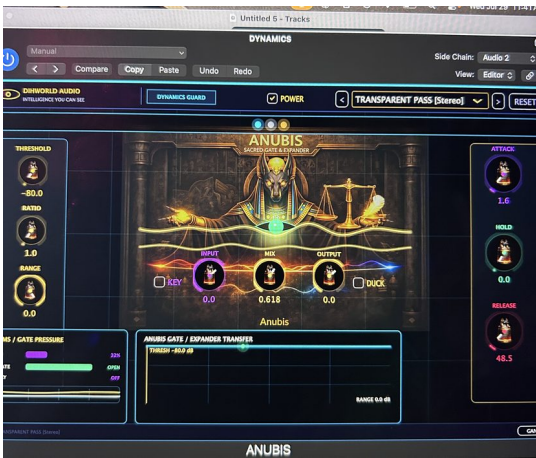

Dynamics gate and guard with threshold, ratio, attack, hold, release, range, a named stereo host Sidechain bus, independent Sidechain Key and Sidechain Duck operation, protected I/O, and parallel mix.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Input
- Mix
- Output
- Power
- Threshold
- Ratio
- Attack
- Hold
- Release

Sidechain Key: route a kick, vocal, guide track, or other key signal to the named stereo Sidechain bus, then enable Sidechain Key. The key drives detection only and is not mixed into the output.

Sidechain Duck: enable Duck when the routed sidechain should push the main program down. Key and Duck are independent controls; with neither enabled, ANUBIS detects from the main input.

Wave colors: yellow/gold means coherent center energy and mono-safe passage; purple means stereo width or phase spread; red means anti-phase or threshold-danger behavior that should be corrected or eased.

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
IN	Main-input RMS energy	Shows the program feeding the gate.
GATE	Current gate passage gain	OPEN is full passage; lower values mean attenuation.
KEY	External sidechain RMS energy	Moves only when a host sidechain is routed.
DUCK	Sidechain-driven gain reduction	More fill means deeper ducking of the main signal.
OUT	Post-gate RMS energy	Compare with IN to judge actual attenuation.


Display	What it measures	How to read it
Transfer graph	Threshold, envelope, and Range floor	Shows where the signal opens and how far closure may fall.
Correlation waves	Left/right phase relationship	Gold is coherent, purple is spread, red warns of anti-phase risk.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

OTIS

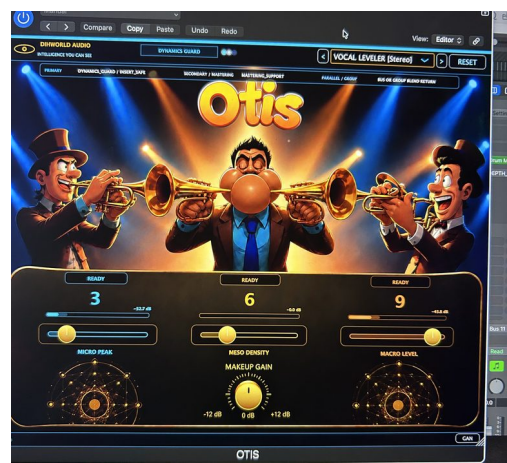

3-6-9 macro dynamics processor: Micro Peak controls short events, Meso Density shapes body, and Macro Level governs the long envelope.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Micro Peak
- Meso Density
- Macro Level
- Makeup Gain
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT	Input peak in dB	Confirms level feeding all three time scales.
RESPONSE	Strongest active 3/6/9 reduction	Shows the greatest current reduction across Micro, Meso, or Macro.
OUTPUT	Output peak in dB	Use with INPUT and Gain Match for fair comparison.
3 / Micro activity	Fast transient reduction	Responds to short peaks and front edges.
6 / Meso activity	Body and phrase-density reduction	Responds to medium-duration energy.
9 / Macro activity	Long-envelope reduction	Responds to sustained level movement.

Current factory programs detected

OTIS PRESET

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DEBO



Pressure-activated dynamics processor with nine updated canonical programs using the restored iCloud names. The approved powered-on default is unchanged; the named bank uses a warmer depth/pressure progression without runtime preset clamping, topping out at 2.2 dB Maximize.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Power
- Flower of Life
- Gain Match
- Input
- Drive
- Maximize
- Depth
- Clarity
- Output

Use VOCAL HOLD as the tonal reference for the bank. The nine updated canonical programs restore the iCloud names and progress from restrained control to stronger pressure without flattening their musical differences.

The presets are intentionally not runtime-clamped. RED LINE WATCH is the strongest factory stage at 4.2 dB Maximize.

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
RMS	Sustained signal body	Shows average energy driving the pressure model.
GUARD PRESSURE	Combined density/containment demand	Higher values mean DEBO is working harder.
PEAK	Fast peak relative to ceiling	Approaching the top warns of limited remaining space.
GOVERNOR	Gain held back by protection	More activity means stronger safety containment.
Pressure window / face	RMS-driven pressure stage	The visual advances with real pressure; red is the ceiling warning state.


Current factory programs detected

NO BRICKS [Stereo]; VOCAL HOLD [Stereo]; BRICK TAP [Stereo]; WALL PRESSURE [Stereo]; SHOULDER CHECK [Stereo]; NO SCISSORS [Stereo]; BREAKTHROUGH [Stereo]; RED LINE WATCH [Stereo]; PHI GUARD [Stereo]

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

LOOKOUT

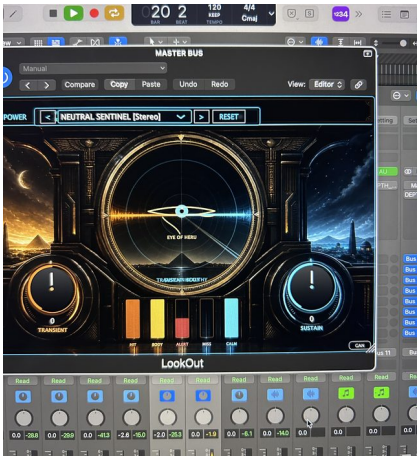

Dual-envelope transient/sustain shaper. Attack and Sustain directly move the level of the transient and sustain portions of the signal, up to +/-18 dB each, ahead of the DIH tone-color stage. Its Eye of Heru state also gives live advisory guidance on transient/sustain balance while it shapes.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Power
- Attack
- Sustain
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
Transient	Detected front-edge energy	Use to judge whether Attack is emphasizing or restraining hits.
Sustain	Detected body and tail energy	Use to judge Sustain changes to ring, room, and body.
Alert	Potential transient/sustain imbalance	Higher values suggest the balance needs attention.
Miss	Underrepresented event energy	Indicates material that may be disappearing.
Stress	Over-concentrated envelope pressure	Reduce shaping intensity when stress remains high.
Composure	Stable transient/sustain balance	Higher is calmer and more controlled.
Eye of Heru	Combined advisory state	It reports balance; it does not move controls automatically.

Current factory programs detected

NEUTRAL SENTINEL [Stereo]; VOCAL FRONT GUARD; DRUM SNAP LOCK; KICK BODY ANCHOR; PERCUSSION EDGE; ROOM TAIL WATCH; MIX BUS COMPOSURE; FINAL PEAK SENTINEL

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Dynamics / Guard Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 4 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

ANUBIS

RELEASE	FAMILY	PLACEMENT
v1.0.1	Dynamics / Guard	Insert Safe

Dynamics gate and guard with threshold, ratio, attack, hold, release, range, a named stereo host Sidechain bus, independent Sidechain Key and Sidechain Duck operation, protected I/O, and parallel mix.

Recommended use: guard/dynamics

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
input	Input	Float
mix	Mix	Float
output	Output	Float
power	Power	Bool
threshold	Threshold	Float
ratio	Ratio	Float
attack	Attack	Float
hold	Hold	Float
release	Release	Float
range	Range	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
extkey	Sidechain Key	Bool
sduck	Sidechain Duck	Bool
gainmatch	Gain Match	Bool

Factory starting points

TRANSPARENT PASS [Stereo] • VOCAL BREATH GUARD [Stereo] • KICK KEY GATE [Stereo] • TEHUTI DUCK GUARD [Stereo] • KEY + DUCK LOCK [Stereo] • DRUM TIGHT GUARD [Stereo] • MONO WALL HOLD [Mono] • DUAL MONO LOCK [Dual Mono]

Meters and visualizers

IN: Main-input RMS energy. Shows the program feeding the gate.

GATE: Current gate passage gain. OPEN is full passage; lower values mean attenuation.

KEY: External sidechain RMS energy. Moves only when a host sidechain is routed.

DUCK: Sidechain-driven gain reduction. More fill means deeper ducking of the main signal.

OUT: Post-gate RMS energy. Compare with IN to judge actual attenuation.

Transfer graph: Threshold, envelope, and Range floor. Shows where the signal opens and how far closure may fall.

Correlation waves: Left/right phase relationship. Gold is coherent, purple is spread, red warns of anti-phase risk.

OTIS

RELEASE	FAMILY	PLACEMENT
v2.1.15	Dynamics / Guard	Insert Safe

3-6-9 macro dynamics processor: Micro Peak controls short events, Meso Density shapes body, and Macro Level governs the long envelope.

Recommended use: dynamics support; secondary silver mastering-support dot

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
trumpet_l	Micro Peak	Float
trumpet_c	Meso Density	Float
trumpet_r	Macro Level	Float
makeup_gain	Makeup Gain	Float
gainmatch	Gain Match	Bool

Factory starting points

TRANSPARENT PASS [Stereo] • VOCAL LEVELER [Stereo] • DIALOG STEADY [Stereo] • DRUM BUS CATCH [Stereo] • MIX BUS GLUE [Stereo] • TRANSIENT GUARD [Stereo] • MONO LEVEL HOLD [Mono] • DUAL MONO CONTROL [Dual]

Meters and visualizers

INPUT: Input peak in dB. Confirms level feeding all three time scales.

RESPONSE: Strongest active 3/6/9 reduction. Shows the greatest current reduction across Micro, Meso, or Macro.

OUTPUT: Output peak in dB. Use with INPUT and Gain Match for fair comparison.

3 / Micro activity: Fast transient reduction. Responds to short peaks and front edges.

6 / Meso activity: Body and phrase-density reduction. Responds to medium-duration energy.

9 / Macro activity: Long-envelope reduction. Responds to sustained level movement.

DeBo

RELEASE	FAMILY	PLACEMENT
v3.6.9	Dynamics / Guard	Insert Safe

Pressure-activated dynamics processor with nine updated canonical programs using the restored iCloud names. The approved powered-on default is unchanged; the named bank uses a warmer depth/pressure progression without runtime preset clamping, topping out at 2.2 dB Maximize.

Recommended use: pressure-activated dynamics guard

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
POWER	Power	Bool
FLOWER	Flower of Life	Bool
GAINMATCH	Gain Match	Bool
INPUT	Input	Factory
DRIVE	Drive	Factory
MAXIMIZE	Maximize	Factory
DEPTH	Depth	Factory
CLARITY	Clarity	Factory
OUTPUT	Output	Factory

Factory starting points

NO BRICKS [Stereo] • VOCAL HOLD [Stereo] • BRICK TAP [Stereo] • WALL PRESSURE [Stereo] • SHOULDER CHECK [Stereo] • NO SCISSORS [Stereo] • BREAKTHROUGH [Stereo] • RED LINE WATCH [Stereo] • PHI GUARD [Stereo]

Meters and visualizers

RMS: Sustained signal body. Shows average energy driving the pressure model.

GUARD PRESSURE: Combined density/containment demand. Higher values mean DEBO is working harder.

PEAK: Fast peak relative to ceiling. Approaching the top warns of limited remaining space.

GOVERNOR: Gain held back by protection. More activity means stronger safety containment.

Pressure window / face: RMS-driven pressure stage. The visual advances with real pressure; red is the ceiling warning state.

LookOut

RELEASE	FAMILY	PLACEMENT
v1.0.1	Dynamics / Guard	Insert Safe

Dual-envelope transient/sustain shaper. Attack and Sustain directly move the level of the transient and sustain portions of the signal, up to +/-18 dB each, ahead of the DIH tone-color stage. Its Eye of Heru state also gives live advisory guidance on transient/sustain balance while it shapes.

Recommended use: dual-envelope transient/sustain shaper; Attack/Sustain directly move transient and sustain gain up to +/-18dB; Eye of Heru advisory guidance is secondary, not the primary function; cyan primary dot with green observation and silver mastering-support dots

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Factory
attack	Attack	Factory
sustain	Sustain	Factory
gainmatch	Gain Match	Factory

Factory starting points

NEUTRAL SENTINEL [Stereo] • VOCAL FRONT GUARD • DRUM SNAP LOCK • KICK BODY ANCHOR • PERCUSSION EDGE • ROOM TAIL WATCH • MIX BUS COMPOSURE • FINAL PEAK SENTINEL

Meters and visualizers

Transient: Detected front-edge energy. Use to judge whether Attack is emphasizing or restraining hits.

Sustain: Detected body and tail energy. Use to judge Sustain changes to ring, room, and body.

Alert: Potential transient/sustain imbalance. Higher values suggest the balance needs attention.

Miss: Underrepresented event energy. Indicates material that may be disappearing.

Stress: Over-concentrated envelope pressure. Reduce shaping intensity when stress remains high.

Composure: Stable transient/sustain balance. Higher is calmer and more controlled.

Eye of Heru: Combined advisory state. It reports balance; it does not move controls automatically.

BASS LOW END

Bass, sub, foundation, and low-end transformation

Build weight and depth while retaining definition, placement, and controlled output.

Included products: MARIANA, MONOLITH, Depth Boost Pro, NTRPL

Recommended route: Bass route: MARIANA -> NTRPL -> MONOLITH. Depth Boost Pro is an optional focused stage.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

MARIANA



Sub and foundation processor with depth, sub pressure, kick definition, target mode, parallel mix, and an optional kick-key sidechain that ducks only MARIANA's added low-end layer.

Preferred placement: Low End Source. Use on bass, sub, kick, or another low-end source before the shared low-end bus.

Core controls

- Power
- Depth
- Sub Pressure
- Foundation
- Kick Define
- Target Mode
- Input
- Mix
- Gain Match


Route the kick or other low-frequency guide to the host's named Sidechain input, then enable KEY. The key is detector-only and never enters MARIANA's audible output.

DUCK sets how much of MARIANA's generated pressure/foundation layer moves out of the kick's way. RECOVERY sets how quickly that added layer returns. The dry bass path is preserved.

KEY is off by default for the original 14 programs. KICK DUCK FOUNDATION and GENTLE KEY BREATH enable KEY and load purpose-matched DUCK/RECOVERY values. With KEY off, or with no sidechain routed, MARIANA follows its original signal path with no sidechain reduction.

Sidechain routing schematic

The dashed gold route is detector control only; it never enters the audible output.

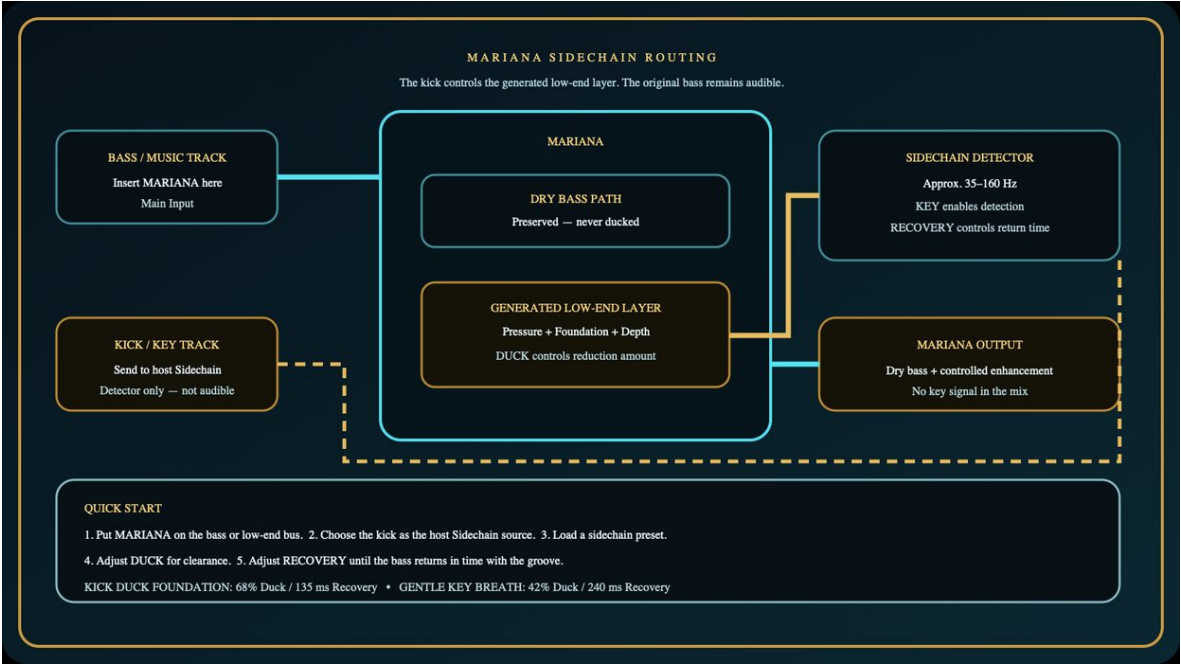

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
DEPTH	Current trench-depth control state	Higher values extend the added low-end field deeper.
PRESSURE	Current sub-pressure control state	Higher values add more low-frequency pressure.
FOUNDATION	Current sustained-foundation control state	Higher values add more continuous low-end support.
IMPACT	Current kick-definition control state	Higher values preserve more front-edge definition.
LOW ENERGY	Detected low-frequency program energy	Shows the bass energy entering MARIANA's field.
BEDROCK	Detected sustained foundation energy	Shows the slower body underneath transient bass events.
KEY	Detected 35-160 Hz sidechain energy	Moves only when KEY is enabled and a host sidechain is routed.
DUCK GR	Reduction of MARIANA's added low-end layer	More activity means the external key is clearing more generated pressure; dry bass remains audible.

Additional controls are mapped in the family technical manual.

Current factory programs detected

MARIANA SWEET SPOT; LOW GRAVITY CLEAN; WARM SUBFIELD; SUB WEIGHT; DEEP PRESSURE; ABYSSAL FIELD; TRENCH FLOOR; GENTLE FINISH; OCEAN FLOOR; SUB ENHANCED; KICK PRESSURE; ABYSS BLOOM; TIDAL TRACE; SHALLOW CURRENT; KICK DUCK FOUNDATION; GENTLE KEY BREATH

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

MONOLITH



Low-end impact and body shaper with excavation, weight, resonance, reverse motion, drive, balance, and an optional kick-key sidechain that clears only the added stone/weight layer.

Preferred placement: Low End Source. Use on bass, sub, kick, or another low-end source before the shared low-end bus.

Core controls

- gate
- input
- output
- gainmatch
- excavation
- impact
- weight
- resonance
- reverse


Route the kick or low-frequency guide to the host's named Sidechain input, then enable KEY. The external key is detector-only and never enters the audible output.

STONE DUCK moves only MONOLITH's added excavation, weight, and resonance layer aside; RECOVERY controls its return. Original input impact is preserved.

KICK OPENS STONE loads 66 percent Duck / 130 ms Recovery. GENTLE STONE POCKET loads 40 percent Duck / 240 ms Recovery. All earlier programs keep KEY off.

Sidechain routing schematic

The dashed gold route is detector control only; it never enters the audible output.

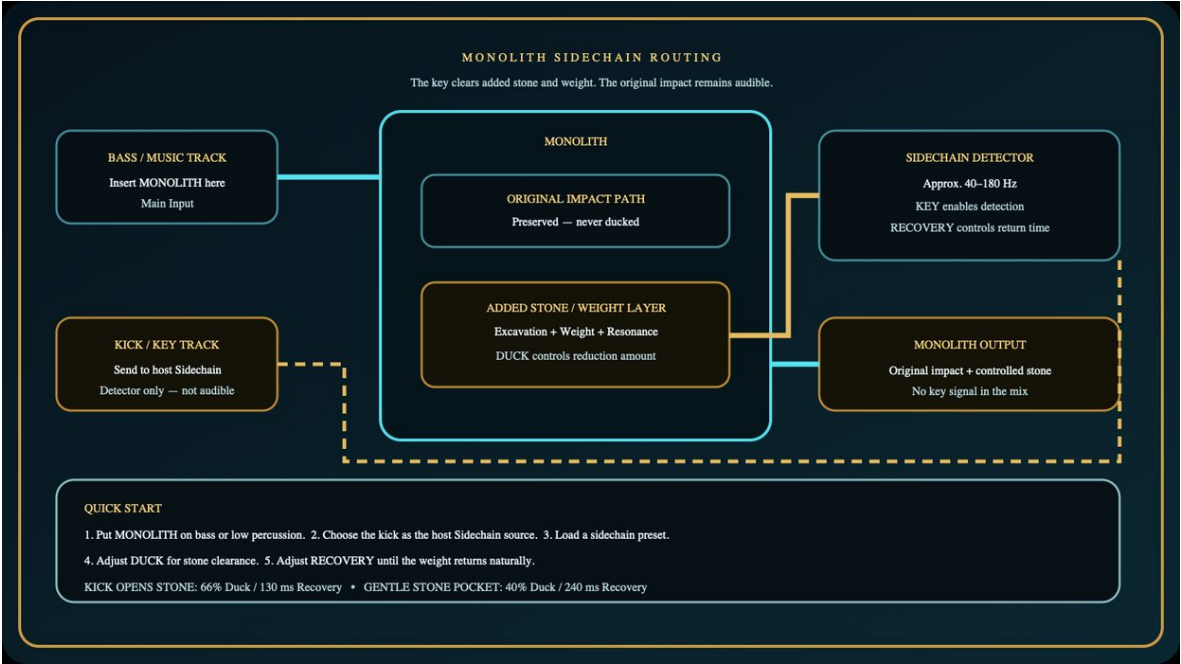

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT / OUTPUT	Live pre/post level	Use for bypass and level matching.
IMPACT	Low-end transient activity	Shows the punch component being produced.
WEIGHT	Sustained low-frequency body	Shows foundation rather than peak attack.
RESONANCE	Active resonant low-end energy	Persistent high readings warn of ringing.
REVERSE	Reverse-motion contribution	Shows how strongly the reverse path is active.
Monolith field	Combined low-end activity map	Reactive summary, not a spectrum analyzer.
KEY	Detected 40-180 Hz sidechain energy	Moves only when KEY is enabled and a host sidechain is routed.
STONE DUCK	Reduction of the added stone/weight layer	The original input impact remains outside this reduction.

Additional controls are mapped in the family technical manual.

Current factory programs detected

MONOLITH PHI IMPACT; MONOLITH TRANSIENT STONE; MONOLITH BODY WEIGHT; MONOLITH SHAPE IMPACT; MONOLITH BUS CARVE; MONOLITH GATEWAY; KICK OPENS STONE [Stereo]; GENTLE STONE POCKET [Stereo]

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Depth Boost Pro



Focused low-end depth extension built on delay-based mid/side field placement. Primary role is low-end depth and width; secondarily it is a spatial gain stage, with a dedicated Spatial Gain control (0 dB down to -12 dB) applied after the depth field, plus protected input trim.

Preferred placement: Low End Source. Use on bass, sub, kick, or another low-end source before the shared low-end bus.

Core controls

- Input Trim
- Gain Match
- Spatial Depth
- Spatial Gain

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
Touch sphere	Depth field plus live level	Water motion follows field/level activity; sphere position remains the output control.
Spatial field	Depth, field energy, and motion	A reactive placement view, not a calibrated spectrum.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

NTRPL



Low-end transformation engine for rewrite map, novelty, interval motion, contour, shape, space, originality guard, and an optional kick-key sidechain that clears only the generated rewrite layer.

Preferred placement: Low End Source. Use on bass, sub, kick, or another low-end source before the shared low-end bus.

Core controls

- Power
- Gain Match
- Rewrite Map
- Novelty
- Chord Rewrite
- Motion
- Interval Distance
- Contour
- Shape


Route a kick or other low-frequency guide to the host's named Sidechain input, then enable KEY. The external key drives detection only and is never mixed into NTRPL's output.

DUCK controls how far the generated rewrite layer moves aside; RECOVERY controls how quickly that rewrite returns. The source bass path is preserved.

KICK CLEARS REWRITE loads 68 percent Duck / 135 ms Recovery. GENTLE REWRITE POCKET loads 42 percent Duck / 240 ms Recovery. All earlier programs keep KEY off.

Sidechain routing schematic

The dashed gold route is detector control only; it never enters the audible output.

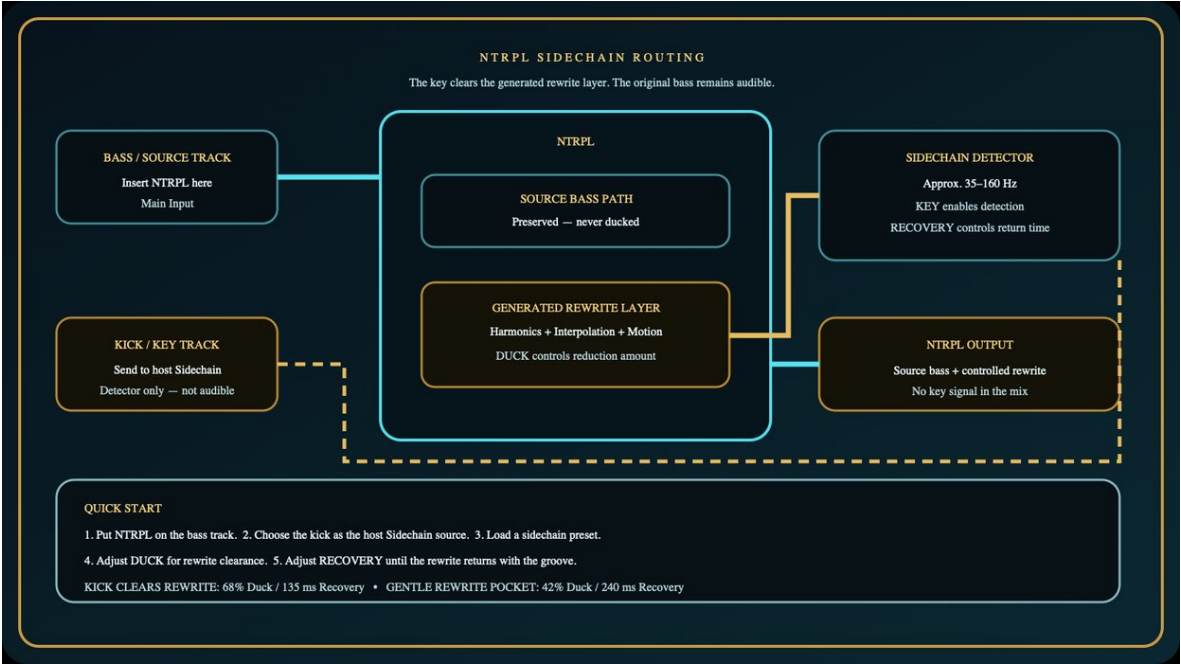

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
SOURCE	Original input contribution	Shows how much source survives into the main route.
REWRITE	Generated harmonic-rewrite activity	Shows the newly synthesized low-end material.
ALT OUT	Alternative new-signal output	Always represents the generated signal path.
MAIN	Final blended output	Use against SOURCE for level and blend context.
Harmonic Rewriter	Live input-to-output contour	Shows source energy changing into rewritten energy.
Rewrite Map	Novelty, chord, interval, contour, motion, space, guard, and mix state	A live process map; it is not a frequency analyzer.
KEY	Detected 35-160 Hz sidechain energy	Moves only when KEY is enabled and a host sidechain is routed.
REWRITE DUCK	Reduction of the generated rewrite layer	The source bass path remains outside this reduction.

Additional controls are mapped in the family technical manual.

Current factory programs detected

KICK CLEARS REWRITE [Stereo]; GENTLE REWRITE POCKET [Stereo]

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Bass / Low End Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 4 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

MARIANA

RELEASE	FAMILY	PLACEMENT
v1.0.1	Bass / Low End	Low End Source

Sub and foundation processor with depth, sub pressure, kick definition, target mode, and parallel mix.

Recommended use: low-end/sub field

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
depth	Depth	Float
pressure	Sub Pressure	Float
foundation	Foundation	Float
kick_define	Kick Define	Float
mode	Target Mode	Choice
input	Input	Float
mix	Mix	Float
gainmatch	Gain Match	Bool

Factory starting points

MARIANA SWEET SPOT • LOW GRAVITY CLEAN • WARM SUBFIELD • SUB WEIGHT • DEEP PRESSURE • ABYSSAL FIELD • TRENCH FLOOR • GENTLE FINISH • OCEAN FLOOR • SUB ENHANCED • KICK PRESSURE • ABYSS BLOOM • TIDAL TRACE • SHALLOW CURRENT

MONOLITH

RELEASE	FAMILY	PLACEMENT
v1.0.4	Bass / Low End	Low End Source

Low-end impact and body shaper with excavation, weight, resonance, reverse motion, drive, and balance.

Recommended use: low-end mass

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
gate	gate	Referenced
input	input	Referenced
output	output	Referenced
channelmode	channelmode	Referenced
gainmatch	gainmatch	Referenced
excavation	excavation	Referenced
impact	impact	Referenced
weight	weight	Referenced
resonance	resonance	Referenced
reverse	reverse	Referenced
drive	drive	Referenced
balance	balance	Referenced

Factory starting points

MONOLITH PHI IMPACT [Stereo] • MONOLITH PHI IMPACT [Mono] • MONOLITH TRANSIENT STONE [Stereo] • MONOLITH TRANSIENT STONE [Mono] • MONOLITH BODY WEIGHT [Stereo] • MONOLITH BODY WEIGHT [Mono] • MONOLITH SHAPE IMPACT [Stereo] • MONOLITH SHAPE IMPACT [Mono] • MONOLITH BUS CARVE [Stereo] • MONOLITH BUS CARVE [Mono] • MONOLITH GATEWAY [Stereo] • MONOLITH GATEWAY [Mono] • MONOLITH PHI IMPACT [Dual Mono] • MONOLITH TRANSIENT STONE [Dual Mono] • MONOLITH BODY WEIGHT [Dual Mono] • MONOLITH SHAPE IMPACT [Dual Mono] • MONOLITH BUS CARVE [Dual Mono] • MONOLITH GATEWAY [Dual Mono]

Meters and visualizers

INPUT / OUTPUT: Live pre/post level. Use for bypass and level matching.

IMPACT: Low-end transient activity. Shows the punch component being produced.

WEIGHT: Sustained low-frequency body. Shows foundation rather than peak attack.

RESONANCE: Active resonant low-end energy. Persistent high readings warn of ringing.

REVERSE: Reverse-motion contribution. Shows how strongly the reverse path is active.

Monolith field: Combined low-end activity map. Reactive summary, not a spectrum analyzer.

DEPTH_BOOST_PRO

RELEASE	FAMILY	PLACEMENT
v1.0.1	Bass / Low End	Low End Source

Focused low-end depth extension built on delay-based mid/side field placement. Primary role is low-end depth and width; secondarily it is a spatial gain stage, with a dedicated Spatial Gain control (0 dB down to -12 dB) applied after the depth field, plus protected input trim.

Recommended use: low/depth support; secondarily a spatial gain plugin via its dedicated Spatial Gain control (0dB to -12dB) applied after delay-based depth/width field placement; blue secondary dot

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
input	Input Trim	Float
gainmatch	Gain Match	Bool
depth	Spatial Depth	Float
output	Spatial Gain	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

PHI ROOT TOUCH [Stereo] • TIGHT KICK ROOT [Stereo] • VOCAL SHADOW LIFT [Stereo] • PHI SPACE OPEN [Stereo] • LOW END GLUE [Stereo] • SUB FLOOR WEIGHT [Stereo] • BASS WIDTH SPREAD [Stereo] • MIX FRONT TO BACK [Stereo] • DRUM ROOM DEPTH [Stereo] • TEMPLE WIDTH [Stereo] • CINEMA FLOOR [Stereo] • LOW FIELD EXTENDER [Stereo] • MONO BASS FOCUS [Stereo] • FULL BUS DEPTH [Stereo] • PHI ROOT TOUCH [Mono] • TIGHT KICK ROOT [Mono] • VOCAL SHADOW LIFT [Mono] • PHI SPACE OPEN [Mono] • LOW END GLUE [Mono] • SUB FLOOR WEIGHT [Mono] • BASS WIDTH SPREAD [Mono] • MIX FRONT TO BACK [Mono] • DRUM ROOM DEPTH [Mono] • TEMPLE WIDTH [Mono] • CINEMA FLOOR [Mono] • LOW FIELD EXTENDER [Mono] • MONO BASS FOCUS [Mono] • FULL BUS DEPTH [Mono] • PHI ROOT TOUCH [Dual Mono] • TIGHT KICK ROOT [Dual Mono] • VOCAL SHADOW LIFT [Dual Mono] • PHI SPACE OPEN [Dual Mono] • LOW END GLUE [Dual Mono] • SUB FLOOR WEIGHT [Dual Mono] • BASS WIDTH SPREAD [Dual Mono] • MIX FRONT TO BACK [Dual Mono] • DRUM ROOM DEPTH [Dual Mono] • TEMPLE WIDTH [Dual Mono] • CINEMA FLOOR [Dual Mono] • LOW FIELD EXTENDER [Dual Mono] • MONO BASS FOCUS [Dual Mono] • FULL BUS DEPTH [Dual Mono]

Meters and visualizers

Touch sphere: Depth field plus live level. Water motion follows field/level activity; sphere position remains the output control.

Spatial field: Depth, field energy, and motion. A reactive placement view, not a calibrated spectrum.

NTRPL

RELEASE	FAMILY	PLACEMENT
v1.0.1	Bass / Low End	Low End Source

Low-end transformation engine for rewrite map, novelty, interval motion, contour, shape, space, and originality guard.

Recommended use: reclassified bass family

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
gainmatch	Gain Match	Bool
chordMap	Rewrite Map	Choice
interpolate	Novelty	Float
motif	Chord Rewrite	Float
rhythm	Motion	Float
pitch	Interval Distance	Float
melody	Contour	Float
shape	Shape	Float
field	Space	Float
guard	Originality Guard	Float
alternateMix	Mix	Float
output	Output	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

01 SOURCE TRACE [Stereo] • 02 PHI BODY REWRITE [Stereo] • 03 LOW WEIGHT LATTICE [Stereo] • 04 HARMONIC REWRITE [Stereo] • 05 ALT PHI FIELD [Stereo] • 06 WIDE RECONTOUR [Stereo] • 07 DEEP BASS BLOOM [Stereo] • 08 EDGE TRANSLATION [Stereo] • 01 SOURCE TRACE [Mono] • 02 PHI BODY REWRITE [Mono] • 03 LOW WEIGHT LATTICE [Mono] • 04 HARMONIC REWRITE [Mono] • 05 ALT PHI FIELD [Mono] • 06 WIDE RECONTOUR [Mono] • 07 DEEP BASS BLOOM [Mono] • 08 EDGE TRANSLATION [Mono] • 01 SOURCE TRACE [Dual Mono] • 02 PHI BODY REWRITE [Dual Mono] • 03 LOW WEIGHT LATTICE [Dual Mono] • 04 HARMONIC REWRITE [Dual Mono] • 05 ALT PHI FIELD [Dual Mono] • 06 WIDE RECONTOUR [Dual Mono] • 07 DEEP BASS BLOOM [Dual Mono] • 08 EDGE TRANSLATION [Dual Mono]

Meters and visualizers

SOURCE: Original input contribution. Shows how much source survives into the main route.

REWRITE: Generated harmonic-rewrite activity. Shows the newly synthesized low-end material.

ALT OUT: Alternative new-signal output. Always represents the generated signal path.

MAIN: Final blended output. Use against SOURCE for level and blend context.

Harmonic Rewriter: Live input-to-output contour. Shows source energy changing into rewritten energy.

Rewrite Map: Novelty, chord, interval, contour, motion, space, guard, and mix state. A live process map; it is not a frequency analyzer.

DRUM INSTRUMENT User Manual

Current: 2026-08-05

Purpose: Drum creation, sampling, sequencing, and impact placement. Create and shape drum material, then establish the musical impact and crowd-response field.

Included products: DIH Drum Morpher, BALLPARK, DrumKrushGlue

Recommended route: Drum route: DIH Drum Morpher -> Ballpark -> DrumKrushGlue.

Preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

DIH Drum Morpher

Sixteen-pad drum sampler and host-synced sequencer with sample loading, pad shaping, restored factory programs, pattern memory, capture, morph, and the original DIH Layer Engine. Each pad can keep its sample unchanged, combine it with a modeled drum layer, or move toward a synthesized drum voice.

Preferred placement: Instrument Track / Drum Source. Load as a drum instrument, then route its output through Ballpark and DrumKrushGlue when that chain serves the production.

Core controls

- 16 velocity-sensitive pads and MIDI notes
- WAV, AIFF, and CAF sample loading
- Volume, pitch, morph, filter, punch, air, and ADSR per pad
- Per-pad Sample, Hybrid, and Synth engine modes
- Per-pad Layer amount and controlled repeat-hit Variation
- Host tempo, swing, grid rate, steps, play, and record
- Global morph, metamorphosis, momentum bend, governor, and ceiling
- Sampler capture, playback, and transfer to pad
- Sixteen per-pad mute toggles for isolating or removing kit voices

Sidechain and wave guide

- Drum Morpher is an instrument and does not require a host sidechain. CAPTURE can record an incoming source and transfer it to any pad.
- The current Audio Unit includes the restored factory program bank and uses a prepared, per-sample output-normalization ramp for smooth level transitions.

Layer Engine quick guide

Mode	What it does	Best starting use
SAMPLE	Plays only the loaded sample through Drum Morpher shaping	When the source already has the exact identity you want.
HYBRID	Keeps the sample and blends an original DIH physical/model layer	Default choice for more body, definition, or repeat-hit life.
SYNTH	Keeps a quieter sample imprint while bringing the modeled layer forward	Electronic kicks, tuned toms/808 support, synthetic percussion, and sound design.

- **LAYER** controls how much modeled reinforcement is added. Start around 15-30 percent. Increase by role: kick and toms can take more; hats and cymbals usually need less.

- **VARIATION** introduces small, deterministic changes in pitch, tone, and stereo position for repeated hits. Start around 5-15 percent. It does not randomize the pattern or replace velocity.
- MIDI velocity still controls hit level. The modeled layer also becomes brighter and more forceful at higher velocities, so programming velocity gives the kit a played response.
- Kick, snare, clap, rim, hats, hand percussion, tom/808, crash, and ride pads use different original DIH models. No Reason Studios samples or presets are included.

Meter and visualizer guide

Display	What it measures	How to read it
L / R output	Left and right output activity	Confirms stereo drum output and imbalance.
GOVERNOR	Output containment activity	More activity means protection is holding energy back.
MORPH	Current metamorphosis activity	Shows how strongly the active pads are transforming.
Pad waveform	Loaded sample amplitude over time	Use to identify attacks, tails, and silence in each pad.
Layer readout	Amount of modeled reinforcement for the selected pad	Raise until the drum gains substance, then bypass-match.
Variation readout	Repeat-hit pitch, tone, and stereo movement	Use low values for realism; higher values for electronic motion.

Start from reset or a purpose-matched preset, bypass-match, and adjust one control at a time.

BALLPARK

Drum impact and placement processor whose base progression and hit calls turn performance energy into an audible stadium-response field.

Preferred placement: Drum Track / Drum Bus. Use as a drum instrument and impact-placement stage before DrumKrushGlue.

Core controls

- Base mode and crowd-response progression
- Mound gain and switch-hitter transient mode
- Drive, depth, width, focus, clarity, mix, and convergence
- Input, RMS, peak, gain-reduction, and ceiling meters
- Foul, walk, single, double, triple, and home-run hit calls

Meter and visualizer guide

Display	What it measures	How to read it
IN	Input level	Confirms drum energy entering the stadium model.
GR	Gain reduction	Shows active impact containment.
OUT	Output level	Use with IN for level matching.
RMS / PEAK	Body level and fast peak	Their separation describes drum crest and punch.
Ceiling score / hit call	Composite impact, control, and ceiling score	Walk through Home Run describes response intensity, not sports prediction.

Current factory programs detected

- ON; GAN

Start from reset or a purpose-matched preset, bypass-match, and adjust one control at a time.

DrumKrushGlue

Bus-preferred drum cohesion stage for binding hits into one controlled impact field, with an optional kick-key sidechain that opens a pocket only in its added weight and glue layer.

Preferred placement: Drum Bus / Parallel Drum Impact Return. Use on the drum bus or a parallel drum-impact return after Drum Morpher and Ballpark when the kit needs adhesive impact.


Core controls

- Power
- Gain Match
- Sidechain Key
- Pocket Duck
- Key Recovery

Sidechain and wave guide

- Route a kick or other guide to the host's named Sidechain input, then enable KEY. The sidechain controls the pocket detector only and is never mixed into the drum bus.
- POCKET moves only the added Krush/Weight/Glue contribution aside; RECOVERY controls how quickly cohesion returns. The original drum path remains audible.
- KICK POCKET GLUE loads 66 percent Pocket / 125 ms Recovery. GENTLE BUS POCKET loads 40 percent Pocket / 230 ms Recovery. All earlier programs keep KEY off.

Sidechain routing schematic

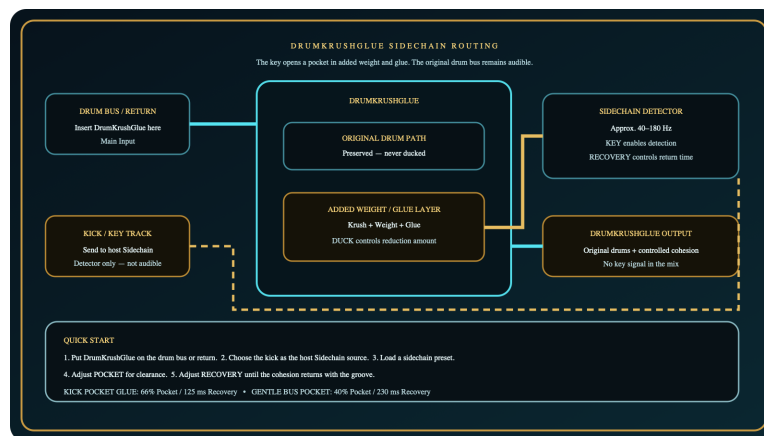

DrumKrushGlue sidechain routing

The dashed gold route is detector control only; it never enters the audible output.

Meter and visualizer guide

Display	What it measures	How to read it
IMPACT	Detected drum peak activity	Shows hit strength entering the impact path.
BODY	Sustained drum energy	Shows weight carried between hits.
REPAIR	Glue/control activity	Shows how strongly cohesion is correcting the bus.
CEILING	Protected output pressure	Persistent maximum activity means the chain is overdriven.
KEY	Detected 40-180 Hz sidechain energy	Moves only when KEY is enabled and a host sidechain is routed.
POCKET	Reduction of the added weight/glue layer	The original drum path remains outside this reduction.

Start from reset or a purpose-matched preset, bypass-match, and adjust one control at a time.

DIHWorld Audio

Drum / Instrument Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 3 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

DIH Drum Morpher

RELEASE	FAMILY	PLACEMENT
v1.0.1	Drum / Instrument	Creative Transform

Sixteen-pad drum sampler and host-synced sequencer with sample loading, pad shaping, restored factory programs, pattern memory, capture, morph, and performance controls. The current AU is registered and uses smoothed output normalization.

Recommended use: instrument/plugin generator

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
--------------	--------------	------

Meters and visualizers

L / R output: Left and right output activity. Confirms stereo drum output and imbalance.

GOVERNOR: Output containment activity. More activity means protection is holding energy back.

MORPH: Current metamorphosis activity. Shows how strongly the active pads are transforming.

Pad waveform: Loaded sample amplitude over time. Use to identify attacks, tails, and silence in each pad.

Ballpark

RELEASE	FAMILY	PLACEMENT
v1.0.1	Drum / Instrument	Creative Transform

Drum impact and placement processor whose base progression and hit calls turn performance energy into an audible stadium-response field.

Recommended use: instrument/drum function

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
--------------	--------------	------

Factory starting points

BALLPARK CANON (Mu Metal) • SINGLE TIGHT (Nickel Focus) • DOUBLE WIDTH (Copper Body) • TRIPLE ENERGY (Iron Weight) • HOME RUN LIFT (Gold Presence) • DUGOUT WARM (Brass) • STADIUM AIR (Silver Air) • GLUE DEFENSE (Mu Metal Shield) • BULLPEN LOCK (Steel) • NINTH INNING (Platinum Authority) • FIFTH TOOL (Alloy) • CROWDPULSE (Copper Ground) • GRANDSTAND (Bronze) • EXTRA BASES (Titanium)

Meters and visualizers

- IN:** Input level. Confirms drum energy entering the stadium model.
- GR:** Gain reduction. Shows active impact containment.
- OUT:** Output level. Use with IN for level matching.
- RMS / PEAK:** Body level and fast peak. Their separation describes drum crest and punch.
- Ceiling score / hit call:** Composite impact, control, and ceiling score. Walk through Home Run describes response intensity, not sports prediction.

DrumKrushGlue

RELEASE	FAMILY	PLACEMENT
v3.6.9	Drum / Instrument	Bus Preferred

Bus-preferred drum cohesion stage for binding hits into one controlled impact field, with secondary dynamics-guard/cyan-dot behavior.

Recommended use: drum-family percussion adhesive; use on drum bus or parallel drum-impact return; secondary dynamics guard/cyan dot

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

DRUM KRUSH GLUE [Stereo] • TIGHT BUS GLUE [Stereo] • BOOM BAP BODY [Stereo] • TRAP SNAP KRUSH [Stereo] • DRILL KICK ANCHOR [Mono] • 808 KRUSH WEIGHT [Stereo] • PARALLEL KRUSH RETURN [Stereo] • DUAL MONO DRUM LOCK

Meters and visualizers

IMPACT: Detected drum peak activity. Shows hit strength entering the impact path.

BODY: Sustained drum energy. Shows weight carried between hits.

REPAIR: Glue/control activity. Shows how strongly cohesion is correcting the bus.

CEILING: Protected output pressure. Persistent maximum activity means the chain is overdriven.

COLOR AMP TAPE

Saturation, amplifier, tape, and harmonic color


Add character through distinct amp, tube, tape, and body-focused engines.

Included products: APIS, PtahTube, KHEPRI, SOVEREIGN

Recommended route: Music/color route: KHEPRI -> PTAHTUBE -> APIS. SOVEREIGN is a source-oriented amp alternative.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

APIS

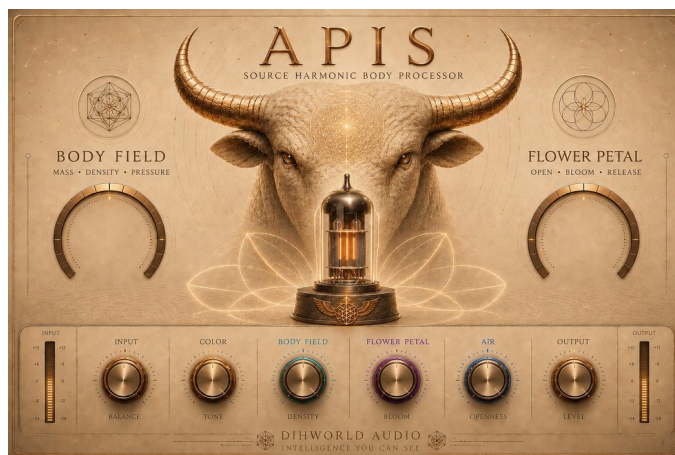

Body and color processor built around color, body, petal dispersion, air, protected I/O, and channel-mode support.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.


Core controls

- Input
- Color
- Body
- Flower Petal
- Air
- Output
- Gain Match

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

PtahTube

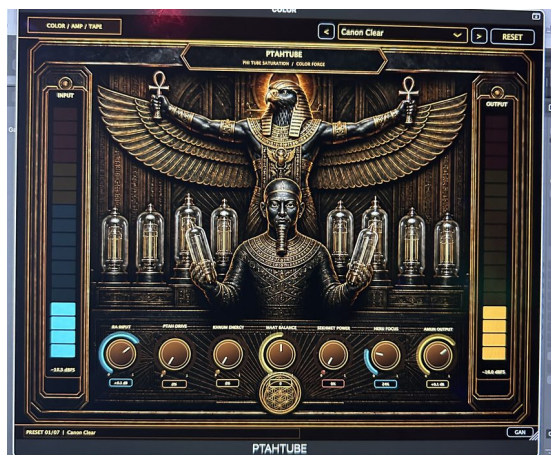

Phi-based tube color processor with input, drive, energy, balance, focus, output, and Flower of Life dispersal tied to its illuminated tube field.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Input
- Drive
- Output
- Energy
- Balance
- Power
- Focus
- Flower of Life Dispersal
- Gain Match

Current factory programs detected

MANUAL | USER SETTINGS

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

KHEPRI



Sacred tape machine with selectable machine, Phi formula, tape type (Gold Alloy, Ferric Oxide, Metal Alloy), speed, drive, bias, wow, flutter, head bump, HF rolloff, and parallel mix.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Power
- Gain Match
- Machine
- Phi Formula
- Tape Type
- Speed
- Input
- Drive
- Bias

Tape stock changes the machine's magnetic character. Gold Alloy is the balanced general-purpose stock; Ferric Oxide is warmer, denser, and better suited to body or vintage motion; Metal Alloy is cleaner, tighter, and more extended for transient detail and open high-frequency reproduction.

The current factory bank is Canon Reset, Clean Print, Vocal Silk, Bass Foundation, Drum Punch, Bus Glue, Air Repro, Vintage Drift, and Dual Reel. Full Reel and the excessive Low Reel program have been removed; Bass Foundation is the restrained low-end replacement.

Start with the source-matched program, enable Gain Match, and compare at equal loudness. Reduce Drive first when the tape color becomes too forward; reduce Wow or Flutter when transport motion distracts from the performance.

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT VU	Ballistic input level	Calibrated to the printed analog VU scale.
OUTPUT VU	Ballistic post-tape level	Compare with INPUT to avoid loudness bias.
Waveform	Recent live output samples	Shows real signal motion, not a decorative animation.
Reels / beetle glow	Tape motion and drive state	Operational feedback; not a calibrated level meter.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SOVEREIGN



Source-oriented amplifier and tone stage with drive, bass, mid, treble, presence, and master controls.

Preferred placement: Mix Bus. Use on the appropriate family bus, mix bus, or mastering chain with careful bypass matching.

Core controls

- Power
- Drive
- Bass
- Mid
- Treble
- Presence
- Master
- Gain Match

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Color / Amp / Tape Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 4 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

APIS

RELEASE	FAMILY	PLACEMENT
v1.0.1	Color / Amp / Tape	Insert Safe

Body and color processor built around color, body, petal dispersion, air, protected I/O, and channel-mode support.

Recommended use: amp/color source tone

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
INPUT	Input	Float
COLOR	Color	Float
BODY	Body	Float
FLOWER	Flower Petal	Float
AIR	Air	Float
OUTPUT	Output	Float
channelmode	Channel Mode	Float
dualmonolink	Dual Mono Link	Float
gainmatch	Gain Match	Bool

Factory starting points

APIS CANON RESET • APIS BODY THRONE • APIS AIR CROWN • APIS BLOOM FIELD • APIS SHADOW CUT • APIS DUAL COMB • APIS FULL FIELD

PTAHTUBE

RELEASE	FAMILY	PLACEMENT
v1.0.1	Color / Amp / Tape	Insert Safe

Phi-based tube color processor with input, drive, energy, balance, focus, output, and Flower of Life dispersal tied to its illuminated tube field.

Recommended use: tube color; vocal clarity required

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
input	Input	Float
drive	Drive	Float
output	Output	Float
energy	Energy	Float
balance	Balance	Float
power	Power	Float
focus	Focus	Float
flower	Flower of Life Dispersal	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

Canon Clear • Warm Filament • Memphis Grit • Vocal Copper Edge • Bus Tube Glue • Drum Ember Forge • Ra Saturation

Khepri

RELEASE	FAMILY	PLACEMENT
v1.0.1	Color / Amp / Tape	Insert Safe

Sacred tape machine with selectable machine, Phi formula, tape type (Gold Alloy, Ferric Oxide, Metal Alloy), speed, drive, bias, wow, flutter, head bump, HF rolloff, and parallel mix.

Recommended use: tape/source color; default mix canon 1/Phi; secondary silver mastering-support dot

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
gainmatch	Gain Match	Bool
machine	Machine	Choice
formula	Phi Formula	Choice
tapeType	Tape Type	Choice
speed	Speed	Choice
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
input	Input	Float
drive	Drive	Float
bias	Bias	Float
wow	Wow	Float
flutter	Flutter	Float
bump	Head Bump	Float
rolloff	HF Rolloff	Float
mix	Mix	Float
output	Output	Float

Meters and visualizers

INPUT VU: Ballistic input level. Calibrated to the printed analog VU scale.

OUTPUT VU: Ballistic post-tape level. Compare with INPUT to avoid loudness bias.

Waveform: Recent live output samples. Shows real signal motion, not a decorative animation.

Reels / beetle glow: Tape motion and drive state. Operational feedback; not a calibrated level meter.

SOVEREIGN

RELEASE	FAMILY	PLACEMENT
v1.0.3	Color / Amp / Tape	Mix Bus

Source-oriented amplifier and tone stage with drive, bass, mid, treble, presence, and master controls.

Recommended use: stronger color and bus authority; secondary silver mastering-support dot

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
drive	Drive	Float
bass	Bass	Float
mid	Mid	Float
treble	Treble	Float
presence	Presence	Float
master	Master	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool

Factory starting points

ROYAL BALANCE [Stereo] • CLEAN CROWN [Stereo] • TAPE FRONT [Stereo] • GUITAR ROYALTY [Stereo] • BASS BODY AMP [Stereo] • VOCAL AUTHORITY [Stereo] • PARALLEL COLOR BUS [Stereo] • DARK IRON CAB [Stereo] • ROYAL BALANCE [Mono] • CLEAN CROWN [Mono] • TAPE FRONT [Mono] • GUITAR ROYALTY [Mono] • BASS BODY AMP [Mono] • VOCAL AUTHORITY [Mono] • PARALLEL COLOR BUS [Mono] • DARK IRON CAB [Mono] • ROYAL BALANCE [Dual Mono] • CLEAN CROWN [Dual Mono] • TAPE FRONT [Dual Mono] • GUITAR ROYALTY [Dual Mono] • BASS BODY AMP [Dual Mono] • VOCAL AUTHORITY [Dual Mono] • PARALLEL COLOR BUS [Dual Mono] • DARK IRON CAB [Dual Mono]

FIELD TONE BALANCE

Field tone, restoration, and tonal balance

Rebalance or restore a source before it reaches later spatial or mastering stages.

Included products: AUSET, AUSAR

Recommended route: Auset is bus preferred for field tilt. Ausar is bus preferred for restoration work.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

AUSET



Field-tone balancer with intensity, tilt, power, and optional Flower of Life dispersal.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Intensity
- Tilt
- Power
- Gain Match
- Flower of Life Dispersal

Current factory programs detected

AUSET FULL RANGE; AUSET NIGHT BALANCE; AUSET LUNAR LIFT; AUSET SOLAR REVEAL; AUSET VELVET BODY; AUSET SHADOW DEPTH; AUSET AIR LIFT REVEAL; AUSET MASTER SUPPORT; AUSET FLOWER BLOOM

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

AUSAR



Restoration processor for hum repair, broadband extraction, transient integrity, and controlled output.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Gain Match
- Hum Repair
- Broadband Extraction
- Transient Integrity
- Output

Current factory programs detected

AUSAR SOURCE RESTORE; AUSAR RELIC WASH; AUSAR RESURRECTION FIELD; AUSAR HUM DEEP CLEAN; AUSAR BROADBAND REVEAL; AUSAR TRANSIENT REPAIR; AUSAR ARCHIVAL BALANCE; AUSAR FULL RANGE PROOF

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Field / Tone / Balance Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 2 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

AUSET

RELEASE	FAMILY	PLACEMENT
v1.0.1	Field / Tone / Balance	Bus Preferred

Field-tone balancer with intensity, tilt, power, and optional Flower of Life dispersal.

Recommended use: tone balance and dispersal field

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
INTENSITY	Intensity	Float
TILT	Tilt	Float
POWER	Power	Bool
gainmatch	Gain Match	Bool
FLOWER_DISPERSAL	Flower of Life Dispersal	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

AUSET NIGHT BALANCE [Stereo] • AUSET LUNAR LIFT [Stereo] • AUSET SOLAR REVEAL [Stereo] • AUSET VELVET BODY [Stereo] • AUSET SHADOW DEPTH [Stereo] • AUSET AIR LIFT REVEAL [Stereo] • AUSET MASTER SUPPORT [Stereo] • AUSET FLOWER BLOOM [Stereo] • AUSET NIGHT BALANCE [Mono] • AUSET LUNAR LIFT [Mono] • AUSET SOLAR REVEAL [Mono] • AUSET VELVET BODY [Mono] • AUSET SHADOW DEPTH [Mono] • AUSET AIR LIFT REVEAL [Mono] • AUSET MASTER SUPPORT [Mono] • AUSET FULL RANGE [Mono] • AUSET NIGHT BALANCE [Dual Mono] • AUSET LUNAR LIFT [Dual Mono] • AUSET SOLAR REVEAL [Dual Mono] • AUSET VELVET BODY [Dual Mono] • AUSET SHADOW DEPTH [Dual Mono] • AUSET AIR LIFT REVEAL [Dual Mono] • AUSET MASTER SUPPORT [Dual Mono] • AUSET FULL RANGE [Dual Mono]

AUSAR

RELEASE	FAMILY	PLACEMENT
v1.0.1	Field / Tone / Balance	Bus Preferred

Restoration processor for hum repair, broadband extraction, transient integrity, and controlled output.

Recommended use: field/tone balance

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
gainmatch	Gain Match	Bool
HUM_REPAIR	Hum Repair	Float
BROADBAND_EXT	Broadband Extraction	Float
TRANSIENT_INT	Transient Integrity	Float
OUTPUT_GAIN	Output	Float

Factory starting points

AUSAR SOURCE RESTORE • AUSAR RELIC WASH • AUSAR RESURRECTION FIELD • AUSAR HUM DEEP CLEAN • AUSAR BROADBAND REVEAL
• AUSAR TRANSIENT REPAIR • AUSAR ARCHIVAL BALANCE • AUSAR FULL RANGE PROOF

DIMENSIONAL IMPACT MOVE

Dimension, width, impact, and motion

Shape depth, front-to-back position, movement, and spatial delay as a coordinated field.

Included products: Depth Impact Hybrid X, PARALLAX, NSR

Recommended route: Width/depth route: Depth Impact Hybrid X -> Parallax -> NSR.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

Depth Impact Hybrid X



Six-mode spatial field for clarity, depth, low bloom, front push, hybrid pressure, fold, freeze, and source-to-horizon movement.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Output
- Hybrid X Mode
- Horizon Fold
- Event Freeze
- Echo
- CPU Saver
- Bypass
- Gain Match
- spectralClarity

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
RMS FIELD	Overall sustained field energy	Shows the body of the dimensional result.
LEFT / RIGHT	Per-channel output activity	Use to spot unintended channel imbalance.
HORIZON	Depth and distant-field contribution	Higher values indicate stronger rearward space.
EVENT	Transient/front-push contribution	Higher values indicate stronger forward impact.
Immersion / Foundation / Motion	Three-part dimensional activity summary	Read together to distinguish depth, low support, and movement.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

PARALLAX



Bus-preferred width and depth field with focus, spread, axis core, link, mix, and output control.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Width
- Depth
- Focus
- Stereo Spread
- Axis Core
- Mix
- Output
- Field Link
- Power

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT / OUTPUT	Live pre/post level	Use for level matching around the width field.
Field visualizer	Width, depth, focus, spread, and axis state	Motion shows spatial behavior; it is not a frequency plot.

Additional controls are mapped in the family technical manual.

Current factory programs detected

Deep Space; Wormhole; Nebula Shift; Stellar Grid; Planetary Orbits; Light Speed; Quantum Field; Dimensional Gate; Gravity Well; Ascension

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

NSR



Phi-ratio spatial delay and movement field combining travel, microphase, air, anchor, spread, time delay, flange, and mix.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Gain Match
- travel
- microphase
- air
- anchor
- spread
- field
- timeDelay
- flange

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
SPECTRUM	Energy across displayed frequency bands	Shows tonal distribution of the current signal.
CORRELATION	Left/right phase similarity	+1 is mono-coherent, 0 is decorrelated, negative values risk cancellation.
L / R	Channel activity	Use to detect imbalance before and after the field.
PHI FIELD VIEW	Combined spatial-field intensity	Shows overall activity of the responder.
STEREO FIELD / WIDTH	Side-to-mid spatial width	Check correlation whenever width stays high.
FIELD ACTIVITY	Wet spatial-path energy	Shows how much processed field is actually active.
DRY / WET waveform	Recent source and processed traces	Compare timing, shape, and motion between paths.
Signal Path	Activity at each processing stage	Locates where energy enters, moves, feeds back, and is contained.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Dimensional / Impact / Move Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 3 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

Depth Impact Hybrid X

RELEASE	FAMILY	PLACEMENT
v1.0.1	Dimensional / Impact / Move	Insert Safe

Six-mode spatial field for clarity, depth, low bloom, front push, hybrid pressure, fold, freeze, and source-to-horizon movement.

Recommended use: spectral clarity, harmonic depth, and hybrid spatial field

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
output	Output	Float
mode	Hybrid X Mode	Choice
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
horizonFold	Horizon Fold	Bool
freeze	Event Freeze	Bool
echo	Echo	Bool
cpuSaver	CPU Saver	Bool
bypass	Bypass	Bool
gainmatch	Gain Match	Bool
spectralClarity	spectralClarity	Referenced
spatialDepth	spatialDepth	Referenced
loContour	loContour	Referenced
subPressure	subPressure	Referenced
foundation	foundation	Referenced
ground	ground	Referenced
mass	mass	Referenced
presenceLift	presenceLift	Referenced
frontPush	frontPush	Referenced
dimensionalGain	dimensionalGain	Referenced
extension	extension	Referenced
horizonDrive	horizonDrive	Referenced
horizonMaximizer	horizonMaximizer	Referenced
eventSmear	eventSmear	Referenced
eventGravity	eventGravity	Referenced
hybridAmount	hybridAmount	Referenced
immersionBlend	immersionBlend	Referenced
marianaBlend	marianaBlend	Referenced
boostBlend	boostBlend	Referenced
horizonBlend	horizonBlend	Referenced
eventBlend	eventBlend	Referenced
pressureBlend	pressureBlend	Referenced

Factory starting points

Balanced Field • Vocal Focus • Drum Front • Bass Foundation • Wide Atmosphere • Pushback Space • Deep Immersion • Hybrid Motion

Meters and visualizers

RMS FIELD: Overall sustained field energy. Shows the body of the dimensional result.

LEFT / RIGHT: Per-channel output activity. Use to spot unintended channel imbalance.

HORIZON: Depth and distant-field contribution. Higher values indicate stronger rearward space.

EVENT: Transient/front-push contribution. Higher values indicate stronger forward impact.

Immersion / Foundation / Motion: Three-part dimensional activity summary. Read together to distinguish depth, low support, and movement.

PARALLAX

RELEASE	FAMILY	PLACEMENT
v1.0.1	Dimensional / Impact / Move	Bus Preferred

Bus-preferred width and depth field with focus, spread, axis core, link, mix, and output control.

Recommended use: bus-preferred dimensional placement

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
width	Width	Float
depth	Depth	Float
focus	Focus	Float
spread	Stereo Spread	Float
axis	Axis Core	Float
mix	Mix	Float
output	Output	Float
field_link	Field Link	Bool
power	Power	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

Deep Space [Stereo] • Wormhole [Stereo] • Nebula Shift [Stereo] • Stellar Grid [Stereo] • Planetary Orbits [Stereo] • Light Speed [Stereo] • Quantum Field [Stereo] • Dimensional Gate [Stereo] • Gravity Well [Stereo] • Ascension [Stereo] • Deep Space [Mono] • Wormhole [Mono] • Nebula Shift [Mono] • Stellar Grid [Mono] • Planetary Orbits [Mono] • Light Speed [Mono] • Quantum Field [Mono] • Dimensional Gate [Mono] • Gravity Well [Mono] • Ascension [Mono] • Deep Space [Dual Mono] • Wormhole [Dual Mono] • Nebula Shift [Dual Mono] • Stellar Grid [Dual Mono] • Planetary Orbits [Dual Mono] • Light Speed [Dual Mono] • Quantum Field [Dual Mono] • Dimensional Gate [Dual Mono] • Gravity Well [Dual Mono] • Ascension [Dual Mono]

Meters and visualizers

INPUT / OUTPUT: Live pre/post level. Use for level matching around the width field.

Field visualizer: Width, depth, focus, spread, and axis state. Motion shows spatial behavior; it is not a frequency plot.

NSR

RELEASE	FAMILY	PLACEMENT
v1.0.1	Dimensional / Impact / Move	Bus Preferred

Phi-ratio spatial delay and movement field combining travel, microphase, air, anchor, spread, time delay, flange, and mix.

Recommended use: phi-based spatial delay, microphase, and flange field

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
telescope	Telescope	Bool
gainmatch	Gain Match	Bool
travel	travel	Referenced
microphase	microphase	Referenced
air	air	Referenced
anchor	anchor	Referenced
spread	spread	Referenced
field	field	Referenced
timeDelay	timeDelay	Referenced
flange	flange	Referenced
mix	mix	Referenced

Factory starting points

Ankh Source Field • Ra Side Light • Ausar Depth Gate • Ma'at Balance • Horus Wide Eye • Seshat Trace • Thoth Phase Door • Sekhem Phi Orbit • Neteru Full Field

Meters and visualizers

- SPECTRUM:** Energy across displayed frequency bands. Shows tonal distribution of the current signal.
- CORRELATION:** Left/right phase similarity. +1 is mono-coherent, 0 is decorrelated, negative values risk cancellation.
- L / R:** Channel activity. Use to detect imbalance before and after the field.
- PHI FIELD VIEW:** Combined spatial-field intensity. Shows overall activity of the responder.
- STEREO FIELD / WIDTH:** Side-to-mid spatial width. Check correlation whenever width stays high.
- FIELD ACTIVITY:** Wet spatial-path energy. Shows how much processed field is actually active.
- DRY / WET waveform:** Recent source and processed traces. Compare timing, shape, and motion between paths.
- Signal Path:** Activity at each processing stage. Locates where energy enters, moves, feeds back, and is contained.

FX SPATIAL

Delay, reverb, tail, and spatial environment


Create audible space, movement, and controlled tails on parallel spatial lanes.

Included products: NTRSTLLR, Cathedral, SacredVerb

Recommended route: Parallel spatial route: NTRSTLLR -> Cathedral -> SacredVerb.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

NTRSTLLR

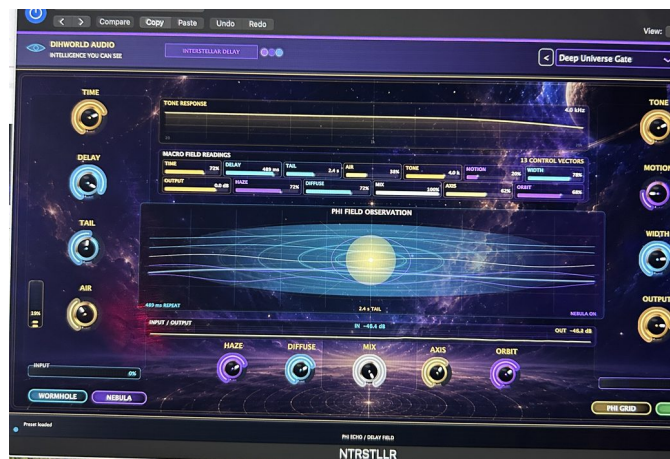

Audible interstellar delay and tail engine with travel, warp, orbit, portal, delay, air, haze, width, diffusion, axis, and Nebula/Wormhole modes.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Micro Peak
- Meso Density
- Macro Level
- Makeup Gain
- Travel
- Warp
- Orbit
- Portal
- Time/Delay

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT / OUTPUT	Weighted peak-plus-RMS level	Use for level matching around the spatial return.
TONE RESPONSE	Current low-to-high response shape	Shows tonal contour, not a mastering EQ recommendation.
WORMHOLE	Delay/warp-path energy	Shows active wormhole return strength.
NEBULA	Portal/diffusion-path energy	Shows active nebula tail strength.
SINGULARITY	Axis and pull concentration	Higher values indicate stronger inward focus.
PHI FIELD OBSERVATION	Combined macro-control activity	A spatial-state summary rather than loudness.
PHI ECHO / DELAY FIELD	Delay taps, orbit, and return motion	Use to understand tail movement and density.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Cathedral



Seven-river chamber environment with arch, convergence, 3-6-9 nodes, protected I/O, and parallel mix.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- Arch
- Seven Rivers
- 3-6-9 Nodes
- Convergence
- Input
- Mix
- Output
- Gain Match

Meter and visualizer guide


These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
ENERGY	Current chamber RMS in dB	Shows how strongly the room is being excited.
DIFFUSION	3-6-9 node density	Higher values produce a denser, smoother tail.
WIDTH	Node density multiplied by wet mix	Shows audible spatial spread, not dry-source width.
RT60	Estimated mid-band decay time	Seconds required for the modeled room to decay by 60 dB.
ROOM RESONANCE	Modeled low/mid/high response	Use to identify room emphasis before printing.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SacredVerb

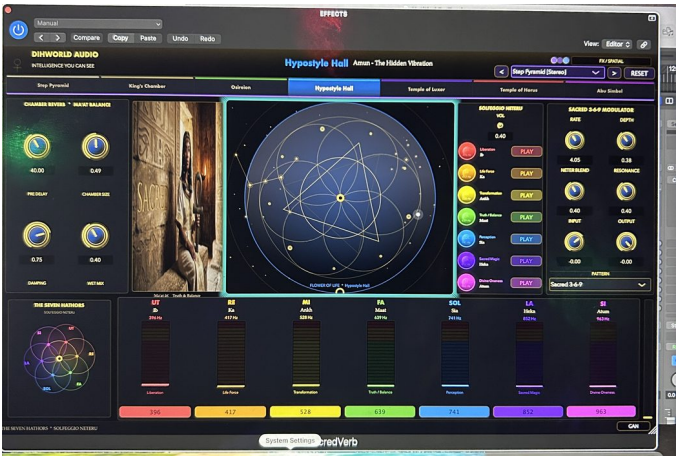

Sacred spatial reverb with pre-delay, chamber size, damping, rate, depth, Neter blend, resonance, chamber and pattern modes, and protected presets.

Preferred placement: Bus Preferred. Use on a family, parallel, or purpose-built bus; audition on an insert only when the source calls for it.

Core controls

- PRE DELAY
- CHAMBER SIZE
- DAMPING
- WET MIX
- RATE
- DEPTH
- NETER BLEND
- RESONANCE
- INPUT

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
Seven Hathor meters	Energy at enabled Solfeggio nodes	Each column shows its resonant band activity and peak hold.
Output meter	Current reverb-output peak	Use to keep the return controlled and level matched.
3-6-9 modulator	Active modulation/pattern state	Shows motion settings; it is not a loudness meter.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

FX / Spatial Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 3 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

NTRSTLLR

RELEASE	FAMILY	PLACEMENT
v1.0.1	FX / Spatial	Bus Preferred

Audible interstellar delay and tail engine with travel, warp, orbit, portal, delay, air, haze, width, diffusion, axis, and Nebula/Wormhole modes.

Recommended use: spatial/nebula/wormhole bus

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
trumpet_l	Micro Peak	Float
trumpet_c	Meso Density	Float
trumpet_r	Macro Level	Float
makeup_gain	Makeup Gain	Float
travel	Travel	Float
warp	Warp	Float
orbit	Orbit	Float
portal	Portal	Float
time_delay	Time/Delay	Float
rubber	Rubber	Float
air	Air	Float
haze	Haze	Float
width	Width	Float
diffusion	Diffusion	Float
axis	Axis	Float
mix	Mix	Float
output	Output	Float
wormhole_mode	Wormhole Mode	Bool
nebula_mode	Nebula Mode	Bool
phi_grid	Phi Grid	Bool
power	Power	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

NTRSTLLR Canon Reset • Interstellar Phi 2 • Sacred Wormhole • Nebula Phi Echo • Short Portal • Deep Universe Gate • Dual Phi Orbit • Time Lens Isolate • Delay Line Isolate • Portal Tail Isolate • Motion Warp Isolate • Air Tone Isolate • Haze Veil Isolate • Width Axis Isolate • Diffusion Cloud • Mono Wormhole Probe • Dual Mono Split Probe • Nebula Only Bloom • Wormhole Only Pull

Meters and visualizers

INPUT / OUTPUT: Weighted peak-plus-RMS level. Use for level matching around the spatial return.

STONE RESPONSE: Current low-to-high response shape. Shows tonal contour, not a mastering EQ recommendation.

WORMHOLE: Delay/warp-path energy. Shows active wormhole return strength.

NEBULA: Portal/diffusion-path energy. Shows active nebula tail strength.

SINGULARITY: Axis and pull concentration. Higher values indicate stronger inward focus.

PHI FIELD OBSERVATION: Combined macro-control activity. A spatial-state summary rather than loudness.

PHI ECHO / DELAY FIELD: Delay taps, orbit, and return motion. Use to understand tail movement and density.

Cathedral

RELEASE	FAMILY	PLACEMENT
v3.6.9	FX / Spatial	Bus Preferred

Seven-river chamber environment with arch, convergence, 3-6-9 nodes, protected I/O, and parallel mix.

Recommended use: reverb/spatial aux

Customer formats: VST3, AU

Exposed parameter surface

Parameter ID	Display name	Type
arch	Arch	Float
rivers	Seven Rivers	Float
nodes	3-6-9 Nodes	Float
convergence	Convergence	Float
input	Input	Float
mix	Mix	Float
output	Output	Float
channel_mode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool

Factory starting points

Sweet Spot (Stereo) • Cordoba (Stereo) • Cologne (Stereo) • St. Peter's (Stereo) • Notre-Dame (Stereo) • St. Sophia's (Stereo) • St. Basil's (Stereo) • Tallinn (Stereo) • Unity Chapel (Stereo) • Seven Rivers (Stereo) • 369 Nodes (Stereo) • Convergence Hall (Stereo) • Golden Nave (Stereo) • Quiet Sanctuary (Stereo) • Sweet Spot (Mono) • Cordoba (Mono) • Cologne (Mono) • St. Peter's (Mono) • Notre-Dame (Mono) • St. Sophia's (Mono) • St. Basil's (Mono) • Tallinn (Mono) • Unity Chapel (Mono) • Seven Rivers (Mono) • 369 Nodes (Mono) • Convergence Hall (Mono) • Golden Nave (Mono) • Quiet Sanctuary (Mono) • Sweet Spot (Dual Mono) • Cordoba (Dual Mono) • Cologne (Dual Mono) • St. Peter's (Dual Mono) • Notre-Dame (Dual Mono) • St. Sophia's (Dual Mono) • St. Basil's (Dual Mono) • Tallinn (Dual Mono) • Unity Chapel (Dual Mono) • Seven Rivers (Dual Mono) • 369 Nodes (Dual Mono) • Convergence Hall (Dual Mono) • Golden Nave (Dual Mono) • Quiet Sanctuary (Dual Mono)

Meters and visualizers

ENERGY: Current chamber RMS in dB. Shows how strongly the room is being excited.

DIFFUSION: 3-6-9 node density. Higher values produce a denser, smoother tail.

WIDTH: Node density multiplied by wet mix. Shows audible spatial spread, not dry-source width.

RT60: Estimated mid-band decay time. Seconds required for the modeled room to decay by 60 dB.

ROOM RESONANCE: Modeled low/mid/high response. Use to identify room emphasis before printing.

SacredVerb

RELEASE	FAMILY	PLACEMENT
v3.5.7	FX / Spatial	Bus Preferred

Sacred spatial reverb with pre-delay, chamber size, damping, rate, depth, Neter blend, resonance, chamber and pattern modes, and protected presets.

Recommended use: reverb and spatial aux

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
PRE_DELAY	PRE DELAY	Float
ROOM_SIZE	CHAMBER SIZE	Float
DAMPING	DAMPING	Float
REVERB_MIX	WET MIX	Float
MOD_RATE	RATE	Float
MOD_DEPTH	DEPTH	Float
NETER_BLEND	NETER BLEND	Float
RESONANCE	RESONANCE	Float
INPUT	INPUT	Float
OUTPUT	OUTPUT	Float
CHAMBER	Chamber	Int
PATTERN_MODE	Pattern Mode	Int
FLOWER	Flower of Life	Bool
ECO_MODE	Eco Mode	Bool
BYPASS	Bypass	Bool
gainmatch	Gain Match	Bool
TRIG_TAIL	Trigger Tail	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
TRIG_	TRIG_	Referenced
EN_	EN_	Referenced

Factory starting points

Step Pyramid [Stereo] • Step Pyramid [Mono] • Step Pyramid [Dual Mono] • King's Chamber [Stereo] • King's Chamber [Mono] • King's Chamber [Dual Mono] • Osireion [Stereo] • Osireion [Mono] • Osireion [Dual Mono] • Hypostyle Hall [Stereo] • Hypostyle Hall [Mono] • Hypostyle Hall [Dual Mono] • Temple of Luxor [Stereo] • Temple of Luxor [Mono] • Temple of Luxor [Dual Mono] • Temple of Horus [Stereo] • Temple of Horus [Mono] • Temple of Horus [Dual Mono] • Abu Simbel [Stereo] • Abu Simbel [Mono] • Abu Simbel [Dual Mono] • Pyramid Early Field [Stereo] • Pyramid Early Field [Mono] • Pyramid Early Field [Dual Mono] • Chamber Long Tail [Stereo] • Chamber Long Tail [Mono] • Chamber Long Tail [Dual Mono] • Stone Room Focus [Stereo] • Stone Room Focus [Mono] • Stone Room Focus [Dual Mono] • Hall Wide Decay [Stereo] • Hall Wide Decay [Mono] • Hall Wide Decay [Dual Mono] • Temple Soft Bloom [Stereo] • Temple Soft Bloom [Mono] • Temple Soft Bloom [Dual Mono] • Bright Temple Tail [Stereo] • Bright Temple Tail [Mono] • Bright Temple Tail [Dual Mono] • Deep Stone Return [Stereo] • Deep Stone Return [Mono] • Deep Stone Return [Dual Mono] • Short Pyramid Room [Stereo] • Short Pyramid Room [Mono] • Short Pyramid Room [Dual Mono] • Short Chamber Room [Stereo] • Short Chamber Room [Mono] • Short Chamber Room [Dual Mono] • Focused Stone Room [Stereo] • Focused Stone Room [Mono] • Focused Stone Room [Dual Mono] • Short Hall Room [Stereo] • Short Hall Room [Mono] • Short Hall Room [Dual Mono] • Soft Temple Room [Stereo] • Soft Temple Room [Mono] • Soft Temple Room [Dual Mono] • Bright Room Edge [Stereo] • Bright Room Edge [Mono] • Bright Room Edge [Dual Mono] • Deep Room Guard [Stereo] • Deep Room Guard [Mono] • Deep Room Guard [Dual Mono] • Open Pyramid Wash [Stereo] • Open Pyramid Wash [Mono] • Open Pyramid Wash [Dual Mono] • Open Chamber Wash [Stereo] • Open Chamber Wash [Mono] • Open Chamber Wash [Dual Mono] • Open Stone Wash [Stereo] • Open Stone Wash [Mono] • Open Stone Wash [Dual Mono] • Open Hall Wash [Stereo] • Open

Hall Wash [Mono] • Open Hall Wash [Dual Mono] • Open Temple Wash [Stereo] • Open Temple Wash [Mono] • Open Temple Wash [Dual Mono] • Open Bright Wash [Stereo] • Open Bright Wash [Mono] • Open Bright Wash [Dual Mono] • Open Deep Wash [Stereo] • Open Deep Wash [Mono] • Open Deep Wash [Dual Mono] • Dark Pyramid Hold [Stereo] • Dark Pyramid Hold [Mono] • Dark Pyramid Hold [Dual Mono] • Dark Chamber Hold [Stereo] • Dark Chamber Hold [Mono] • Dark Chamber Hold [Dual Mono] • Dark Stone Hold [Stereo] • Dark Stone Hold [Mono] • Dark Stone Hold [Dual Mono] • Dark Hall Hold [Stereo] • Dark Hall Hold [Mono] • Dark Hall Hold [Dual Mono] • Dark Temple Hold [Stereo] • Dark Temple Hold [Mono] • Dark Temple Hold [Dual Mono] • Dark Bright Hold [Stereo] • Dark Bright Hold [Mono] • Dark Bright Hold [Dual Mono] • Dark Deep Hold [Stereo] • Dark Deep Hold [Mono] • Dark Deep Hold [Dual Mono] • Word Room [Stereo] • Word Room [Mono] • Word Room [Dual Mono] • Solar Chamber [Stereo] • Solar Chamber [Mono] • Solar Chamber [Dual Mono] • Depth Room [Stereo] • Depth Room [Mono] • Depth Room [Dual Mono] • Hidden Hall [Stereo] • Hidden Hall [Mono] • Hidden Hall [Dual Mono] • Aura Room [Stereo] • Aura Room [Mono] • Aura Room [Dual Mono] • Bright Strike [Stereo] • Bright Strike [Mono] • Bright Strike [Dual Mono] • Veil Room [Stereo] • Veil Room [Mono] • Veil Room [Dual Mono] • Low Foundation [Stereo] • Low Foundation [Mono] • Low Foundation [Dual Mono] • Bloom Room [Stereo] • Bloom Room [Mono] • Bloom Room [Dual Mono] • Union Hall [Stereo] • Union Hall [Mono] • Union Hall [Dual Mono] • Vision Room [Stereo] • Vision Room [Mono] • Vision Room [Dual Mono] • Ascent Room [Stereo] • Ascent Room [Mono] • Ascent Room [Dual Mono] • 396 Foundation [Stereo] • 396 Foundation [Mono] • 396 Foundation [Dual Mono] • 417 Lift [Stereo] • 417 Lift [Mono] • 417 Lift [Dual Mono] • 528 Bloom [Stereo] • 528 Bloom [Mono] • 528 Bloom [Dual Mono] • 639 Balance [Stereo] • 639 Balance [Mono] • 639 Balance [Dual Mono] • 741 Perception [Stereo] • 741 Perception [Mono] • 741 Perception [Dual Mono] • 852 Vision [Stereo] • 852 Vision [Mono] • 852 Vision [Dual Mono] • 963 Ascent [Stereo] • 963 Ascent [Mono] • 963 Ascent [Dual Mono]

Meters and visualizers

Seven Hathor meters: Energy at enabled Solfeggio nodes. Each column shows its resonant band activity and peak hold.

Output meter: Current reverb-output peak. Use to keep the return controlled and level matched.

3-6-9 modulator: Active modulation/pattern state. Shows motion settings; it is not a loudness meter.

HARMONICS PITCH

Harmonic structure, pitch, and instrument generation


Shape harmonic emphasis, rhythmic spectral motion, or generated instrument voices.

Included products: THOTH, TEHUTI, AU

Recommended route: Thoth and Tehuti are insert safe. AU is the family instrument and synth.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

THOTH

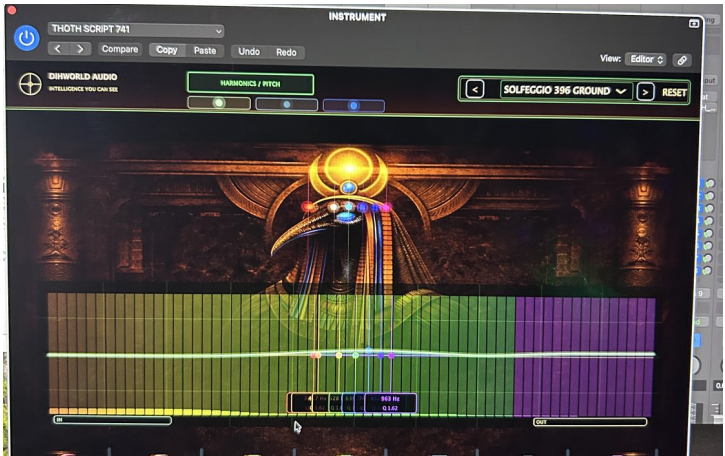

Sacred harmonic EQ with low and high shelves, visible shelf curves, Flower of Life mode, protected I/O, and parallel mix.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Power
- Input
- Mix
- Low Shelf
- High Shelf
- Output
- Flower of Life
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
Spectrum bands	Live energy in each displayed EQ region	Use to see where harmonic energy is accumulating.
Shelf curves	Current low/high shelf response	These show the selected EQ shape, not measured level.
IN / OUT	Pre/post peak activity	Use for level-fair harmonic decisions.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

TEHUTI



Harmonic motion processor using low, mid, and high ducking with depth, speed, mix, and Flower of Life mode.

Preferred placement: Insert Safe. Use directly on a source or instrument channel and bypass-match before committing.

Core controls

- Power
- Low Duck
- Mid Duck
- High Duck
- Depth
- Speed
- Mix
- Flower of Life
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT	Main-program peak activity	Shows the signal being ducked.
SIDECHAIN SEND	External sidechain envelope	Confirms that the host sidechain is present.
LOW GR	Reduction below 162 Hz	Shows low-band ducking driven by the sidechain.
MID GR	Reduction from 162 Hz to 1.62 kHz	Shows mid-band ducking driven by the sidechain.
HIGH GR	Reduction above 1.62 kHz	Shows high-band ducking driven by the sidechain.
Duck curves	Expected reduction versus sidechain energy	The live dot shows the current operating point.
History	Recent sidechain and reduction motion	Use to judge pumping and release behavior.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

AU



DIHWorld instrument and synth with factory sound selection, drag-and-drop source support, nine Neter voices, modulation, space, glide, sustain, and master control. The current AU is registered and uses smoothed output normalization.

Preferred placement: Instrument Track. Load as an instrument; use factory voices or drag-and-drop source material, then shape it inside the harmonic family.

Core controls

- Factory Sound
- PTAH
- RA
- SET
- ASAR
- MAAT
- SEKHMET
- KHNUM
- HERU

The current Audio Unit is registered for Logic and uses a prepared, per-sample output-normalization ramp so gain changes do not jump at audio-block boundaries.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Harmonics / Pitch Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 3 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

Thoth

RELEASE	FAMILY	PLACEMENT
v1.0.1	Harmonics / Pitch	Insert Safe

Sacred harmonic EQ with low and high shelves, visible shelf curves, Flower of Life mode, protected I/O, and parallel mix.

Recommended use: harmonics/pitch

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
input	Input	Float
mix	Mix	Float
ls_gain	Low Shelf	Float
hs_gain	High Shelf	Float
output	Output	Float
flower	Flower of Life	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool

Factory starting points

THOTH FLAT REFERENCE • THOTH MIX POLISH • THOTH VOCAL CLARITY • THOTH VOCAL WARMTH • THOTH DRUM HARMONIC LIFT • THOTH BASS TRANSLATE • THOTH LOW MID CLEANUP • THOTH PRESENCE SEAT • THOTH GENTLE AIR • SOLFEGGIO 396 GROUND • SOLFEGGIO 417 WEIGHT • SOLFEGGIO 528 BODY • SOLFEGGIO 639 SCRIBE • SOLFEGGIO 741 FOCUS • SOLFEGGIO 852 AIR • SOLFEGGIO 963 FLOWER • THOTH DYNAMIC NOTCH SHOWCASE • THOTH DYNAMIC SMILE SHOWCASE • THOTH DYNAMIC AIR SHOWCASE

Meters and visualizers

Spectrum bands: Live energy in each displayed EQ region. Use to see where harmonic energy is accumulating.

Shelf curves: Current low/high shelf response. These show the selected EQ shape, not measured level.

IN / OUT: Pre/post peak activity. Use for level-fair harmonic decisions.

TEHUTI

RELEASE	FAMILY	PLACEMENT
v1.0.3	Harmonics / Pitch	Insert Safe

Harmonic motion processor using low, mid, and high ducking with depth, speed, mix, and Flower of Life mode.

Recommended use: harmonics/pitch

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
low_duck	Low Duck	Float
mid_duck	Mid Duck	Float
high_duck	High Duck	Float
depth	Depth	Float
speed	Speed	Float
mix	Mix	Float
flower	Flower of Life	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

TEHUTI OPEN REFERENCE • TEHUTI LOW SPEED HIGH DEPTH • TEHUTI LOW DEPTH HIGH SPEED • TEHUTI LOW BAND LOCK • TEHUTI MID SWIM FAST • TEHUTI HIGH SHIMMER DUCK • TEHUTI FULL BAND PUMP • TEHUTI REVERSE POCKET • TEHUTI VOCAL CARVE DEEP • TEHUTI PERCUSSIVE SNAP • TEHUTI SLOW WIDE BREATH • TEHUTI PARALLEL EDGE

Meters and visualizers

- INPUT:** Main-program peak activity. Shows the signal being ducked.
- SIDECHAIN SEND:** External sidechain envelope. Confirms that the host sidechain is present.
- LOW GR:** Reduction below 162 Hz. Shows low-band ducking driven by the sidechain.
- MID GR:** Reduction from 162 Hz to 1.62 kHz. Shows mid-band ducking driven by the sidechain.
- HIGH GR:** Reduction above 1.62 kHz. Shows high-band ducking driven by the sidechain.
- Duck curves:** Expected reduction versus sidechain energy. The live dot shows the current operating point.
- History:** Recent sidechain and reduction motion. Use to judge pumping and release behavior.

AU

RELEASE	FAMILY	PLACEMENT
v1.0.3	Harmonics / Pitch	Insert Safe

DIHWorld instrument and synth with factory sound selection, drag-and-drop source support, nine Neter voices, modulation, space, glide, sustain, and master control. The current AU is registered and uses smoothed output normalization.

Recommended use: instrument/harmonic utility

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
SOUND	Factory Sound	Choice
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
PTAH	PTAH	Referenced
RA	RA	Referenced
SET	SET	Referenced
ASAR	ASAR	Referenced
MAAT	MAAT	Referenced
SEKHMET	SEKHMET	Referenced
KHNUM	KHNUM	Referenced
HERU	HERU	Referenced
DRIVE	DRIVE	Referenced
AMOUNT	AMOUNT	Referenced
DEPTH	DEPTH	Referenced
SV_MIX	SV_MIX	Referenced
HARP	HARP	Referenced
ORGAN	ORGAN	Referenced
CHOIR	CHOIR	Referenced
MOD	MOD	Referenced
BREATH	BREATH	Referenced
VIBRATO	VIBRATO	Referenced
PHI	PHI	Referenced
AZIMUTH	AZIMUTH	Referenced
FLOWER	FLOWER	Referenced
HATHOR	HATHOR	Referenced
RAW	RAW	Referenced
MOD_MACRO	MOD_MACRO	Referenced
MASTER	MASTER	Referenced
GLIDE	GLIDE	Referenced
PURE	PURE	Referenced
SUSTAIN	SUSTAIN	Referenced

Parameter ID	Display name	Type
GAINMATCH	GAINMATCH	Referenced

Factory starting points

AU Core • Canon Glass • Temple Keys • Organ Foundation • Motion Pluck • Horizon Pad • Root Foundation • Santuri Full

CREATIVE TRANSFORM

Creative reconstruction and transformation


Recombine processors, recover hidden content, or reshape a source beyond corrective work.

Included products: SlotMachine, Archaeologist X, SERQET

Recommended route: Use as deliberate creative stages; audition in context and bypass match before printing.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

SlotMachine

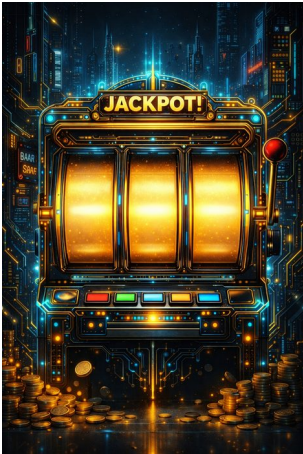

Three-chamber creative host that combines source, opposition, and resolution through architecture, blend, morph, and containment.

Preferred placement: Creative Transform. Use as an intentional instrument or creative transformation stage and print only after contextual auditioning.

Core controls

- Chamber A Source
- Chamber B Opposition
- Chamber C Resolution
- Architecture
- Blend
- Morph
- Containment
- Gain Match

Meter and visualizer guide


These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT	Input peak	Confirms level entering the three chambers.
OUTPUT	Output peak	Use for level matching.
RMS	Average program body	Shows sustained density.
CREST	Peak-to-RMS relationship	Higher values mean sharper transients; lower values mean denser material.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Archaeologist X

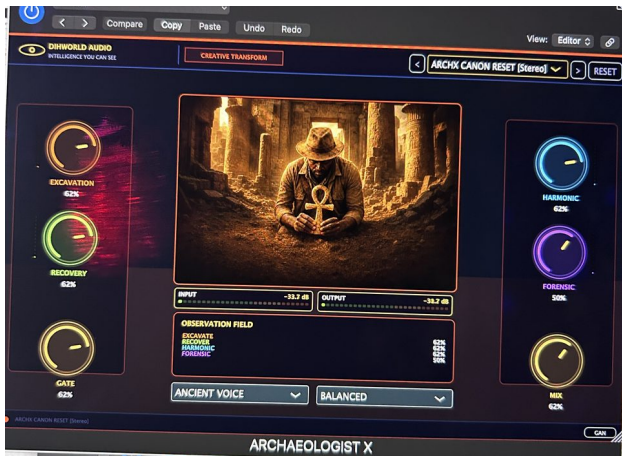

Forensic recovery processor for excavation, recovery field, harmonic extraction, layer selection, gate, and parallel mix.

Preferred placement: Creative Transform. Use as an intentional instrument or creative transformation stage and print only after contextual auditioning.

Core controls

- Power
- Gain Match
- Excavation Engine
- Recovery Field
- Harmonic Extraction
- Forensic Layer
- Gate
- Mix
- Output

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.


Display	What it measures	How to read it
INPUT / OUTPUT	Live pre/post peak	Use for bypass and level matching.
EXCAVATION	Low/deep recovery activity	Shows energy being uncovered by excavation.
RECOVERY	Recovered-source contribution	Shows how much repaired material is active.
HARMONIC	Extracted harmonic activity	Shows reconstructed tonal information.
FORENSIC	Forensic layer/gate activity	Shows the selective analysis path at work.
Observation Field	Combined four-process activity	A process summary, not a spectrum.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SERQET

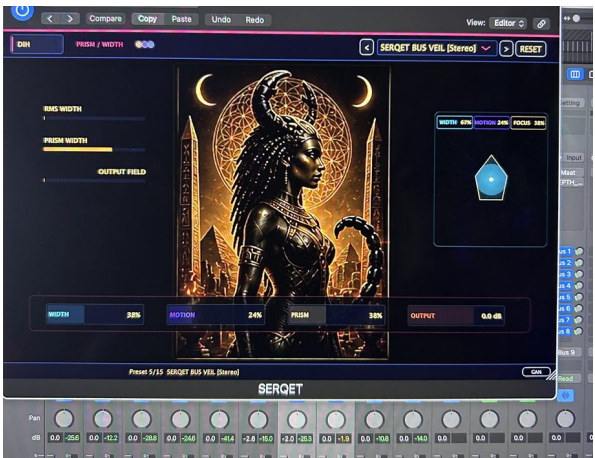

Creative sting and width processor with intensity, venom saturation, convergence focus, and output control.

Preferred placement: Creative Transform. Use as an intentional instrument or creative transformation stage and print only after contextual auditioning.

Core controls

- Width Reach
- Movement Trace
- Prism Focus
- Output Master
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
RMS WIDTH	Input RMS feeding the width field	Shows source energy available for widening.
PRISM WIDTH	Measured side-field width	Higher values indicate a broader stereo prism.
OUTPUT FIELD	Post-process RMS energy	Use with RMS WIDTH for level context.
Prism visualizer	Width, motion, focus, and output state	The polygon is a spatial-state map, not a loudness target.

Current factory programs detected

SERQET CANON WIDTH; SERQET VEIL MOTION; SERQET PRISM LENS; SERQET WIDE FIELD; SERQET BUS VEIL

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Creative Transform Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 3 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

SlotMachine

RELEASE	FAMILY	PLACEMENT
v2.2.6	Creative Transform	Creative Transform

Three-chamber creative host that combines source, opposition, and resolution through architecture, blend, morph, and containment.

Recommended use: creative transform

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
chamberA	Chamber A Source	Choice
chamberB	Chamber B Opposition	Choice
chamberC	Chamber C Resolution	Choice
architecture	Architecture	Float
blend	Blend	Float
morph	Morph	Float
containment	Containment	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool

Factory starting points

SLOT MACHINE CANON RESET [Stereo] • RELIC SPIN [Stereo] • IMPACT REROUTE [Stereo] • GOLDEN COLLISION [Stereo] • SOVEREIGN FLIP [Stereo] • WORMHOLE PRIZE [Stereo] • PARALLAX JACKPOT [Stereo] • FOCUSED CHAMBER [Stereo] • SLOT MACHINE CANON RESET [Mono] • RELIC SPIN [Mono] • IMPACT REROUTE [Mono] • GOLDEN COLLISION [Mono] • SOVEREIGN FLIP [Mono] • WORMHOLE PRIZE [Mono] • PARALLAX JACKPOT [Mono] • FOCUSED CHAMBER [Mono] • SLOT MACHINE CANON RESET [Dual Mono] • RELIC SPIN [Dual Mono] • IMPACT REROUTE [Dual Mono] • GOLDEN COLLISION [Dual Mono] • SOVEREIGN FLIP [Dual Mono] • WORMHOLE PRIZE [Dual Mono] • PARALLAX JACKPOT [Dual Mono] • FOCUSED CHAMBER [Dual Mono]

Meters and visualizers

- INPUT:** Input peak. Confirms level entering the three chambers.
- OUTPUT:** Output peak. Use for level matching.
- RMS:** Average program body. Shows sustained density.
- CREST:** Peak-to-RMS relationship. Higher values mean sharper transients; lower values mean denser material.

ARCHAEOLOGIST X

RELEASE	FAMILY	PLACEMENT
v2.0.6	Creative Transform	Creative Transform

Forensic recovery processor for excavation, recovery field, harmonic extraction, layer selection, gate, and parallel mix.

Recommended use: creative recovery/excavation

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
power	Power	Bool
gainmatch	Gain Match	Bool
excavation	Excavation Engine	Float
recovery	Recovery Field	Float
harmonic	Harmonic Extraction	Float
forensic	Forensic Layer	Float
gate	Gate	Float
mix	Mix	Float
output	Output	Float
profile	Profile	Choice
mode	Mode	Choice
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

ARCHX CANON RESET [Stereo] • RELIC VOICE [Stereo] • DUST DETAIL [Stereo] • BODY RECOVERY [Stereo] • AIR SCRIPT [Stereo] • FORENSIC LENS [Stereo] • TEMPLE MEMORY [Stereo] • FULL EXCAVATION FIELD [Stereo] • ARCHX CANON RESET [Mono] • RELIC VOICE [Mono] • DUST DETAIL [Mono] • BODY RECOVERY [Mono] • AIR SCRIPT [Mono] • FORENSIC LENS [Mono] • TEMPLE MEMORY [Mono] • FULL EXCAVATION FIELD [Mono] • ARCHX CANON RESET [Dual Mono] • RELIC VOICE [Dual Mono] • DUST DETAIL [Dual Mono] • BODY RECOVERY [Dual Mono] • AIR SCRIPT [Dual Mono] • FORENSIC LENS [Dual Mono] • TEMPLE MEMORY [Dual Mono] • FULL EXCAVATION FIELD [Dual Mono]

Meters and visualizers

INPUT / OUTPUT: Live pre/post peak. Use for bypass and level matching.

EXCAVATION: Low/deep recovery activity. Shows energy being uncovered by excavation.

RECOVERY: Recovered-source contribution. Shows how much repaired material is active.

HARMONIC: Extracted harmonic activity. Shows reconstructed tonal information.

FORENSIC: Forensic layer/gate activity. Shows the selective analysis path at work.

Observation Field: Combined four-process activity. A process summary, not a spectrum.

SERQET

RELEASE	FAMILY	PLACEMENT
v1.0.3	Creative Transform	Creative Transform

Creative sting and width processor with intensity, venom saturation, convergence focus, and output control.

Recommended use: width/creative secondary

Customer formats: AU, VST3

Exposed parameter surface

Parameter ID	Display name	Type
STING	Width Reach	Float
VENOM	Movement Trace	Float
FOCUS	Prism Focus	Float
OUTPUT	Output Master	Float
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

SERQET CANON WIDTH [Stereo] • SERQET VEIL MOTION [Stereo] • SERQET PRISM LENS [Stereo] • SERQET WIDE FIELD [Stereo] • SERQET BUS VEIL [Stereo] • SERQET CANON WIDTH [Mono] • SERQET VEIL MOTION [Mono] • SERQET PRISM LENS [Mono] • SERQET WIDE FIELD [Mono] • SERQET BUS VEIL [Mono] • SERQET CANON WIDTH [Dual Mono] • SERQET VEIL MOTION [Dual Mono] • SERQET PRISM LENS [Dual Mono] • SERQET WIDE FIELD [Dual Mono] • SERQET BUS VEIL [Dual Mono]

Meters and visualizers

RMS WIDTH: Input RMS feeding the width field. Shows source energy available for widening.

PRISM WIDTH: Measured side-field width. Higher values indicate a broader stereo prism.

OUTPUT FIELD: Post-process RMS energy. Use with RMS WIDTH for level context.

Prism visualizer: Width, motion, focus, and output state. The polygon is a spatial-state map, not a loudness target.

MASTERING CORE

Mastering preparation, balance, lift, authority, and containment

Prepare, balance, polish, lift when needed, and contain the final program.

Included products: ANKH, SPHYNX, MAAT, Horizon X, PLATINUM

Recommended route: Choose one preparation stage, one balance or field stage, then ANKH. Place SESHAT last as observation only.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

Shell canon: Mastering Core uses a silver preset-shell stripe and machined silver/chrome frame. PLATINUM is a primary Mastering Core product.

ANKH



Sacred optical leveler for late-stage compression, Ma'at limiting, attack, release, drive, ratio, stereo link, Flower luminosity, and final containment.

Preferred placement: Master Field. Use late in the mastering chain for macro field structure or final containment.

Core controls

- Gain Match
- RA Input
- Mix
- Sekhem Attack
- Ma'at Release
- Ptah Drive
- Ascension Ratio
- Amun Output
- Compress

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT LEVEL	Peak level entering ANKH	Use to verify healthy mastering-chain entry.
GAIN REDUCTION	Current optical/limiter attenuation	More fill means more level is being removed.
OUTPUT LEVEL	Peak level after containment	Compare with Input for level-fair decisions.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

SPHYNX



Mastering normalizer and calibrator that prepares input level, target, engine strength, normalization amount, mix, and output.

Preferred placement: Mix Bus. Use on the appropriate family bus, mix bus, or mastering chain with careful bypass matching.

Core controls

- Input
- Calibrate
- Normalize
- Engine
- Target
- Mix
- Output
- Gain Match

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT PEAK	Peak entering calibration	Confirms available headroom before normalization.
PROGRAM RMS	Average program energy	Use to understand body level, not final delivery loudness alone.
AUTO TRIM	Gain correction calculated by SPHYNX	Center is 0 dB; left cuts and right boosts.
OUTPUT PEAK	Peak after normalization	Verify headroom after calibration.
Crest / headroom	Peak-to-RMS and remaining space	Use together to avoid flattening transient structure.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

MAAT



Mastering balance processor for foundation and air, bandwidth, truth, architecture, phase, stereo link, saturation mode, and output.

Preferred placement: Mix Bus. Use on the appropriate family bus, mix bus, or mastering chain with careful bypass matching.

Core controls

- Foundation Boost
- Foundation Atten
- Foundation Frequency
- Air Boost
- Air Atten
- Bandwidth
- Balance
- Truth
- Architecture

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
TRUTH	Composite tonal/phase balance score	Higher values mean the current foundation/air balance is closer to the intended field.
INPUT / OUTPUT	Live pre/post level	Use for level matching.
FOUNDATION	Low-frequency contribution	Shows active foundation energy.
AIR	Upper-frequency contribution	Shows active air energy.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

Horizon X



Mastering finalizer with dawn/dusk states, volume, drive, maximizer, depth, clarity, gravity, pull, collapse, return, and blended Horizon/Event modes.

Preferred placement: Mix Bus. Use on the appropriate family bus, mix bus, or mastering chain with careful bypass matching.

Core controls

- Input
- Output
- Bypass
- RA Clip
- Gain Match
- Volume
- Drive
- Maximizer
- Depth

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
LIVE SIGNAL	Per-channel input RMS on a -60 to 0 dBFS scale	Shows program energy entering the finalizer.
FIELD STATE	Combined Horizon/Event processing state	A process-state visualization, not a delivery-loudness meter.
OUTPUT LEVEL	Post-finalizer level on a -60 to 0 dBFS scale	Use with LIVE SIGNAL for level-fair review.

Additional controls are mapped in the family technical manual.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

PLATINUM



Mastering authority processor using silver air, gold drive, copper body, iron glue, nickel focus, platinum authority, and final output.

Preferred placement: Mix Bus. Use on the appropriate family bus, mix bus, or mastering chain with careful bypass matching.

Core controls

- Gain Match
- AG Air
- AU Drive
- CU Body
- FE Glue
- NI Focus
- PT Authority
- Output

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Mastering Core Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 5 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\Phi/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

ANKH

RELEASE	FAMILY	PLACEMENT
v2.1.4	Mastering Core	Master Field

Sacred optical leveler for late-stage compression, Ma'at limiting, attack, release, drive, ratio, stereo link, Flower luminosity, and final containment.

Recommended use: final containment authority

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
gainmatch	Gain Match	Bool
inputDb	RA Input	Float
mix	Mix	Float
attack	Sekhem Attack	Float
release	Ma'at Release	Float
drive	Ptah Drive	Float
ascension	Ascension Ratio	Float
outputDb	Amun Output	Float
compress	Compress	Bool
limit_on	Limit	Bool
flower_of_life	Flower of Life	Bool
link	Stereo Link	Bool
bypass	Bypass	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

[Stereo] ESSENTIAL / Default • [Stereo] COLOR / Soft Optical • [Stereo] BUS / Life Compress • [Stereo] MASTER / Canon Ceiling • [Stereo] REPAIR / Transient Watch • [Stereo] UTILITY / Unity Reference • [Mono] ESSENTIAL / Default • [Mono] COLOR / Soft Optical • [Mono] BUS / Life Compress • [Mono] MASTER / Canon Ceiling • [Mono] REPAIR / Transient Watch • [Mono] UTILITY / Unity Reference • [Dual Mono] ESSENTIAL / Default • [Dual Mono] COLOR / Soft Optical • [Dual Mono] BUS / Life Compress • [Dual Mono] MASTER / Canon Ceiling • [Dual Mono] REPAIR / Transient Watch • [Dual Mono] UTILITY / Unity Reference

Meters and visualizers

INPUT LEVEL: Peak level entering ANKH. Use to verify healthy mastering-chain entry.

GAIN REDUCTION: Current optical/limiter attenuation. More fill means more level is being removed.

OUTPUT LEVEL: Peak level after containment. Compare with Input for level-fair decisions.

SPHYNX

RELEASE	FAMILY	PLACEMENT
v1.0.1	Mastering Core	Mix Bus

Mastering normalizer and calibrator that prepares input level, target, engine strength, normalization amount, mix, and output.

Recommended use: prepares material before field/finalization

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
INPUT	Input	Float
CALIBRATE	Calibrate	Float
NORMALIZE	Normalize	Float
ENGINE	Engine	Float
TARGET	Target	Float
MIX	Mix	Float
OUTPUT	Output	Float
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

SPHYNX CANON ALIGN [Stereo] • SPHYNX GENTLE CALIBRATE [Stereo] • SPHYNX TRANSLATION [Stereo] • SPHYNX DYNAMIC PRESERVE [Stereo] • SPHYNX MASTER ANCHOR [Stereo] • SPHYNX LEVEL MATCH [Stereo] • SPHYNX CANON ALIGN [Mono] • SPHYNX GENTLE CALIBRATE [Mono] • SPHYNX TRANSLATION [Mono] • SPHYNX DYNAMIC PRESERVE [Mono] • SPHYNX MASTER ANCHOR [Mono] • SPHYNX LEVEL MATCH [Mono] • SPHYNX CANON ALIGN [Dual Mono] • SPHYNX GENTLE CALIBRATE [Dual Mono] • SPHYNX TRANSLATION [Dual Mono] • SPHYNX DYNAMIC PRESERVE [Dual Mono] • SPHYNX MASTER ANCHOR [Dual Mono] • SPHYNX LEVEL MATCH [Dual Mono]

Meters and visualizers

INPUT PEAK: Peak entering calibration. Confirms available headroom before normalization.

PROGRAM RMS: Average program energy. Use to understand body level, not final delivery loudness alone.

AUTO TRIM: Gain correction calculated by SPHYNX. Center is 0 dB; left cuts and right boosts.

OUTPUT PEAK: Peak after normalization. Verify headroom after calibration.

Crest / headroom: Peak-to-RMS and remaining space. Use together to avoid flattening transient structure.

Maat

RELEASE	FAMILY	PLACEMENT
v1.0.1	Mastering Core	Mix Bus

Mastering balance processor for foundation and air, bandwidth, truth, architecture, phase, stereo link, saturation mode, and output.

Recommended use: mastering balance/justice stage with secondary observation/advisor dot

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
FOUNDATION_BOOST	Foundation Boost	Float
FOUNDATION_ATTEN	Foundation Atten	Float
FOUNDATION_FREQ	Foundation Frequency	Float
AIR_BOOST	Air Boost	Float
AIR_ATTEN	Air Atten	Float
BANDWIDTH	Bandwidth	Float
BALANCE	Balance	Float
TRUTH	Truth	Float
ARCHITECTURE	Architecture	Float
OUTPUT	Output	Float
POWER	Power	Bool
gainmatch	Gain Match	Bool
PHASE_INVERT	Phase Invert	Bool
FOUNDATION_WEIGHT_ON	Foundation Weight On	Bool
RUMBLE_HPF	Rumble HPF	Float
STEREO_LINK_MODE	Stereo Link Mode	Float
SATURATION	Saturation Tube Tape	Float

Factory starting points

MAAT SWEET SPOT [Stereo] • TRUTH ALIGN [Stereo] • FOUNDATION WEIGHT [Stereo] • AIR SHEEN [Stereo] • LOW END MERCY [Stereo] • BRIGHTNESS MERCY [Stereo] • MIX SEAT [Stereo] • WARM BALANCE [Stereo] • MASTER READY [Stereo] • CHAMBER POLISH [Stereo] • GENTLE FINISH [Stereo] • BREATH ROOT [Stereo] • CANON GROUND [Stereo] • FULL RESET [Stereo] • MAAT SWEET SPOT [Mono] • TRUTH ALIGN [Mono] • FOUNDATION WEIGHT [Mono] • AIR SHEEN [Mono] • LOW END MERCY [Mono] • BRIGHTNESS MERCY [Mono] • MIX SEAT [Mono] • WARM BALANCE [Mono] • MASTER READY [Mono] • CHAMBER POLISH [Mono] • GENTLE FINISH [Mono] • BREATH ROOT [Mono] • CANON GROUND [Mono] • FULL RESET [Mono] • MAAT SWEET SPOT [Dual Mono] • TRUTH ALIGN [Dual Mono] • FOUNDATION WEIGHT [Dual Mono] • AIR SHEEN [Dual Mono] • LOW END MERCY [Dual Mono] • BRIGHTNESS MERCY [Dual Mono] • MIX SEAT [Dual Mono] • WARM BALANCE [Dual Mono] • MASTER READY [Dual Mono] • CHAMBER POLISH [Dual Mono] • GENTLE FINISH [Dual Mono] • BREATH ROOT [Dual Mono] • CANON GROUND [Dual Mono] • FULL RESET [Dual Mono]

Meters and visualizers

TRUTH: Composite tonal/phase balance score. Higher values mean the current foundation/air balance is closer to the intended field.

INPUT / OUTPUT: Live pre/post level. Use for level matching.

FOUNDATION: Low-frequency contribution. Shows active foundation energy.

AIR: Upper-frequency contribution. Shows active air energy.

HORIZON X

RELEASE	FAMILY	PLACEMENT
v1.0.1	Mastering Core	Mix Bus

Mastering finalizer with dawn/dusk states, volume, drive, maximizer, depth, clarity, gravity, pull, collapse, return, and blended Horizon/Event modes.

Recommended use: mastering finalizer and controlled lift

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
input	Input	Float
output	Output	Float
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
bypass	Bypass	Bool
clip	RA Clip	Bool
gainmatch	Gain Match	Bool
volume	Volume	Factory
drive	Drive	Factory
maximizer	Maximizer	Factory
depth	Depth	Factory
clarity	Clarity	Factory
mix	Mix	Factory
gravity	Gravity	Factory
pull	Pull	Factory
collapse	Collapse	Factory
return	Return	Factory
eventBlend	Event Blend	Factory
horizonBlend	Horizon Blend	Factory
field	Field Of Life	Factory
mode	Mode	Factory

Factory starting points

[FINALIZER] Canon Open • [CLARITY] Source True • [DEPTH] Root Anchor • [EVENT] Motion Rise • [MAXIMIZER] Expansion • [FINALIZER] Full Field • [UTILITY] Canon Reset

Meters and visualizers

LIVE SIGNAL: Per-channel input RMS on a -60 to 0 dBFS scale. Shows program energy entering the finalizer.

FIELD STATE: Combined Horizon/Event processing state. A process-state visualization, not a delivery-loudness meter.

OUTPUT LEVEL: Post-finalizer level on a -60 to 0 dBFS scale. Use with LIVE SIGNAL for level-fair review.

PLATINUM

RELEASE	FAMILY	PLACEMENT
v1.0.1	Mastering Core	Mix Bus

Mastering authority processor using silver air, gold drive, copper body, iron glue, nickel focus, platinum authority, and final output.

Recommended use: master bus authority; secondary red-orange color/amp/tape support

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice
gainmatch	Gain Match	Bool
AG_AIR	AG Air	Factory
AU_DRIVE	AU Drive	Factory
CU_BODY	CU Body	Factory
FE_GLUE	FE Glue	Factory
NI_FOCUS	NI Focus	Factory
PT_AUTHORITY	PT Authority	Factory
OUTPUT	Output	Factory

Factory starting points

PLATINUM CANON RESET • PLATINUM AIR CROWN • PLATINUM BODY THRONE • PLATINUM GLUE FIELD • PLATINUM FOCUS CUT • PLATINUM DUAL AUTH • PLATINUM FULL RANGE

MASTER FIELD

Macro master-field structure and finish


Organize foundation, architecture, dimension, tonal axis, and finish at the macro level.

Included products: IMHOTEP

Recommended route: Imhotep belongs late in the clean mastering route before ANKH containment.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

IMHOTEP

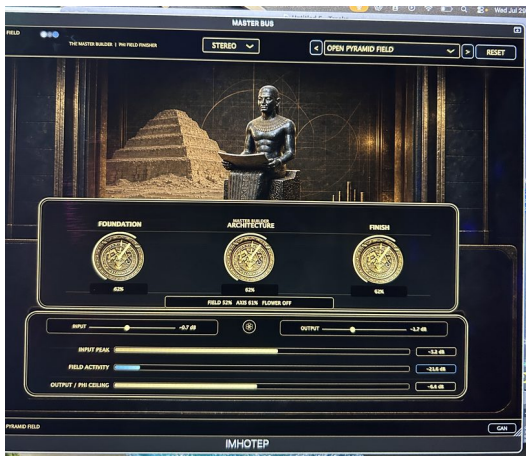

Macro master-field builder for foundation, architecture, dimension, finish, tonal axis, I/O trim, and Flower of Life dispersal.

Preferred placement: Master Field. Use late in the mastering chain for macro field structure or final containment.

Core controls

- Flower of Life Dispersal
- Gain Match
- Foundation
- Architecture
- Dimension
- Finish
- Tonal Axis
- Input Trim
- Output Trim

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
INPUT PEAK	Peak entering the master builder	Confirms headroom before macro shaping.
FIELD ACTIVITY	Combined foundation, architecture, dimension, and finish activity	Shows how strongly the macro field is engaged.
OUTPUT / PHI CEILING	Output level relative to containment	Persistent maximum readings mean less available headroom.

Current factory programs detected

MASTER BUILDER CANON; CLEAN PRINT FRAME; FOUNDATION MONUMENT; VOCAL MASTER ORDER; DENSE MIX REBUILD; OPEN PYRAMID FIELD; TRANSIENT STONEWORK; GREAT PYRAMID

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Master Field Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 1 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

IMHOTEP

RELEASE	FAMILY	PLACEMENT
v1.0.1	Master Field	Master Field

Macro master-field builder for foundation, architecture, dimension, finish, tonal axis, I/O trim, and Flower of Life dispersal.

Recommended use: macro master-field structure and finish

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
dispersal	Flower of Life Dispersal	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
foundation	Foundation	Factory
architecture	Architecture	Factory
dimension	Dimension	Factory
finish	Finish	Factory
tilt	Tonal Axis	Factory
input	Input Trim	Factory
output	Output Trim	Factory

Factory starting points

MASTER BUILDER CANON • CLEAN PRINT FRAME • FOUNDATION MONUMENT • VOCAL MASTER ORDER • DENSE MIX REBUILD • OPEN PYRAMID FIELD • TRANSIENT STONework • GREAT PYRAMID

Meters and visualizers

INPUT PEAK: Peak entering the master builder. Confirms headroom before macro shaping.

FIELD ACTIVITY: Combined foundation, architecture, dimension, and finish activity. Shows how strongly the macro field is engaged.

OUTPUT / PHI CEILING: Output level relative to containment. Persistent maximum readings mean less available headroom.

UTILITY OBSERVATION

Observation, metering, and print confirmation


Observe final behavior without becoming a tone-changing stage.

Included products: SESHAT

Recommended route: Place Seshat at the end of the analysis and print lane.

Family preset law: Factory presets describe musical intent and expose the useful range of the plugin. They do not change protected Input, Mix, Output, Power, or final ceiling controls unless the plugin's explicit canon requires it. Cathedral and SacredVerb retain their protected preset behavior. Preset changes must remain clickless.

SESHAT

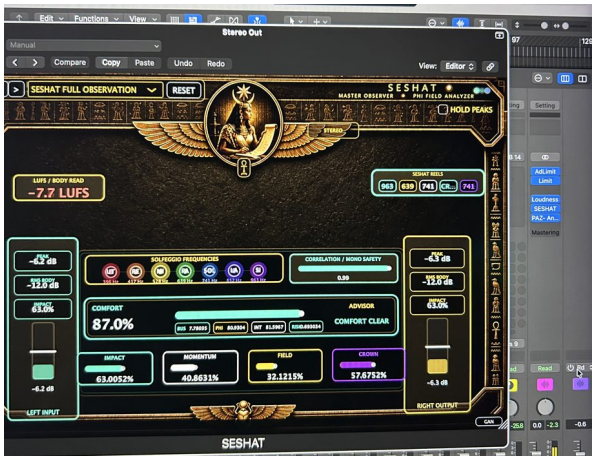

Final observation and analysis lane with restored spacious panel layout and optional peak hold; Full Observation shows the complete meter set, while each named preset shows only the meter or panel relevant to that view. It is not a tone-shaping processor.

Preferred placement: Observation. Place last in the analysis and print lane for final observation and confirmation.

Core controls

- Hold Peaks
- Gain Match

Full Observation displays every analysis panel. Each named observation preset displays only the meter or panel required by that preset, restoring the focused older workflow and keeping unused meters off screen.

SESHAT PRINT SCAN is a read-only print-confirmation view: it does not process or change the audio. Read the five SESHAT REELS from left to right as Impact, Field, Momentum, Alignment, and Moon. Each reel advances through the symbolic 396, 417, 528, 639, 741, 852, 963, PHI, CROWN, and MOON scale as that observation rises; those reel numbers are ranks, not frequency readings.

Meter and visualizer guide

These displays observe audio or processing state. They do not move controls unless the product description explicitly says otherwise.

Display	What it measures	How to read it
LUFS / BODY READ	Short-window perceptual loudness	Use for loudness context, not as the only delivery decision.
LEFT INPUT / RIGHT OUTPUT	Peak, RMS body, impact, and held peak	Shows entry and exit behavior; Hold Peaks retains the highest marker.
CORRELATION / MONO SAFETY	Left/right phase relationship	+1 is coherent, 0 is wide/uncorrelated, negative values risk cancellation.
SOLFEGGIO FREQUENCIES	Energy near the seven displayed resonant bands	Shows tonal concentration around 396 through 963 Hz.
IMPACT	Fast peak relative to the canon ceiling	Higher means stronger transient force.
FIELD	Body RMS plus stereo-side pressure	Higher means denser sustained spatial load.
MOMENTUM	Change in impact plus transient shape	Higher means faster, more active movement.
PHI ALIGNMENT	Proximity to DIH golden-ratio checkpoints	Higher means field pressure sits nearer a PHI reference point.

Display	What it measures	How to read it
INTEGRITY	Similarity between impact and field pressure	Higher means transients and body remain proportionate.
CROWN	Weighted combined observation score	Summarizes impact, field, momentum, alignment, and integrity.
MOON	Transient shape plus momentum	Higher means stronger forward or launching behavior.
HF RISK	High-frequency energy imbalance	Higher values warn of potential harshness.
PHASE RISK	Correlation and side-energy danger	Higher values warn of mono cancellation.
LEVEL RISK	Peak/ceiling and transient danger	Higher values warn of insufficient headroom.
COMFORT	Alignment, integrity, and low-risk balance	Higher values indicate a more stable field.
ADVISOR	Combined risk recommendation	A diagnostic suggestion; it does not change audio.
REEL 1 - Impact	Transient-force rank	First reel; 396 is low and MOON is highest.
REEL 2 - Field	Sustained spatial-pressure rank	Second reel; numbers are symbolic stages, not Hz.
REEL 3 - Momentum	Motion/transient-change rank	Third reel; higher stages mean more movement.
REEL 4 - Alignment	PHI-alignment rank	Fourth reel; higher stages mean closer alignment.
REEL 5 - Moon	Forward-propulsion rank	Fifth reel; higher stages mean stronger launch.

Working method

Load a purpose-matched preset or begin from reset, bypass-match the result, then move one control at a time. Presets are starting points; protected gain and final output remain user decisions unless the plugin canon explicitly states otherwise.

DIHWorld Audio

Utility / Observation Technical Manual

Current product versions, controls, presets, meters, and placement

DIHWorld Audio builds connected production systems around the Imhotep 369 Engine—a Triadic Harmonic Lattice—and Ma'at 357 / MomentumBend. Phi-derived control and the canonical Phi/2 ceiling preserve movement, balance, and musical intent without brickwall limiting.

This edition documents 1 current products. Release numbers are taken from the installed DIHWorld Audio Audio Units verified on 2026-08-24; they are product versions, not a shared catalog version.

Canon reference: normalized $\text{Phi}/2 = 0.809016994$. MomentumBend shapes motion and containment; the ceiling is a canonical boundary, not permission for hard limiting.

Operating law: begin from reset or a purpose-matched preset, compare at equal loudness, change one system at a time, and judge the result in the full arrangement.

SESHAT

RELEASE	FAMILY	PLACEMENT
v1.0.3	Utility / Observation	Observation

Final observation and analysis lane with restored spacious panel layout and optional peak hold; Full Observation shows the complete meter set, while each named preset shows only the meter or panel relevant to that view. It is not a tone-shaping processor.

Recommended use: observation-first advisor/meter; translates phi score into guidance without altering audio

Customer formats: AU, VST3, Standalone

Exposed parameter surface

Parameter ID	Display name	Type
hold_peaks	Hold Peaks	Bool
gainmatch	Gain Match	Bool
channelmode	Channel Mode	Choice
dualmonolink	Dual Mono Link	Choice

Factory starting points

SESHAT FULL OBSERVATION • SESHAT PEAK / TRUE PEAK • SESHAT TRANSIENT IMPACT • SESHAT FIELD PRESSURE • SESHAT MOMENTUM DRIFT • SESHAT PHI ALIGNMENT • SESHAT INTEGRITY GRID • SESHAT CROWN / MOONSHOT • SESHAT LUFS BODY • SESHAT CORRELATION • SESHAT SOLFEGGIO ENERGY • SESHAT TRANSIENT HISTORY • SESHAT SIDE PRESSURE • SESHAT PRINT SCAN

Meters and visualizers

- LUFS / BODY READ:** Short-window perceptual loudness. Use for loudness context, not as the only delivery decision.
- LEFT INPUT / RIGHT OUTPUT:** Peak, RMS body, impact, and held peak. Shows entry and exit behavior; Hold Peaks retains the highest marker.
- CORRELATION / MONO SAFETY:** Left/right phase relationship. +1 is coherent, 0 is wide/uncorrelated, negative values risk cancellation.
- SOLFEGGIO FREQUENCIES:** Energy near the seven displayed resonant bands. Shows tonal concentration around 396 through 963 Hz.
- IMPACT:** Fast peak relative to the canon ceiling. Higher means stronger transient force.
- FIELD:** Body RMS plus stereo-side pressure. Higher means denser sustained spatial load.
- MOMENTUM:** Change in impact plus transient shape. Higher means faster, more active movement.
- PHI ALIGNMENT:** Proximity to DIH golden-ratio checkpoints. Higher means field pressure sits nearer a PHI reference point.
- INTEGRITY:** Similarity between impact and field pressure. Higher means transients and body remain proportionate.
- CROWN:** Weighted combined observation score. Summarizes impact, field, momentum, alignment, and integrity.
- MOON:** Transient shape plus momentum. Higher means stronger forward or launching behavior.
- HF RISK:** High-frequency energy imbalance. Higher values warn of potential harshness.
- PHASE RISK:** Correlation and side-energy danger. Higher values warn of mono cancellation.
- LEVEL RISK:** Peak/ceiling and transient danger. Higher values warn of insufficient headroom.
- COMFORT:** Alignment, integrity, and low-risk balance. Higher values indicate a more stable field.
- ADVISOR:** Combined risk recommendation. A diagnostic suggestion; it does not change audio.
- REEL 1 - Impact:** Transient-force rank. First reel; 396 is low and MOON is highest.
- REEL 2 - Field:** Sustained spatial-pressure rank. Second reel; numbers are symbolic stages, not Hz.
- REEL 3 - Momentum:** Motion/transient-change rank. Third reel; higher stages mean more movement.
- REEL 4 - Alignment:** PHI-alignment rank. Fourth reel; higher stages mean closer alignment.
- REEL 5 - Moon:** Forward-propulsion rank. Fifth reel; higher stages mean stronger launch.