



---

# Evaluating Resiliency and Performance of Networked Satellite Systems

Evaluierung der Resilienz und Leistung von Vernetzten  
Satelliten Systemen

---

**Robert Alexander Uwe Richter**

Universitätsmasterarbeit  
zur Erlangung des akademischen Grades

Master of Science  
(M. Sc.)

im Studiengang  
IT Systems Engineering

eingereicht am 11. November 2024 am  
Fachgebiet Data-Intensive Internet Computing der  
Digital-Engineering-Fakultät  
der Universität Potsdam

**Gutachter**

Prof. Dr. Vaibhav Bajpai  
Prof. Dr. Tilmann Rabl

**Betreuer**

Dr. Vasilis Ververis



# Abstract

---



# Acknowledgments

---



# Contents

---

<b>Abstract</b>	<b>iii</b>
<b>Acknowledgments</b>	<b>v</b>
<b>Contents</b>	<b>vii</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Background</b>	<b>3</b>
2.1 Satellite Communication Explained . . . . .	3
2.1.1 Bent-Pipes . . . . .	5
2.2 Usecase of Networked Satellite Systems . . . . .	5
2.3 Satellite Network Simulators . . . . .	5
2.3.1 StarPerf . . . . .	6
2.3.2 Hypatia . . . . .	6
2.3.3 Problems of Network Simulators . . . . .	6
2.4 Latency over whole Data Range . . . . .	7
2.5 Latency and Packet Loss Correlation . . . . .	8
2.5.1 Correlation in Single Years . . . . .	8
2.6 Traceroute Analysis . . . . .	9
2.6.1 Privacy Concerns in Traceroute Data . . . . .	12
<b>3 Conclusions &amp; Outlook</b>	<b>15</b>
<b>Bibliography</b>	<b>19</b>
<b>Declaration of Authorship</b>	<b>21</b>









## 2.1 Satellite Communication Explained

A satellite communication system has the target to send packets from a sender connected via a networked satellite ISP to a receiver connected to a terrestrial ISP.

The structure is illustrated in Figure 2.1. Initially, there is a sender connected to a satellite antenna provided by the specific networked satellite ISP. The satellite antenna is also colloquially called "dishy". From the senders' perspective, there is no different use compared to a traditional terrestrial internet connection. The antenna will send packets to a satellite that might either forward the packets to another satellite or directly send them to a nearby Ground Station (GS) (also called Point of Presence (PoP)). The GS serves as an "entry point" to the terrestrial internet. A GS can forward packets through wired connections, so they will reach the receiver eventually.

The technology of communicating with satellites will not be explained here. Amongst others, it is described by Pratt et al. [PA19].


Theoretically, the propagation of data in satellite communication happens at the speed of light. However, the latencies still vary a lot depending on the choice of networked satellite ISP. Each of them provides a different satellite constellation. One of the dominating factors is the altitude of the constellation. The higher the satellites are positioned, the more region a single satellite covers. Therefore, fewer satellites are required to cover a specific region, which reduces costs.

Overall, one differentiates between Geostationary Orbit (GEO) (35'786 km altitude), Medium-Earth Orbit (MEO) (2'000 - 35'786 km altitude), and Low-Earth Orbit (LEO) (< 2'000 km altitude) satellite constellations. One can see that this has a significant impact on the latency.

$$\frac{2 \cdot 35'786 \text{ km}}{300'000 \frac{\text{km}}{\text{s}}} \approx 0.240 \text{ s} \quad (2.1)$$

$$\frac{2 \cdot 550 \text{ km}}{300'000 \frac{\text{km}}{\text{s}}} \approx 0.004 \text{ s} \quad (2.2)$$

A GEO constellation has a minimum latency of around 240 ms, as shown in Equation 2.1, assuming a packet needs to reach a satellite in GEO altitude and get

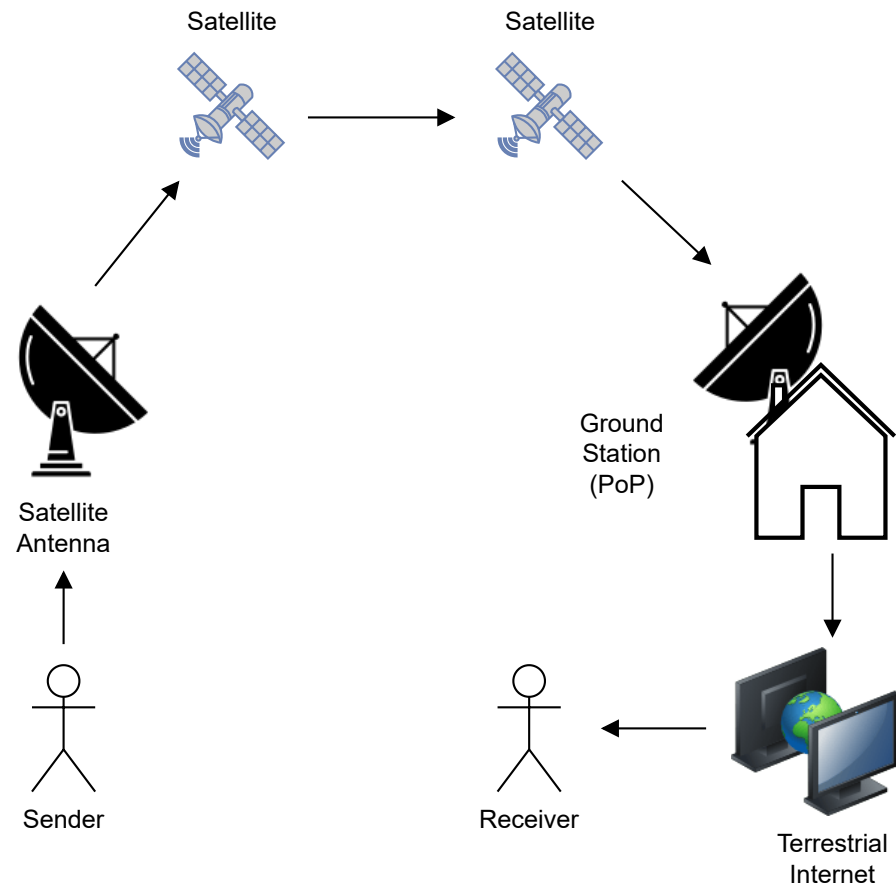

**Figure 2.1:** The structure of satellite communication.

back to the earth's surface. On the other hand, Equation 2.2 shows that a **LEO** satellite constellation at an altitude of 550 km (like in the case of Starlink) has a minimum latency of only 4 ms. Research has shown that even in practice **LEO** constellations are superior compared to **GEO** constellations, especially in terms of latency [Ram+23; Seg20]. However, terrestrial internet performed better compared to **LEO** constellations [Ma+23; Moh+24].

### 2.1.1 Bent-Pipes

Ground stations are required for satellites to route packets to a receiver. Depending on the location of the sender, the first satellite on the route might have to forward packets to a different satellite (using an Inter-Satellite Link (ISL)) in order to reach a region with a GS. Such a route is called "Bent-Pipe". Depending on the number of satellites on the route, it is called an "n-hop-bent-pipe". If there is only a single satellite involved, it is a 1-hop-bent-pipe.

It is in question how the bent-pipe influences the performance and behavior of a networked satellite system. Research still discusses whether bent-pipes provide a positive ([Hau+20]) or negative ([Moh+24]) impact.

## 2.2 Usecase of Networked Satellite Systems

Networked satellite systems are around for quite a while since humanity possesses both satellites and the internet. The internet has become a key-technology for communication in nearly every aspect of the society. Having no access to the internet will result in significant drawbacks. However, internet requires a complex infrastructure with high cost. Especially in distant location with little population, building such an infrastructure will not be affordable.

Therefore, people came up with the idea of using satellites to communicate with distant locations. In theory, only three satellites are required to communicate with any point on earth. The cost of providing this number of satellites is much less compared to the costs of providing a terrestrial network infrastructure with similar accessibility.

There is one group of people that will not receive terrestrial network infrastructure: people on boats and planes. While there is cellular internet access, it is not offered on the sea and in the high sky. Therefore, the only option of internet access is satellite internet, which is served all over the world.

Additionally, networked satellite systems are much more resilient to physical influences like earthquakes, terrorist attacks, or storms [Ste+24]. Terrestrial infrastructure can be destroyed easily and therefore especially governments contracted networked satellite system ISPs.

## 2.3 Satellite Network Simulators

Amongst concrete measurements, one can also simulate networked satellite systems. This became increasingly interesting when the constellations were composed of

many more satellites compared to traditional [GEO](#) satellite constellations. For example, [LEO](#) constellations comprise hundreds to thousands of satellites, which implies a highly complex system.

Sadly, measurements are often highly difficult as they either require acquiring satellite hardware or recruiting users that already possess the required hardware. Simulation would tackle both problems, while maintaining low cost. To the best of our knowledge, we found two networked satellite simulators for [LEO](#) constellations.

### 2.3.1 StarPerf

*StarPerf*<sup>1</sup> [[LLL20](#)] is a mega-constellation performance simulation platform. It specifically aims at measuring the impact of the movements of satellites. Also, it measures performance in different areas. However, setting it up required, amongst others, Matlab and STK. This made the project difficult and expensive to test. Therefore, we did not advance in trying out *StarPerf*.

### 2.3.2 Hypatia


*Hypatia*<sup>2</sup> [[Kas+20](#)] is another LEO network simulation framework, released in 2020 just like *StarPerf*. It aims at a low-level simulation on packet-level and visualizes the data. Unlike *StarPerf*, it only requires a Python3 installation. Sadly, running simulations with Hypatia is highly complex as it requires the user to define, amongst others, the satellites, ground stations, and points of presence. This information is hardly available, which renders the simulations barely usable.

### 2.3.3 Problems of Network Simulators

To the best of our knowledge, research has stopped relying on simulators since 2020. There is proper hardware available that allows testing in the real world. Testing in the real world has the advantage as it takes more variables into account. Crucial factors for the performance of a networked satellite system are the weather, congestion, solar magnetic storms, material failure, and many more. Those cannot be ideally tested with simulations and will eventually produce wrong results. Therefore, for further research of this thesis, simulations will not be used.

<sup>1</sup> [SpaceNetLab/StarPerf\\_Simulator](#)

<sup>2</sup> [snkas/hypatia](#)

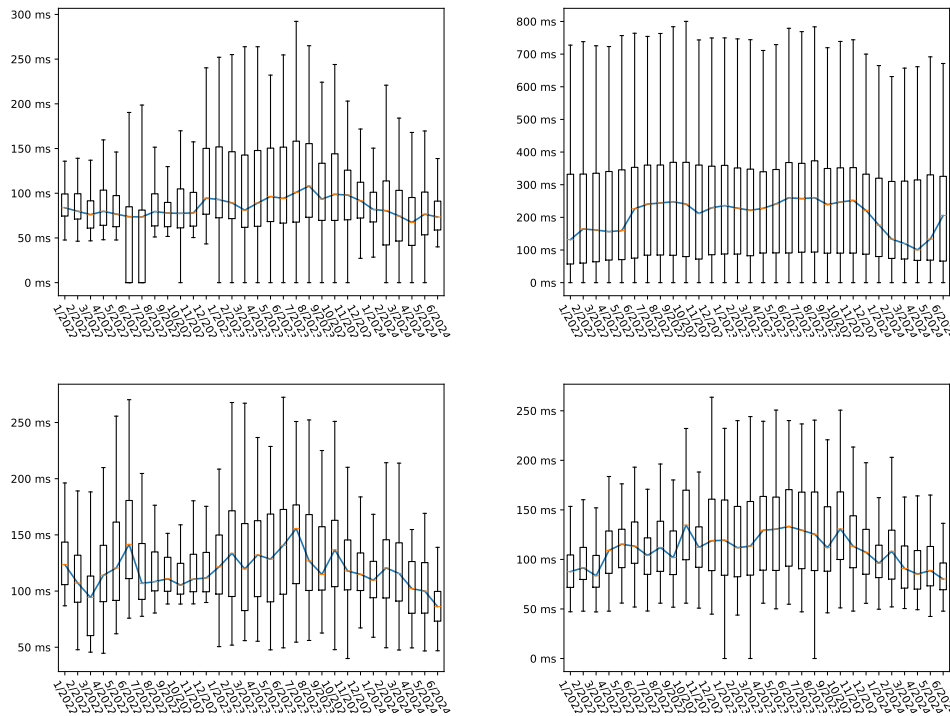

**Figure 2.2:** Latency History for Germany, the USA, Poland, and Austria in the period 01/2022 to 06/2024

## 2.4 Latency over whole Data Range

The performance of Starlink latency has changed over time. We looked at RIPE Atlas TLS data that has been collected by built-in measurements (i.e., measurements that are continuously running in each individual probe in a fixed time interval).

Figure 2.2 shows the history of median latencies from January 2022 until June 2024 for Germany, the United States, Poland, and Austria<sup>3</sup>.

One can see that the median latency is usually at around 100 to 150 ms for most countries. However, in 2022 the latency was lower compared to 2023. Most of the countries observed show an upwards trend in the late months of 2022 (most of the time in December). In the late months of 2023, the latency starts to decline again. In the last couple of months, we observe an increase in latency once again.

We assume the reason for a rise of latency in the congestion of the Starlink network. In the recent time Starlink extended their availability across more countries

<sup>3</sup> These countries were chosen due to the completeness of data

allowing more users, especially those in countries with less networking infrastructure, to access the network. On the contrary, Starlink also launched more satellites (2022: 3481, 2024: 5700+) and added more PoP which likely reduces the congestion.

However, countries still vary a lot in performance. This is due to various different factors, e.g., weather, ground station infrastructure,

## 2.5 Latency and Packet Loss Correlation

Latency and packet loss are closely bonded. An increase of packet loss might yield an increase in latency and vice-versa. For the data presented in the previous chapter, we looked at the interval from January 2022 to June 2024. For each month, we used the overall packet loss and the median latency. We used a Pearson, Kendall, and Spearman correlation to determine possible correlations between latency and packet loss. The results are shown in Table 2.1.

In a correlation, a value close to 1 or -1 shows a strong correlation. Values close to 0 do not appear to be correlated. In the results, some countries show a correlation, e.g., France or Czechia. Other countries, e.g., Canada or Australia do not show correlating values. As the number of countries with a stronger and those with a weaker correlation is equally distributed, we cannot conclude a correlation between latency and packet loss in Starlink networks.

### 2.5.1 Correlation in Single Years

Analyzing single years give a better understanding of the development of correlation in the year 2022, 2023, and 2024 (until June). The Tables 2.2, 2.3, and 2.4 show the individual correlation values for the year. There are only countries displayed, where a correlation value could be calculated.

In 2022, there was little correlation at all. Likely, other factors like satellite infrastructure or presence of PoP might have been more contributing to performance issues. 2023 showed a stronger correlation compared to 2022. We assume that this is due to a more stable network. The interaction between packet loss and latency might have become more significant. In 2024, the correlation decreased once again slightly. This behavior is similar to the one observed for the latencies in recent months. A possible explanation for that is a growing user base of Starlink leading to a congestion of the system. It has to be noted that the growth of number of satellites did not increase from 2023 to 2024 as much as it did from 2022 to 2023, which might be a cause of the issue.



**Table 2.1:** Packet Loss and Latency Correlation

Country January 2022 - June 2024	Pearson Correlation	Kendall Correlation	Spearman Correlation
Falkland Islands (Malvinas)	0.447641	0.595238	0.624282
Réunion	0.636822	0.716314	0.847658
Kiribati	0.819596	0.794851	0.801966
Canada	-0.090981	0.218391	0.280534
Poland	0.093155	-0.025287	-0.073637
Haiti	0.383601	0.670768	0.844964
Spain	-0.323940	-0.163650	-0.179434
Czechia	0.700248	0.730392	0.806351
United States	-0.556997	-0.425287	-0.610234
France	0.893576	0.664368	0.840267
Italy	-0.073752	0.181609	0.293882
United Kingdom	-0.238013	-0.227586	-0.279644
Honduras	0.415387	0.410256	0.575585
Australia	-0.025590	0.013841	0.035834
Netherlands	0.190923	0.055364	0.111952
Greece	0.249727	0.496864	0.668590
Sweden	0.678500	0.726984	0.896199
Austria	0.054429	0.039080	0.073192
Belgium	-0.082786	-0.029885	-0.031368
Philippines	0.254523	0.460118	0.676049
Virgin Islands, U.S.	0.712898	0.706384	0.878571
Germany	-0.787348	-0.549425	-0.753059

## 2.6 Traceroute Analysis

Looking at traceroute results, we can make conclusions about the routing behavior of Starlink network devices. In the data we gathered more than forty million traceroute measurements. Those include primarily built-in measurements from RIPE Atlas probes to *\*.root-servers.net* for Starlink probes (Autonomous System Number (ASN) 14593).

**Table 2.2:** Packet Loss and Latency Correlation in 2022

Country 2022	Pearson Correlation	Kendall Correlation	Spearman Correlation
Canada	0.478988	0.272727	0.307692
Poland	0.601734	0.303030	0.342657
Spain	-0.286931	-0.053571	-0.037594
United States	-0.241717	-0.212121	-0.363636
France	0.177126	-0.060606	-0.083916
Italy	0.646487	0.484848	0.587413
United Kingdom	0.514397	0.363636	0.496503
Honduras	0.208592	-0.333333	-0.426573
Australia	0.870466	0.325669	0.450715
Netherlands	0.159295	-0.106873	-0.164624
Greece	0.811845	0.836660	0.853766
Austria	0.013609	-0.060606	-0.146853
Belgium	-0.283806	-0.242424	-0.272727
Germany	-0.663075	-0.303030	-0.517483


## Routing Behavior

First, we found that the satellite hops are likely invisible to the traceroute. We conclude that as there are no hops visible above water, even for probes located in remote regions, e.g., Kiribati in the Pacific Ocean. In Figure 2.3, one can see a visualization of a traceroute result from Kiribati to *f.root-servers.net*. One can see that the first visible hop is located in New Zealand or an island to the north of New Zealand. However, if satellites were visible, we'd be able to observe more satellites.

Coming from the first insight, we can also conclude that Inter-Satellite Links (ISLs) are enabled. If they were not, we would likely not be able to see a successful traceroute from Kiribati to a location. The next closest known PoP is on Hawaii. However, the distance between both is 4000 km, which is more than a single satellite can cover. Aside from that, we do not observe the usage of the PoP in Hawaii, but in more distant locations, which just strengthens the argument. Therefore, we conclude that ISLs are enabled. This is special interest, as it was not clear in recent research [Hau+20].

**Table 2.3:** Packet Loss and Latency Correlation in 2023

Country 2023	Pearson Correlation	Kendall Correlation	Spearman Correlation
Falkland Islands (Malvinas)	0.364389	0.466667	0.518072
Réunion	0.587427	0.467801	0.592125
Canada	0.370590	0.363636	0.608392
Poland	-0.261476	-0.090909	-0.216783
Haiti	0.757392	0.390673	0.529108
Spain	-0.413832	-0.160714	-0.218045
Czechia	0.415844	0.383333	0.458333
United States	-0.302660	-0.242424	-0.251748
France	0.779247	0.666667	0.818182
Italy	-0.568765	-0.272727	-0.412587
United Kingdom	-0.812772	-0.606061	-0.748252
Honduras	0.343476	0.516667	0.617754
Australia	-0.578546	-0.121212	-0.258741
Netherlands	0.212359	0.181818	0.314685
Greece	-0.268072	0.212121	0.195804
Sweden	0.515385	0.533333	0.717391
Austria	-0.294406	-0.121212	-0.125874
Belgium	0.441123	0.454545	0.573427
Philippines	-0.196523	-0.030303	-0.034965
Virgin Islands, U.S.	0.553108	0.578196	0.783080
Germany	-0.620018	-0.424242	-0.622378

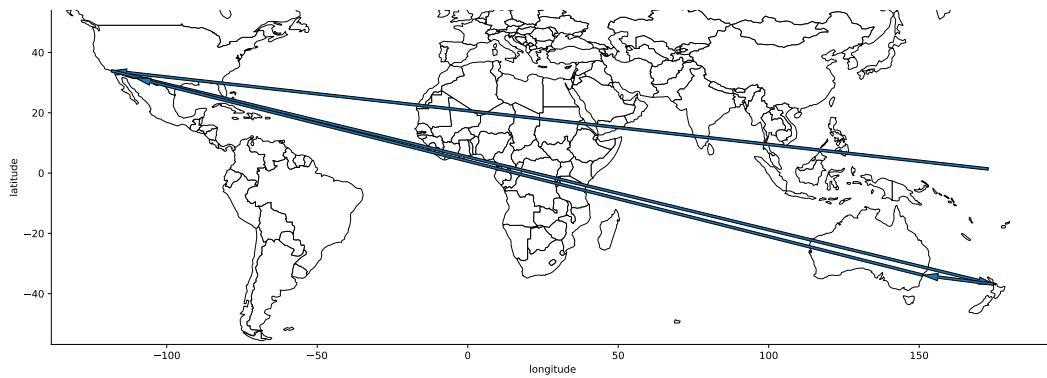**Figure 2.3:** Visualization of a Traceroute from Kiribati

**Table 2.4:** Packet Loss and Latency Correlation in 2024

Country 2024	Pearson Correlation	Kendall Correlation	Spearman Correlation
Réunion	0.301680	-0.066667	-0.085714
Kiribati	0.744916	0.673575	0.718421
Canada	-0.003851	-0.600000	-0.771429
Poland	0.239930	0.333333	0.371429
Haiti	0.376160	0.200000	0.257143
Spain	-0.044513	-0.333333	-0.142857
United States	-0.529555	-0.600000	-0.771429
France	0.418669	0.200000	0.257143
Italy	-0.600898	-0.866667	-0.942857
United Kingdom	0.243811	0.333333	0.428571
Honduras	0.431954	0.333333	0.542857
Australia	-0.155578	-0.066667	-0.085714
Netherlands	0.433624	0.466667	0.542857
Greece	-0.813812	-0.466667	-0.600000
Sweden	0.280194	0.066667	0.085714
Austria	0.915449	0.466667	0.600000
Belgium	0.428515	0.333333	0.371429
Philippines	-0.920833	-0.466667	-0.428571
Virgin Islands, U.S.	-0.450938	-0.333333	-0.428571
Germany	-0.603772	-0.333333	-0.485714

### 2.6.1 Privacy Concerns in Traceroute Data

One of the most important responsibilities of an Internet Service Provider (ISP) is to ensure the privacy of its users. This also includes to route traffic only in trusted countries. In the case of Starlink, we were able to observe a different behavior. We looked at a slice of the built-in traceroute measurements from German Starlink probes and analyzed their most common targets. We filtered for anycasted servers (e.g., \*.root-servers.net) and bogon IPs (i.e., IPs that cannot be associated with metadata).

In Table 2.5, the top twenty most frequent hits of IP addresses are shown. The IP addresses are joined with data from IPInfo. As traffic goes from a German probe to an anycasted server, located in Germany, one would expect little traffic outside Germany, and none outside Europe. The top five IP addresses are located within

**Table 2.5:** IP Hitlist for Built-In Traceroute Measurements

Hits	City	Country	Organization	IP Address
10634	Frankfurt am Main	Germany	AS1299	62.115.37.20
8202	Offenbach	Germany	Unknown	80.81.192.154
6207	Amsterdam	Netherlands	Unknown	193.239.116.217
5582	Frankfurt am Main	Germany	AS2914	213.198.72.18
5257	Frankfurt am Main	Germany	AS3257	89.149.137.14
4932	Chicago	United States	AS14593	206.224.65.178
4916	Chicago	United States	AS14593	206.224.65.180
4850	Chicago	United States	AS14593	206.224.65.182
4755	Chicago	United States	AS14593	206.224.65.184
4358	Miami	United States	AS49791	81.31.213.126
4333	Zürich	Switzerland	Unknown	185.1.147.30
4256	Tokyo	Japan	Unknown	210.173.176.242
4179	Chicago	United States	AS14593	206.224.65.186
4035	Chicago	United States	AS14593	206.224.65.192
4014	Frankfurt am Main	Germany	AS6762	213.144.184.30
4010	Chicago	United States	AS14593	206.224.65.190
4005	Chicago	United States	AS14593	206.224.65.188
4002	Frankfurt am Main	Germany	AS1299	62.115.124.118
3990	Singapore	Singapore	AS2497	202.232.1.69
3827	Frankfurt am Main	Germany	AS6939	72.52.92.70

or close to Germany, but the next five already involve traffic to the United States. Here, we observe an unexpected behavior. Assuming that the data is not flawed, this is a clear violation of guiding privacy principles.



# 3

## Conclusions & Outlook

---





# List of Acronyms

---

<b>ISLs</b> Inter-Satellite Links . . . . .	10
<b>ISL</b> Inter-Satellite Link . . . . .	5
<b>ISP</b> Internet Service Provider . . . . .	12
<b>LEO</b> Low-Earth Orbit . . . . .	3
<b>MEO</b> Medium-Earth Orbit . . . . .	3
<b>GEO</b> Geostationary Orbit . . . . .	3
<b>ASN</b> Autonomous System Number . . . . .	9
<b>PoP</b> Point of Presence . . . . .	3
<b>GS</b> Ground Station . . . . .	3



# Bibliography

---

- [Hau+20] Yannick Hauri, Debopam Bhattacharjee, Manuel Grossmann, and Ankit Singla. **"Internet from Space" without Inter-satellite Links**. *HotNets 2020 - Proceedings of the 19th ACM Workshop on Hot Topics in Networks* (Nov. 2020), 205–211. DOI: [10.1145/3422604.3425938](https://doi.org/10.1145/3422604.3425938). URL: <https://dl.acm.org/doi/10.1145/3422604.3425938> (see pages 5, 10).
- [Kas+20] Simon Kassing, Debopam Bhattacharjee, André Baptista Águas, Jens Eirik Saethre, and Ankit Singla. **Exploring the "Internet from space" with Hypatia**. In: *IMC '20: ACM Internet Measurement Conference, Virtual Event, USA, October 27-29, 2020*. ACM, 2020, 214–229. DOI: [10.1145/3419394.3423635](https://doi.org/10.1145/3419394.3423635). URL: <https://doi.org/10.1145/3419394.3423635> (see page 6).
- [LLL20] Zeqi Lai, Hewu Li, and Jihao Li. **StarPerf: Characterizing Network Performance for Emerging Mega-Constellations**. In: *28th IEEE International Conference on Network Protocols, ICNP 2020, Madrid, Spain, October 13-16, 2020*. IEEE, 2020, 1–11. DOI: [10.1109/ICNP49622.2020.9259357](https://doi.org/10.1109/ICNP49622.2020.9259357). URL: <https://doi.org/10.1109/ICNP49622.2020.9259357> (see page 6).
- [Ma+23] Sami Ma, Yi Ching Chou, Haoyuan Zhao, Long Chen, Xiaoqiang Ma, and Jiangchuan Liu. **Network Characteristics of LEO Satellite Constellations: A Starlink-Based Measurement from End Users**. In: *IEEE INFOCOM 2023 - IEEE Conference on Computer Communications, New York City, NY, USA, May 17-20, 2023*. Movement, Environment, LEO, Performance, Comparison LEO vs Terrestrial, TCP vs UDP, Power Consumption, Bent-Pipe. IEEE, 2023, 1–10. DOI: [10.1109/INFOCOM53939.2023.10228912](https://doi.org/10.1109/INFOCOM53939.2023.10228912). URL: <https://doi.org/10.1109/INFOCOM53939.2023.10228912> (see page 4).
- [Moh+24] Nitinder Mohan, Andrew E. Ferguson, Hendrik Cech, Rohan Bose, Prakita Rayyan Renatin, Mahesh K. Marina, and Jörg Ott. **A Multifaceted Look at Starlink Performance**. In: *Proceedings of the ACM on Web Conference 2024, WWW 2024, Singapore, May 13-17, 2024*. Ed. by Tat-Seng Chua, Chong-Wah Ngo, Ravi Kumar, Hady W. Lauw, and Roy Ka-Wei Lee. ACM, 2024, 2723–2734. DOI: [10.1145/3589334.3645328](https://doi.org/10.1145/3589334.3645328). URL: <https://doi.org/10.1145/3589334.3645328> (see pages 4, 5).
- [PA19] Timothy Pratt and Jeremy E Allnutt. **Satellite communications**. John Wiley & Sons, 2019 (see page 3).

- [Ram+23] Aravindh Raman, Matteo Varvello, Hyunseok Chang, Nishanth Sastry, and Yasir Zaki. **Dissecting the Performance of Satellite Network Operators**. *PACMNET 1:CoNEXT3* (2023), 15:1–15:25. DOI: [10.1145/3629137](https://doi.org/10.1145/3629137). URL: <https://doi.org/10.1145/3629137> (see page 4).
- [Seg20] Sascha Segan. **Tested: SpaceX’s Starlink Satellite Internet Service Is Fast, But It’ll Cost You**. *PC Mag* (Oct. 2020) (see page 4).
- [Ste+24] Aleksandr Stevens, Blaise Iradukunda, Brad Bailey, and Ramakrishnan Durairajan. **Can LEO Satellites Enhance the Resilience of Internet to Multi-hazard Risks?** In: *Passive and Active Measurement - 25th International Conference, PAM 2024, Virtual Event, March 11-13, 2024, Proceedings, Part II*. Ed. by Philipp Richter, Vaibhav Bajpai, and Esteban Carisimo. Vol. 14538. Lecture Notes in Computer Science. Springer, 2024, 170–195. DOI: [10.1007/978-3-031-56252-5\\_9](https://doi.org/10.1007/978-3-031-56252-5_9). URL: [https://doi.org/10.1007/978-3-031-56252-5\\_9](https://doi.org/10.1007/978-3-031-56252-5_9) (see page 5).

# Declaration of Authorship

---

I hereby declare that this thesis is my own unaided work. All direct or indirect sources used are acknowledged as references.

Potsdam, September 3, 2024

---

Robert Alexander Uwe Richter