

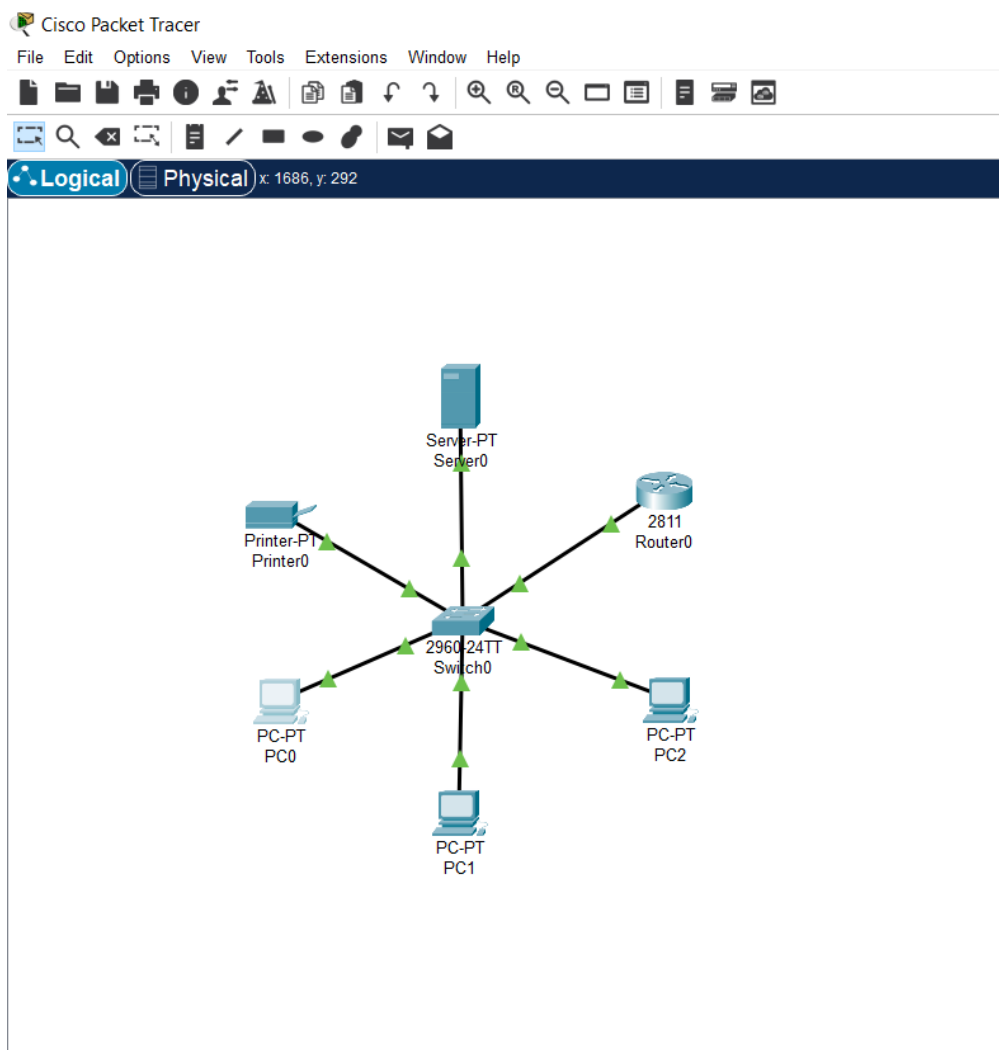


Сетевой принтер имеет встроенный сетевой адаптер для прямого подключения к сети, а обычный подключается к компьютеру, делая сетевой принтер более выгодным при необходимости общего доступа к печати нескольким пользователям без участия выделенного ПК.

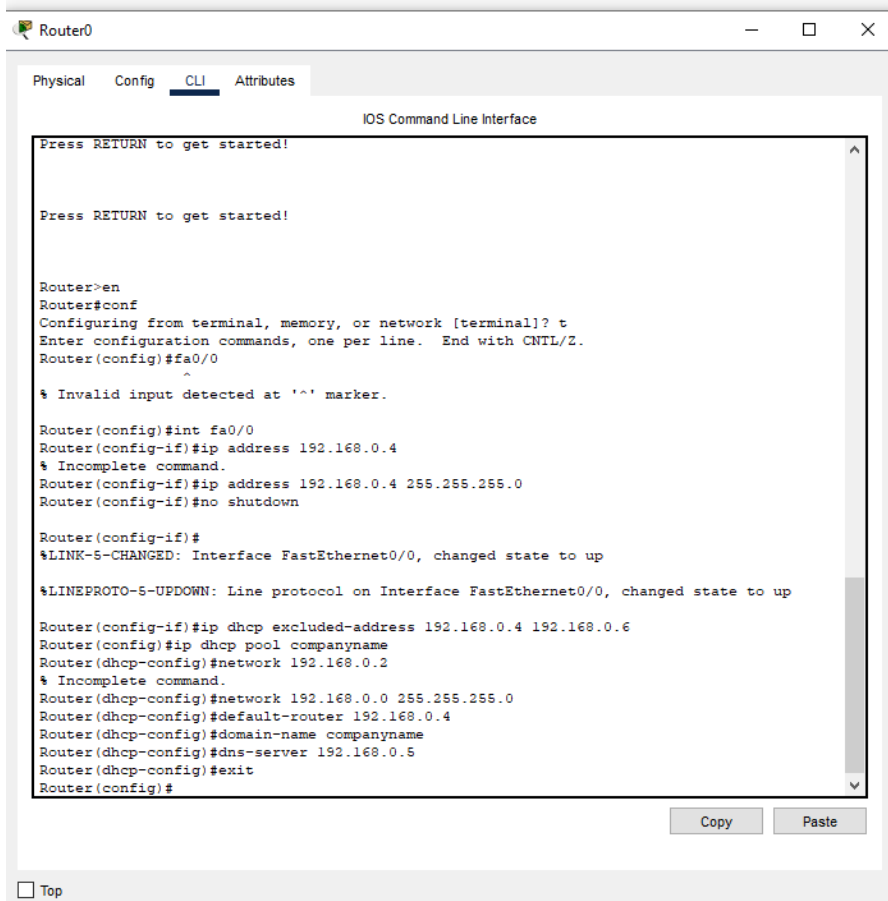

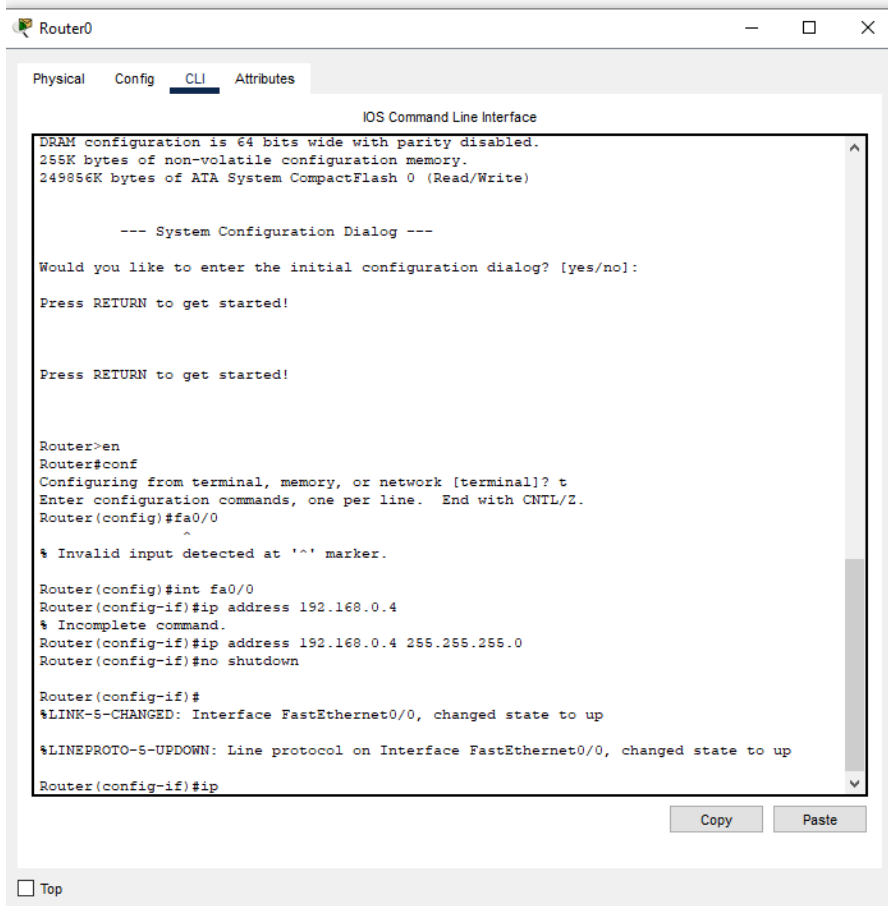

Server0

PhysicalConfigServicesDesktopProgrammingAttributes

GLOBAL

Settings

Algorithm Settings

INTERFACE

FastEthernet0

FastEthernet0

Port Status

☒ On

Bandwidth

☒ 100 Mbps

☐ 10 Mbps

☒ Auto

Duplex

☐ Half Duplex

☒ Full Duplex

☒ Auto

MAC Address

0060.4703.95D5

IP Configuration

☐ DHCP

☒ Static

IPv4 Address

192.168.0.5

Subnet Mask

255.255.255.0

IPv6 Configuration

☐ Automatic

☒ Static

IPv6 Address

Link Local Address

FE80::260:47FF:FE03:95D5

☐ Top

Server0

PhysicalConfigServicesDesktopProgrammingAttributes

SERVICES

HTTP

DHCP

DHCPv6

TFTP

DNS

SYSLOG

AAA

NTP

EMAIL

FTP

IoT

VM Management

Radius EAP

DNS

DNS Service

☒ On

☐ Off

Resource Records

Name

Type

A Record

Address

Add

Save

Remove

No.	Name	Type	Detail
0	company.com	A Record	192.168.0.2

DNS Cache

☐ Top

