

PRAKTIKUM SISTEM OPERASI

MODUL 2
INSTALASI XINU



Oleh:

Dimastian Aji Wibowo


(2311104058)

PROGRAM STUDI S1 REKAYASA PERANGKAT LUNAK
DIREKTORAT KAMPUS PURWOKERTO
UNIVERSITAS TELKOM
2026


JURNAL

1. Instalasi Xinu


a. Rename development-system

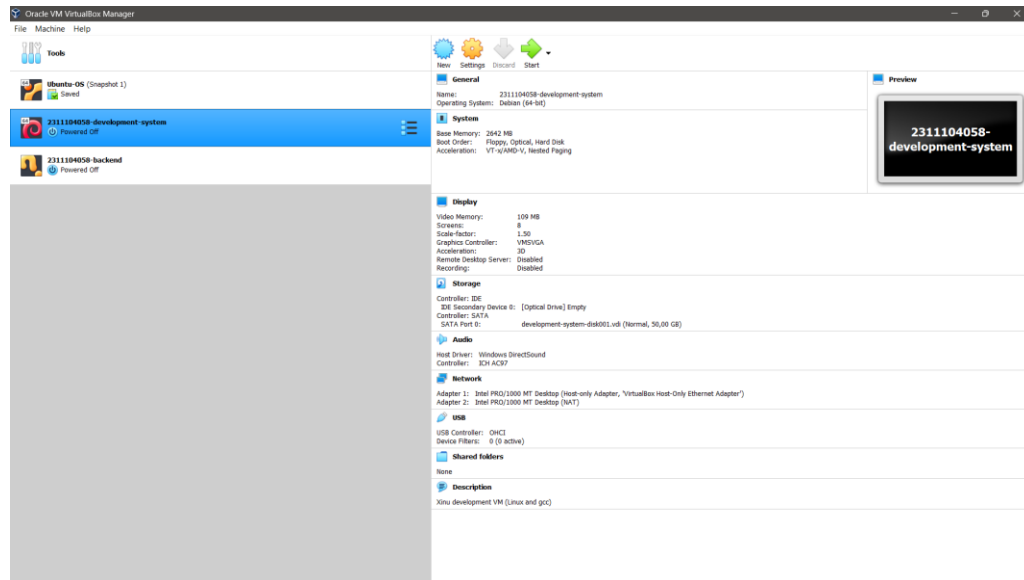


b. Rename backend

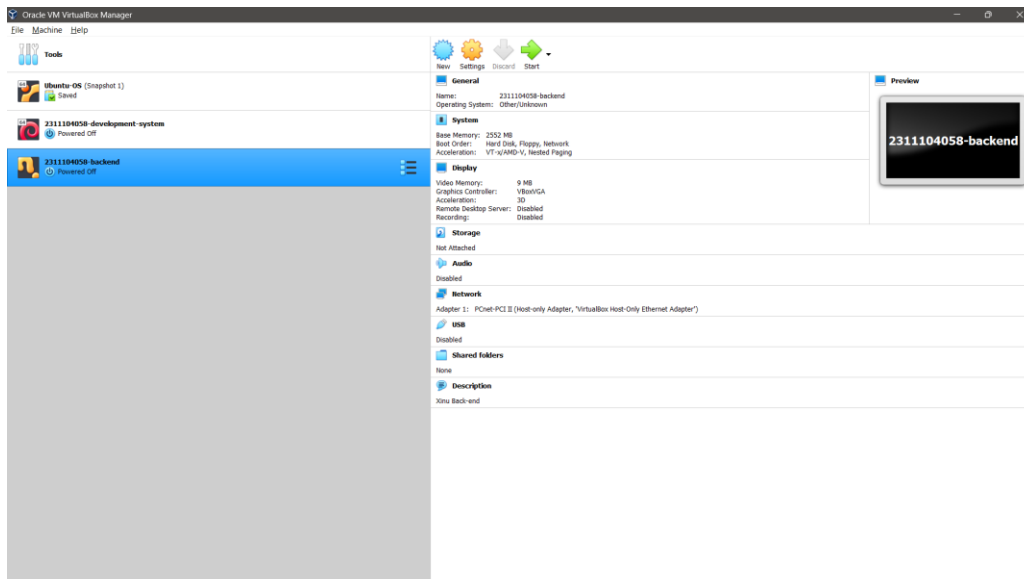


c. Ganti Serial Port

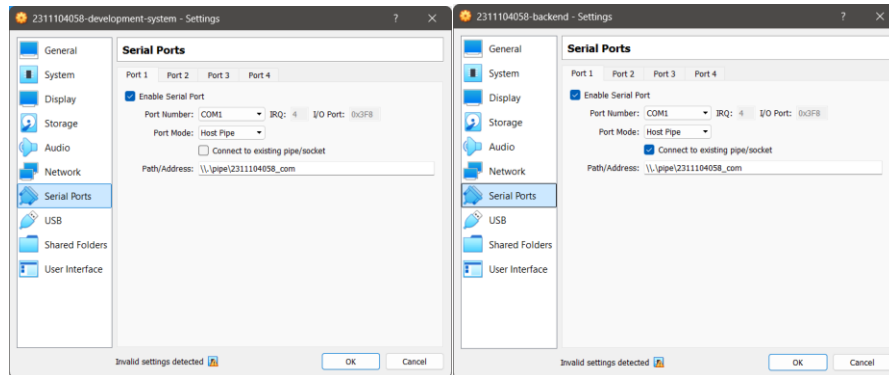

d. Ganti Password

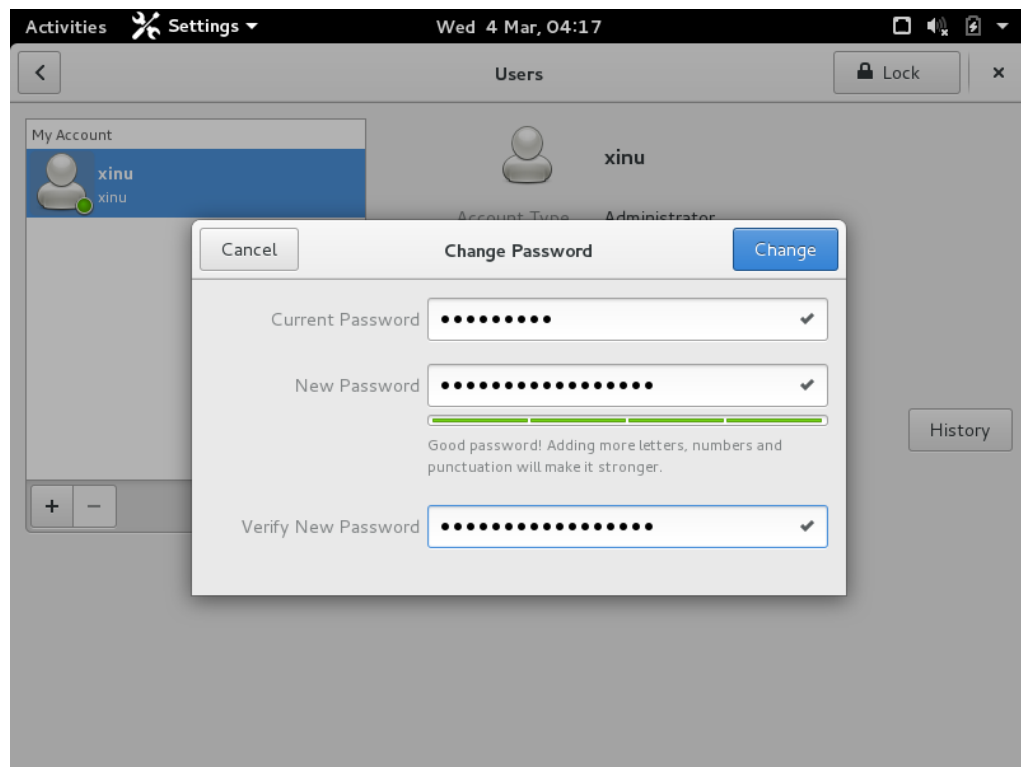

2. Menjalankan development-system

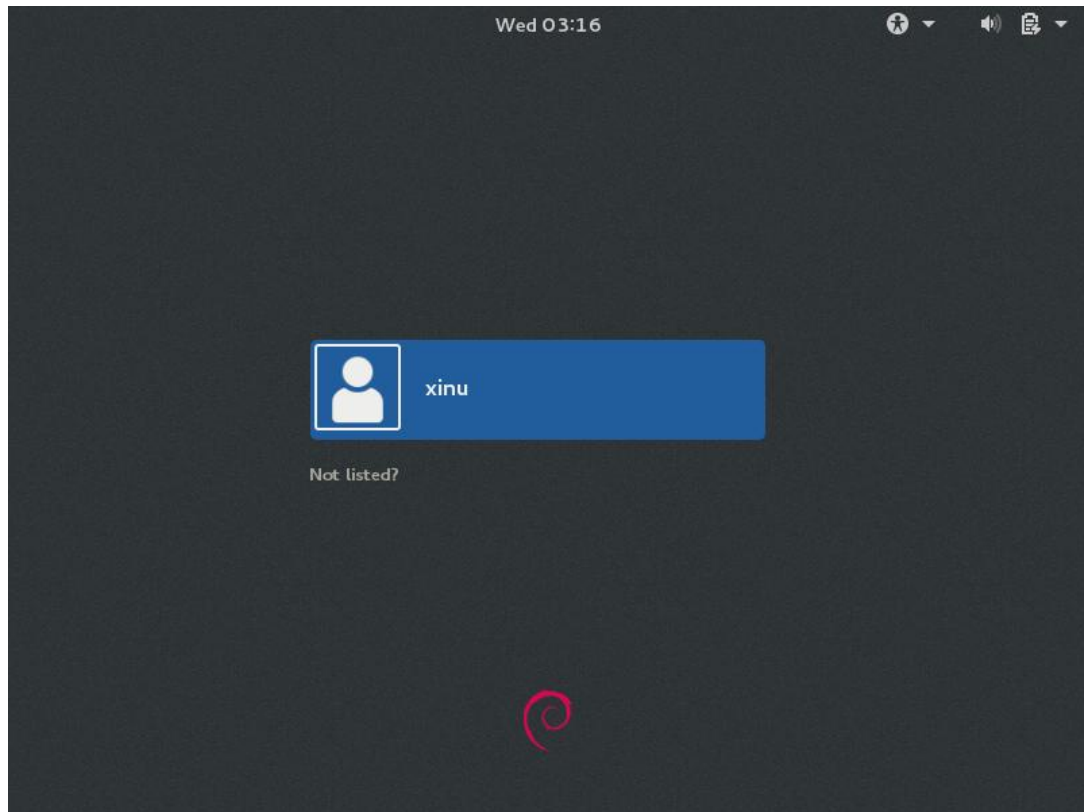


3. Menjalankan backend

```
IPXE (PCI E2:00.0) starting execution...ok
IPXE initialising devices...ok

iPXE 1.0.0+ -- Open Source Network Boot Firmware -- http://ipxe.org
Features: DNS TFTP HTTP PXE PXEXT Menu

net0: 08:00:27:ae:68:54 using pcnet32 on PCI00:03.0 (open)
[Link:up, TX:0 TXE:0 RX:0 RXE:0]
DHCP (net0 08:00:27:ae:68:54)..... ok
net0: 192.168.201.114/255.255.255.0
Next server: 192.168.201.1
Filename: xinu.grub
tftp://192.168.201.1/xinu.grub... ok
Welcome to GRUB!
```

4. Test koneksi

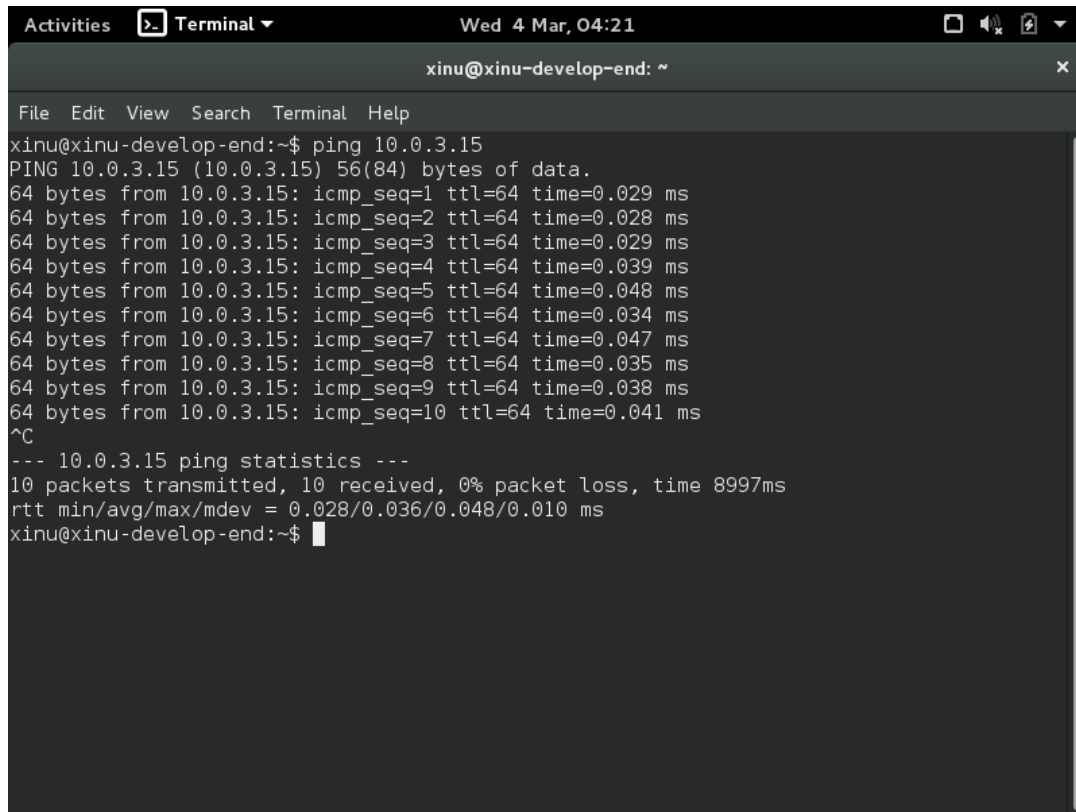A screenshot of a terminal window titled 'xinu@xinu-develop-end: ~'. The terminal shows the command 'ping 10.0.3.15' being executed. The output displays 10 successful ping responses, each showing 64 bytes from 10.0.3.15 with varying TTL and time values. Below the responses, a summary line shows '10 packets transmitted, 10 received, 0% packet loss, time 8997ms' and 'rtt min/avg/max/mdev = 0.028/0.036/0.048/0.010 ms'. The prompt 'xinu@xinu-develop-end:~\$' is visible at the bottom.

```
Activities Terminal Wed 4 Mar, 04:21
xinu@xinu-develop-end: ~
File Edit View Search Terminal Help
xinu@xinu-develop-end:~$ ping 10.0.3.15
PING 10.0.3.15 (10.0.3.15) 56(84) bytes of data.
64 bytes from 10.0.3.15: icmp_seq=1 ttl=64 time=0.029 ms
64 bytes from 10.0.3.15: icmp_seq=2 ttl=64 time=0.028 ms
64 bytes from 10.0.3.15: icmp_seq=3 ttl=64 time=0.029 ms
64 bytes from 10.0.3.15: icmp_seq=4 ttl=64 time=0.039 ms
64 bytes from 10.0.3.15: icmp_seq=5 ttl=64 time=0.048 ms
64 bytes from 10.0.3.15: icmp_seq=6 ttl=64 time=0.034 ms
64 bytes from 10.0.3.15: icmp_seq=7 ttl=64 time=0.047 ms
64 bytes from 10.0.3.15: icmp_seq=8 ttl=64 time=0.035 ms
64 bytes from 10.0.3.15: icmp_seq=9 ttl=64 time=0.038 ms
64 bytes from 10.0.3.15: icmp_seq=10 ttl=64 time=0.041 ms
^C
--- 10.0.3.15 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 8997ms
rtt min/avg/max/mdev = 0.028/0.036/0.048/0.010 ms
xinu@xinu-develop-end:~$
```

5. Pertanyaan

- Xinu OS digunakan pada sistem embedded? Benar/Salah
Benar
- Sebutkan 2 vm yang digunakan pada lab ini!
2311104058-development-system dan 2311104058-backend
- VM apa yang menghasilkan Xinu Image?
2311104058-development-system
- VM apa yang menjalankan OS Xinu?
2311104058-backend
- Sebutkan 2 nama jaringan yang ada pada arsitektur!
NAT dan Host-only Adapter
- Pada VM apa DHCP server dan TFTP server berada?
DHCP server dan TFTP server ada di 2311104058-development-system
- Pada VM apa PXE boot berada?
PXE boot ada di 2311104058-backend