

Product range	FLEXLINE	Ecodesign Check 2016 / 2018	No	/	No
Serie	FLNG	specific fan power [W/(m ³ /s)]			3.032
Unit design	Stacked unit	Total weight [kg]			~2.784
type of unit	External unit				
	Supply	Return			
Air flow rate	4.600 [m ³ /h]	4.600 [m ³ /h]			
Model	FLNG 20x40	FLNG 20x40			
External Static Pressure	700 [Pa]	300 [Pa]			
Fan Model / Qty.	RH35C.CR/SM12-B28 / 1x1	RH35C.CR/SM12-B24 / 1x1			
Fan Motor Power / Nominal Rpm	3 [kW] (1x1) / 2900 [1/min]	2.2 [kW] (1x1) / 2875 [1/min]			
Connection to mains	3 ph / 400 V / 1 Hz				
Cross Section Velocity	1,71 [m/s]				
Coil Cross Section Velocity	2.35 [m/s]				
Heat Recovery Capacity (Winter)	16.34 [kW]				
Heat Recovery Temp. Eff. (EN308)	51,00 [%]				
Heat Recovery Humidity Eff. (EN308)	53.1 [%]				
cooling capacity	32.96 [kW]				
heating capacity	- [kW]				
Total Dimensions (H/W/L)	2011 / 1324 / 9220 [mm]				
Design Winter Outdoor Temperature	0,00 [°C]				
Air Density / Altitude / Eurovent Ref. City	1,20 [kg/m ³] / 0 [m] / IZMIR ADNAN MENDERES (37,10 [C°] / 22,00 [%])				

Energy Efficiency Class

Mechanical Characteristics (EN1886)

Casing Strength	D1(M)
Thermal Transmittance	T2(M)
Thermal Bridging	TB2(M)
Filter bypass leakage	F9
Casing Air Leakage	L1(M)

Casing / Frame


		Supply Side	Return Side
P	Thickness	50,0 [mm]	50,0 [mm]
a	Insulation Type / Density	Rock wool 70kg/m ³	Rock wool 70kg/m ³
n	External Sheet Metal	Z275 Steel + Polyester Painted (0,80mm)	Z275 Steel + Polyester Painted (0,80mm)
e	Internal Sheet Metal	AISI 304 Stainless Steel (0,80mm)	AISI 304 Stainless Steel (0,80mm)
i	Base Panel Insulation	Rock wool 70kg/m ³	Rock wool 70kg/m ³
	Base Panel Internal Sheet Metal	AISI 304 Stainless Steel (0,80mm)	AISI 304 Stainless Steel (0,80mm)
	Frame Type	Z275 + Epoxy Primer Polyester Painted Steel	Z275 + Epoxy Primer Polyester Painted Steel
	Model Box: FL NG		

Ecodesign - Check

Non-Residential Ventilation Unit,BVU	2016			2018		
	Check	Value	Limit	Check	Value	Limit
Fan with Variable Speed Drive	Warning	Intended to be use	Mandatory	Warning	Intended to be use	Mandatory
Pressure Gauge for Filters	Approved	none	Not Needed	Failed	none	Mandatory
SFP internal in W/(m³/s)	Approved	467 [W/(m³/s)]	1.008 [W/(m³/s)]	Approved	467 [W/(m³/s)]	908 [W/(m³/s)]
Heat Recovery	Approved	Cross Flow Plate	Mandatory	Approved	Cross Flow Plate	Mandatory
Thermal Efficiency of Heat Recovery	Failed [%]	51,00 [%]	67 [%]	Failed [%]	51,00 [%]	73 [%]
Thermal By-Pass of Heat Recovery	Failed	none	Mandatory	Failed	none	Mandatory
Total Check	Failed			Failed		

Ecodesign - Technical Data

Manufacturer	head quarter	
Typology	NRVU, BVU	
Model	FLNG 20x40	FLNG 20x40
type of heat recovery system	Cross Flow Plate Heat Exchanger	
Thermal Efficiency of Heat Recovery System (EN 308)	51,00 [%]	
Maximum Internal Leakage Rate (±250 Pa, EN 308)	Less than %3	
Maximum External Leakage Rate	Leakage Class Rate 1,6% at +400Pa and 1,25% at -400Pa	
	Supply	Extract
Air flow rate	4.600 [m³/h]	4.600 [m³/h]
face velocity at design flow rate	1,71 [m/s]	1,71 [m/s]
Absorbed Motor Power For Energy Class, VSD Included	2,820 [kW]	1,174 [kW]
Fan Static Efficiency (1253/2014)	62,39 [%]	57,8 [%]
Static System Efficiency (1253/2014)	62,39 [%]	57,8 [%]
Energy Class for Filters	D	No Classification
Internal Static Pressure Drop of Ventilation Components	139 [Pa]	141 [Pa]
Total Static Pressure Drop at Design Conditions	1416 [Pa]	532 [Pa]
External Static Pressure Drop	700 [Pa]	300 [Pa]
SFPint, Specific Fan Power at Ecodesign Ref. Config.	223 [W/(m³/s)]	244 [W/(m³/s)]
SFPint tot, Tot. Spec. Fan Pow. at Ecodesign Ref. Config.	467 [W/(m³/s)]	
SFPint, 2016 Limit Value	1.008 [W/(m³/s)]	
SFPint, 2018 Limit Value	908 [W/(m³/s)]	

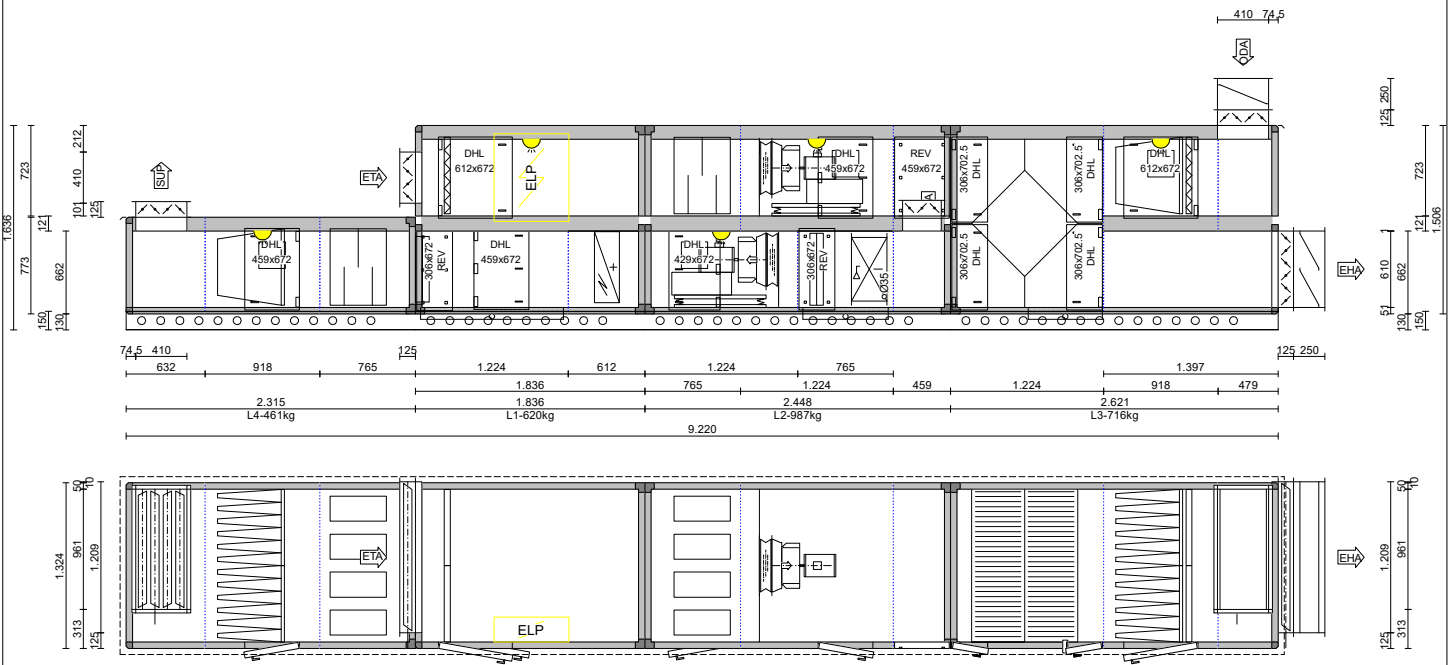

Project	Ekol Sada Hastanesi	Revision Date	5.06.2026
Unit Reference	HKS-17	Designer	Sample 3
Airflow Rate [m³/h]	4.600	Model	FLNG 20x40 FLNG 20x40

Intake / Outlet section		Supply air		Section length [mm]		479,0	Pressure drop [Pa]		44
<u>Damper:</u>				Dimensions [mm]		961,0 x 410,0 x 125,0			
Actuated by	Ready to actuator	Airflow [m³/h]	4.600	Frame	Aluminium				
Qty. Levers	1	air velocity [m/s]	3,24	Blades	Aluminium				
torque [Nm]	5,000	Pressure drop [Pa]	9	Tightness class	Standard				
<u>Weather louver</u>				Dimensions [mm]		961,0 x 410,0 x 250,0			
Type	WL	Material	Z275 Steel + Polyster Pai						

Bag Filter section with prefilter		Supply air	Section length [mm]	918,0	Pressure drop [Pa]	200
Type	Panel Filter					
Mounting	from side-pullout		Filter surface [m²]	7,60		
Efficiency Class (EN 779)	G4		Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 48,0 - 2		
Initial dP [Pa]	53					
Medium dP	78					
Final dP [Pa]	103					
ISO 16890 Class	Coarse 60%					
Filter Cross Sect. Vel. [m/s]	1,82					
Filter Energy Class	No Classification					
Type	Bag Filter					
Mounting	from side-pullout		Filter surface [m²]	7,60		
Efficiency Class (EN 779)	F7		Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 535,0 - 2 6		
Initial dP [Pa]	72					
Medium dP	122					
Final dP [Pa]	172					
ISO 16890 Class	ePM1 55%					
Filter Cross Sect. Vel. [m/s]	1,82					
Filter Energy Class	D					
Door with hinge and lever			Dimensions WxH [mm]	612,0 x 672,0		
Inspection window	rectangular		Dimensions WxH [mm]	212,0 x 212,0		
Lamp	Lamp - Std					

Plate exchanger - diagonal		Supply air	Section length [mm]	1.224,0	Pressure drop [Pa]	71
Supplier	Recuperator BQ AL 06 N 1224 L 1 AR CD SC		Cooling mode			
Pressure drop std. [Pa]	71 (Supply)	71 (Exhaust)	Supply			
Velocity [m/s]	2,00 (Supply)	2,00 (Exhaust)	Supply [m³/h]	4.600	Pressure drop [Pa]	77
Temperature efficiency [%]	51,00 (ErP)		DB Inlet [°C]	42,00	RH Inlet [%]	32,3
efficiency [%]	50,00 (EN 13053)		DB Outlet [°C]	32,80	RH Outlet [%]	54,0
Efficiency class	H6 (EN 13053)		Exhaust			
Heating mode			Exhaust [m³/h]	4.600	Pressure drop [Pa]	74
Supply			DB Inlet [°C]	24,00	RH Inlet [%]	50,0
Flow rate [m³/h]	4.600	Pressure drop [Pa]	DB Outlet [°C]	33,30	RH Outlet [%]	29,0
DB Inlet [°C]	0,00	RH Inlet [%]	Condensing water	0		
DB Outlet [°C]	10,60	RH Outlet [%]	Temperature efficiency [%]	51,4	(wet)	
Exhaust			Recovery capacity [kW]	14,24	(dry)	
Flow rate [m³/h]	4.600	Pressure drop [Pa]	Number of exchanger	1 pcs		
DB Inlet [°C]	20,00	RH Inlet [%]	By-pass	No	By-pass Length [mm]	0
DB Outlet [°C]	10,30	RH Outlet [%]	edge length [mm]	600,0	total length [mm]	1.224,0
Condensing water [kg/h]	1,82				diagonal [mm]	849
Temperature efficiency [%]	53,1 (wet)	50,9 (dry)	Material frame	AL		
Recovery capacity [kW]	16,34	(dry)	Material exchanger	AL		
Freezing temperature	0,00 [°C]					


Door with hinge and lever	Dimensions WxH [mm]	306,0 x 702,5
Door with hinge and lever	Dimensions WxH [mm]	306,0 x 702,5
Door with hinge and lever	Dimensions WxH [mm]	306,0 x 702,5
Door with hinge and lever	Dimensions WxH [mm]	306,0 x 702,5
Drain pan	Quality AISI 304 Stainless Steel	Drain connection 1 1/4"

Mixing Section			Supply air	Section length [mm]	459,0	Pressure drop [Pa]
Winter			Summer			
	Fresh air	Return air		Fresh air	Return air	
Flow rate [m³/h]	690	3.910	Flow rate [m³/h]	690	3.910	
Mixing ratio [%]	15	85	Mixing ratio [%]	15	85	
DB inlet [°C]	10,6	20	DB inlet [°C]	32,8	24	
RH inlet [%]	42	50	RH inlet [%]	54	50	
Mixed air			Mixed air			
DB outlet [°C]	18,60		DB outlet [°C]	25,30		
RH outlet [%]	50,2		RH outlet [%]	51,9		

Project	Ekol Sada Hastanesi	Revision Date	5.06.2026
Unit Reference	HKS-17	Designer	Sample 3
Airflow Rate [m³/h]	4.600	Model	FLNG 20x40 FLNG 20x40

Cooling coil		Supply air	Section length [mm]	765,0	Pressure drop [Pa]	187
Evaporating coil		Air Side	Fluid Side			
Flow Rate [m³/h]	4.600		Fluid	R410A		
Velocity on Coil [m/s]	2,35		Evaporation Temp. [°C]	7,00		
DB Inlet [°C]	25,30	RH Inlet [%] 51,9	Overheating [°C]	5,00		
DB Outlet [°C]	10,50	RH Outlet [%] 98,3	Condensing temp. [°C]	54,00		
total capacity [kW]	32,96		Pressure drop [kPa]	26,8		
sensible capacity [kW]	22,85		Flow Rate [kg/s]	0,220		
Pressure drop [Pa]	173 / 132	(wet/dry)				
Heating mode		Air Side	Fluid Side			
DB Inlet [°C]	18,60	RH Inlet 50,2	Pressure drop [kPa]	7,1		
DB Outlet [°C]	32,14	RH Outlet 22,4	Flow Rate [kg/s]	0,103		
Capacity [kW]	20,92					
Coil Code F 32x28-12 C S 16T 8R 1070A 2.1P 8NC (.12/.5)		Materials:				
Row No.	8	Fins Aluminium (0,120 mm)				
Nos. of Refr. Circuits	1 circuit	Tubes copper (0,500 mm)				
Circuit No.	8	Header copper				
fin spacing [mm]	2,10	Frames AISI 304 Stainless Steel				
Inner Volume [lt]	15,840	Fin protection -				
Finned Area [m²]	104,30					
Tube No.	16					
Finned Width [mm]	1.070,0					
Connection Qty / Dia [mm]	1 / 35					
Revision panel with turn bolt		Dimensions WxH [mm]		306,0 x 672,0		
Drain pan	Quality	AISI 304 Stainless Steel		Drain connection	1 1/4"	
Drop eliminator	Brand	Rehau	Frame Z275 Steel + Polyster Painted	Fins	PPTV	14 Pa

Plug fan		Supply air		Section length [mm]		1.224,0		Pressure drop [Pa]			
Fan data				Motor data							
Air flow rate [m³/h]		4.600									
Type		Plug				Model Brand		Standard			
Supplier / Model / Quantity in WxH		ZA-RH35C.CR/SM12-B28-362939 / 1x1				Model / Quantity in WxH		Std-IE3-50-100-2-3 / 1x1			
						Rated Power [kW]		3,000 x (1x1)			
Internal Static Pressure Drop [Pa]		716				nominal RPM [1/min]		2.900			
External Static Pressure Drop [Pa]		700				Phase / Voltage / Frequency		3x400 V / 50 Hz			
Fan Installation Pressure Drop [Pa]						Efficiency Class		IE3			
total static pressure drop [Pa]		1.416				Motor Full Load Efficiency [%]		87,1			
Dynamic Pressure of Fan [Pa]		68				Rated Current [A]		5,77			
Total Pressure of Fan [Pa]		1.484				Protection / Ins. & Temp. Class		IP55/ F			
Frequency Operation / Max [Hz]		53,5 / 57				Exproof Motor (Yes/No)		No			
Fan Rpm Operation / Max [1/min]		3.098 / 3.300				Tot. Abs. power,excluding VSD [kW]		2,8130			
shaft power [kW]		2,450				Tot. Abs. power,including VSD [kW]		2,900			
Impeller Efficiency Static/Total [%]		74 / 77,5									
Overall Efficiency [%]		66,2									
K-factor (p=1.2 kg/m³)		121									
SoundPowerLevel Intake/Outlet		80,8 / 89,4 db(A)				AV Isolator Info		Spring AV Isolator			
Spark-Proof Fan (Yes/No)		No									
Tot Stc dP w/ DryCoil dP [Pa]		1375									
Fan octave band sound power level (Lokt)											
Okt. Frq. Hz	125	250	500	1000	2000						
Inlet	67,0	79,0	78,0	75,0	73,0	71,0	67,0				
Outlet	76,0	83,0	84,0	86,0	82,0	79,0	73,0				
sound power level [dB (A)]		89,4									
Sound power [dB]		90,8									

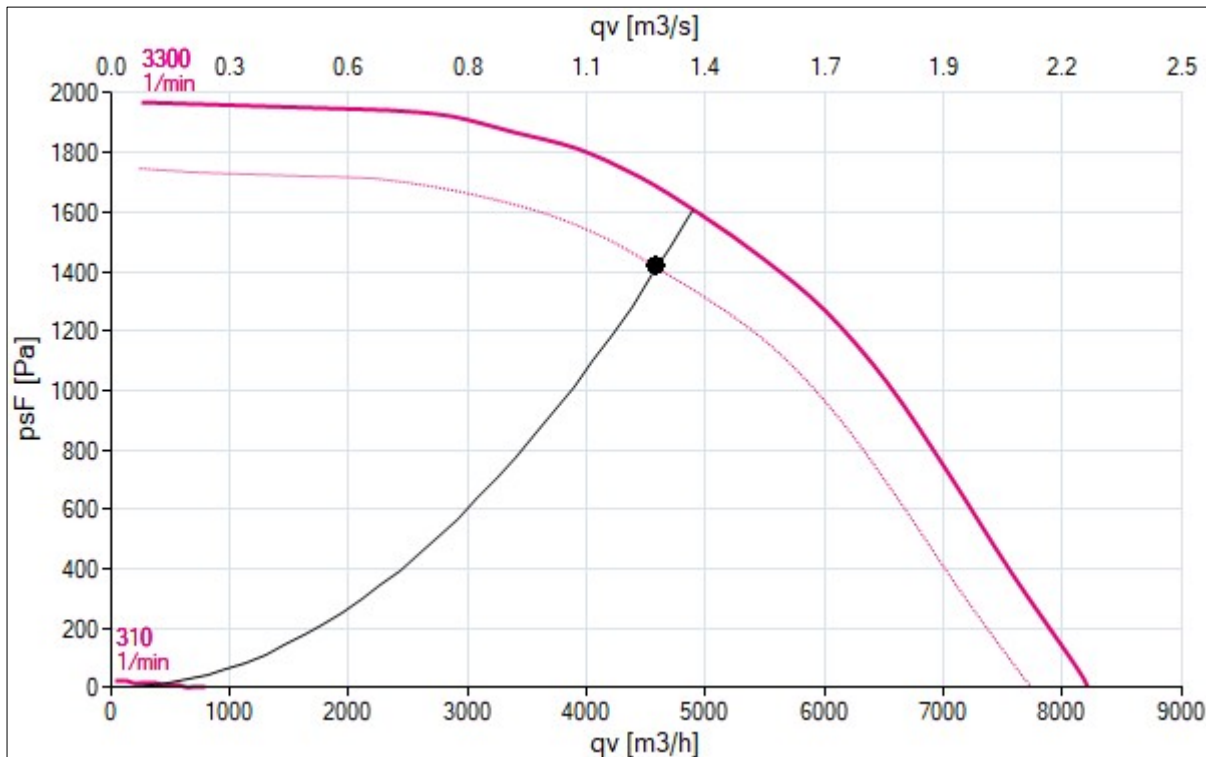

	Project	Ekol Sada Hastanesi	Revision Date	5.06.2026
	Unit Reference	HKS-17	Designer	Sample 3
	Airflow Rate [m³/h]	4.600	Model	FLNG 20x40 FLNG 20x40

Door with hinge and lever		Dimensions WxH [mm]	429,0 x 672,0
Opening	L	Dimensions WxH [mm]	420,0 x 455,0
<u>Inspection window</u>	rectangular	Dimensions WxH [mm]	212,0 x 212,0
<u>Lamp</u>	Lamp - Std		

Electric heater	Supply air	Section length [mm]	612,0	Pressure drop [Pa]	1
Air Side Flow Rate [m³/h] 4.600 total capacity [kW] 8,00 Pressure drop [Pa] 1 DB Inlet [°C] 10,50 RH Inlet [%] 98,3 DB Outlet [°C] 15,33 RH Outlet [%] 72,0 Air direction Right to Left		Heater Properties "Std_EI_Heat/VRA-FU-M-1219x607x200-8kW(8)-400V3-S-IP55-NI-50°C-R-M1" Stages 1 Bars STST Frame STST Connection Data 3x400 V			

Empty section	Supply air	Section length [mm]	1.224,0	Pressure drop [Pa]	14
Flow Rate [m³/h]	4.600	Section length [mm]	1.224,0		
Door with hinge and lever		Dimensions WxH [mm]	459,0 x 672,0		
Revision panel with turn bolt		Dimensions WxH [mm]	306,0 x 672,0		
<u>Drop eliminator</u>	Brand Rehau	Frame Z275 Steel + Polyster Painted	Fins	PPTV	14 Pa
<u>Drain pan</u>	Quality AISI 304 Stainless Steel	Drain connection		1 1/4"	
1 set	Empty Atomizer Humidifer				

Sound attenuator	Supply air	Section length [mm]	765,0	Pressure drop [Pa]	12
Splitter Type	S1 - 200x4x612x450	Selected Attenuator Info Fqr [Hz] 125 250 500 1000 2000 4000 8000 Sum db(A) Abs [dB] 6,0 18,0 30,0 33,0 31,0 25,0 24,0			
Air volume [m³/h]	4.600				
Splitter frame	STST				
Pressure drop [Pa]	12				
Splitter length 1 [mm]	450,0				
Number of splitters	4				
Splitter Gap					

Project	Ekol Sada Hastanesi	Revision Date	5.06.2026
Unit Reference	HKS-17	Designer	Sample 3
Airflow Rate [m³/h]	4.600	Model	FLNG 20x40 FLNG 20x40

Filter	Supply air	Section length [mm]	918,0	Pressure drop [Pa]	178
Type	Bag Filter				
Mounting	from side-pullout	Filter surface [m²]	7,60		
Efficiency Class (EN 779)	F9	Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 535,0 - 2 6		
Initial dP [Pa]	128				
Medium dP	178				
Final dP [Pa]	228				
ISO 16890 Class	ePM1 85%				
Filter Cross Sect. Vel. [m/s]	1,82				
Filter Energy Class	D				
Door with hinge and lever		Dimensions WxH [mm]	459,0 x 672,0		
<u>Inspection window</u>	rectangular	Dimensions WxH [mm]	212,0 x 212,0		
<u>Lamp</u>	Lamp - Std				

Intake / Outlet section	Supply air	Section length [mm]	632,0	Pressure drop [Pa]	9
<u>Damper:</u>		Dimensions [mm]	961,0 x 410,0 x 125,0		
Actuated by	Ready to actuator	Airflow [m³/h]	4.600	Frame	Aluminium
Qty. Levers	1	air velocity [m/s]	3,24	Blades	Aluminium
torque [Nm]	5,000	Pressure drop [Pa]	9	Tightness class	Standard

noise calculation									
sound power [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	
Inlet	60,0	70,0	66,0	61,0	54,0	48,0	44,0	67,0	
Outlet	68,0	61,0	48,0	45,0	41,0	42,0	37,0	56,6	
Casing	58,0	57,0	52,0	53,0	49,0	43,0	29,0	58,1	
sound pressure level [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	measuring point at 3 m Distance
Casing	40,5	39,5	34,5	35,5	31,5	25,5	11,5	40,6	
Tolerance +/- 3 dB									


Exhaust air


Project	Ekol Sada Hastanesi	Revision Date	5.06.2026
Unit Reference	HKS-17	Designer	Sample 3
Airflow Rate [m³/h]	4.600	Model	FLNG 20x40 FLNG 20x40

Filter	Exhaust air	Section length [mm]	1.836,0	Pressure drop [Pa]	126		
Type	Panel Filter						
Mounting	from side-pullout		Filter surface [m²]	7,60			
Efficiency Class (EN 779)	M5		Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 48,0 - 2			
Initial dP [Pa]	71						
Medium dP	121						
Final dP [Pa]	171						
ISO 16890 Class	ePM10 50%						
Filter Cross Sect. Vel. [m/s]	1,82						
Filter Energy Class	No Classification						
Door with hinge and lever			Dimensions WxH [mm]	612,0 x 672,0			
<u>Damper:</u>			Dimensions [mm]	1.209,0 x 410,0 x 125,0			
Actuated by	Ready to actuator	Airflow [m³/h]	4.600	Frame	Aluminium		
Qty. Levers	1	air velocity [m/s]	2,58	Blades	Aluminium		
torque [Nm]	10,000	Pressure drop [Pa]	5	Tightness class	Standard		
<u>Lamp</u>	Lamp - Std						

Sound attenuator		Exhaust air	Section length [mm]		765,0	Pressure drop [Pa]				12
Splitter Type	S1 - 200x4x612x450	Selected Attenuator Info								
Air volume [m³/h]	4.600	Fqr [Hz]	125	250	500	1000	2000	4000	8000	Sum db(A)
Splitter frame	STST	Abs [dB]	6,0	18,0	30,0	33,0	31,0	25,0	24,0	
Pressure drop [Pa]	12									
Splitter length 1 [mm]	450,0									
Number of splitters	4									
Splitter Gap										

Plug fan		Exhaust air		Section length [mm]		1.224,0		Pressure drop [Pa]	
Fan data				Motor data					
Air flow rate [m³/h]		4.600							
Type		Plug				Model Brand		Standard	
Supplier / Model / Quantity in WxH		ZA-RH35C.CR/SM12-B24-362539 / 1x1				Model / Quantity in WxH		Std-IE3-50-90-2-2.2 / 1x1	
						Rated Power [kW]		2,200 x (1x1)	
Internal Static Pressure Drop [Pa]		232				nominal RPM [1/min]		2.875	
External Static Pressure Drop [Pa]		300				Phase / Voltage / Frequency		3x400 V / 50 Hz	
Fan Installation Pressure Drop [Pa]						Efficiency Class		IE3	
total static pressure drop [Pa]		532				Motor Full Load Efficiency [%]		85,9	
Dynamic Pressure of Fan [Pa]		68				Rated Current [A]		4,45	
Total Pressure of Fan [Pa]		600				Protection / Ins. & Temp. Class		IP55/ F	
Frequency Operation / Max [Hz]		41 / 52				Exproof Motor (Yes/No)		No	
Fan Rpm Operation / Max [1/min]		2.364 / 3.000				Tot. Abs. power,excluding VSD [kW]		1,1407	
shaft power [kW]		0,980				Tot. Abs. power,including VSD [kW]		1,176	
Impeller Efficiency Static/Total [%]		69,4 / 78,3							
Overall Efficiency [%]		65,3							
K-factor (p=1.2 kg/m³)		121							
SoundPowerLevel Intake/Outlet		74,9 / 82,7 db(A)				AV Isolator Info		Spring AV Isolator	
Spark-Proof Fan (Yes/No)		No							
Fan octave band sound power level (Lokt)									
Okt. Frq. Hz	125	250	500	1000	2000	4000	8000		
Inlet	68,0	76,0	73,0	67,0	66,0	64,0	64,0		
Outlet	71,0	79,0	77,0	80,0	74,0	70,0	69,0		
sound power level [dB (A)]		82,7							
Sound power [dB]		84,9							

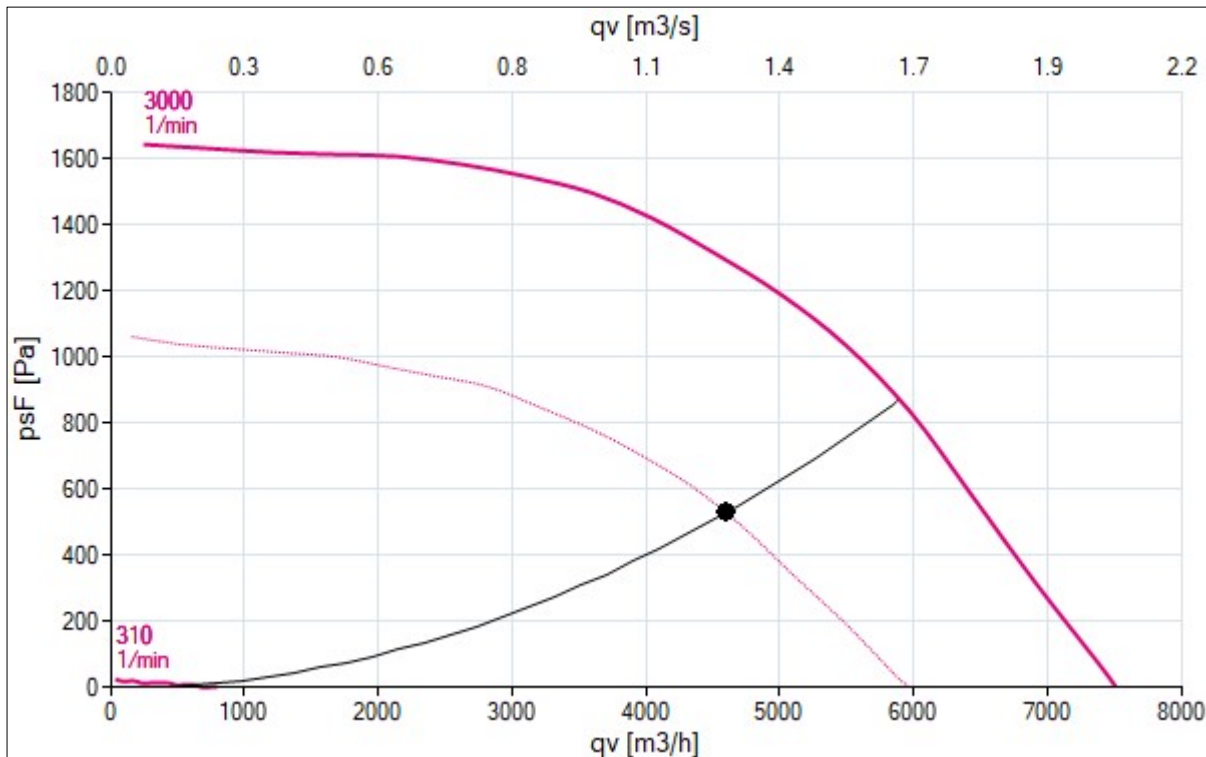

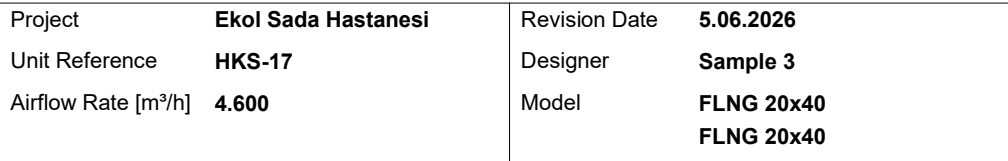

Mixing Section		Exhaust air	Section length [mm]	459,0	Pressure drop [Pa]	11
Revision panel with turn bolt			Dimensions WxH [mm]		459,0 x 672,0	
<u>Damper:</u>			Dimensions [mm]		961,0 x 310,0 x 125,0	
Actuated by	Ready to actuator	Airflow [m³/h]	3,910	Frame	Aluminium	
Qty. Levers	1	air velocity [m/s]	3,65	Blades	Aluminium	
torque [Nm]	5,000	Pressure drop [Pa]	11	Tightness class	Standard	

Intake / Outlet section		Exhaust air	Section length [mm]	1.397,0	Pressure drop [Pa]	12
<u>Damper:</u>				Dimensions [mm]	1.209,0 x 610,0 x 125,0	
Actuated by	Ready to actuator	Airflow [m³/h]	4.600	Frame	Aluminium	
Qty. Levers	1	air velocity [m/s]	1,73	Blades	Aluminium	
torque [Nm]	10,000	Pressure drop [Pa]	2	Tightness class	Standard	
<u>Weather louvre</u>				Dimensions [mm]	1.209,0 x 610,0 x 250,0	
Type	WL	Material	Z275 Steel + Polyster Pai			

<u>Baseframe</u>	BASE	Material	Z275 Steel + Polyster Pai	isolated	No
Hole for crane [mm]	63,2	Height [mm]	150,0	Welded	No
1 set	roof				
1 set	Palette				

Delivery sections

no.	Length	Width	Height	Weight
1	1.836,0	1.324,0	1.506,0	620,00
2	2.448,0	1.324,0	1.506,0	987,00
3	2.621,0	1.324,0	1.506,0	716,00
4	2.315,0	1.324,0	773,0	461,00

Automation Control Scenarios

Fan Control Scenario

Constant Duct Pressure with Air Flow Readout

Temperature Control Scenario

Cascaded Extract Air Temperature Control

Recirculation Control

Modulated Recirculation via CO2 Sensor

Free Cooling

No

Dehumidify Control Options

Frequency Invertor Model Selection

Standard

Door Switch Selection

Yes

AHU Kit Options

1 Pcs AHUKit Count

Display Options

Panel Mount Display (IP65)

PLC Display Options

PLC without Display

Fire Guard

Preconfigured for External Fire Block and Run Indication Signal

Additional Room Sensors

1 Pcs Room temperature + humidity sensor

Damper actuator

Spring return

-

External Communication

Control Panel Price Option

Frequency Invertor Position

Inside Cabinet (Electric Panel)

Automation Scenario Part List

1	Pcs	High Temperature Thermostat - 1st Electrical Heater	-
1	Pcs	Panel Filter Differential Pressure Switch	-
1	Pcs	Bag Filter Differential Pressure Switch	-
1	Pcs	Bag Filter Differential Pressure Switch	-

1	Pcs	Panel filter Differential Pressure Switch	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Outdoor - 5 Nm	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Supply - 5 Nm	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Exhaust - 10 Nm	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Extract - 10 Nm	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Mixing - 5 Nm	-
1	Pcs	Climatix Extension Module	-
1	Pcs	Extension Module Terminal Kit	-
1	Pcs	Climatix controller	-
1	Pcs	Controller Terminal Kit	-
1	Pcs	Climatix HMI-TM is designed to operate with Climatix controllers	-
1	Pcs	Door Switch - Supply	-
1	Pcs	Door Switch - Exhaust	-
1	Pcs	Room Humidity & Temperature Sensor	-
3	Pcs	Temperature Sensor	-
1	Pcs	Temperature and Humidity Sensor	-
1	Pcs	Co2 and Temperature Sensor	-
1	Pcs	Pressure Sensor - Supply Fan	-
1	Pcs	Pressure Sensor - Exhaust Fan	-
		Control Cabinet (IP54) - A	-
1	Pcs	Frequency Invertor - Supply Fan	-
1	Pcs	Frequency Invertor - Exhaust Fan	-
1	Pcs	Panic Button	-