


Product range	FLEXLINE	Ecodesign Check 2016 / 2018	No	No
Serie	FLNG	specific fan power [W/(m ³ /s)]		3.542
Unit design	Stacked unit	Total weight [kg]		~4.729
type of unit	External unit			
	Supply	Return		
Air flow rate	8.550 [m ³ /h]	8.350 [m ³ /h]		
Model	FLNG 30x50	FLNG 30x50		
External Static Pressure	800 [Pa]	600 [Pa]		
Fan Model / Qty.	RH45C.CR/SM20-B38 / 1x1	RH40C.CR/SM20-B28 / 1x1		
Fan Motor Power / Nominal Rpm	7.5 [kW] (1x1) / 2920 [1/min]	4 [kW] (1x1) / 2910 [1/min]		
Connection to mains	3 ph / 400 V / 1 Hz			
Cross Section Velocity	1,69 [m/s]			
Coil Cross Section Velocity	2.25 [m/s]			
Heat Recovery Capacity (Winter)	30.75 [kW]			
Heat Recovery Temp. Eff. (EN308)	51,40 [%]			
Heat Recovery Humidity Eff. (EN308)	53.7 [%]			
cooling capacity	118.44 [kW]			
heating capacity	- [kW]			
Total Dimensions (H/W/L)	2248 / 1630 / 9136 [mm]			
Design Winter Outdoor Temperature	0,00 [°C]			
Air Density / Altitude / Eurovent Ref. City	1,20 [kg/m ³] / 0 [m] / IZMIR ADNAN MENDERES (37,10 [°C] / 22,00 [%])			

Energy Efficiency Class

Mechanical Characteristics (EN1886)

Casing Strength	D1(M)
Thermal Transmittance	T2(M)
Thermal Bridging	TB2(M)
Filter bypass leakage	F9
Casing Air Leakage	L1(M)

Casing / Frame			
		Supply Side	Return Side
P a n e l	Thickness	50,0 [mm]	50,0 [mm]
	Insulation Type / Density	Rock wool 70kg/m ³	Rock wool 70kg/m ³
	External Sheet Metal	Z275 Steel + Polyester Painted (0,80mm)	Z275 Steel + Polyester Painted (0,80mm)
	Internal Sheet Metal	AISI 304 Stainless Steel (0,80mm)	AISI 304 Stainless Steel (0,80mm)
	Base Panel Insulation	Rock wool 70kg/m ³	Rock wool 70kg/m ³
	Base Panel Internal Sheet Metal	AISI 304 Stainless Steel (0,80mm)	AISI 304 Stainless Steel (0,80mm)
	Frame Type	Z275 + Epoxy Primer Polyester Painted Steel	Z275 + Epoxy Primer Polyester Painted Steel
	Model Box: FL NG		

Ecodesign - Check

Non-Residential Ventilation Unit,BVU	2016			2018		
	Check	Value	Limit	Check	Value	Limit
Fan with Variable Speed Drive	Warning	Intended to be use	Mandatory	Warning	Intended to be use	Mandatory
Pressure Gauge for Filters	Approved	none	Not Needed	Failed	none	Mandatory
SFP internal in W/(m³/s)	Approved	382 [W/(m³/s)]	740 [W/(m³/s)]	Approved	382 [W/(m³/s)]	650 [W/(m³/s)]
Heat Recovery	Approved	Cross Flow Plate	Mandatory	Approved	Cross Flow Plate	Mandatory
Thermal Efficiency of Heat Recovery	Failed [%]	51,40 [%]	67 [%]	Failed [%]	51,40 [%]	73 [%]
Thermal By-Pass of Heat Recovery	Failed	none	Mandatory	Failed	none	Mandatory
Total Check	Failed			Failed		

Ecodesign - Technical Data

Manufacturer	head quarter	
Typology	NRVU, BVU	
Model	FLNG 30x50	FLNG 30x50
type of heat recovery system	Cross Flow Plate Heat Exchanger	
Thermal Efficiency of Heat Recovery System (EN 308)	51,40 [%]	
Maximum Internal Leakage Rate (±250 Pa, EN 308)	Less than %3	
Maximum External Leakage Rate	Leakage Class Rate 1,6% at +400Pa and 1,25% at -400Pa	
	Supply	Extract
Air flow rate	8.550 [m³/h]	8.350 [m³/h]
face velocity at design flow rate	1,69 [m/s]	1,65 [m/s]
Absorbed Motor Power For Energy Class, VSD Included	5,334 [kW]	3,339 [kW]
Fan Static Efficiency (1253/2014)	65,5 [%]	55,84 [%]
Static System Efficiency (1253/2014)	65,5 [%]	54,55 [%]
Energy Class for Filters	D	No Classification
Internal Static Pressure Drop of Ventilation Components	154 [Pa]	80 [Pa]
Total Static Pressure Drop at Design Conditions	1540 [Pa]	787 [Pa]
External Static Pressure Drop	800 [Pa]	600 [Pa]
SFPint, Specific Fan Power at Ecodesign Ref. Config.	235 [W/(m³/s)]	147 [W/(m³/s)]
SFPint tot, Tot. Spec. Fan Pow. at Ecodesign Ref. Config.	382 [W/(m³/s)]	
SFPint, 2016 Limit Value	740 [W/(m³/s)]	
SFPint, 2018 Limit Value	650 [W/(m³/s)]	




Bag Filter section with prefilter		Supply air	Section length [mm]	938,0	Pressure drop [Pa]	223
Type	Panel Filter					
Mounting	from side-pullout		Filter surface [m²]	11,32		
Efficiency Class (EN 779)	G4		Dimension & Quantity WxHxD & pcs	592,0	x	592,0
Initial dP [Pa]	54			48,0	x	2
Medium dP	79			287,0	x	592,0
Final dP [Pa]	104			48,0	x	3
ISO 16890 Class	Coarse 60%					
Filter Cross Sect. Vel. [m/s]	1,84					
Filter Energy Class	No Classification					
Type	Bag Filter					
Mounting	from side-pullout		Filter surface [m²]	11,32		
Efficiency Class (EN 779)	F7		Dimension & Quantity WxHxD & pcs	592,0	x	592,0
Initial dP [Pa]	73			535,0	x	2
Medium dP	123			287,0	x	592,0
Final dP [Pa]	173			535,0	x	6
ISO 16890 Class	ePM1 55%					
Filter Cross Sect. Vel. [m/s]	1,84					
Filter Energy Class	D					
Door with hinge and lever			Dimensions WxH [mm]	582,0 x 978,0		
Damper:			Dimensions [mm]	1.515,0 x 710,0 x 125,0		
Actuated by	Ready to actuator	Airflow [m³/h]	8.550	Frame	Aluminium	
Qty. Levers	1	air velocity [m/s]	2,21	Blades	Aluminium	
torque [Nm]	10,000	Pressure drop [Pa]	4	Tightness class	Standard	
Weather louvre			Dimensions [mm]	1.515,0 x 710,0 x 250,0		
Type	WL	Material	Z275 Steel + Polyster Pai			
Inspection window		rectangular	Dimensions WxH [mm]	212,0 x 212,0		
Lamp		Lamp - Std				

Plate exchanger - diagonal		Supply air		Section length [mm]	1.377,0	Pressure drop [Pa]		86
Supplier	Recuperator			Cooling mode Supply Supply [m³/h] 8.550 DB Inlet [°C] 42,00 DB Outlet [°C] 32,90 Exhaust Exhaust [m³/h] 8.350 DB Inlet [°C] 24,00 DB Outlet [°C] 33,40 Condensing water 0 Temperature efficiency [%] 52,1 (wet) Recovery capacity [kW] 26,20 (dry)				
	FQ AL 07 N 1530 L 1 AE SM							
Pressure drop std. [Pa]	86 (Supply)	82 (Exhaust)						
Velocity [m/s]	2,61 (Supply)	2,55 (Exhaust)						
Temperature efficiency [%]	51,40 (ErP)							
efficiency [%]	50,20 (EN 13053)							
Efficiency class	H6 (EN 13053)							
Heating mode								
Supply								
Flow rate [m³/h]	8.550	Pressure drop [Pa]	81					
DB Inlet [°C]	0,00	RH Inlet [%]	80,0					
DB Outlet [°C]	10,70	RH Outlet [%]	37,0					
Exhaust								
Flow rate [m³/h]	8.350	Pressure drop [Pa]	80					
DB Inlet [°C]	20,00	RH Inlet [%]	50,0					
DB Outlet [°C]	9,80	RH Outlet [%]	92,0					
Condensing water [kg/h]	2,88							
Temperature efficiency [%]	53,7 (wet)	52,1 (dry)						
Recovery capacity [kW]	30,75	(dry)						
Freezing temperature	0,00 [°C]							
				Number of exchanger 1 pcs				
				By-pass No				
				By-pass Length [mm] 0				
				edge length [mm] 705,0				
				total length [mm] 1.530,0				
				diagonal [mm] 997				
				Material frame AL				
				Material exchanger AL				

Door with hinge and lever	Dimensions WxH [mm]	459,0 x 1.008,5
Door with hinge and lever	Dimensions WxH [mm]	429,0 x 1.008,5
Door with hinge and lever	Dimensions WxH [mm]	429,0 x 1.008,5
Door with hinge and lever	Dimensions WxH [mm]	459,0 x 1.008,5
Drain pan	Quality AISI 304 Stainless Steel	Drain connection 1 1/4"

Cooling coil		Supply air		Section length [mm]	918,0	Pressure drop [Pa]	210
Evaporating coil		Air Side		Fluid Side			
Flow Rate [m³/h]	8.550			Fluid	R410A		
Velocity on Coil [m/s]	2,25			Evaporation Temp. [°C]	7,00		
DB Inlet [°C]	32,90	RH Inlet [%]	53,0	Overheating [°C]	5,00		
DB Outlet [°C]	11,40	RH Outlet [%]	99,1	Condensing temp. [°C]	54,00		
total capacity [kW]	118,44			Pressure drop [kPa]	28,2		
sensible capacity [kW]	61,44			Flow Rate [kg/s]	0,790		
Pressure drop [Pa]	198 / 124	(wet/dry)					
Heating mode		Air Side		Fluid Side			
DB Inlet [°C]	10,70	RH Inlet	37,0	Pressure drop [kPa]	4,1		
DB Outlet [°C]	32,17	RH Outlet	9,9	Flow Rate [kg/s]	0,304		
Capacity [kW]	61,59						
Coil Code F 32x28-12 C S 26T 10R 1280A 2.5P 26NC (.12/.5)				Materials:			
Row No.	10			Fins	Aluminium (0,120 mm)		
Nos. of Refr. Circuits	3 circuits			Tubes	copper (0,500 mm)		
Circuit No.	26			Header	copper		
fin spacing [mm]	2,50			Frames	AISI 304 Stainless Steel		
Inner Volume [lt]	38,700			Fin protection	-		
Finned Area [m²]	214,90						
Tube No.	26						
Finned Width [mm]	1.280,0						
Connection Qty / Dia [mm]	1 / 54						
Revision panel with turn bolt		Dimensions WxH [mm]		306,0 x 978,0			
Drain pan	Quality	AISI 304 Stainless Steel		Drain connection		1 1/4"	
Drop eliminator	Brand	Rehau	Frame Z275 Steel + Polyster Painted	Fins	PPTV	12 Pa	

Plug fan		Supply air		Section length [mm]		1.377,0		Pressure drop [Pa]					
Fan data				Motor data									
Air flow rate [m³/h]		8.550											
Type		Plug				Model Brand		Standard					
Supplier / Model / Quantity in WxH		ZA-RH45C.CR/SM20-B38-362940 / 1x1				Model / Quantity in WxH		Std-IE3-50-132-2-7.5 / 1x1					
						Rated Power [kW]		7,500 x (1x1)					
Internal Static Pressure Drop [Pa]		740				nominal RPM [1/min]		2.920					
External Static Pressure Drop [Pa]		800				Phase / Voltage / Frequency		3x400 V / 50 Hz					
Fan Installation Pressure Drop [Pa]						Efficiency Class		IE3					
total static pressure drop [Pa]		1.540				Motor Full Load Efficiency [%]		90,1					
Dynamic Pressure of Fan [Pa]		93				Rated Current [A]		14,00					
Total Pressure of Fan [Pa]		1.633				Protection / Ins. & Temp. Class		IP55/ F					
Frequency Operation / Max [Hz]		44,6 / 51				Exproof Motor (Yes/No)		No					
Fan Rpm Operation / Max [1/min]		2.621 / 2.970				Tot. Abs. power,excluding VSD [kW]		5,4165					
shaft power [kW]		4,880				Tot. Abs. power,including VSD [kW]		5,584					
Impeller Efficiency Static/Total [%]		75 / 79,5											
Overall Efficiency [%]		69,2											
K-factor (p=1.2 kg/m³)		197											
SoundPowerLevel Intake/Outlet		83,2 / 92,7 db(A)				AV Isolator Info		Spring AV Isolator					
Spark-Proof Fan (Yes/No)		No											
Tot Stc dP w/ DryCoil dP [Pa]		1466											
Fan octave band sound power level (Lokt)													
Okt. Frq. Hz	125	250	500	1000	2000							4000	8000
Inlet	71,0	85,0	78,0	76,0	76,0							74,0	71,0
Outlet	78,0	90,0	88,0	89,0	85,0	81,0	77,0						
sound power level [dB (A)]		92,7											
Sound power [dB]		94,8											

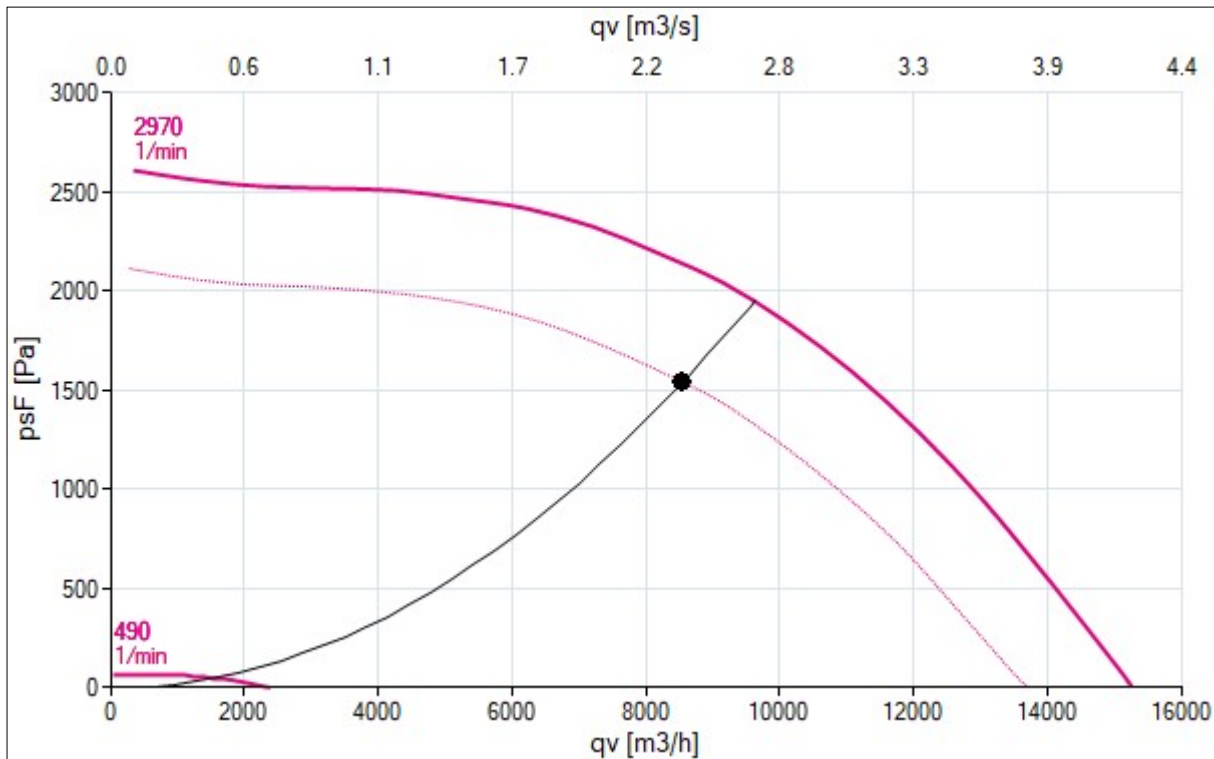

Project	Ekol Sada Hastanesi	Revision Date	20.04.2026
Unit Reference	HKS-12	Designer	Sample 3
Airflow Rate [m³/h]	8.550	Model	FLNG 30x50 FLNG 30x50

Door with hinge and lever	Dimensions WxH [mm]	429,0 x 978,0
Opening L	Dimensions WxH [mm]	570,0 x 600,0
<u>Inspection window</u> rectangular	Dimensions WxH [mm]	212,0 x 212,0
<u>Lamp</u> Lamp - Std		

Electric heater	Supply air	Section length [mm]	612,0	Pressure drop [Pa]	
Air Side		Heater Properties			
Flow Rate [m³/h]	8.550	"Std_EI_Heat/VRA-FU-M-1525x913x200-6kW(6)-400V3-S-IP55-NI-50°C-R-M1"			
total capacity [kW]	6,00				
Pressure drop [Pa]					
DB Inlet [°C]	11,40	RH Inlet [%]	99,1	Stages	1
DB Outlet [°C]	13,35	RH Outlet [%]	87,0	Bars	STST
Air direction	Right to Left			Frame	STST
				Connection Data	3x400 V

Empty section		Supply air		Section length [mm]		1.224,0		Pressure drop [Pa]		12	
Flow Rate [m³/h]		8.550		Section length [mm]		1.224,0					
Door with hinge and lever				Dimensions WxH [mm]				459,0 x 978,0			
Revision panel with turn bolt				Dimensions WxH [mm]				306,0 x 978,0			
<u>Drop eliminator</u>		Brand	Rehau	Frame Z275 Steel + Polyster Painted		Fins		PPTV		12 Pa	
<u>Drain pan</u>		Quality	AISI 304 Stainless Steel		Drain connection		1 1/4"				
1 set		Empty Atomizer Humidifer									

Sound attenuator	Supply air	Section length [mm]	765,0	Pressure drop [Pa]	12
Splitter Type	S1 - 200x5x918x450	Selected Attenuator Info			
Air volume [m³/h]	8.550	Fqr [Hz]	125 250 500 1000 2000 4000 8000 Sum db(A)		
Splitter frame	STST	Abs [dB]	6,0 18,0 30,0 33,0 31,0 25,0 24,0		
Pressure drop [Pa]	12				
Splitter length 1 [mm]	450,0				
Number of splitters	5				
Splitter Gap					

Project	Ekol Sada Hastanesi	Revision Date	20.04.2026
Unit Reference	HKS-12	Designer	Sample 3
Airflow Rate [m³/h]	8.550	Model	FLNG 30x50 FLNG 30x50

Filter	Supply air	Section length [mm]	918,0	Pressure drop [Pa]	179
Type	Bag Filter				
Mounting	from side-pullout	Filter surface [m²]	11,32		
Efficiency Class (EN 779)	F9	Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 535,0 -	2	6
Initial dP [Pa]	129		287,0 x 592,0 x 535,0 -	1	
Medium dP	179		287,0 x 592,0 x 535,0 -	2	3
Final dP [Pa]	229		287,0 x 287,0 x 535,0 -	1	3
ISO 16890 Class	ePM1 85%				
Filter Cross Sect. Vel. [m/s]	1,84				
Filter Energy Class	D				
Door with hinge and lever		Dimensions WxH [mm]	459,0 x 978,0		
<u>Inspection window</u>	rectangular	Dimensions WxH [mm]	212,0 x 212,0		
<u>Lamp</u>	Lamp - Std				

Intake / Outlet section	Supply air	Section length [mm]	632,0	Pressure drop [Pa]	18
<u>Damper:</u>		Dimensions [mm]	1.267,0 x 410,0 x 125,0		
Actuated by	Ready to actuator	Airflow [m³/h]	8.550	Frame	Aluminium
Qty. Levers	1	air velocity [m/s]	4,57	Blades	Aluminium
torque [Nm]	10,000	Pressure drop [Pa]	18	Tightness class	Standard

noise calculation									
sound power [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	
Inlet	64,0	76,0	66,0	62,0	57,0	51,0	48,0	70,0	
Outlet	70,0	68,0	52,0	48,0	44,0	44,0	41,0	61,4	
Casing	60,0	64,0	56,0	56,0	52,0	45,0	33,0	61,5	
sound pressure level [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	measuring point at 3 m Distance
Casing	42,5	46,5	38,5	38,5	34,5	27,5	15,5	44,0	
Tolerance +/- 3 dB									


Exhaust air

Project	Ekol Sada Hastanesi	Revision Date	20.04.2026
Unit Reference	HKS-12	Designer	Sample 3
Airflow Rate [m³/h]	8.550	Model	FLNG 30x50 FLNG 30x50

Filter	Exhaust air	Section length [mm]	1.836,0	Pressure drop [Pa]	81
Type	Panel Filter				
Mounting	from side-pullout	Filter surface [m²]	11,32		
Efficiency Class (EN 779)	G4	Dimension & Quantity WxHxD & pcs	592,0 x 592,0 x 48,0 - 2		
Initial dP [Pa]	52		287,0 x 592,0 x 48,0 - 3		
Medium dP	77		287,0 x 287,0 x 48,0 - 1		
Final dP [Pa]	102				
ISO 16890 Class	Coarse 60%				
Filter Cross Sect. Vel. [m/s]	1,79				
Filter Energy Class	No Classification				
Door with hinge and lever		Dimensions WxH [mm]	429,0 x 978,0		
<u>Damper:</u>		Dimensions [mm]	1.515,0 x 710,0 x 125,0		
Actuated by	Ready to actuator	Airflow [m³/h]	8.350	Frame	Aluminium
Qty. Levers	1	air velocity [m/s]	2,16	Blades	Aluminium
torque [Nm]	10,000	Pressure drop [Pa]	4	Tightness class	Standard
<u>Lamp</u>	Lamp - Std				

Sound attenuator	Exhaust air	Section length [mm]	1.224,0	Pressure drop [Pa]	12
Splitter Type	S1 - 200x5x918x450	Selected Attenuator Info			
Air volume [m³/h]	8.350	Fqr [Hz]	125 250 500 1000 2000 4000 8000 Sum db(A)		
Splitter frame	STST	Abs [dB]	6,0 18,0 30,0 33,0 31,0 25,0 24,0		
Pressure drop [Pa]	12				
Splitter length 1 [mm]	450,0				
Number of splitters	5				
Splitter Gap					
Revision panel with turn bolt		Dimensions WxH [mm]	306,0 x 978,0		

Plug fan		Exhaust air		Section length [mm]		1.071,0		Pressure drop [Pa]	
Fan data				Motor data					
Air flow rate [m³/h]		8.350							
Type		Plug				Model Brand		Standard	
Supplier / Model / Quantity in WxH		ZA-RH40C.CR/SM12-B28-362308 / 1x1				Model / Quantity in WxH		Std-IE3-50-112-2-4 / 1x1	
						Rated Power [kW]		4,000 x (1x1)	
Internal Static Pressure Drop [Pa]		187				nominal RPM [1/min]		2.910	
External Static Pressure Drop [Pa]		600				Phase / Voltage / Frequency		3x400 V / 50 Hz	
Fan Installation Pressure Drop [Pa]						Efficiency Class		IE3	
total static pressure drop [Pa]		787				Motor Full Load Efficiency [%]		88,1	
Dynamic Pressure of Fan [Pa]		143				Rated Current [A]		7,44	
Total Pressure of Fan [Pa]		930				Protection / Ins. & Temp. Class		IP55/ F	
Frequency Operation / Max [Hz]		48,2 / 52				Exproof Motor (Yes/No)		No	
Fan Rpm Operation / Max [1/min]		2.803 / 3.030				Tot. Abs. power,excluding VSD [kW]		3,2466	
shaft power [kW]		2,860				Tot. Abs. power,including VSD [kW]		3,347	
Impeller Efficiency Static/Total [%]		63,9 / 75,5							
Overall Efficiency [%]		67,7							
K-factor (p=1.2 kg/m³)		154							
SoundPowerLevel Intake/Outlet		84,2 / 92,2 db(A)				AV Isolator Info		Spring AV Isolator	
Spark-Proof Fan (Yes/No)		No							
Fan octave band sound power level (Lokt)									
Okt. Frq. Hz	125	250	500	1000	2000	4000	8000		
Inlet	75,0	85,0	82,0	76,0	76,0	73,0	75,0		
Outlet	80,0	89,0	87,0	89,0	84,0	79,0	80,0		
sound power level [dB (A)]		92,2							
Sound power [dB]		94,6							

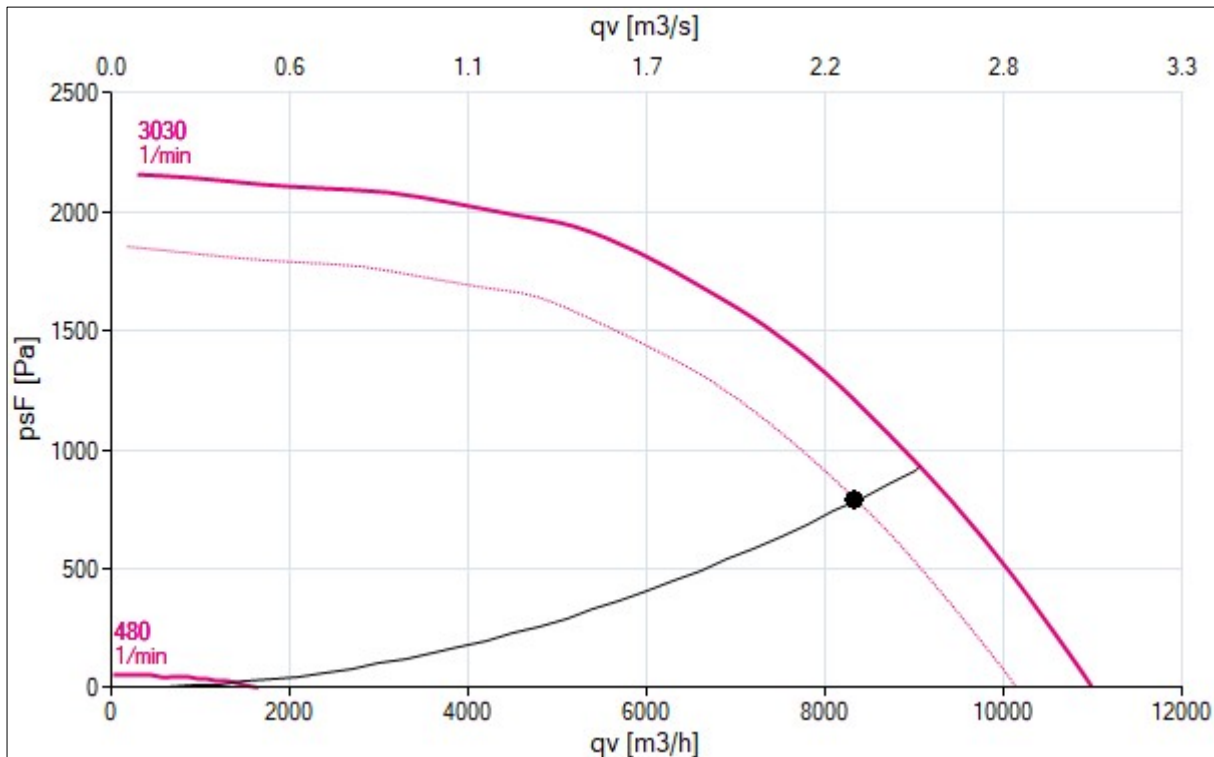

Project	Ekol Sada Hastanesi	Revision Date	20.04.2026
Unit Reference	HKS-12	Designer	Sample 3
Airflow Rate [m³/h]	8.550	Model	FLNG 30x50 FLNG 30x50

Door with hinge and lever	Dimensions WxH [mm]	429,0 x 978,0
Opening L	Dimensions WxH [mm]	450,0 x 490,0
<u>Inspection window</u> rectangular	Dimensions WxH [mm]	212,0 x 212,0
<u>Lamp</u> Lamp - Std		

Plate exchanger - diagonal	Exhaust air	Section length [mm]	1.377,0	Pressure drop [Pa]	86
-----------------------------------	--------------------	----------------------------	----------------	---------------------------	-----------

Intake / Outlet section	Exhaust air	Section length [mm]	938,0	Pressure drop [Pa]	12
--------------------------------	--------------------	----------------------------	--------------	---------------------------	-----------

<u>Damper:</u>				Dimensions [mm]	1.515,0 x 910,0 x 125,0
Actuated by	Ready to actuator	Airflow [m³/h]	8.350	Frame	Aluminium
Qty. Levers	1	air velocity [m/s]	1,68	Blades	Aluminium
torque [Nm]	20,000	Pressure drop [Pa]	2	Tightness class	Standard

<u>Weather louvre</u>	Dimensions [mm]	1.515,0 x 910,0 x 250,0
Type WL	Material	Z275 Steel + Polyster Pai

noise calculation									
sound power [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	
Inlet	68,0	66,0	51,0	42,1	43,0	46,0	49,0	59,8	
Outlet	78,0	86,0	84,0	86,0	77,0	71,0	72,0	88,3	
Casing	62,0	63,0	55,0	56,0	51,0	43,0	36,0	61,1	
sound pressure level [dB]									
Frq. Hz	125	250	500	1000	2000	4000	8000	Sum [dB(A)]	measuring point at 3 m Distance
Casing	44,5	45,5	37,5	38,5	33,5	25,5	18,5	43,6	
Tollerance +/- 3 dB									

<u>Baseframe</u>	BASE	Material	Z275 Steel + Polyster Pai	isolated	No
Hole for crane [mm]	63,2	Height [mm]	150,0	Welded	No
1 set	roof				
1 set	Palette				

<u>Delivery sections</u>	no.	Length	Width	Height	Weight
	1	1.836,0	1.630,0	2.118,0	1.038,00
	2	2.295,0	1.630,0	2.118,0	1.596,00
	3	2.315,0	1.630,0	2.118,0	1.234,00
	4	2.315,0	1.630,0	1.079,0	860,00

Automation Control Scenarios

Fan Control Scenario

Constant Duct Pressure with Air Flow Readout

Temperature Control Scenario

Cascaded Extract Air Temperature Control

Free Cooling

No

Dehumidify Control Options

Frequency Invertor Model Selection

Standard

Door Switch Selection

Yes

AHU Kit Options

3 Pcs AHUKit Count

Display Options

Panel Mount Display (IP65)

PLC Display Options

PLC without Display

Fire Guard

Preconfigured for External Fire Block and Run Indication Signal

Additional Room Sensors

1 Pcs Room temperature + humidity sensor

Damper actuator

Spring return

-

External Communication

Control Panel Price Option

Frequency Invertor Position

Inside Cabinet (Electric Panel)

Automation Scenario Part List

1	Pcs	High Temperature Thermostat - 1st Electrical Heater	-
1	Pcs	Panel Filter Differential Pressure Switch	-
1	Pcs	Bag Filter Differential Pressure Switch	-
1	Pcs	Bag Filter Differential Pressure Switch	-
1	Pcs	Panel filter Differential Pressure Switch	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Outdoor - 10 Nm	-

1	Pcs	Damper Actuator On-Off 7nM Spring Return - Supply - 10 Nm	-
1	Pcs	Damper Actuator On-Off 18nM Spring Return - Exhaust - 20 Nm	-
1	Pcs	Damper Actuator On-Off 7nM Spring Return - Extract - 10 Nm	-
1	Pcs	Climatix Extension Module	-
1	Pcs	Extension Module Terminal Kit	-
1	Pcs	Climatix controller	-
1	Pcs	Controller Terminal Kit	-
1	Pcs	Climatix HMI-TM is designed to operate with Climatix controllers	-
1	Pcs	Door Switch - Supply	-
1	Pcs	Door Switch - Exhaust	-
1	Pcs	Room Humidity & Temperature Sensor	-
4	Pcs	Temperature Sensor	-
1	Pcs	Temperature and Humidity Sensor	-
1	Pcs	Pressure Sensor - Supply Fan	-
1	Pcs	Pressure Sensor - Exhaust Fan	-
		Control Cabinet (IP54) - A	-
1	Pcs	Frequency Invertor - Supply Fan	-
1	Pcs	Frequency Invertor - Exhaust Fan	-
1	Pcs	Panic Button	-