OS-1

子二乙U13157126陳定波

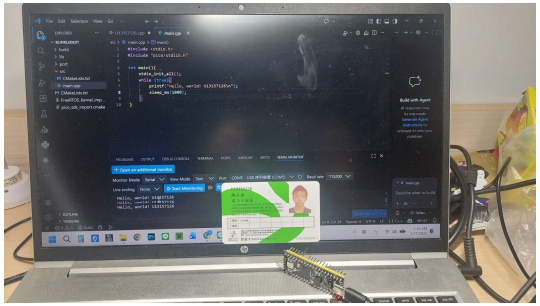
File Edit Selection View Go
EXPLORER
BUILDRELEASEDEBUG
> build
> lib
> port
> src
CMakeLists.txt
main.cpp
CMakeLists.txt
EnumTCG_KernelImp...
pico_sdk_import.cmake
main.cpp > main()
#define stdio_usb_init();
while true{}
printf("Hello, world! %lld\n",);
sleep_ms(1000);
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS MONITOR SERIAL MONITOR
Open an additional monitor
Monitor Mode Serial View Mode Text Port COM3 - USB 序列设备 (COM3) Baud rate 115200
Line ending Mode Start Monitoring
Hello, world! 1635371520
Hello, world! 1635371520
Hello, world! 1635371520
Build with Agent
AI suggestions may be inaccurate.
Generate Agent Instructions to onboard AI onto your codebase.
Describe what to build
Agent decides