

1. Use Round Machine Sockets for CPU's socket
2. To take pins to be diameter between 15mil (0.38mm) and 25mil (0.635mm)




**EZ80-INTERFACE**

**1 MAIN**


Created:	2024-05-13
Updated:	2025-08-06
Version:	V1.11
Count:	4




# I2C

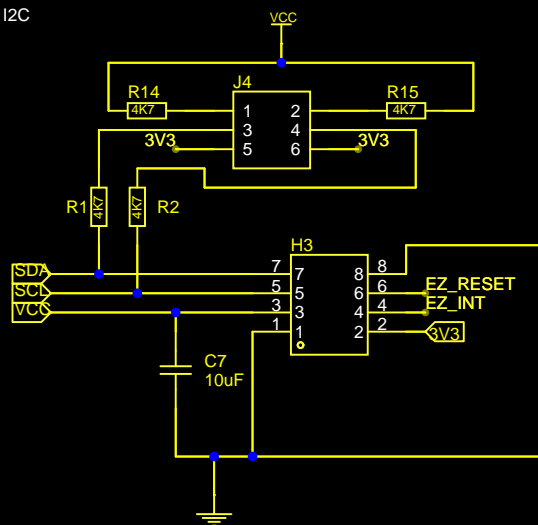


# POWER

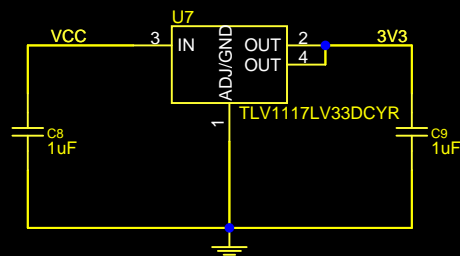

# GPIO-PC1-7



# UART

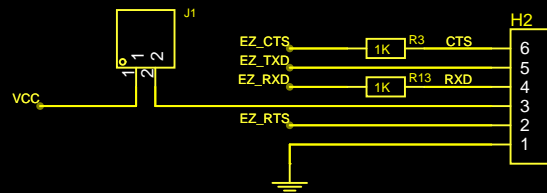

# SPI



# EZ80-INTERFACE

3 ON-BOARD

Created:	2024-05-14
Updated:	2025-08-06
Version:	V1.11
Count:	4