

FULL CUTOFF WALLPACK

NIGHTSHADE SERIES

130 LM/W

SELECTABLE POWER. SELECTABLE CCT. FULL CUTOFF.

WATTAGE	VOLTAGE	LIFESPAN	WARRANTY	CRI	CCT
45/60/75W	120-277V	50,000 h	5 years	>80	30/40/50K

SELECTABLE POWER. SELECTABLE CCT. FULL CUTOFF.

A full cutoff wall pack that keeps light on the ground and off the sky. Wattage and colour temperature are set inside the fixture, so one wall pack covers several designs. For custom solutions please contact our sales representative.

For custom solutions please contact our sales representative.

PHONE: 702.847.7680 WEB: www.ledconnection.com EMAIL: bids@ledconnection.com 915 E Dale Ave Ste 110 Henderson, NV 89044

FULL CUTOFF WALLPACK

NIGHTSHADE SERIES



LC-FWP-WS-3CCT

3 WATTAGES | 3 CCTS | IP65 | 0-10V

QUALITY DEFENDER

Heavy-duty die-cast aluminium with a UV-stabilized powder coat, IP65 and wet-location rated.


PRODUCT DESCRIPTION

The NightShade Series Full Cutoff Wallpack is designed to eliminate light pollution and maximize energy savings. Internal switches select the wattage (45, 60 or 75W) and colour temperature (3000, 4000 or 5000K) on site, so one fixture covers several designs. Constructed from heavy-duty die-cast aluminium with a UV-stabilized powder coat, it mounts over a recessed junction box, runs on 120-277VAC with 0-10V dimming, and is IP65 and wet-location rated. Photocell and 8W emergency battery backup are available.

OVERVIEW

- Wattage options: 45W / 60W / 75W
- Input voltage: 120-277VAC
- Efficacy: 130 lm/W
- Colour temperature: 3000K / 4000K / 5000K
- Colour rendering: Ra >80
- Rated life: 50,000 h
- Warranty: 5 years
- Ingress protection: IP65, wet location
- Power Factor: >0.9
- Beam: 70 x 80 deg

DIMENSIONS

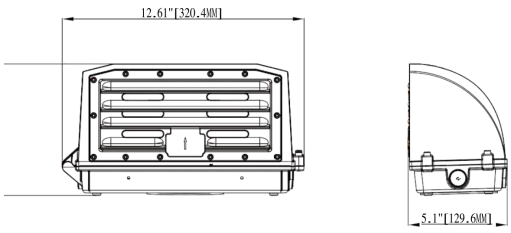

W x H x D
12.61 x 6.86 x 5.1 in
(320 x 174 x 130 mm)

MOUNTING
Over a recessed junction box

ORDER LOGIC

Build a NightShade Series SKU by selecting one option from each segment.

LC – FWP – WS – 3CCT – NV – BR – PC

[BRAND] [02] [03] [04] [05] [06] [07]

02 SERIES	03 WATTAGE	04 CCT	05 VOLTAGE	06 FINISH	07 OPTIONS
FWP Full Cutoff Wallpack	**WS** 45/60/75W selectable	**3CCT** 3000/4000/5000K	**NV** 120-277V	**BL** Black **BR** Dark Bronze	**PC** Photocell **EM8W** 8W emergency backup

For custom solutions please contact our sales representative.

NOTE:

WATTAGE AND CCT ARE SET ON INTERNAL DIP SWITCHES. SET THEM BEFORE THE FIXTURE IS POWERED.

ELECTRICAL DATA

SPECIFICATION	VALUE
Wattage options	45W / 60W / 75W
Input voltage	120-277VAC
Efficacy	130 lm/W
CCT	3000K / 4000K / 5000K
Colour rendering	Ra >80
Rated life	50,000 h
Warranty	5 years
Ingress protection	IP65, wet location
Power Factor	>0.9
Current	0.41 / 0.55 / 0.69 A at 45 / 60 / 75W
Beam	70 x 80 deg
Controls	0-10V dimming (purple DIM+, gray DIM-)
Adjustment	Wattage and CCT on internal DIP switches
Options	Photocell (PC) / 8W emergency battery backup (EM8W)
Housing	Heavy-duty die-cast aluminium, UV-stabilized powder coat
Finishes	Black / Dark Bronze
Mounting	Wall, over a recessed junction box
Operating temperature	-40 F to +104 F
Storage Temp	-40 F to +158 F