

RECESSED DOWNLIGHT, 8 IN, SELECTABLE

UNIVERSAL DOWNLIGHT

113 LM/W

SELECTABLE POWER. SELECTABLE CCT. RETROFIT FROM BELOW.

WATTAGE	VOLTAGE	LIFESPAN	WARRANTY	CRI	CCT
12/16/22W	120-277V	50,000 h	5 years	>80	30/35/40K

SELECTABLE POWER. SELECTABLE CCT. RETROFIT FROM BELOW.

An 8 in recessed downlight for retrofit and new construction, installed from below the ceiling with its own metal-clad whip. For custom solutions please contact our sales representative.

For custom solutions please contact our sales representative.

PHONE: 702.847.7680 WEB: www.ledconnection.com EMAIL: bids@ledconnection.com 915 E Dale Ave Ste 110 Henderson, NV 89044

RECESSED DOWNLIGHT, 8 IN, SELECTABLE

UNIVERSAL DOWNLIGHT



LC-UDL-8-A

3 WATTAGES | 3 CCTS | IC | 0-10V

QUALITY DEFENDER

Wet location, IC and airtight rated, with a deep recessed light source for low glare.


PRODUCT DESCRIPTION

The Universal Downlight is suitable for retrofit and new construction applications, with 120-277V input and an integrated IC-rated junction box. Wattage (12, 16 or 22W) and CCT (3000, 3500 or 4000K) are set on toggle switches on the back of the fixture. It does not need a recessed frame in new construction, and a retrofit is done from below the ceiling without removing the existing fixture, supported by the factory-installed metal-clad whip. The LC-UDL-8-GR goof ring (up to 12 in diameter) covers oversized cavities.

OVERVIEW

- Wattage options: 12W / 16W / 22W
- Lumens: 1350 / 1800 / 2350 lm
- Input voltage: 120-277VAC
- Efficacy: Up to 113 lm/W
- Colour temperature: 3000K / 3500K / 4000K
- Colour rendering: Ra >80
- Rated life: 50,000 h
- Warranty: 5 years
- Ingress protection: Wet location, IC and airtight rated
- Power Factor: >0.90

DIMENSIONS

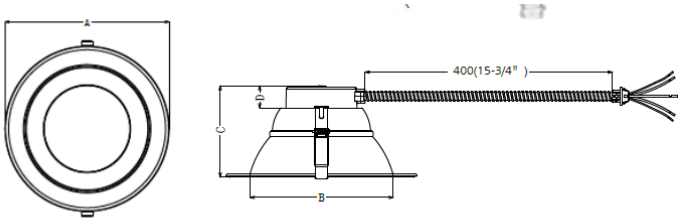

8 in MODEL
A 10-5/16 in
B 7-7/8 in
C 4-7/8 in
D 1-1/3 in

WHIP 15-3/4 in (400 mm)

GOOF RING LC-UDL-8-GR
up to 12 in diameter

ORDER LOGIC

Build a Universal Downlight SKU by selecting one option from each segment.

LC – UDL – 8 – A

[BRAND] [02] [03] [04]

02 SERIES	03 SIZE	04 VERSION
UDL Universal Downlight	**8** 8 in	**A** 12/16/22W, CCT selectable

For custom solutions please contact our sales representative.

NOTE:

WATTAGE AND CCT ARE SET ON THE TOGGLE SWITCHES ON THE BACK. SET THEM BEFORE THE FIXTURE IS POWERED.

ELECTRICAL DATA

SPECIFICATION	VALUE
Wattage options	12W / 16W / 22W
Lumens	1350 / 1800 / 2350 lm
Input voltage	120-277VAC
Efficacy	Up to 113 lm/W
CCT	3000K / 3500K / 4000K
Colour rendering	Ra >80
Rated life	50,000 h
Warranty	5 years
Ingress protection	Wet location, IC and airtight rated
Power Factor	>0.90
Controls	0-10V dimming
Adjustment	Wattage and CCT on toggle switches on the back of the fixture
Driver	Built-in, with integral metal-clad whip, 15-3/4 in (400 mm)
Finishes	White standard, custom finish available
Operating temperature	-20 F to +122 F
Total Harmonic Distortion	<15%