PROJECT NAME: _____ CATALOG NUMBER: _____


NOTES: _____ FIXTURE SCHEDULE: _____


UNIVERSAL DOWNLIGHT









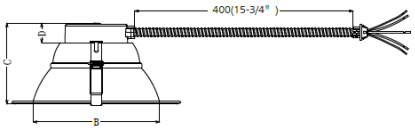

Size	Dimensions			
	A	B	C	D
4"	5-15/16"	3-13/16"	3-5/8"	1- 1/3"
6"	8-5/16"	5-13/16"	4-3/8"	1-1/3"
8"	10-5/16"	7-7/8"	4-7/8"	1-1/3"
10"	11-9/16"	8-5/8"	5-1/2"	1-1/3"

PRODUCT DESCRIPTION

The Universal Downlight is suitable for retrofit and new construction applications, with 100-277V input and an integrated IC-rated junction box. Adjustable wattage and CCT via toggle switch on back of fixture allows field customizability. Does not require recessed frame for installation in new construction.

Easy retrofit and installation can be performed from below the ceiling without removing existing fixture, supported by factory-installed metal-clad whip. Goof rings provide support for oversized downlight cavities.

OVERVIEW

- High lumen efficiency up to 115lm/W
- Available Sizes: 4in, 6in, 8in, & 10in
- Wattage Adjustable: See chart below for wattage
- CCT Adjustable: 3000K/3500K/4000K
- Wet location, IC and airtight rated
- Built-In driver with integral metal-clad whip
- Deep recessed light source provides low glare
- Standard white housing; custom finish available
- Input voltage: 100 - 277VAC (0-10V dimming)
- Power factor: >=0.90
- CRI: Ra>80
- THD: <15%
- PF: >0.90
- Operating temperature range: -20°F to 122°F
- Rated Life: 50,000+ hours
- Limited warranty: 5 years on luminaire

ORDERING INFO

Size	4"	6"	8"	10"
Part Number	**LC-UDL-4**	**LC-UDL-6**	**LC-UDL-8**	**LC-UDL-10**
Selectable Power	6W/8W/12W (650/820/1000 lumens)	8W/12W/16W (850/1200/1400 lumens)	12W/16W/22W (1350/1800/2350 lumens)	22W/28W/33W (2500/2800/3200 lumens)
Selectable CCT	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K	3000K/3500K/4000K
Rated Voltage	120-277V (0-10V Dimming)	120-277V (0-10V Dimming)	120-277V (0-10V Dimming)	120-277V (0-10V Dimming)