

LED STRIP

TRIPROOF VAPORLIGHT

≤150 LM/W

WEATHER-TIGHT & VANDAL-RESISTANT – IP66, IK10 RATED

WATTAGE	CCT	VOLTAGE	CRI	LIFESPAN	WARRANTY
20-100W	30-60K	100-277V	80+	186,000h	5 year

DESIGNED FOR DEMANDING ENVIRONMENTS

A rugged linear fixture for stairwells, parking structures and industrial applications, with five power connection options plus integral motion sensor and emergency battery options.

For custom solutions please contact our sales representative.

PHONE: 702.847.7680 WEB: www.ledconnection.com EMAIL: bids@ledconnection.com 915 E Dale Ave Ste 110 Henderson, NV 89044

LED STRIP

TRIPROOF VAPORLIGHT

LC-TP



DIMMING 1-10V

5 YEARS WARRANTY

SENSOR AVAILABLE

QUALITY DEFENDER
Weather-tight, vandal-resistant performance for demanding indoor and sheltered outdoor environments.


PRODUCT DESCRIPTION


The Triproof Strip Series is a weather-tight and vandal-resistant linear fixture designed for demanding environments.Ruggedly-built with IP66 and IK10 ratings, the Triproof Vaporlight features two lumen efficacy packages and five power connection options to support a wide range of installation requirements. Additional options include integral motion sensors and a factory-installed 8W emergency battery for 90+ minutes of run time. The Triproof Strip is an ideal choice for commercial or industrial applications such as stairwells and parking structures when a robust linear strip fixture is required.

OVERVIEW

- Available sizes: 2ft, 4ft & 8ft
- Factory-installed battery backup option available
- Input voltage: 100-277VAC (0-10V dimming)
- DALI dimming optional
- Operating temperature range: -68°F to 104°F
- IP66 & IK10 rating, 94V0 materials
- Flicker-free UL Class P certified driver, PF > 0.95
- SMD2835 LED light source, SDCM < 4
- PC lens with aluminum PCB & housing
- CRI: 80+ · Beam angle: 120°
- Rated life: 50,000+ hours (calculated L70: 186,000h)
- Limited warranty: 5 years on luminaire

DIMENSIONS

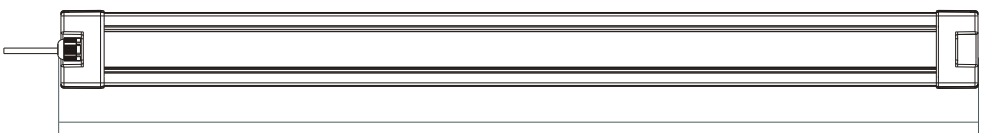



ORDER LOGIC

Build a Triproof Vaporlight SKU by selecting one option from each segment.

SAMPLE CODE

LC - TP65X2 - 20 - X

[BRAND] [02][03] [04] [05]

02 DIFFUSER TYPE*	03 SIZE	04 POWER	05 CCT**
F Frosted 135 - 145 lm/W	**2** 2 ft	**20** 20W	**W** 3000K/4000K
S Stripped 140 - 155 lm/W	**4** 4 ft	**30** 30W **40** 40W	**P** 5000K
	8 8 ft	**50** 50W **60** 60W	**C** 6000K
		80 80W **100** 100W	

For custom solutions please contact our sales representative.
**Change the first X with F or S.*
***Change the second X with W, P or C.*

NOTE:

WATTAGE AVAILABILITY VARIES BY FIXTURE SIZE.

ELECTRICAL DATA


SIZE	2FT	2FT	4FT	4FT	4FT	8FT	8FT
WATTAGE	20W	30W	40W	50W	60W	80W	100W
LUMENS	2,600	5,200	5,200	6,500	7,800	13,000	13,000
WORKING CURRENT	750mA	750mA	950mA	1450mA	1900mA	2100mA	2100mA

LUMEN MAINTENANCE @50,000 HRS – 92%

Calculated L70 @25°C ambient: 186,000 hours. Lumen maintenance data is based on LED testing per IES LM-80 and projected per IES TM-21.

PHOTOMETRIC DISTRIBUTION

140 lm/W

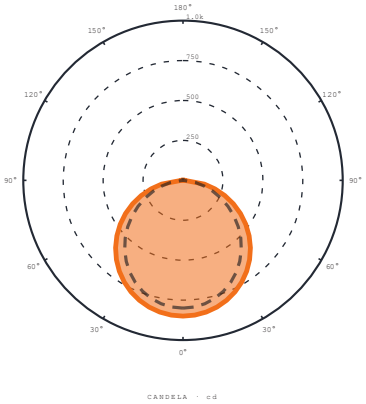

4000K

40W