

LED FLOOD LIGHT, SELECTABLE

SELECTABLE FLOODLIGHT

120 LM/W

DRAFT - PLACEHOLDER FAMILY NAME - REQUIRES DINO'S APPROVAL

WATTAGE	VOLTAGE	LIFESPAN	WARRANTY	CRI	CCT
40/60/80W	120-277V	50,000 h	5 years	>70	30/40/50K

SELECTABLE POWER. SELECTABLE CCT. YOKE OR SLIP-FITTER.

A die-cast flood for building, sign and site lighting. Power and colour temperature are set in the field, and the same fixture ships on a yoke or a slip-fitter. For custom solutions please contact our sales representative.

For custom solutions please contact our sales representative.

PHONE: 702.847.7680 WEB: www.ledconnection.com EMAIL: bids@ledconnection.com 915 E Dale Ave Ste 110 Henderson, NV 89044

LED FLOOD LIGHT, SELECTABLE

SELECTABLE FLOODLIGHT



LC-FL-WS-3CCT

3 WATTAGES | **3** CCTS | IP65 | 0-10V

QUALITY DEFENDER

ADC12 die-cast aluminium with integrated fins, IP65 with a drainage groove, wet-location rated.


PRODUCT DESCRIPTION

The Selectable Floodlight is a die-cast aluminium flood for building, sign and site lighting. Power (40, 60 or 80W) and colour temperature (3000, 4000 or 5000K) are set on switches under a rear cover, so one fixture covers several designs. It runs on 120-277VAC with 0-10V dimming, is IP65 and wet-location rated, and mounts on a yoke or a slip-fitter (pole up to 2-3/8 in, aiming 0-90 deg). On a 480V circuit it needs a step-down transformer to 277V.

OVERVIEW

- Wattage options: 40W / 60W / 80W
- Input voltage: 120-277VAC
- Efficacy: 120 lm/W
- Colour temperature: 3000K / 4000K / 5000K
- Colour rendering: Ra >70
- Rated life: 50,000 h
- Ingress protection: IP65, wet location
- Power Factor: >0.9
- Controls: 0-10V dimming (purple DIM+, pink DIM-)
- Input: 120-277VAC only. A 480V circuit needs a step-down transformer to 277V.

DIMENSIONS

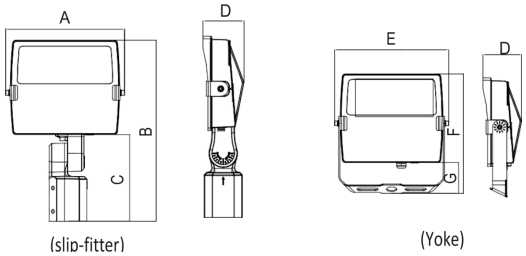

YOKE (E x F x D)
9.61 x 10.07 x 3.23 in
(244 mm x 256 mm x 82 mm)

SLIP-FITTER (A x B x D)
9.42 x 14.35 x 3.23 in
(239 mm x 364 mm x 82 mm)

WEIGHT 4.96 lb (2.25 kg)

ORDER LOGIC

Build a Selectable Floodlight SKU by selecting one option from each segment.

LC – FL – WS – 3CCT – Y

[BRAND] [02] [03] [04] [05]

02 SERIES	03 WATTAGE	04 CCT	05 MOUNTING
FL Floodlight	**WS** 40/60/80W selectable	**3CCT** 3000/4000/5000K selectable	**Y** Yoke **SF** Slip-fitter

For custom solutions please contact our sales representative.

NOTE:

DRAFT: THE SUPPLIER DOCUMENTS DISAGREE ON WATTAGE, CRI AND EFFICACY. SEE DRAFT CONFLICTS BELOW.

ELECTRICAL DATA

SPECIFICATION	VALUE
Wattage options	40W / 60W / 80W
Input voltage	120-277VAC
Efficacy	120 lm/W
CCT	3000K / 4000K / 5000K
Colour rendering	Ra >70
Rated life	50,000 h
Ingress protection	IP65, wet location
Power Factor	>0.9
Current	0.733 A at 80W
Controls	0-10V dimming (purple DIM+, pink DIM-)
Adjustment	Wattage and CCT switches under a rear cover
Mounting	Yoke (Y) / Slip-fitter (SF), pole up to 2-3/8 in (60 mm), aiming 0-90 deg
Housing	ADC12 die-cast aluminium, integrated heat-sink fins, drainage groove
Finishes	Bronze (grey-brown) / Black
Operating temperature	-40 F to +104 F
Storage Temp	-40 F to +158 F
Warranty	5 years

LUMEN MAINTENANCE

Lumen maintenance data pending. Must be backed by an LM-80 report and projected per IES TM-21 before publication.

DRAFT CONFLICTS

Wattage: supplier sheet 50/60/80W; supplier quote and LC item 40/60/80W; Kroger 345 FL1 is set at 40W. Printed 40/60/80W, confirm the 40W setting with the supplier.
CRI: parameter table Ra >70, cover badge Ra >80. Printed >70.
Efficacy: supplier sheet 120 lm/W, supplier quote >140 lm/W. Printed 120 lm/W.
Photocell: mentioned in the supplier's feature text, not in its table or our part number. Not on this sheet.
Rated life: supplier datasheet 30,000 h; LED Connection rates it 50,000 h (Dino, 2026-10-21). Needs LM-80 / TM-21 backing before release.