

**PRE-RELEASE – NOT FOR DISTRIBUTION**

- DRAFT - REQUIRES DINO'S APPROVAL. Values as read from the supplier documents, none verified.
- Placeholder family name. Part numbers LC-FL-WS-3CCT-Y / -SF kept as already sold.
- CONFLICTS on wattage, CRI and efficacy between supplier documents: see the NOTE on page 3.
- Pending: warranty, UL/ETL under LED Connection, IES photometrics, LM-80 / TM-21.
- Photo and drawings come from the supplier sheet: check them for any supplier mark.

LED FLOOD LIGHT, SELECTABLE

# SELECTABLE FLOODLIGHT

## 120 LM/W

DRAFT - PLACEHOLDER FAMILY NAME - REQUIRES DINO'S APPROVAL

| WATTAGE | VOLTAGE | LIFESPAN | WARRANTY | CRI | CCT |
|---|---|---|---|---|---|
| 40/60/80W | 120-277V | 30,000 h | Pending | >70 | 30/40/50K |

**SELECTABLE POWER. SELECTABLE CCT. YOKE OR SLIP-FITTER.**

A die-cast flood for building, sign and site lighting. Power and colour temperature are set in the field, and the same fixture ships on a yoke or a slip-fitter. For custom solutions please contact our sales representative.

*For custom solutions please contact our sales representative.*



PHONE: 702.847.7680 WEB: www.ledconnection.com EMAIL: bids@ledconnection.com 915 E Dale Ave Ste 110 Henderson, NV 89044

LED FLOOD LIGHT, SELECTABLE

# SELECTABLE FLOODLIGHT



## LC-FL-WS-3CCT

**3** WATTAGES | **3** CCTS | IP65 | 0-10V

**QUALITY DEFENDER**

ADC12 die-cast aluminium with integrated fins, IP65 with a drainage groove, wet-location rated.


## PRODUCT DESCRIPTION

The Selectable Floodlight is a die-cast aluminium flood for building, sign and site lighting. Power (40, 60 or 80W) and colour temperature (3000, 4000 or 5000K) are set on switches under a rear cover, so one fixture covers several designs. It runs on 120-277VAC with 0-10V dimming, is IP65 and wet-location rated, and mounts on a yoke or a slip-fitter (pole up to 2-3/8 in, aiming 0-90 deg). On a 480V circuit it needs a step-down transformer to 277V.

## OVERVIEW

- Wattage options: 40W / 60W / 80W
- Input voltage: 120-277VAC
- Efficacy: 120 lm/W
- Colour temperature: 3000K / 4000K / 5000K
- Colour rendering: Ra >70
- Rated life: 30,000 h
- Ingress protection: IP65, wet location
- Power Factor: >0.9
- Controls: 0-10V dimming (purple DIM+, pink DIM-)
- Input: 120-277VAC only. A 480V circuit needs a step-down transformer to 277V.

## DIMENSIONS

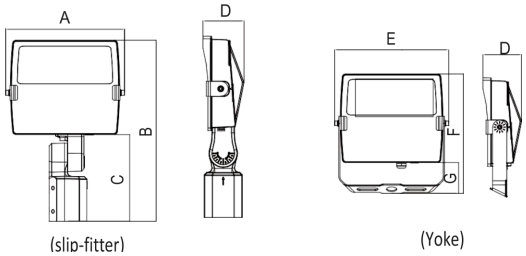


**YOKE (E x F x D)**
**9.61 x 10.07 x 3.23 in**
**(244 mm x 256 mm x 82 mm)**

**SLIP-FITTER (A x B x D)**
**9.42 x 14.35 x 3.23 in**
**(239 mm x 364 mm x 82 mm)**

**WEIGHT 4.96 lb (2.25 kg)**

## ORDER LOGIC

Build a Selectable Floodlight SKU by selecting one option from each segment.

# LC – FL – WS – 3CCT – Y

[BRAND] [02] [03] [04] [05]

| 02 SERIES | 03 WATTAGE | 04 CCT | 05 MOUNTING |
|---|---|---|---|
| **FL**<br>Floodlight | **WS**<br>40/60/80W selectable | **3CCT**<br>3000/4000/5000K selectable | **Y**<br>Yoke<br>**SF**<br>Slip-fitter |

*For custom solutions please contact our sales representative.*

**NOTE:**

DRAFT: THE SUPPLIER DOCUMENTS DISAGREE ON WATTAGE, CRI AND EFFICACY. SEE DRAFT CONFLICTS BELOW.

## ELECTRICAL DATA

| SPECIFICATION | VALUE |
|---|---|
| **Wattage options** | 40W / 60W / 80W |
| **Input voltage** | 120-277VAC |
| **Efficacy** | 120 lm/W |
| **CCT** | 3000K / 4000K / 5000K |
| **Colour rendering** | Ra >70 |
| **Rated life** | 30,000 h |
| **Ingress protection** | IP65, wet location |
| **Power Factor** | >0.9 |
| **Current** | 0.733 A at 80W |
| **Controls** | 0-10V dimming (purple DIM+, pink DIM-) |
| **Adjustment** | Wattage and CCT switches under a rear cover |
| **Mounting** | Yoke (Y) / Slip-fitter (SF), pole up to 2-3/8 in (60 mm), aiming 0-90 deg |
| **Housing** | ADC12 die-cast aluminium, integrated heat-sink fins, drainage groove |
| **Finishes** | Bronze (grey-brown) / Black |
| **Operating temperature** | -40 F to +104 F |
| **Storage Temp** | -40 F to +158 F |

**LUMEN MAINTENANCE**

Lumen maintenance data pending. Must be backed by an LM-80 report and projected per IES TM-21 before publication.

**DRAFT CONFLICTS**

Wattage: supplier sheet 50/60/80W; supplier quote and LC item 40/60/80W; Kroger 345 FL1 is set at 40W. Printed 40/60/80W, confirm the 40W setting with the supplier.
CRI: parameter table Ra >70, cover badge Ra >80. Printed >70.
Efficacy: supplier sheet 120 lm/W, supplier quote >140 lm/W. Printed 120 lm/W.
Photocell: mentioned in the supplier's feature text, not in its table or our part number. Not on this sheet.
Warranty: the supplier's badge says 5 years. LED Connection sets its own warranty; shown as Pending.