C3-28 | Corrected Model-Selection Assessment

Training and checkpoint: COMPLETED / RETAINED
Intra-training validation comparison: PASSED
Frozen development baseline comparison: FAILED
Learned reference deployment: DISABLED

Frozen development cases: 72
Learned healthy reference MAE: 43.282 RAW
Flat reference MAE: 59.216 RAW
Training-mean reference MAE: 42.759 RAW

Interpretation:
The learned reference beats the flat baseline but not the training-mean baseline.
Its improvement on intra-training validation does not prove a frozen-dev win.
The learned surface remains research-only; primary trained CRDL is unchanged.
A public RGB upload must not use C3-28 as a validated normal-road estimate.

Physical depth, area, volume and FHWA severity remain unverified from the model.
C3-22 visual severity is a separate experimental classification.
RAW error coverage is exploratory development evidence, not field confidence.

The visual figures on following pages document research, NOT deployed 3D accuracy.

Research visualization only — learned reference NOT selected for deployment

C3-28 - Reconstruction evidence | NOT metric 3D


A. RGB research image




B. Supplied pothole mask




C. RGB-D fitted healthy reference (rel. RAW)

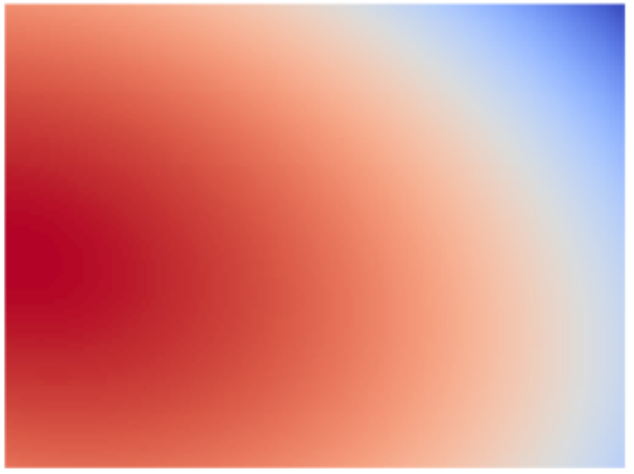


D. Learned healthy reference

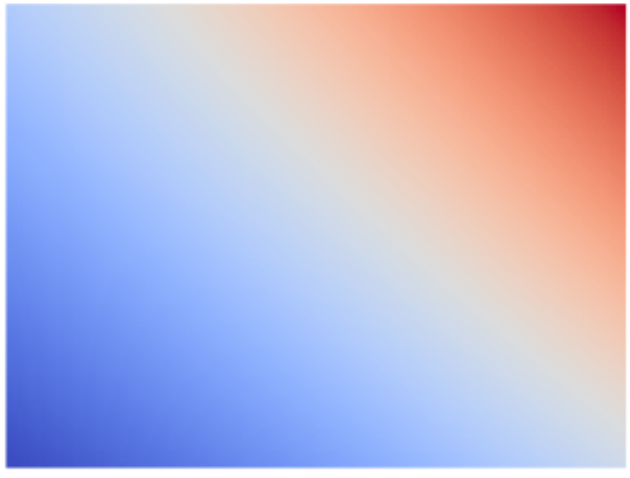

E. Trained CRDL relative depression

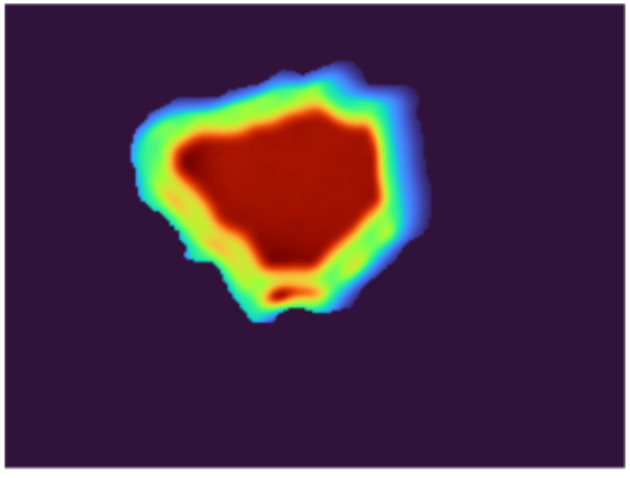


F. Combined estimated relative surface

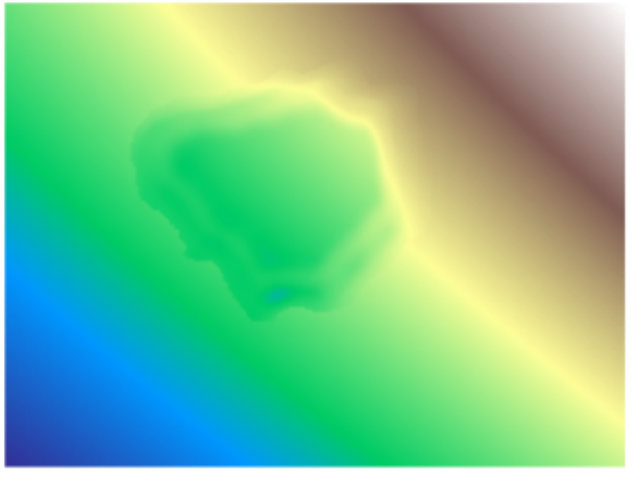


Research visualization only — learned reference NOT selected for deployment

Reference versus CRDL depression: no mm and no physical perspective

Expected relative healthy-road shape

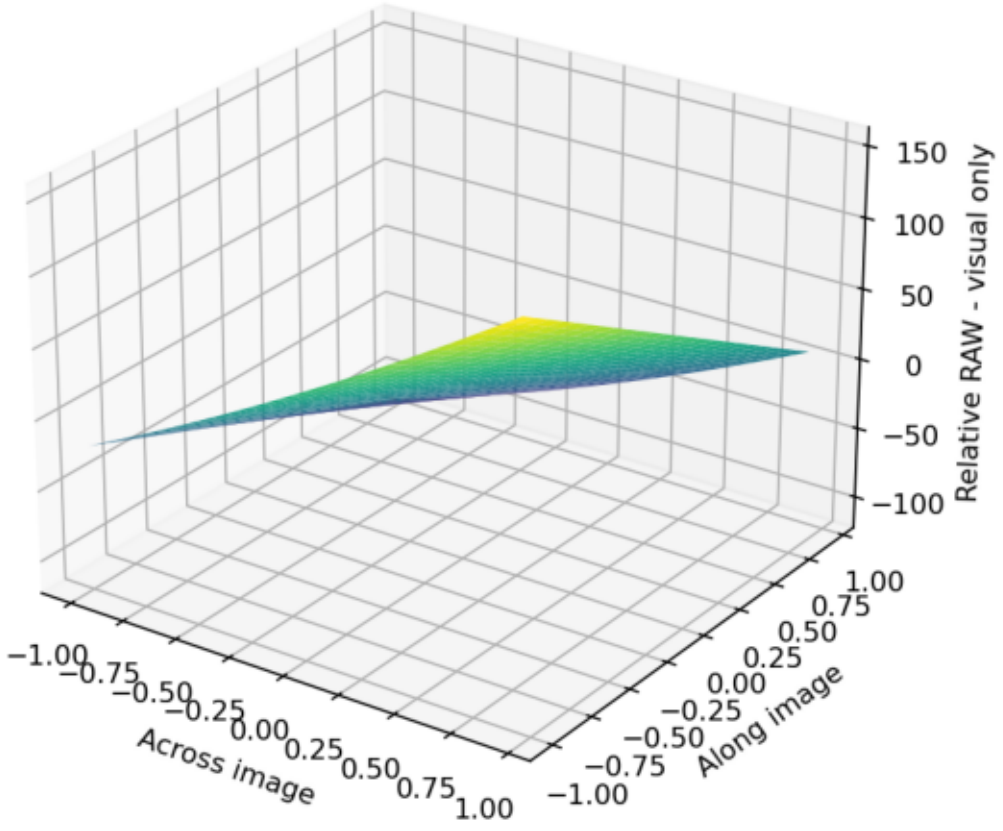

Estimated damaged relative road surface

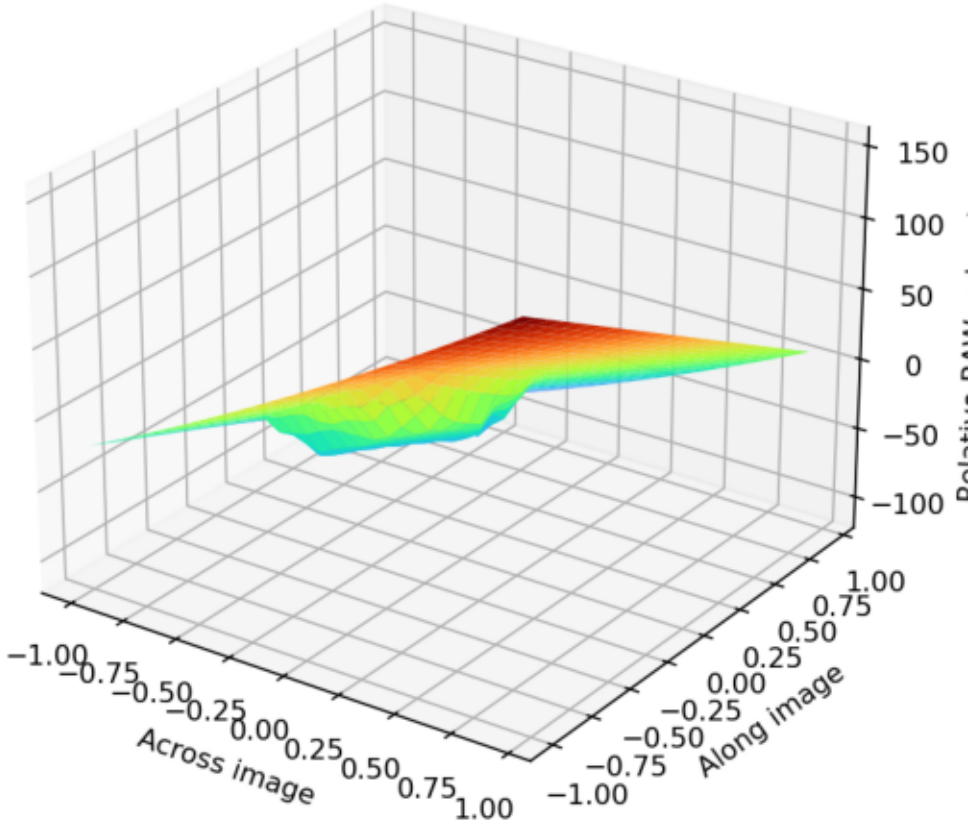

Research visualization only — learned reference NOT selected for deployment

