1. Description

1.1. Project

Project Name	stmD3
Board Name	custom
Generated with:	STM32CubeMX 5.2.0
Date	12/17/2019

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

2. Pinout Configuration

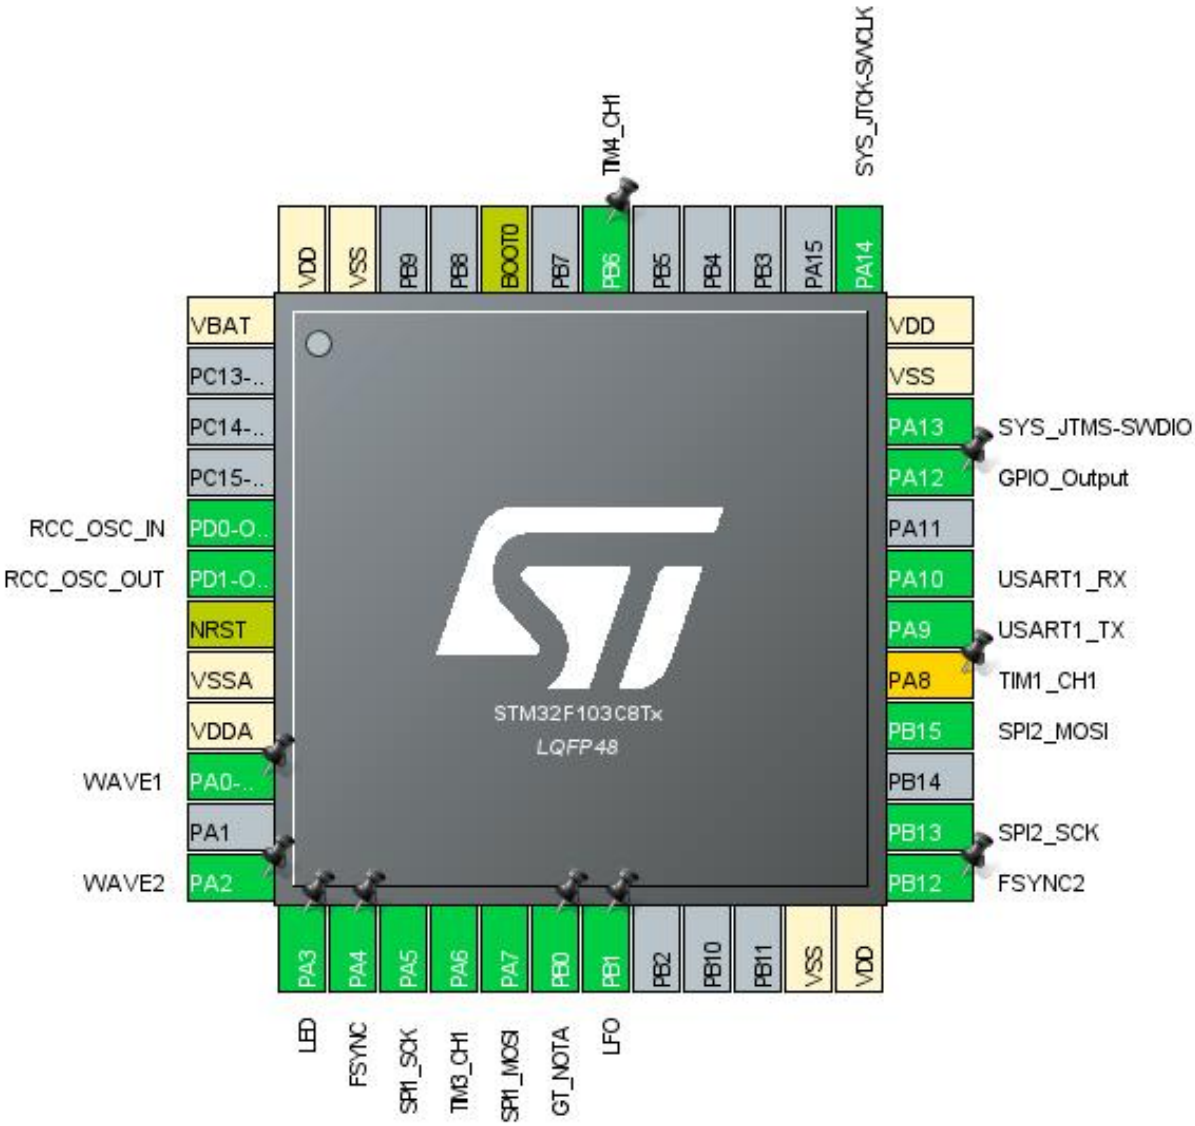

3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
10	PA0-WKUP	I/O	GPIO_Analog, ADC1_IN0	WAVE1
12	PA2	I/O	ADC2_IN2	WAVE2
13	PA3 *	I/O	GPIO_Output	LED
14	PA4 *	I/O	GPIO_Output	FSYNC
15	PA5	I/O	SPI1_SCK	
16	PA6	I/O	TIM3_CH1	
17	PA7	I/O	SPI1_MOSI	
18	PB0 *	I/O	GPIO_Output	GT_NOTA
19	PB1	I/O	GPIO_Analog, ADC1_IN9	LFO
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	FSYNC2
26	PB13	I/O	SPI2_SCK	
28	PB15	I/O	SPI2_MOSI	
29	PA8 **	I/O	TIM1_CH1	
30	PA9	I/O	USART1_TX	
31	PA10	I/O	USART1_RX	
33	PA12 *	I/O	GPIO_Output	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
42	PB6	I/O	TIM4_CH1	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

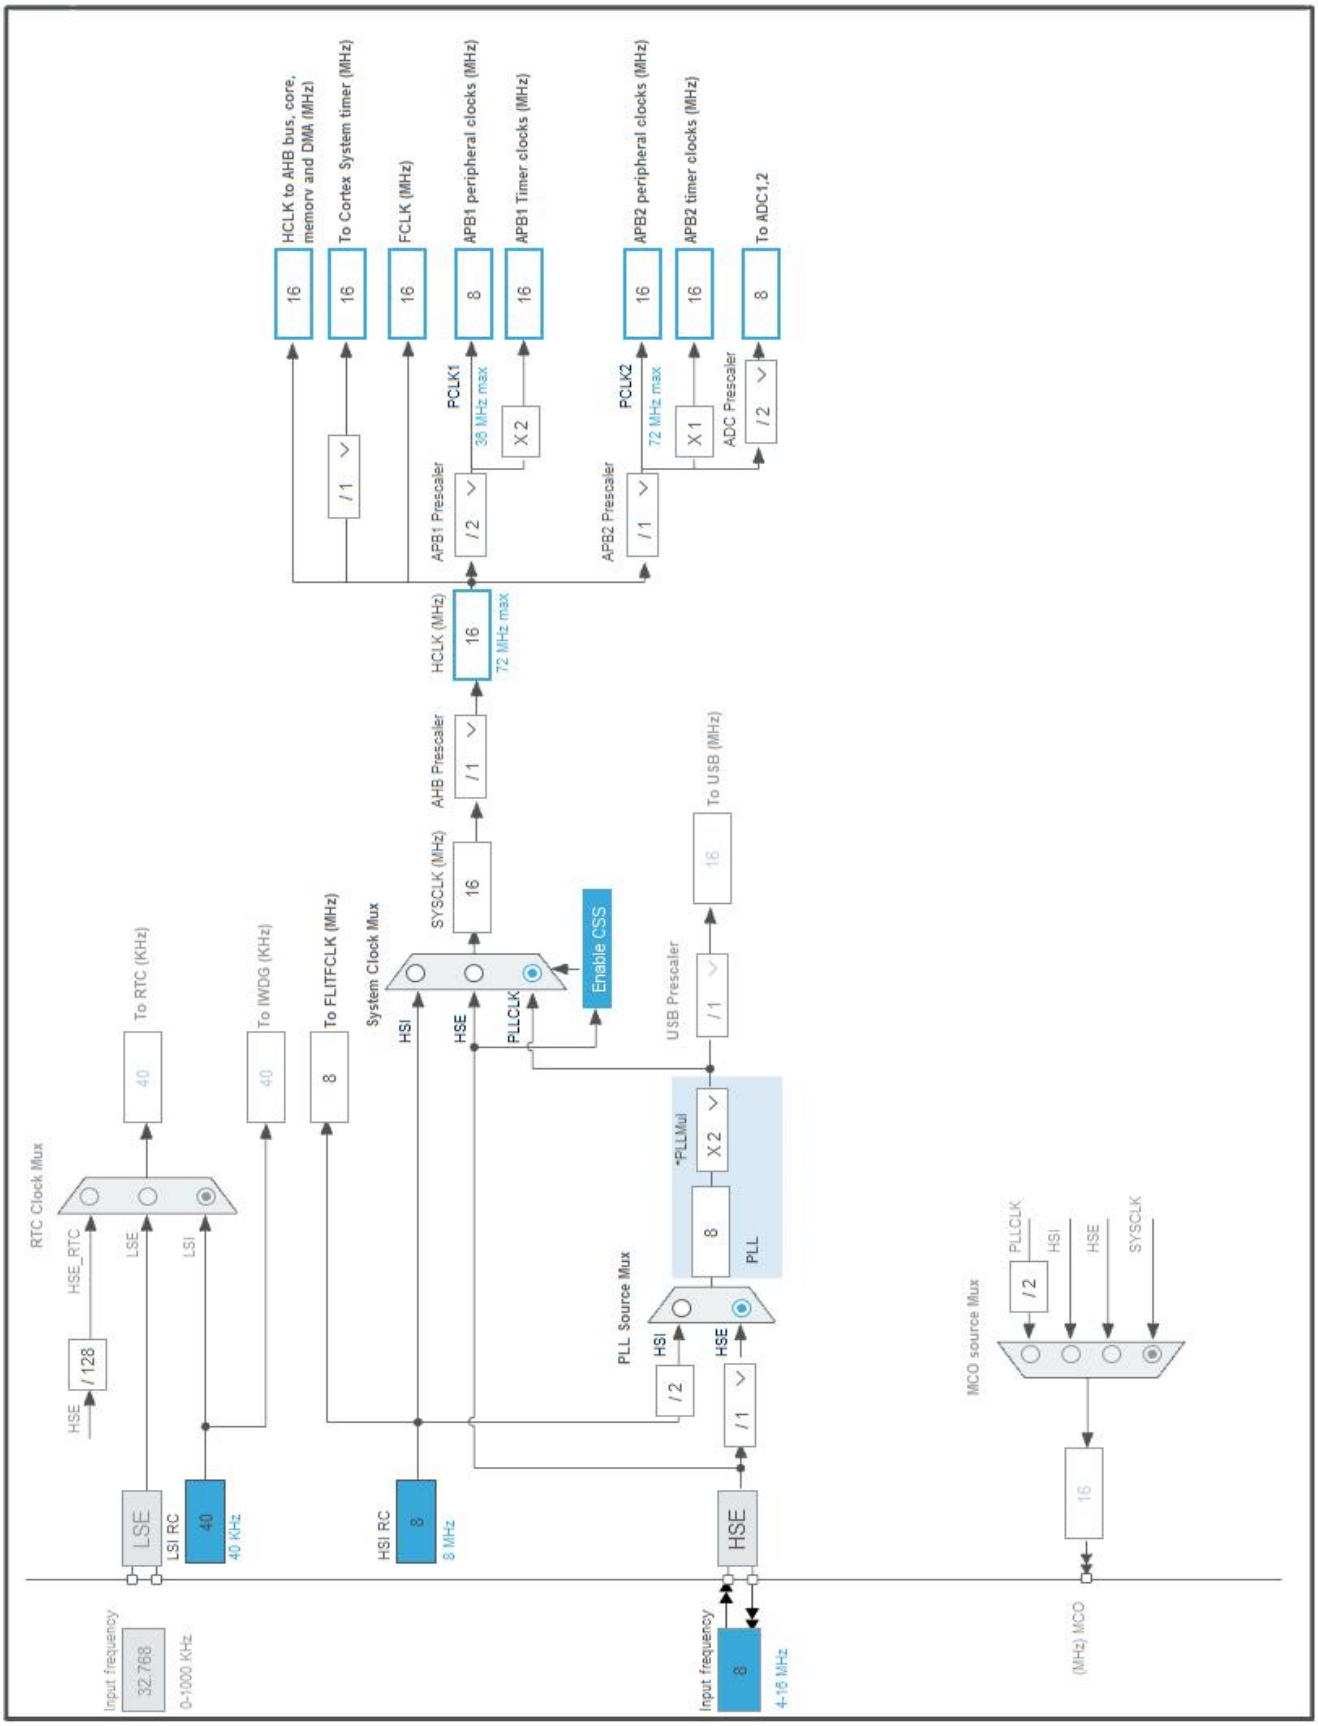

5. Software Project

5.1. Project Settings

Name	Value
Project Name	stmD3
Project Folder	C:\Users\nicolau2010\Documents\engenharia 2019-2\pi3\stmD3
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F1 V1.7.0

5.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	13587_Rev17

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. ADC1

mode: IN0

mode: IN9

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
Rank	1
Channel	Channel 0
Sampling Time	1.5 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.2. ADC2

mode: IN2

7.2.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions	Enable
Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
Rank	1
Channel	Channel 2
Sampling Time	1.5 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

7.4. SPI1

Mode: Transmit Only Master

7.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**32 ***
Baud Rate	**500.0 KBits/s ***
Clock Polarity (CPOL)	**High ***

Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

7.5. SPI2

Mode: Transmit Only Master

7.5.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**32 ***
Baud Rate	**250.0 KBits/s ***
Clock Polarity (CPOL)	**High ***
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

7.6. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.7. TIM3

Channel1: Output Compare CH1

7.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division

auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Output Compare Channel 1:

Mode	Frozen (used for Timing base)
Pulse (16 bits value)	0
CH Polarity	High

7.8. TIM4

Channel1: PWM Generation CH1

7.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**1 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	0
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

7.9. USART1

Mode: Asynchronous

7.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	n/a	n/a	WAVE1
	PB1	ADC1_IN9	Analog mode	n/a	n/a	LFO
ADC2	PA2	ADC2_IN2	Analog mode	n/a	n/a	WAVE2
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	**High ***	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	**High ***	
SPI2	PB13	SPI2_SCK	Alternate Function Push Pull	n/a	**High ***	
	PB15	SPI2_MOSI	Alternate Function Push Pull	n/a	**High ***	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	n/a	Low	
TIM4	PB6	TIM4_CH1	Alternate Function Push Pull	n/a	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	**High ***	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	**n/a**	
Single Mapped Signals	PA8	TIM1_CH1	Alternate Function Push Pull	n/a	Low	
GPIO	PA0-WKUP	GPIO_Analog	Analog mode	n/a	n/a	WAVE1
	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FSYNC
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	GT_NOTA
	PB1	GPIO_Analog	Analog mode	n/a	n/a	LFO
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	FSYNC2
	PA12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low
USART1_TX	DMA1_Channel4	Memory To Peripheral	Low

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

USART1_TX: DMA1_Channel4 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel4 global interrupt	true	0	0
DMA1 channel5 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 global interrupts	unused		
TIM3 global interrupt	unused		
TIM4 global interrupt	unused		
SPI1 global interrupt	unused		
SPI2 global interrupt	unused		
USART1 global interrupt	unused		

*** User modified value**

9. Software Pack Report