VXLAN

Eth1/34   VLAN 40   Eth1/34

Cisco N9K SW1   **Cisco N9K SW1**

Eth1/33   Eth1/33

VLAN 30   VLAN 30

server-1   **server-2**

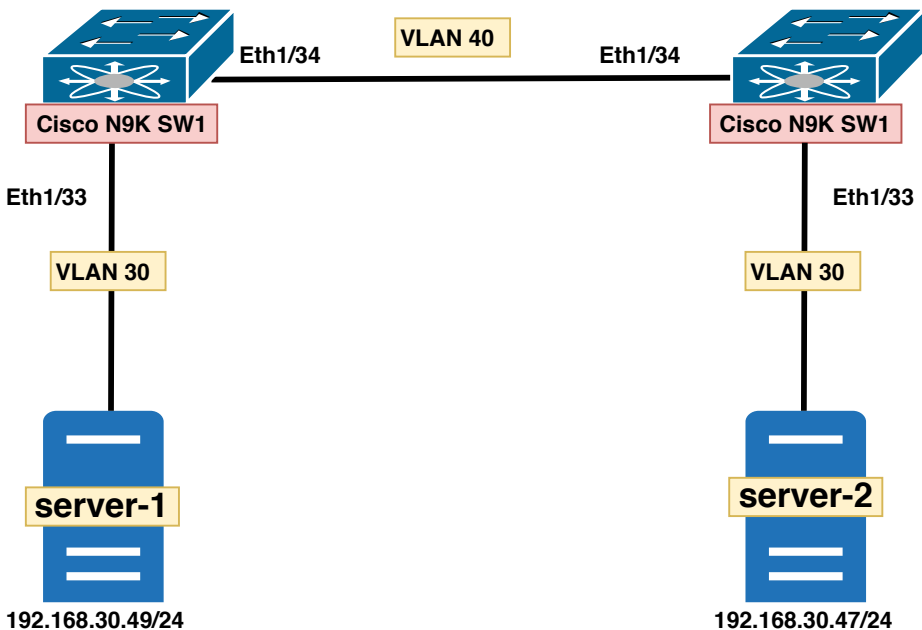**192.168.30.49/24**   **192.168.30.47/24**

1. Routed interfaces (Eth1/34-Eth1/34) between two N9K
2. Now Server-1 will traffic through routed interface using VXLAN.