

## PRODUCT TECHNICAL DATA SHEET

## F104-LED SERIES

## SPECIFICATIONS

**Housing**

Made from heavy duty cast aluminum to withstand harsh weather.

**Hardware**

All exposed hardware is made of durable stainless steel, with industrial strength seals.

**Interior Design & Optical**

Energy efficient LED driver is mounted on a removable plate, with quick disconnect wiring to allow easy driver maintenance.

L70 at 50,000 hours with CRI≥70.

**Exterior Design & Finish**


Luminaire is designed to fit post top mounting or pendant mounting with our ornamental arms and poles, and is suitable for wet locations.

Finish is electrostatically applied with thermoset polyester powder-coat.

## SIZES


	length	width	height	weight	tenon size	EPA
<b>Large</b>	20"	20"	42"	26 lbs	3"(W) x 4"(L)	1.85 ft <sup>2</sup>
<b>Small</b>	16"	16"	37"	24 lbs	3"(W) x 4"(L)	0.75 ft <sup>2</sup>

## PHOTOMETRICS

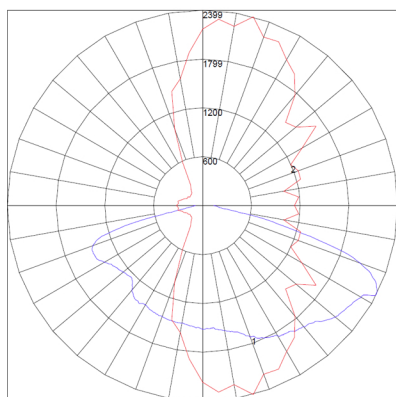

**SAMPLE ILLUSTRATION**  
IES type III, short

◀ polar graph

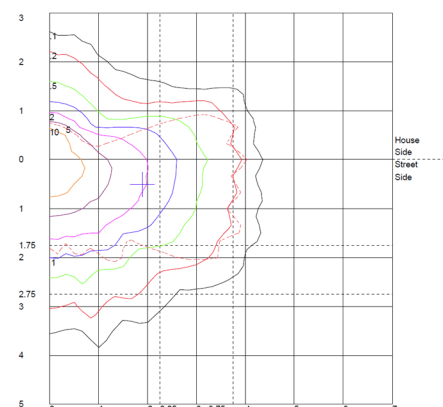

ISO footcandle ▶

PRODUCT	FITTER	DIFFUSER TYPE	WATTAGE	CCT	VOLTAGE	OPTICS	OPTIONS	FINIALS	COLOR
F104-L	A	CAC CLEAR ACRYLIC	LED	3000K	120V~277V	IES TYPE	DIM	N/A	STANDARD RAL
F104-S	B		35W	4000K		II (2)	DIMMING CONTROL		6005 GREEN
	C	CPC CLEAR POLYCARBONATE	50W	5000K	STEP DOWN	III (3)			7012 GREY
	D		55W	6000K	TRANSFORMER	IV (4)	FUS		8019 BRONZE
	E	EAC EXTERNAL PRISMATIC	70W		347V	V (5)	INTERNAL FUSING		9011 BLACK
	F	ACYLIC	90W	± 10% VARIANCE	480V				9016 WHITE
	G		120W				PCB		*TEXTURE AVAILABLE
	H	EPC EXTERNAL PRISMATIC					BUTTON TYPE PHOTOCELL		CUSTOM RAL
	I	POLYCARBONATE	CUSTOM						
	J						HSS		
	K	FAC FROSTED ACRYLIC					HOUSE SIDE SHIELD		
	L								
	Q	FPC FROSTED POLYCARBONATE					TWL		
	R						TWIST LOCK SYSTEM		
	T	WAC WHITE ACRYLIC							
	U	WPC WHITE POLYCARBONATE					WIRELESS CONTROL AVAILABLE		

**Product ordering sample**

F104 - L - A - FAC - 35LED - 3000K - 120~277V - TYPE II - DIM - FA - RAL9011 BLACK