



QUICKSHIP
UNDER 10 DAYS

METALUMEN'S

10 Day QuickShip Program

Ordering Steps Checklist

Step 1. Complete Quickship Part Number

Enter the Quantity in the QTY box located at the end of the part number.

Select Aircraft Cable Length.

Step 2. Row Configurations

Enter the quantity under the QTY column.

If applicable, select a pod to indicate desired emergency or battery location.

Step 3. Submit form





Sign and submit completed form to the appropriate inside sales representative.

QuickShip Terms & Conditions

1. Shipment within 10 business days.
2. Day one begins next business day after order is entered (order entered as QuickShip is automatically released by the system).
3. Order must be designated with "QS" in front of the part number.
4. Rail 2, Rail 4 and Stail are available at 3000K and 3500K and 80 CRI.
5. Transform is available at 3500K and 80 CRI.
6. Dual circuit wiring is available for Rail 2, Rail 4 and Stail.
7. All luminaires and hangers/canopies offered only in standard finishes.
8. No integral control options.
9. No louvers.
10. No changes or cancellations permitted after receipt of order.
11. Large orders are subject to review. We will do our best to accommodate.
12. Minimum 20 linear feet per order or 5 units of standard runs to qualify for QS program.
13. Installing contractor is responsible to ensure that fixture wiring adheres to local codes.
14. All other standard Metalumen Terms and Conditions apply.

Transform TRA14 Information


- There is one driver box per fixture. For example, a continuous row with 6 fixtures will have a total of 6 driver boxes.
- Maximum recommended remote mounting distance is 34ft. (18AWG wire at 2% power loss).
- Power over aircraft cable is at each mounting location.
- Transform comes only with Power over aircraft cable.
- Excess power over aircraft cable must not be cut. The Transform will become inoperative if the power over aircraft cable is cut.

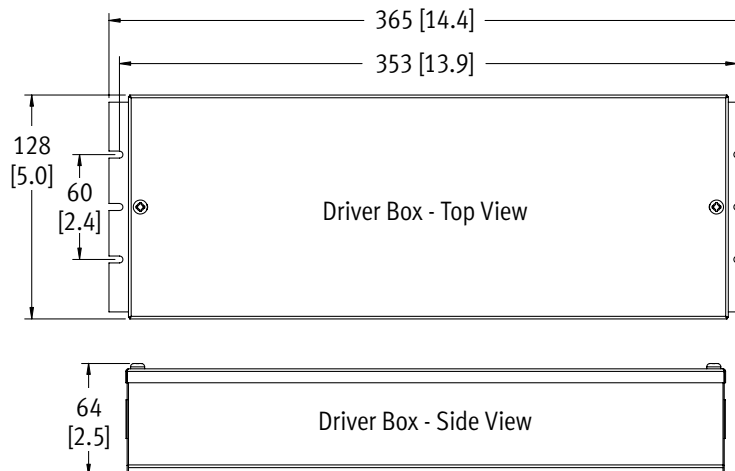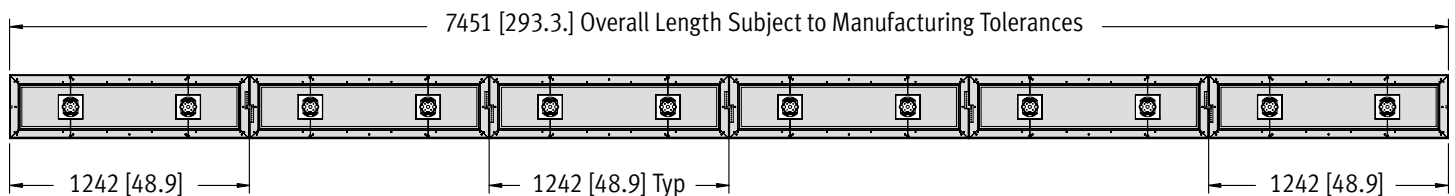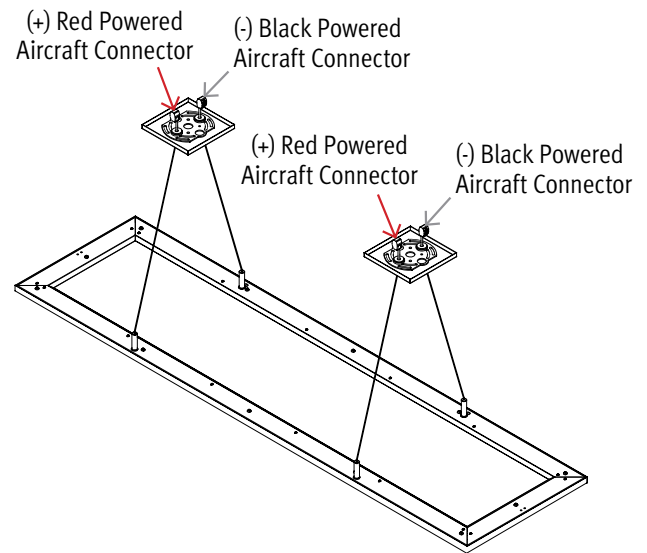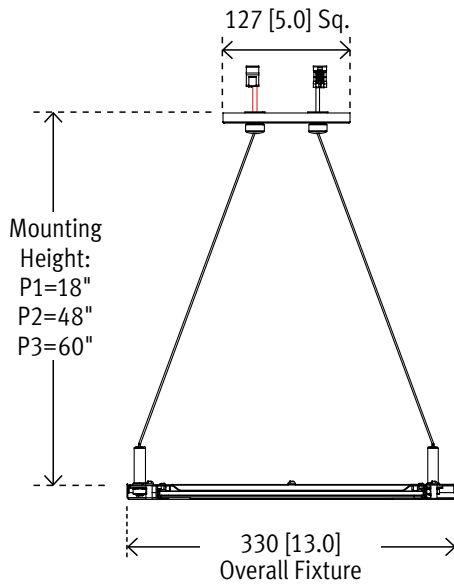



Transform TRA14

Direct / Indirect



Pendant

ORDERING STEPS

Step 1. Complete **Quickship Part Number** and enter the **Quantity (QTY)**.

Step 2. If applicable, complete **Row Configurations** by entering the QTY.

Step 3. Submit Form

See page 4 for more Ordering Steps Checklist details

Step 1. QuickShip PART NUMBER

Example Part Number: QSTRA14-2L35K-4-AR-W-L31-P1-1-NR-N

QSTRA14	2L35K		AR	W	1			N	R	N	
Series	Color Temp	Length	Optics	Finish	LL/Driver	Circuitry	Mounting	Voltage	Controls	Driver Loc.	Options













Color Temp 2L35K = 3500K	Optics AR = AccuRay®	Light Level (LL) / Driver Performance at 3500K 0-10V Dimming (Standard)	Circuitry 1 = 1 Circuit	Voltage 1 = 120 V 2 = 277 V 3 = 347 V 4 = UNV (120-277V)	Controls N = None																				
Length 4 = 4 ft	Finish W = White	<table> <tr> <th>Light Level</th> <th>Lumens</th> <th>Wattage</th> <th>Efficacy (LPW)</th> </tr> <tr> <td>L1</td> <td>2399</td> <td>23</td> <td>104</td> </tr> <tr> <td>L2</td> <td>4639</td> <td>49</td> <td>94</td> </tr> <tr> <td>L3</td> <td>6749</td> <td>74</td> <td>91</td> </tr> <tr> <td>L4</td> <td>7679</td> <td>85</td> <td>90</td> </tr> </table>	Light Level	Lumens	Wattage	Efficacy (LPW)	L1	2399	23	104	L2	4639	49	94	L3	6749	74	91	L4	7679	85	90	Mounting * P1 = Pendant Aircraft Cable 18" P2 = Pendant Aircraft Cable 48" P3 = Pendant Aircraft Cable 60"		Driver Location R = Remote
Light Level	Lumens	Wattage	Efficacy (LPW)																						
L1	2399	23	104																						
L2	4639	49	94																						
L3	6749	74	91																						
L4	7679	85	90																						
R = Continuous Rows (See p.28)					Options N = None																				

* Transform comes only with Power over aircraft cable. Excess power over aircraft cable must not be cut. The Transform will become inoperative if the power over aircraft cable is cut.

Job #:		Project Name:		Signature:	
Date:		Project Type:			

Step 2. Row Configurations


Part 1) Enter desired quantity of rows under the QTY column

QTY	Nominal Length	Run Length Overall	
	4'	1241 [48.9]	
	8'	2484 [97.8]	
	12'	3726 [146.7]	
	16'	4968 [195.6]	
	20'	6210 [244.5]	
	24'	7451 [293.3]	
	28'	8694 [342.3]	
	32'	9936 [391.2]	
	36'	11178 [440.1]	
	40'	12420 [489.0]	
	44'	13662 [537.9]	
	48'	14904 [586.8]	

LEGEND

 One Transform Section

 Mounting Points & Power Wire Entries

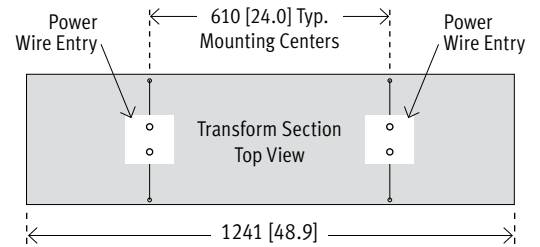

For more detailed mounting information,
see "Transform TRA14 Information" on page 6.