ARTEMIS 3 W RECESSED WALL WASHING LED DOWNLIGHT













Artemis 3 W - Recessed Wall Washing LED Downlight. Artemis 3 W features SENSO-designed reflectors and a wide range of colour temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	e AR3V	V						
		1	2	3	4	5	6	7
Drive	er	AR3W						
	1		2	3	4	5	6	

Product Specifications

SAMPLE: Fixture AR3W - TL - A90 - 610 - 24 - 10 - DL - 02 - 08 | Driver 910 - AR3W - TL - STD - 120 - A90 - 07

1 - Trim	2 -	LED	3 - Optio	4 - CCT	5 - Lumen	6	Accessory	7 - Trim Col	our 8	- Baffle Colour
FL · Flanged TL · Trimless	A90	7 · 90 CRI	610 · 10 618 · 18 630 · 30 645 · 45 660 · 60	27 · 2700K 30 · 3000K 35 · 3500K	10 · 1000 15 · 1500 20 · 2000 30 · 3000	DL	No Accessory Diffusing Lens Honeycomb	01 · White 02 · Black 08 · Silver XX · Custom	02	1 · White 2 · Black 8 · Silver X · Custom
1 - Housing Sty	rle	2 - Trim		3 - Driver	I	Dim Level			Dim Level	4 - Voltage
910 · Remote 915 · Plaster Fran 920 · IC Housing		Same as	s Fixture	STD · Non I LCS · 0 - 10 DIM · Phas ELDOLC · 0 - 10 ELDODA · Dali F LUTES · Hilum	O Volt Protocol e*2 O Volt Protocol Protocol	N/A 1% 10% 0.1% 0.1%	DMX · SEN	re for phase ries Eco System	1% 1% 5%	120 · 120V 277 · 277V 347 · 347V*5
5 - LED		6 - Lumen								
Same as Fixture	me as Fixture Same as Fixture			*1 With DIM driver, only available in 1000im and 1500im *2 120V only *3 Requires remote housing *4 Specified separatly *5 Not available with ELDO, Lutron or DMX				Project : uantity :		
							Notes :			













ARTEMIS 3 W

RECESSED WALL WASHING LED DOWNLIGHT



Light Engine

Output: up to 3000lm

High Efficacy: up to 150 lumen/Watt

Colour Options (CCT): 2400K, 2700K, 3000K, 3500K, 4000K or 6500K

Colour Consistency: Range within a 2-MacAdam Ellipse

Colour rendering (CRI): 90 CRI & 50+ R9 Value

Driver

Dimming: 1% dimming standard with 0.1% option

Industry leading Low ripple Ripple:

Efficiency: Power Factor > 0.9

Efficiency over 85%

Class 2 output for safety

Installation: Small Footprint allows retrofit installations

Accessories **Diffusing Lens** Honeycomb Mesh


Installation


- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 18° tilt angle


Construction / Finish

- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

Ø5.2" [132mm]




















ARTEMIS 3 W





Housing Options

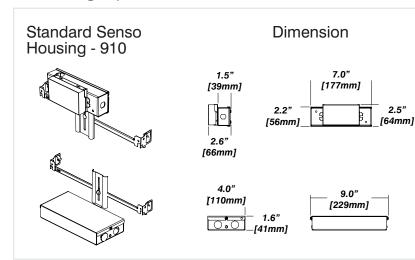

Included

Unless specified otherwise, this is provided as standard


Bar hanger • Length: from 14-3/16" to 26"

Driver with enclosure Galvanized steel enclosure


* driver can be installed either: (A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired


to secure the fixture

New Construction - 915



Dimension





Included


Galvanized steel construction with cut-out to

Bar hanger •


Length: from 14-3/16" to 26"

Outlet Box Included Outlet Box •

IC Housing - 920



Dimension



Included

IC Housing

Galvanized steel construction

Airtight

Includes gasketed junction box

Plaster Frame

Galvanized steel construction

Bar hanger Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1000lm







