





# ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT

SHIPPING  
Q1 2018

SENSO  
SPEC SHEET

Recessed Lightin

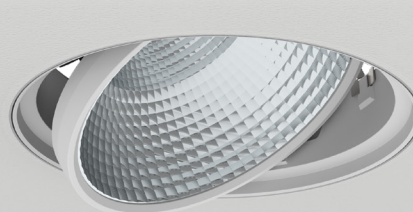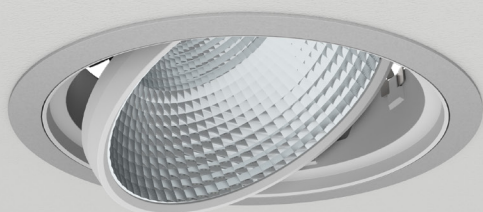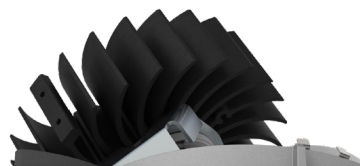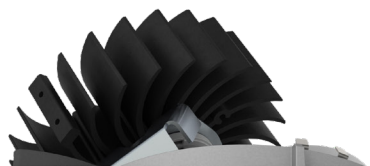

**Artemis - Recessed Adjustable LED Downlight.** Artemis 5 A features SENSO-designed reflectors and a wide range of colour temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

## Ordering Code

Fixture	<b>AR5A</b>							
		1	2	3	4	5	6	7
Driver		<b>AR5A</b>	--			--	--	
		1	2	3	4	5	6	

## Product Specifications

SAMPLE: Fixture **AR5A - TL - A90 - 610 - 24 - 15 - DL - 02 - 08** | Driver **910 - AR5A - TL - STD - 120 - A90 - 07**

1 - Trim	2 - LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory	7 - Trim Colour	8 - Baffle Colour
<b>FL</b> · Flanged <b>TL</b> · Trimless	<b>A90</b> · 90 CRI	<b>610</b> · 10° <b>618</b> · 18° <b>630</b> · 30° <b>645</b> · 45° <b>660</b> · 60°	<b>24</b> · 2400K <b>27</b> · 2700K <b>30</b> · 3000K <b>35</b> · 3500K <b>40</b> · 4000K <b>65</b> · 6500K	<b>15</b> · 1500 <b>20</b> · 2000 <b>30</b> · 3000 <b>40</b> · 4000 <b>50</b> · 5000 <b>60</b> · 6000	<b>00</b> · No Accessory <b>DL</b> · Diffusing Lens <b>HO</b> · Honeycomb	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom	<b>01</b> · White <b>02</b> · Black <b>08</b> · Silver <b>XX</b> · Custom

1 - Housing Style	2 - Trim	3 - Driver	Dim Level	Dim Level	4 - Voltage
<b>910</b> · Remote <b>915</b> · Plaster Frame*1 <b>920</b> · IC Housing	Same as Fixture	<b>STD</b> · Non Dimming <b>LCS</b> · 0 - 10 Volt Protocol <b>DIM</b> · Phase*2 <b>ELDOLC</b> · 0 - 10 Volt Protocol <b>ELDODA</b> · Dali Protocol <b>LUTES</b> · Hilume Ecodigital	N/A 1% 10% 0.1% 0.1% 1%	<b>LUT3W</b> · Hilume 3 Wires <b>LUT2W</b> · 2 Wire for phase <b>LUT5S</b> · 5 Series Eco System <b>DMX</b> · SENSO*3 <b>EMG</b> · Emergency Driver*3/4	1% 1% 5% <b>120</b> · 120V <b>277</b> · 277V <b>347</b> · 347V*5

5 - LED	6 - Lumen	
Same as Fixture	Same as Fixture	<p>*1 With <b>DIM</b> driver, only available in <b>1500lm</b></p> <p>*2 120V only</p> <p>*3 Requires remote housing</p> <p>*4 Specified separately</p> <p>*5 Not available with ELDO, Lutron or DMX</p>

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_

# ARTEMIS 5 A

## RECESSED ADJUSTABLE LED DOWNLIGHT

### Light Engine


- Output:** up to 6500lm  
**High Efficacy:** up to 150 lumen/Watt  
**Colour Options (CCT):** 2400K, 2700K, 3000K, 3500K, 4000K or 6500K  
**Colour Consistency:** Range within a 2-MacAdam Ellipse  
**Colour rendering (CRI):** 90 CRI & 50+ R9 Value

### Driver


- Dimming:** 1% dimming standard with 0.1% option  
**Ripple:** Industry leading Low ripple  
**Efficiency:** Power Factor >0.9  
Efficiency over 85%  
Class 2 output for safety  
**Installation:** Small Footprint allows retrofit installations

### Accessories

*Diffusing Lens*



*Honeycomb Mesh*



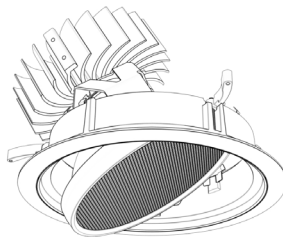


### Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- 0° to 30° adjustable tilt angle


### Construction / Finish

- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

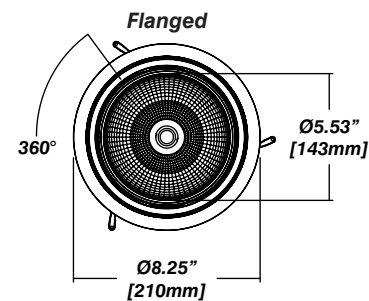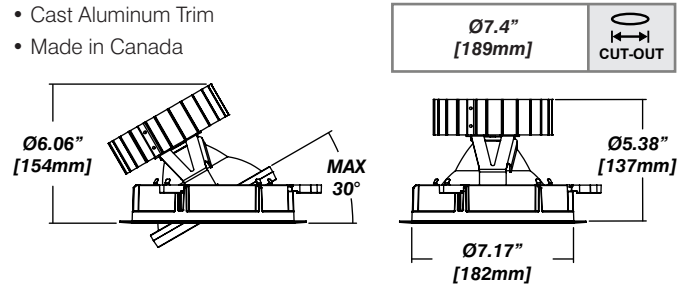

### Reflector

*Faceted Reflector*


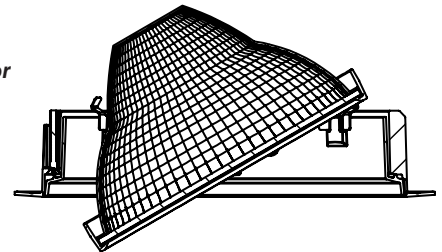


# ARTEMIS 5 A

RECESSED ADJUSTABLE LED DOWNLIGHT

## Housing Options

### Standard Senso Housing - 910

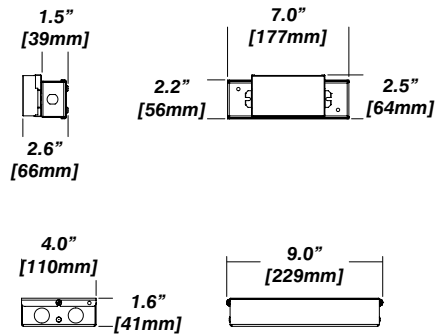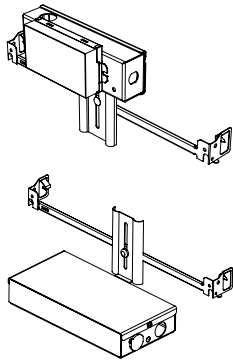

### Dimension

### Included



Unless specified otherwise, this is provided as standard

- Bar hanger** • Length: from 14-3/16" to 26"
- Driver with enclosure** • Galvanized steel enclosure

\* driver can be installed either:

(A) laying on top of ceiling. (B) mounted to the bar hanger and fixed to the ceiling. (C) remote from the fixture, with the bar hanger still used if desired to secure the fixture

### New Construction - 915

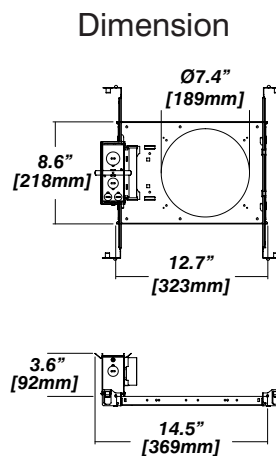
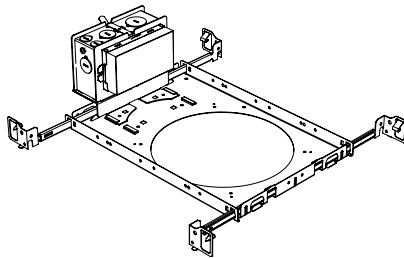


### Dimension

### Included

- Plaster Frame** • Galvanized steel construction with cut-out to
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included

### IC Housing - 920

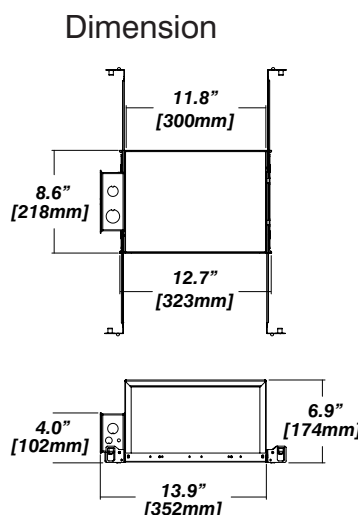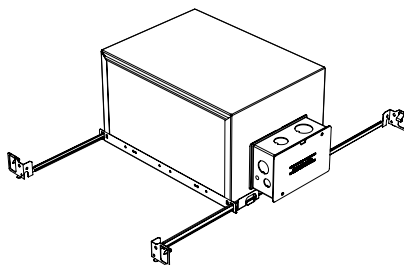

### Dimension

### Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

**Note:** use only with LED modules up to 1000lm