SHUTTERING

PLYWOOD

Wallgreens has a superior Film Faced Densified Shuttering Plate (FFDSP) capable of a high level performance for varied applications, manufactured from selected veneers peeled from hardwood plantations

- Scratch & Chemical Resistant
- Weather & Boil-proof Bonding
- Favourable weight to strength ratio
- Easy to Machine & Fasten
- Environment Friendly

Technical Properties of Shuttering Ply		
Properties	SAL	Floor Board
Density	IS: 4900 : 1993	0.96 gm / cc
Tensile Strength		
Along the grain		85 N / mm
Across the grain		49 N / mm
Cross Breaking Strength		
Along the grain	IS: 4900 : 1993	102 N / mm2
Across the grain	IS: 1734 Part 4	67 N / mm21
Glue Shear Strength	Dry State	Wet State
Along the grain	150 N / mm	140 N / mm
Across the grain	140 N / mm	130 N / mm
Module of Elasticity (N/mm2)	Load	Elasticity
200 mm span	470 kg 10669	
300 mm span	155 kg	11875
400 mm span	70 kg	12712
500 mm span	40 kg	14188

		Tolerence
Length	1800 to 3200 mm	+6 mm, -0
Width	900 to 1675 mm	+3 mm, -0
Thickness	12, 18, 21, 24, 32 & 40 mm	+- 5%

**Customised sizes available as per requirement*

SHUTTERING
PLYWOOD

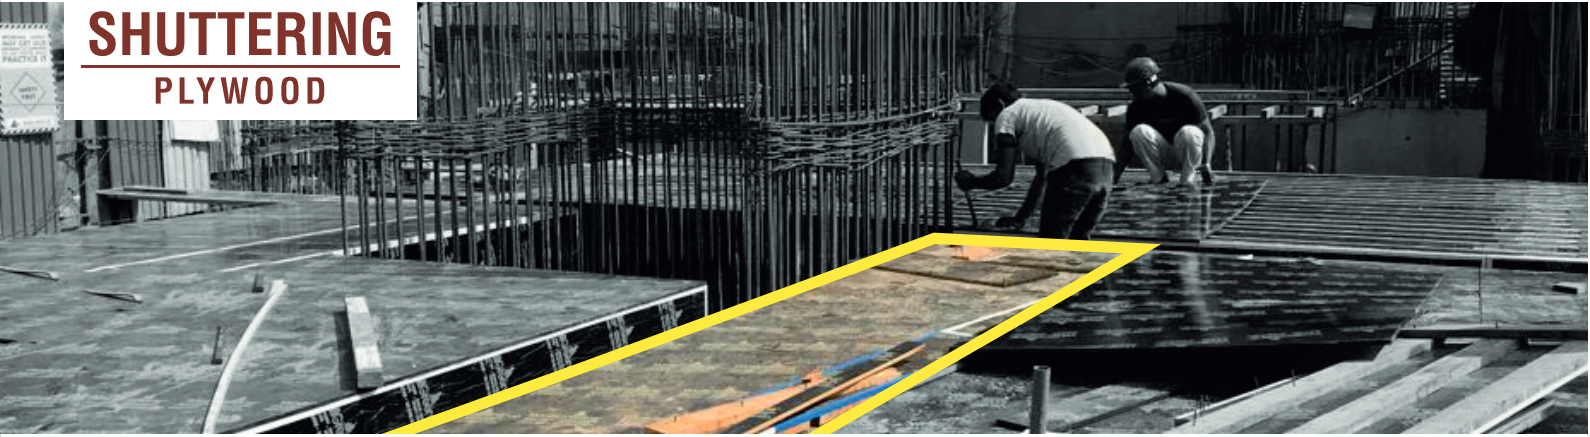

The entire process of manufacturing veneers, resins, film and densified plates is completed in-house at a state-of-the-art plant with German collaboration.