

Ortofon OM10 - Thorens TD160 Super, SME III

Measurement Report

DATE Wednesday, 22 July 2026 at 17:58
INPUT EVO4
MEASUREMENTS 1 kHz Reference, Speed & Wow Analysis

MEASUREMENTS

Channel balance	0.82 dB (L/R)
Playback RPM	34.14 RPM • +2.41% vs 33 1/3 • Settled min 34.06 RPM • Settled max 34.23 RPM • Span 0.17 RPM
DIN-shaped wow &	0.037%
Raw speed variation	Unweighted RMS $\pm 0.130\%$ • 2-sigma $\pm 0.256\%$
Raw wow/flutter components	Unweighted wow RMS 0.121% • Unweighted flutter RMS 0.045%
1 kHz Electrical Crosstalk	L→R -24.9 dB • R→L -28.7 dB • Balance 3.83 dB • Avg separation 26.8 dB
Distortion diagnostics	L 88.00% THD • R 108.73% THD • L-R -20.73% • 2nd Δ 0.4 dB • 3rd Δ 1.6 dB
Distortion quality	Variable • L 92/149 frames • THD MAD 39.081% • H2 MAD 5.42 dB • H3 MAD 4.61 dB R 77/147 frames • THD MAD 59.550% • H2 MAD 5.26 dB • H3 MAD 5.25 dB
Harmonic profile	L 2nd -5.2 dB • 3rd -7.5 dB • 4th -11.9 dB • 5th -13.8 dB R 2nd -5.6 dB • 3rd -5.9 dB • 4th -8.5 dB • 5th -8.9 dB


Session recommendation Confirm the speed result with another valid capture, then correct the deck speed if the same error repeats. Single-session observation — repeat variable diagnostics before adjusting anti-skate, zenith, azimuth, VTA, or VTF.

DIAGNOSTIC BALANCE



Harmonic Profile

Solid L • Dashed R • Lower is cleaner

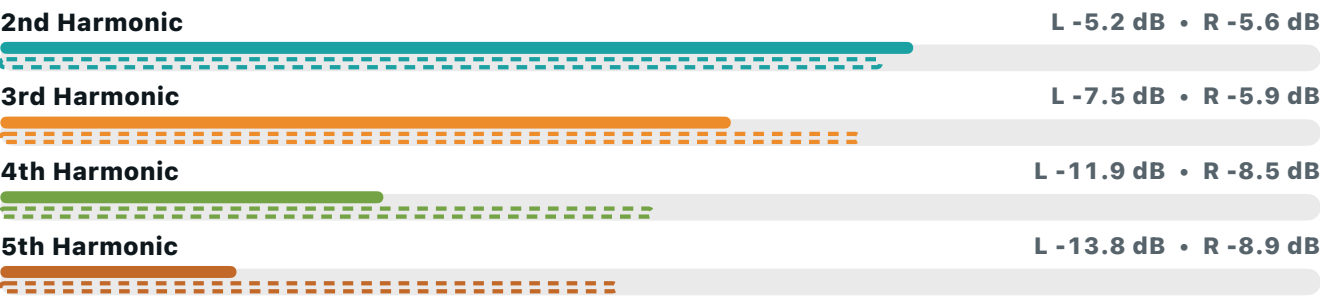

EXPERIMENTAL THD COMPARISON

Comparison unavailable. Phase tracking could not retain enough clean, continuous tone segments in the left and right channels. Official legacy results remain valid; repeat the capture and inspect the record for clicks or dropouts.

The Official legacy measurements above remain valid and continue to drive all recommendations. No setup decision should be made from a missing experimental comparison.

NOTES

Completed measurements: 1 kHz Reference.