


# AM2901 MANUAL TEST BOARD

REV A | 5 V LOGIC

Block diagram with optional 62256 SRAM data storage

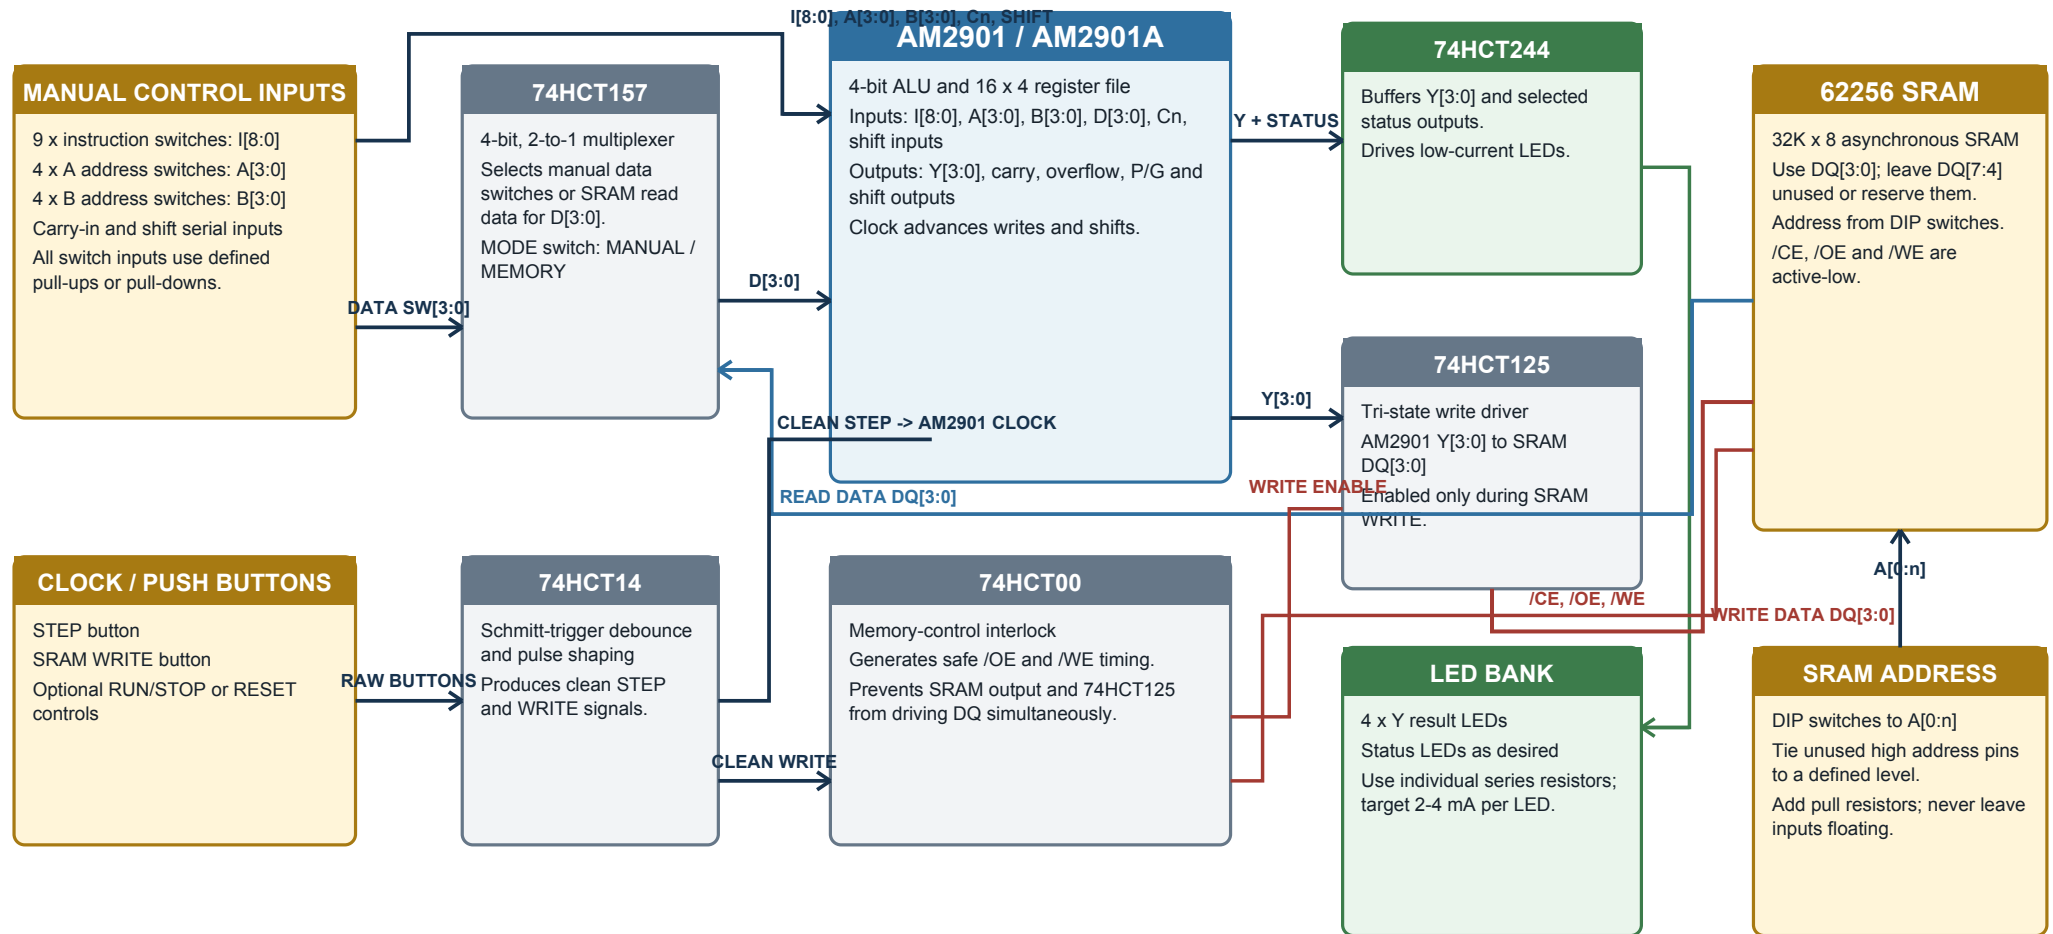

REGULATED +5 V AND COMMON GROUND | 100 nF AT EVERY IC | BULK CAPACITOR NEAR POWER INPUT

**BUS SAFETY:** READ: 74HCT125 disabled, SRAM /OE enabled. WRITE: SRAM /OE disabled first, then 74HCT125 enabled and /WE pulsed.  
Default pull-ups must keep /WE HIGH and the write driver disabled during power-up and switch transitions.