

LXFHS127ALS | LOGX 4, 8 & 12 CORE SM FTTH DROP CABLE (1000M)

12 CORE ARMoured

DESCRIPTION

LOGX FTTH Single Mode Drop Fiber Cables are designed for Fiber-to-the-Home (FTTH) subscriber drops and indoor/outdoor distribution. Built with ITU-T G.657.A1 bend-insensitive fibers, dual dielectric FRP strength members, corrugated light steel tape armoring (for 8 & 12 cores), and flame-retardant LSZH outer jacket.

FEATURES & BENEFITS

- **ITU-T G.657.A1 Bend-Insensitive Optical Fiber** for tight radius routing
- **Dual Dielectric FRP Strength Members** for superior anti-electromagnetic performance
- **Corrugated Light Steel Tape Armoring** (8C & 12C) for rodent and crush protection
- **Low Smoke Zero Halogen (LSZH) Jacket** for enhanced fire safety compliance
- Compact, lightweight, and flexible structure for easy stripping and splicing
- Standard 1000 Meter (1KM) wooden drum packaging

TYPICAL APPLICATIONS

- FTTH Access Networks and Last-Mile Subscriber Drop Links
- Indoor Riser and Horizontal Optical Distribution in Multi-Dwelling Units (MDU)
- Direct Underground Conduit or Indoor Duct Installations

SPECIFICATIONS & TECHNICAL PARAMETERS

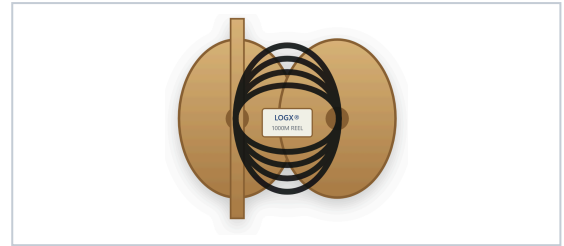
Fiber Type	G.657.A1 Single Mode Optical Fiber (Bend-Insensitive)	Core Options	4 Core / 8 Core / 12 Core
Strength Member	Dual Non-Metallic FRP (Fiber Reinforced Plastic)	Armoring (8 & 12 Core)	Corrugated Light Steel Tape Armored (Rodent-Proof)
Outer Sheath	Low Smoke Zero Halogen (LSZH) / UV Resistant	Cable Diameter	3.0mm ± 0.2mm (4C) / 6.0mm ± 0.4mm (8C/12C)
Attenuation	≤ 0.36 dB/km (1310nm) ≤ 0.22 dB/km (1550nm)	Packaging	1000 Meters (1KM) Wooden Drum Reel

MECHANICAL CHARACTERISTICS

Tensile Strength	Long Term ≥ 300N Short Term ≥ 600N
Crush Resistance	Long Term ≥ 1000N/100mm Short Term ≥ 2200N
Min. Bend Radius	15 mm (Dynamic) 10 mm (Static - G.657.A1)

ENVIRONMENTAL SPECIFICATIONS

Operating Temp.	-40°C to +70°C
Installation Temp.	-20°C to +60°C
Fire Rating	LSZH (IEC 60332-1, IEC 60754, IEC 61034)

**COMPLIANCE & STANDARDS**

- ITU-T G.657.A1 & ITU-T G.652.D
- IEC 60793 / IEC 60794
- IEC 60332-1 (Flame Retardant) & IEC 60754 (Halogen Free)
- RoHS & REACH Compliant

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	PACKAGING
LXFHN047ALS	Logx SM drop fiber cable, 4 core, 3.0mm Cable with 2 FRP, G.657.A1 fiber, LSZH (1000M)	1000M / Drum
LXFHS087ALS	Logx SM drop fiber cable, 8 core, Light steel Armoured single tube with 2 FRP, G.657.A1, LSZH (1000M)	1000M / Drum
LXFHS127ALS	Logx SM drop fiber cable, 12 core, Light steel Armoured single tube with 2 FRP, G.657.A1, LSZH (1000M)	1000M / Drum