

LXFTLCSUS21.5 | LOGX 1.5M & 2M 0.9MM LC/UPC SM & OM3 FIBER PIGTAIL

1.5M · SINGLE MODE OS2

DESCRIPTION

LOGX LC/UPC 0.9mm Fiber Optic Pigtails are precision factory-terminated fiber ends designed for fusion splicing inside fiber patch panels, wall-mount enclosures, and splice trays. Features high-purity zirconia ferrules, low insertion loss, and easy-strip 0.9mm tight buffer coating.

FEATURES & BENEFITS

- **0.9mm Easy-Strip Tight Buffer** for fast and clean fusion splicing
- **Precision Factory Polished LC/UPC Ferrule** with $\leq 0.2\text{dB}$ Insertion Loss
- **Available in Single Mode (OS2) and 10G Multimode (OM3)** in 1.5M and 2.0M lengths
- 100% Optically Tested for IL, RL, and end-face geometry
- High mechanical durability and environmental stability
- Individually packaged with protective connector dust cap

TYPICAL APPLICATIONS

- Fusion Splicing inside 19-Inch Fiber Patch Panels and Optical Distribution Frames (ODF)
- FTTH Terminal Boxes and Wall-Mount Optical Enclosures
- Industrial Automation & Telecommunication Network Splicing

SPECIFICATIONS & TECHNICAL PARAMETERS

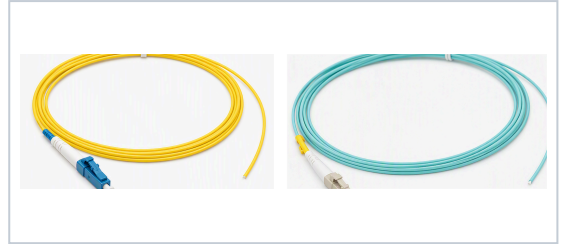
Connector Type	LC/UPC Simplex (0.9mm Buffer)	Fiber Types	Single Mode 9/125 μm (OS2) / Multimode 50/125 μm (OM3)
Buffer Diameter	0.9 mm Tight Buffer	Jacket Material	PVC (OFNR)
Lengths Available	1.5 Meters / 2.0 Meters	Ferrule Material	Precision Zirconia Ceramic
Insertion Loss	$\leq 0.3\text{ dB}$	Return Loss	$\geq 50\text{ dB}$ (Single Mode UPC) $\geq 30\text{ dB}$ (OM3)

OPTICAL CHARACTERISTICS

Insertion Loss	$\leq 0.3\text{ dB}$
Return Loss	$\geq 50\text{ dB}$ (SM UPC) $\geq 30\text{ dB}$ (OM3)
Operating Wavelength	1310 / 1550 nm (SM) 850 / 1300 nm (OM3)

ENVIRONMENTAL SPECIFICATIONS

Operating Temp.	-20°C to +70°C
Jacket Material	PVC (OFNR)
Standard Compliance	Telcordia GR-326-CORE, IEC 61754-20

**COMPLIANCE & STANDARDS**

- TIA/EIA-568.3-D & ISO/IEC 11801
- Telcordia GR-326-CORE / IEC 61754-20
- RoHS & REACH Compliant

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	LENGTH
LXFTLCSUS21.5	Logx 1.5M 0.9 PIGTAIL LC/UPC SM Simplex, PVC (Single Mode OS2)	1.5M
LXFTLCSUS22	Logx 2M 0.9 PIGTAIL LC/UPC SM Simplex, PVC (Single Mode OS2)	2.0M
LXFTLCSUM31.5	Logx 1.5M 0.9 PIGTAIL LC/UPC OM3 Simplex, PVC (Multimode OM3)	1.5M
LXFTLCSUM32	Logx 2M 0.9 PIGTAIL LC/UPC OM3 Simplex, PVC (Multimode OM3)	2.0M