

LXPP6U2410 | LOGX P1224 & P1248 UTP 24 & 48 PORTS BLANK PATCH PANEL

1U / 24 PORTS

DESCRIPTION

LOGX Blank Patch Panels offer modular flexibility for structured cabling consolidation in 19-inch equipment racks. Constructed from rugged 1.5mm cold-rolled steel with numerical port numbering, write-on label areas, and a detachable rear cable management bar to organize and relieve strain on incoming cables.

FEATURES & BENEFITS

- **Universal 19-Inch Rack Mount** available in 1U (24 Port) and 2U (48 Port)
- **Modular Blank Design** accepts CAT6, CAT6A, and Fiber Optic Keystone Jacks
- **Detachable Rear Cable Management Bar** with designated tie points for cable strain relief
- **Bold Numerical Port Identification** (1-24 / 1-48) with white labeling strips
- Heavy-duty 1.5mm SPCC cold-rolled steel with durable matte black finish
- Supplied with complete M6 rack mounting hardware and nylon cable ties

TYPICAL APPLICATIONS

- Main Distribution Frames (MDF) & Intermediate Distribution Frames (IDF)
- High-Density Data Center and Enterprise Telecommunications Racks
- Mixed-Media Cabling Deployments (Copper Data, Voice, Fiber, and AV)

SPECIFICATIONS & TECHNICAL PARAMETERS


Product Standard	LOGX P1224 / P1248 Blank Patch Panel	Rack Size	Standard 19-Inch (1U 24 Port / 2U 48 Port)
Shielding Type	UTP (Unshielded)	Panel Material	1.5mm Heavy-Duty SPCC Cold-Rolled Steel
Port Configuration	Accepts all standard snap-in Keystone Jacks	Rear Management	Includes Rear Cable Management Bar & Tie Hooks
Identification	Screen-Printed Port Numbers (1-24 / 1-48) & White Label Fields	Accessories	M6 Cage Nuts, Screws & Cable Ties Included

MECHANICAL CHARACTERISTICS

Frame Material	1.5 mm SPCC Steel with Matte Black Finish
Rear Cable Bar	Detachable Steel Support Bar with Tie Slots
Jack Mounting	Standard Snap-In Keystone Latch

SYSTEM COMPATIBILITY

Keystone Support	CAT6 / CAT6A / CAT5e / Fiber / Audio-Video Jacks
Operating Temp.	-20°C to +70°C
Standards	ANSI/TIA-568.2-D, ISO/IEC 11801, EIA-310-D

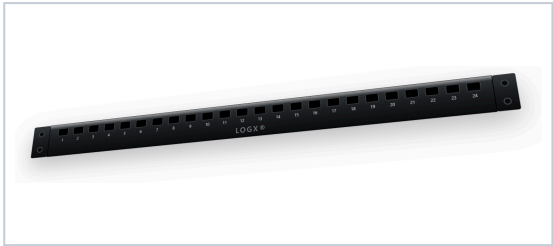

COMPLIANCE & STANDARDS

- EIA/ECA-310-E Standard 19" Specifications
- ANSI/TIA-568.2-D & ISO/IEC 11801
- RoHS & REACH Compliant

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	CONFIGURATION
LXPP6U2410	Logx P1224 UTP 24 Ports Patch Panel Blank, 1U 19 Inch Rack Mount, with Rear Cable Bar	1U / 24 Ports
LXPP6U4820	Logx P1248 UTP 48 Ports Patch Panel Blank, 2U 19 Inch Rack Mount, with Rear Cable Bar	2U / 48 Ports