

LOGX CAT 6A S/FTP SHIELDED LAN CABLE

CAT6A S/FTP LAN Cable, 305 m Box

LOGX CAT6A S/FTP LAN CABLE (305M) COPPER 0.54MM, 4 PAIR S/FTP, 23 AWG

PART NUMBER

LXC6ASFPVG305

DESCRIPTION


LOGX CAT 6A S/FTP Solid LAN Cable is engineered for maximum electromagnetic interference (EMI) protection in enterprise 10-Gigabit Ethernet deployments. Features 23AWG (0.54mm) solid bare copper conductors, individual foil shielding around each pair (AL-Foil), and an overall tinned copper braid shield.

FEATURES & BENEFITS

- Double Shielding (S/FTP):** Individual Foil per pair + Overall Tinned Braid
Solid 23AWG Bare Copper (0.54mm) for superior 10GBASE-T performance
Extended 500MHz Bandwidth with high signal-to-noise ratio
Ultimate Alien Crosstalk (ANEXT) & EMI Immunity
100% Pass Fluke Channel / Permanent Link certified
305 Meter (1000 ft) Wooden Drum / Dispenser packaging

TYPICAL APPLICATIONS

- 10GBASE-T 10-Gigabit Ethernet Data Center Infrastructure
High EMI Industrial & Mission-Critical Server Racks
High-Power PoE / PoE+ / PoE++ (IEEE 802.3bt up to 90W)

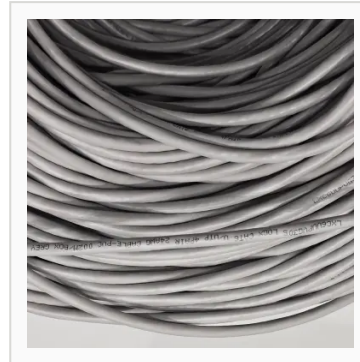

COMPLIANCE & STANDARDS

- ✓ ANSI/TIA-568.2-D Category 6A
- ✓ ISO/IEC 11801 Class EA | IEC 61156-5
- ✓ EN 50173-1 & EN 50288-10-1
- ✓ 100% Pass Fluke Test Certified
- ✓ RoHS & REACH Compliant

COLOR CODING

Pair 1	White-Blue / Blue
Pair 2	White-Orange / Orange
Pair 3	White-Green / Green
Pair 4	White-Brown / Brown

SPECIFICATIONS & TECHNICAL PARAMETERS

Product Standard	LOGX CAT6A S/FTP Shielded LAN Cable	Conductor Material	Solid Bare Copper 0.54mm (23 AWG)
Individual Shield	Each Pair Aluminum / Mylar Foil Shield (100% Coverage)	Overall Shield	Tinned Copper Wire Braiding Shield
Outer Sheath	Flame-Retardant PVC / LSZH (Grey Color)	Overall Diameter	7.6 ± 0.4 mm
Packaging	305M (1000ft) Wooden Drum / Dispenser Reel	Test Performance	100% Pass Fluke Test (500 MHz)

MECHANICAL CHARACTERISTICS

Bending Radius	8 × Cable Diameter (Installed)
Pulling Tension	120 N Elongation ≥ 100%
Operating Temp.	-20°C to +60°C

ELECTRICAL CHARACTERISTICS

Frequency Bandwidth	Up to 500 MHz (10GBASE-T High Speed)
Shielding Immunity	Screening Attenuation ≥ 75 dB (EMI/RFI Proof)
Quality Test	100% Pass Fluke Channel / Permanent Link

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	PACKAGING
LXC6ASFPVG305	CAT6A S/FTP LAN Cable, 305 m Box	305M Drum