

LOGX CAT 6 UTP PATCH CORD

CAT6 U/UTP Patch Cord, 0.25 m

LOGX CAT6 UTP, 4PX28AWG+CROSS+PVC+RJ45, GOLD PLATED PINS, PASS FLUKE TEST

PART NUMBER

LXPC6UUPVG0.25

DESCRIPTION


LOGX CAT 6 UTP patch cords are specifically manufactured with 4-pair 28AWG stranded copper conductors, an integrated central cross divider (+cross) for optimum pair separation and crosstalk suppression, high-durability PVC jacket, and RJ45 plugs with gold-plated pins. Factory certified to 100% Pass Fluke Test, ensuring superior network transmission performance and signal integrity.

FEATURES & BENEFITS

- 100% Pass Fluke Test guaranteed electrical performance
- 4PX28AWG Stranded Conductors for high flexibility and slim profile
- Central Cross Separator (+cross) to optimize pair isolation & NEXT
- RJ45 Connectors with Gold Plated Pins for superior contact
- Durable PVC Outer Jacket (Grey)
- Slim, compact design ideal for high-density data centers and server racks
- Molded snagless strain-relief boot for latch and cable protection
- ≥ 1000 Mating / Insertion Cycles Durability

TYPICAL APPLICATIONS

- 1000BASE-T Gigabit Ethernet / 100BASE-TX Fast Ethernet
- High-Density Server Racks & Switch Patching
- Power over Ethernet (PoE / PoE+ / PoE++ IEEE 802.3af/at/bt)
- VoIP Telephony, CCTV IP Cameras, and Digital High-Speed Data

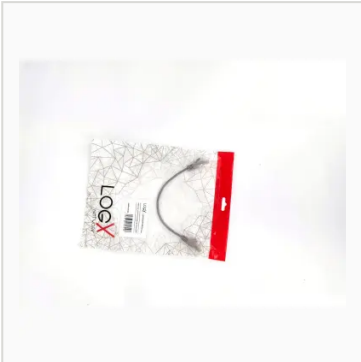

COMPLIANCE & STANDARDS

- ✓ ANSI/TIA 568.2-D Category 6
- ✓ ISO/IEC 11801 Class E
- ✓ IEC 61156-6 | EN 50173-1 & EN 50399
- ✓ 100% Pass Fluke Test Certified
- ✓ RoHS & REACH Compliant

COLOR CODING

Pair 1	White-Blue / Blue
Pair 2	White-Orange / Orange
Pair 3	White-Green / Green
Pair 4	White-Brown / Brown

SPECIFICATIONS & CONSTRUCTION

Product Model	LOGX Category 6 (CAT6)	Central Separator	PE Cross Separator (+cross)
Shielding Type	UTP (Unshielded)	Connector Type	RJ45 (8P8C)
Conductor Structure	4PX28AWG Stranded Copper	Contacts Plating	Gold Plated Pins
Jacket Sheath	PVC (Polyvinyl Chloride)	Quality Standard	Pass Fluke Test (100%)
Jacket Color	Grey (G)	Assembly Type	Injection Molding Snagless Boot
Outer Diameter	4.8 ± 0.2 mm	Durability	≥ 1000 Insertion Cycles
Installation Temp.	0°C ~ +50°C	Operating Temp.	-20°C ~ +60°C

MECHANICAL CHARACTERISTICS

Min. Tension	≥ 100 N
Conductor Elongation	≥ 15%
Jacket Tensile Strength	≥ 10 MPa
Jacket Elongation	≥ 125%
Min. Bend Radius	4 × Overall Diameter

ELECTRICAL CHARACTERISTICS

Quality Test	100% Pass Fluke Test
DC Resistance Unbal.	≤ 2.0%
Dielectric Strength	1.0 kV, 1 Min (No breakdown)
Delay Skew / Delay	≤ 45 ns/100m ≤ 555 ns/100m
Insulation Resistance	≥ 5000 MΩ·km

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	LENGTH
LXPC6UUPVG0.25	CAT6 U/UTP Patch Cord, 0.25 m	0.25 Meter
LXPC6UUPVG0.5	CAT6 U/UTP Patch Cord, 0.5 m	0.5 Meter
LXPC6UUPVG1	CAT6 U/UTP Patch Cord, 1 m	1 Meter
LXPC6UUPVG3	CAT6 U/UTP Patch Cord, 3 m	3 Meters
LXPC6UUPVG5	CAT6 U/UTP Patch Cord, 5 m	5 Meters
LXPC6UUPVG10	CAT6 U/UTP Patch Cord, 10 m	10 Meters